

Popular Electronics®

WORLD'S LARGEST SELLING ELECTRONICS MAGAZINE

MARCH 1982/\$


THE ELECTRONIC WORLD

Enhancing Stereo Sound with Signal Processors

Portables for all Electronic Tastes:

ZENITH'S 5" TV/AM-FM COMBO • MICROTAPE MACHINES FOR MUSIC • SINCLAIR'S NEW 12-OZ. ZX81 MICROCOMPUTER

Buying Guide to Computer Printers

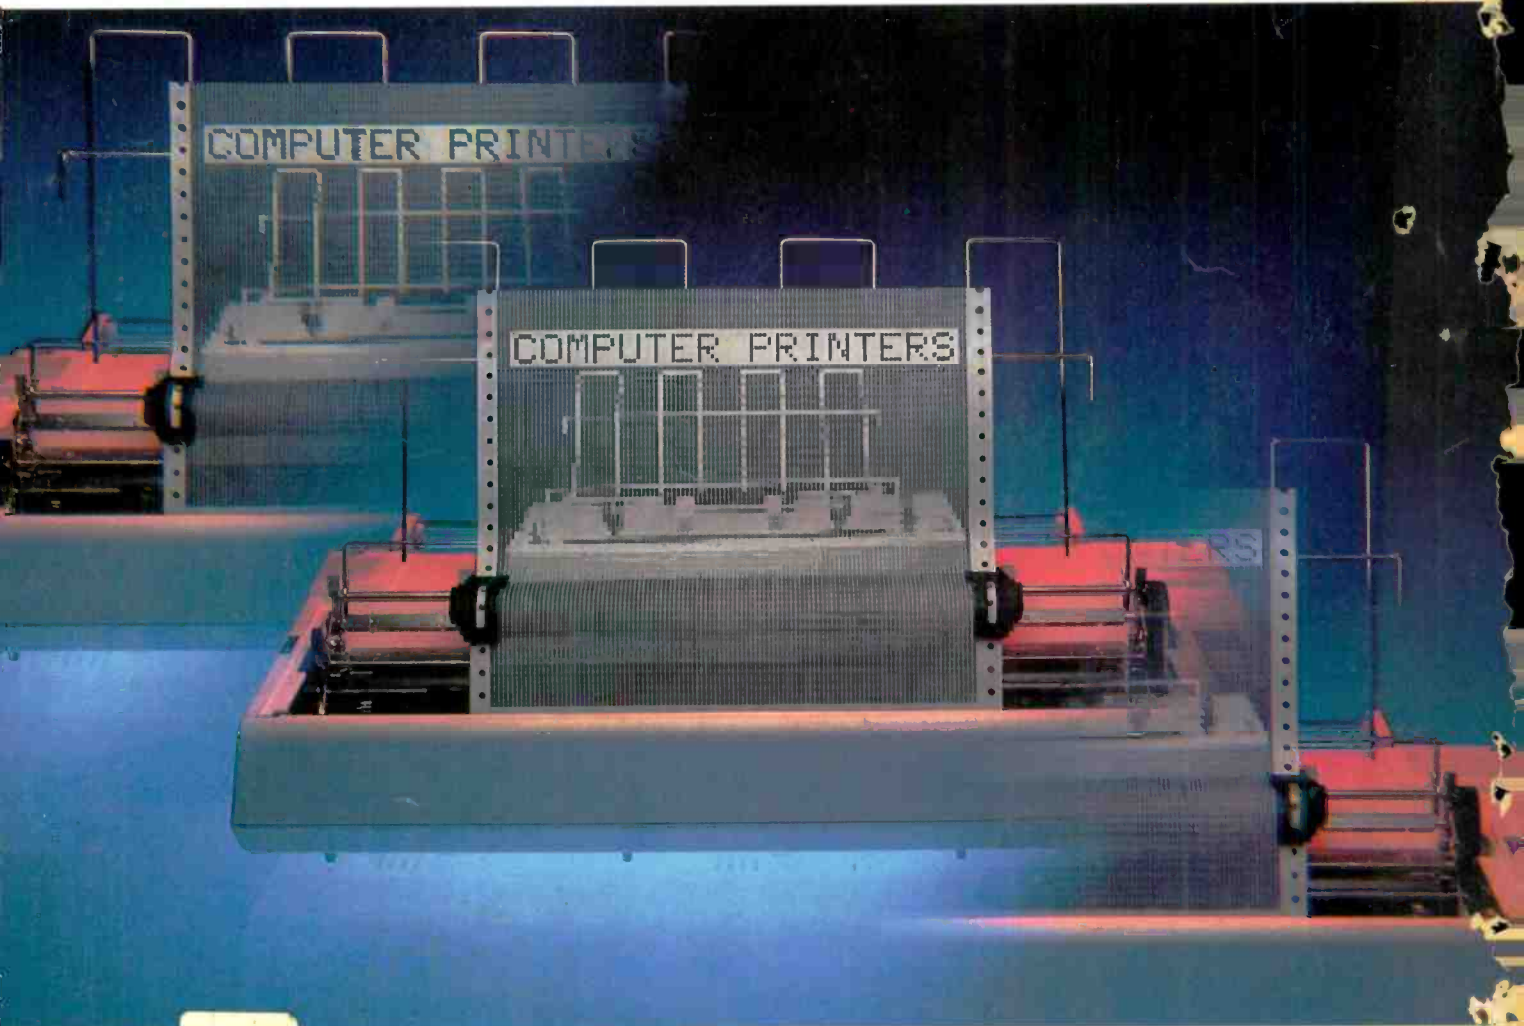


220

Special Issue:

2 Audio Preamplifier

Heath IO-4550 Dual-Trace Oscilloscope

www.americanradiohistory.com



NOW THAT YOU FIRST GEN TAKE A LOOK



Welcome to a tour of the biggest Apple.
The Apple® III Personal Computer — the most powerful machine in its class.

Because it's the only personal computer that lets you add up to 256K RAM, hang on a full complement of peripherals, and still have four expansion slots left for future growth. (Unlike some micros which become woefully "slot-bound" when upgraded to maximum memory.)

Because it's the only machine now using 64K RAM chips to keep 256K tidy on a single board.

And because it's the only machine that gives you the help of SOS.

THE MOST SOPHISTICATED OS.

SOS is the Apple III's Sophisticated Operating System, an elegant software interface that frees you from most system control tasks. It features a hierarchical file system, device- and user-level interrupt capabilities, a device-independent file system and memory management capability.

Since all Apple III languages use SOS, they share a common disk format. So Apple III programs can merge and communicate — a Pascal application program can directly access a BASIC text file, for example.

Xerox 820	Hewlett-Packard 125—Model 10	IBM Personal Computer	Apple III
<i>Standard Memory</i>			
64K	64K	64K	128K
<i>Maximum Memory when fully configured*</i>			
64K	64K	192K	256K
<i>Expandability</i>			
No expansion slots	No expansion slots	No extra expansion slots in fully configured* 192K system	4 extra expansion slots in fully configured 256K system*
<i>Diskette Storage (per drive)</i>			
92K	256K	160K	140K
<i>Mass Storage (per drive)</i>			
—	1.16 megabyte Floppy Disk	—	5 megabyte Hard Disk
<i>Display Graphics Capability</i>			
High resolution B/W	High resolution B/W	High resolution B/W or 4-color (color requires additional card)	High resolution B/W or 16-color
<i>Software Available</i>			
Word Processing Super Calc®	Word Processing VisiCalc® 125 Business Graphics Communications	Word Processing VisiCalc®	Word Processing VisiCalc® III Business Graphics Communications Apple II software library CP/M® library (available Spring, 1982)
—	—	—	—
CP/M® library	CP/M® library	CP/M® 86 programs	—

*Fully configured" means system includes, at minimum, monitor, printer, 2-disk drives and RS-232 communicator. NOTE: Chart based on manufacturer's information available as of December, 1981.

WE SEEN THEIR ERATION AT OUR THIRD.



SOS allocates system resources to make the most of dynamic memory, simplifies programming with standard device and file interfaces for all languages, and speeds software development by reducing program size and complexity.

OUR NEW PROFILE.

ProFile™ is Apple's new personal mass storage system—a quick, quiet 5MB hard disk ideal for software development or any mass storage application. Shown above twixt monitor and console, it comes with everything you need to get up and running, including interface card and driver software.

The III's standard built-in drive is a 140-K floppy that can be daisy-chained with three additional drives through a back panel connector. Which leaves you plenty of expansion slots for things like our new Universal Parallel Interface Card or our OEM Prototyping Card.

CHANGE KEYS.

The 128-character ASCII-encoded keyboard happens to be fully-programmable. So you can (with SOS) do neat things like remap it into

DVORK. Or create armies of special function keys. Or teach your Apple to write Chinese.

Its own languages already include Business BASIC, UCSD Pascal™, Assembly and, soon, a powerful new COBOL—and, in emulation mode, most languages available for Apple II.

Look up from the keyboard and you'll see our standard Monitor III green phosphor display (80 char. x 24 lines, u/l). It can show you some of the highest resolution graphics available—560 x 192 in 16 gray scales. Or choose a color monitor, and you could be seeing 16-color graphics in high 280 x 192 resolution.

HIT LIST.

We have a new edition of that monster hit, VisiCalc® with more modeling space than any other version. Plus AppleWriter III, a powerful new word processing package. Plus a new Business Graphics package. Plus a new Mail List Manager.

Plus a Pascal Utility Library that lets you take full advantage of all UCSD Pascal features.

Plus Access III—sophisticated smart terminal software to access mainframes with asynchronous communications up to 9600 bps.

Plus Apple II emulation to access that vast software library.

Plus, soon, a CP/M® card to access that other vast library.

Even with all this, the Apple III's potential remains essentially untapped.

So we're offering improved documentation, new programmer's aids, expert hotline counseling and an open channel to the industry leader in software publishing. Us.

See your Apple dealer for more information and, perhaps, a little comparison shopping.

We're sure you'll find that between our third generation and their first, there's quite a gap.

The personal computer.



For the authorized dealer nearest you, call (800) 538-9696. In California, call (800) 662-9238. Or write: Apple Computer Inc., 10260 Bandlely Dr., Cupertino, CA 95014. VisiCalc is a registered trademark of Personal Software, Inc. UCSD Pascal is a trademark of the Regents of the University of California. CP/M is a registered trademark of Digital Research, Inc. Apple is a registered trademark.

The networks use Scotch® Video Tape for the same reasons you should: true color and clarity.

All three major networks use Scotch® Video Tape. Because they *have* to get the best picture possible.

You can get true color and clarity at home, too. With Scotch Beta or VHS Videocassettes. Here's why:

We make video tape for home use just as carefully as the tape we make for the networks. It's not exactly the same. For one thing, network tape is wider. But we start with the same basic ferric

oxide particles. It's made by the same processes, on the same machinery and to the same exacting quality control standards.

And because your home isn't a professional studio, our exclusive micro-fine Anachron™ particles are cobalt-encapsulated, giving you superb picture quality. And they are protected by a unique Static Barrier™. This barrier virtually eliminates dust, a major cause of video dropouts—those white flashes in the picture.

We apply this kind of state-of-the-art technology to every video tape we make. That means you can count on true color and clarity in the extended play modes as well as at the fastest speed.

So take a tip from the experts. And start enjoying true color and clarity like the networks get in your own home.

Scotch® Videocassettes.
The truth comes out.



SCOTCH® • VIDEOCASSETTES

3M

CIRCLE NO. 63 ON FREE INFORMATION CARD

www.americanradiohistory.com

Popular Electronics®

WORLD'S LARGEST-SELLING ELECTRONICS MAGAZINE

Feature Articles

CHOOSING A PRINTER FOR A SMALL COMPUTER/ <i>Alexander B. Burawa</i> _____	37
<i>Guidelines for buying a printer and how various types work.</i>	
SERVICING SOLDERLESS SOCKETS/ <i>John T. Bailey</i> _____	67
CONTROLLING AC POWER/ <i>Ralpy Tenny</i> _____	78
<i>How to control ac voltages from remote locations.</i>	

Construction Articles

4-TO-3-WIRE TAILLIGHT CONVERSION/ <i>Michael S. Cranmer</i> _____	68
ADD DOUBLES TO YOUR COMPUTER/ <i>James Barbarello</i> _____	70
<i>Two can play computer games without crowding the keyboard.</i>	

The Electronic World

ENHANCING STEREO SOUND WITH SIGNAL PROCESSORS/ <i>Leonard Feldman</i> _____	49
<i>How "audio enhancement" devices can improve your stereo system.</i>	

Equipment Reviews

CROWN MODEL SL2 PREAMPLIFIER _____	20
ZENITH EXPLORER TV/AM/FM CLOCK RADIO _____	24
SINCLAIR ZX81 PERSONAL COMPUTER _____	32
HEATHKIT MODEL IO-4550 DUAL-TRACE OSCILLOSCOPE _____	88

Columns

ENTERTAINMENT ELECTRONICS/ <i>Ivan Berger</i> _____	16
<i>Microtape and Music.</i>	
COMPUTER BITS/ <i>Carl Warren</i> _____	90
<i>Extend Your Apple.</i>	
COMPUTER SOURCES/ <i>Leslie Solomon</i> _____	94
SOLID-STATE DEVELOPMENTS/ <i>Forrest M. Mims</i> _____	97
<i>Focus on CMOS</i>	
HOBBY SCENE _____	101
EXPERIMENTER'S CORNER/ <i>Forrest M. Mims</i> _____	103
<i>How to Protect Profitable Ideas.</i>	
<i>Part 1. Adventures of an Idea Peddler.</i>	
DX LISTENING/ <i>Glenn Hauser</i> _____	106
<i>Researching the Shortwave Audience.</i>	
PROJECT OF THE MONTH/ <i>Forrest M. Mims</i> _____	112
<i>Power Pulse Generator.</i>	

Departments

EDITORIAL/ <i>Art Salsberg</i> _____	6
<i>Whose Time Has Come?</i>	
LETTERS _____	8
NEW PRODUCTS _____	10
ADVERTISER'S INDEX _____	108
ELECTRONICS LIBRARY _____	111
OPERATION ASSIST _____	113
PERSONAL ELECTRONICS NEWS _____	126

COVER PHOTO BY JAY BRENNER Copyright © 1982
 PRINTOUT CREATED BY COMPUTER AMUSEMENTS SYSTEMS, INC.

COPYRIGHT © 1982 BY ZIFF-DAVIS PUBLISHING COMPANY. All rights reserved. Popular Electronics (ISSN 0032-4485) March 1982, Volume 20, Number 3. Published monthly by Ziff-Davis Publishing Co., at One Park Ave., New York, NY 10016. Richard P. Frieze, President; Selwyn Taubman, Treasurer; Bertram A. Abrams, Secretary. One year subscription rate for U.S. and Possessions, \$15.00; Canada, \$20.00; all other countries, \$23.00 (cash orders only, payable in U.S. currency). Second Class Postage Paid at New York, N.Y. 10016 and at additional mailing offices. Authorized as second class mail by the Post Office Dept., Ottawa, Canada, and for payment of postage in cash. POPULAR ELECTRONICS including ELECTRONICS WORLD, Trade Mark Registered. Indexed in the Reader's Guide to Periodical Literature. Ziff-Davis also publishes Boating, Car and Driver, Cycle, Flying, Popular Photography, Skiing, Stereo Review, Electronic Experimenter's Handbook, and Tape Recording & Buying Guide. Forms 3579 and all Subscription Correspondence: POPULAR ELECTRONICS, Circulation Dept. P.O. Box 2774, Boulder, CO 80302. Please allow at least eight weeks for change of address, enclosing, if possible, an address label from a recent issue. Permissions: Material in this publication may not be reproduced in any form without permission. Requests for permission should be directed to John Babcock, Rights and Permissions, Ziff-Davis Publishing Co., One Park Ave., New York, NY 10016.

If you seek the sound of success... learn professional recording technology.



Obtain the **Multi-track Recording Technology** diploma in one year, or the four year **B.S. Degree in Music Technology** via the Institute of Audio Research—New York University joint program.

Spring '82 Quarter starts **Thursday, March 25th.**

Summer '82 Quarter starts **Tuesday, July 6th.**

Write or call for our 24-page brochure, (please mention this publication):



Institute of Audio Research

64 University Place
 Greenwich Village
 New York, N.Y. 10003
 212/677-7580
 or 800/847-4187
 (Toll-free from outside of N.Y. State)

Established 1969

Licensed by N.Y. State Dept. of Education
 Approved for Veterans Training

The \$149⁹⁵ personal computer.



Introducing the Sinclair ZX81

If you're ever going to buy a personal computer, now is the time to do it.

The new Sinclair ZX81 is the most powerful, yet easy-to-use computer ever offered for anywhere near the price: only \$149.95* completely assembled.

Don't let the price fool you. The ZX81 has just about everything you could ask for in a personal computer.

A breakthrough in personal computers

The ZX81 is a major advance over the original Sinclair ZX80—the world's largest selling personal computer and the first for under \$200.

In fact, the ZX81's new 8K Extended BASIC offers features found only on computers costing two or three times as much.

Just look at what you get:

- Continuous display, including moving graphics
- Multi-dimensional string and numerical arrays

* Plus shipping and handling. Price includes connectors for TV and cassette, AC adaptor, and FREE manual.

- Mathematical and scientific functions accurate to 8 decimal places
- Unique one-touch entry of key words like PRINT, RUN and LIST
- Automatic syntax error detection and easy editing
- Randomize function useful for both games and serious applications
- Built-in interface for ZX Printer
- 1K of memory expandable to 16K

The ZX81 is also very convenient to use. It hooks up to any television set to produce a clear 32-column by 24-line display. And you can use a regular cassette recorder to store and recall programs by name.

If you already own a ZX80
The 8K Extended BASIC chip used in the ZX81 is available as a plug-in replacement for your ZX80 for only \$39.95, plus shipping and handling—complete with new keyboard overlay and the ZX81 manual.

So in just a few minutes, with no special skills or tools required, you can upgrade your ZX80 to have all the powerful features of the ZX81. (You'll have everything except continuous display, but you can still use the PAUSE and SCROLL commands to get moving graphics.)

With the 8K BASIC chip, your ZX80 will also be equipped to use the ZX Printer and Sinclair software.

Order at no risk**

We'll give you 10 days to try out the ZX81. If you're not completely satisfied, just return it to Sinclair Research and we'll give you a full refund.

And if you have a problem with your ZX81, send it to Sinclair Research within 90 days and we'll repair or replace it at no charge.

** Does not apply to ZX81 kits.



NEW SOFTWARE: Sinclair has published pre-recorded programs on cassettes for your ZX81, or ZX80 with 8K BASIC. We're constantly coming out with new programs, so we'll send you our latest software catalog with your computer.



ZX PRINTER: The Sinclair ZX Printer will work with your ZX81, or ZX80 with 8K BASIC. It will be available in the near future and will cost less than \$100.



16K MEMORY MODULE: Like any powerful, full fledged computer, the ZX81 is expandable. Sinclair's 16K memory module plugs right onto the back of your ZX81 (or ZX80, with or without 8K BASIC). Cost is \$99.95, plus shipping and handling.



ZX81 MANUAL: The ZX81 comes with a comprehensive 164-page programming guide and operating manual designed for both beginners and experienced computer users. A \$10.95 value, it's yours free with the ZX81.

The \$99⁹⁵ personal computer.

Introducing the ZX81 kit

If you really want to save money, and you enjoy building electronic kits, you can order the ZX81 in kit form for the incredible price of just \$99.95*. It's the same, full-featured computer, only you put it together yourself. We'll send complete, easy-to-follow instructions on how you can assemble your ZX81 in just a few hours. All you have to supply is the soldering iron.

How to order

Sinclair Research is the world's largest manufacturer of personal computers.

The ZX81 represents the latest technology in microelectronics, and it picks up right where the ZX80 left off. Thousands are selling every week.

We urge you to place your order for the new ZX81 today. The sooner you order, the sooner you can start enjoying your own computer.


To order, simply call our toll free number, and use your MasterCard or VISA.

To order by mail, please use the coupon. And send your check or money order. We regret that we cannot accept purchase orders or C.O.D.'s.

CALL 800-543-3000. Ask for operator #509. In Ohio call 800-582-1364. In Canada call 513-729-4300. Ask for operator #509. Phones open 24 hours a day, 7 days a week. Have your MasterCard or VISA ready.

These numbers are for orders only. For information, you must write to Sinclair Research Ltd., 2 Sinclair Plaza, Nashua, NH 03061.

sinclair

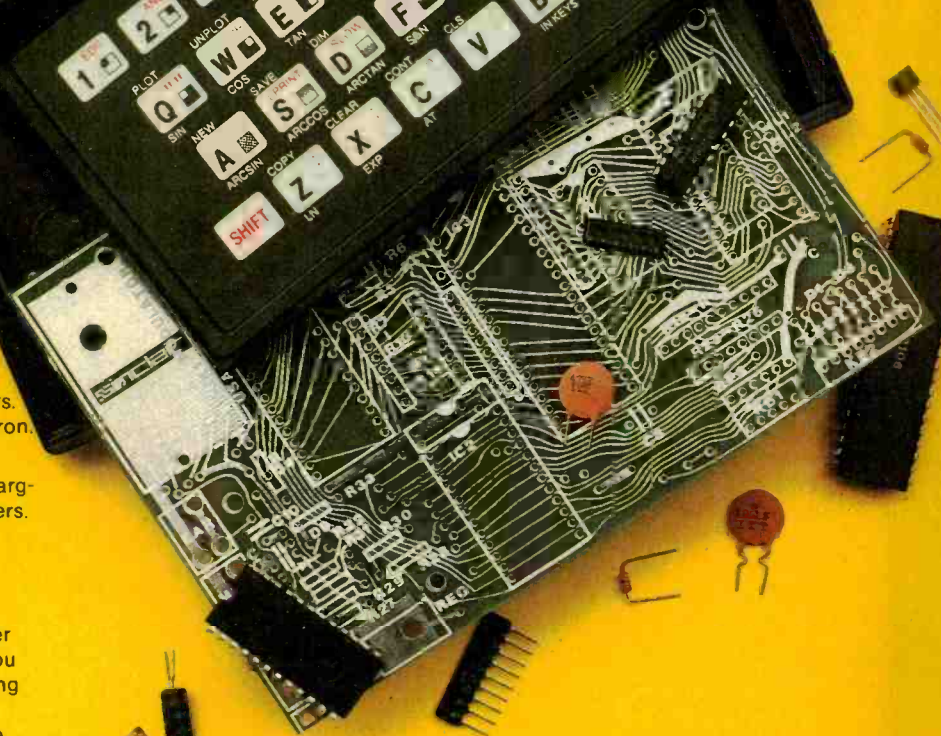

AD CODE	03PE	PRICE†	QTY	AMOUNT
	ZX81	\$149.95		
	ZX81 Kit	99.95		
	8K BASIC chip (for ZX80)	39.95		
	16K Memory Module (for ZX81 or ZX80)	99.95		
	Shipping and Handling	4.95		\$4.95
TOTAL				

MAIL TO: Sinclair Research Ltd., One Sinclair Plaza, Nashua, NH 03061.

NAME _____

ADDRESS _____

CITY/STATE/ZIP _____

†U.S. Dollars



EDITORIAL

Whose Time Has Come?

Hindsight is marvelous. But how many people can recognize a development whose time has come when it's only in the embryonic marketing state? Western Union didn't when it had a chance to get Alexander Bell's telephone. After all, the telegraph was master, wasn't it? At one time, IBM and Remington Rand ignored computers that didn't fill whole rooms. So two engineers from MIT started a minicomputer company called Digital Equipment Corp., in which a venture capitalist invested \$70,000 for 78% ownership. (DEC registered over \$3-billion in sales in 1981.)

What's on the horizon that will make inroads into our technological industry? Perhaps it will be fiber optics. It's only a \$65-million business now, but it's been predicted that it will hit close to \$1-billion by 1990.

How about microcassette car audio systems? It's not here now, but Matsushita Electric, parent company of Panasonic, Technics, and Quasar, will be marketing it in Japan next year.

Will video-game parlors give way to computer parlors? Or will some far-sighted computer company open non-selling computer centers in key cities to spread the gospel? It would not be a completely magnanimous gesture to do so if the company already has a substantial share of the market; creating a

larger pool of buyers would benefit the company if it maintained only its present share.

If this sounds far fetched, you should know that Hitachi, Ltd. opened up a "my-com" (the Japanese shorthand name for a microcomputer) center called GAIN in the Akihabara section of Tokyo in 1977. It's a favorite hangout for teenagers, and has working micros equipped for all levels of computer literacy, including instructing newcomers. The center, with 10 a.m. to 7 p.m. hours, has 500 to 600 visitors a day.

With desktop computers perhaps sounding a death knell for intelligent terminals, or so it seems, will companies leap-frog to 32-bit CPUs instead of moving from 8-bit to 16-bit machines? Motorola's 68000 16/32-bit CPU is pointing the way. Even though software hasn't caught up to 16-bit yet, the future of super-number crunchers with Unix or Unix look-alike operating systems for 32-bit micros seems bright. To draw an analogy, the U.S. could have moved more quickly past the A-bomb once it was developed to a thermonuclear device since the latter was to be its strategic successor anyway. Dr. Edward Teller was indeed chomping at the bit in an effort to do so, but the more idealistic and charismatic Dr. J. Robert Oppenheimer won the day. (The only reason the U.S. did

move forward with dispatch about four years later was due to the Soviet Union detonating its first super bomb, a half-year before us.)

High-resolution TV, with 1150 lines, is a reality today. One hangup is standards. Will the world settle on 1150 or will countries follow the path taken for standard TV, which has a few different systems? Furthermore, will stereo-TV sound systems be available in the U.S. as they are in Japan? I understand that a different system is being toyed with here.

And finally, will digital very-large-scale ICs (VLSI) be used to advantage to bring us digital TV receivers? The technology is already here, and it would mean lower manufacturing costs, better TV performance, and an extension of these advantages to video cassette recorders (digital, of course). ICs for this purpose have already been fabricated in West Germany by the ITT Semiconductors Group, with a sampling kit of six VLSI and two LSI chips reportedly available. Which TV maker will pick up the gauntlet?

Popular Electronics

JOE MESICS
Publisher

ARTHUR P. SALSBERG
Editorial Director

DONALD MENNIE
Executive Editor

LESLIE SOLOMON
Technical Director

JOHN R. RIGGS
Managing Editor

EDWARD I. BUXBAUM
Art Director

JOSEPH DESPOSITO
Technical Editor

DAVID M. WEBER
Features Editor

ANDRE DUZANT
Technical Illustrator

CARMEN ROBLES
Production Editor

JEFF NEWMAN
Editorial Assistant

Contributing Editors:
Walter Buchsbaum,

Carl Warren, Stan Prentiss, Glenn Hauser,
Julian Hirsch, Forrest Mims, Ivan Berger

MARIE MAESTRI
Executive Assistant

Editorial and Executive Offices
One Park Avenue
New York, New York 10016
212 725-3500

Publisher
Joe E. Mesics
212 725-3568

New York Office
Advertising Manager:
Richard Govatski (725-7460)
Sales:
Tom Ballou (725-3578)
Ken Lipka (725-3580)

Midwestern Office
Suite 1400, 180 N. Michigan Ave.,
Chicago, IL 60601 (312 346-2600)
Sales: Ted Welch

Western Representative
Norman S. Schindler & Associates, Inc.
7050 Owensmouth Ave., #209
Canoga Park, CA 91303 (213 999-1414)
Sales: Norm Schindler, David Adrian

Representation in Japan
J. S. Yagi
Iwai Trading Co., Ltd.
603 Ginza Sky Heights Bldg.
18-13, Ginza 7-Chome
Tokyo, Japan 104

Ziff-Davis Publishing Company

Richard P. Friese President

Albert S. Traina President, Consumer Magazine Division

Furman Hebb Executive Vice President

Phillip T. Heffernan Senior Vice Presidents

Sidney Holtz

Edward D. Muhlfeld

Philip Sine

Robert Bavier

Vice Presidents

Baird Davis

George Morrissey

Selwyn Taubman

Treasurer

Bertram A. Abrams

Secretary

Editorial correspondence: POPULAR ELECTRONICS, 1 Park Ave., New York, NY 10016. Editorial contributions must be accompanied by return postage and will be handled with reasonable care; however, publisher assumes no responsibility for return or safety of manuscripts, art work, or models submitted.

The publisher has no knowledge of any proprietary rights which will be violated by the making or using of any items disclosed in this issue.



Member Audit Bureau of Circulations

POPULAR ELECTRONICS

Radio Shack - The Leader in Small Business Computers Also Has Computers for Your Home!

Introducing the Lowest-Cost Color Disk System Ever--

Radio Shack's TRS-80®!

Radio Shack now offers disk drives for our popular TRS-80 Color Computer. Now you can have superb high-resolution color graphics and fast, "on-line" access to large amounts of data.

Only \$1198 for a 1-Drive System. Our new \$599 disk drive makes our TRS-80 Color Computer—complete with 16,000 characters (16K) of internal memory and Extended Color BASIC language—a versatile, low-cost computing system that's ready to attach to your own TV receiver.

Stores 156,000 Characters! Just plug in the Program Pak™ controller to add disk storage to the Color Computer. The Disk Operating System is completely contained in the Program Pak, so you get a full 156K-bytes of on-line storage. The Program Pak also includes Color Disk BASIC—an enhanced version of the Color Computer's programming language.

Easy to Use. The 16K TRS-80 Color Computer lets you create sophisticated color diagrams, business charts and even simple animation—using just a few simple one-line commands! This gives experienced programmers incredible power, yet makes it easy for


beginners, too. We take you from the ground up with over 500 pages of easy-to-read documentation.

Instant Fun and Games. And just for fun, you can also use any of our plug-in game cartridges. Battle starships in outer space, conquer dinosaurs from a prehistoric world, or just brush up on your chess.

Expandable, too. Your TRS-80 Color Computer Disk System can expand with up to four drives for over 626,000 characters of storage! And the additional drives are only \$399 each. Add up to 16K more memory, a printer and other accessories any-time.

Radio Shack's TRS-80—The Best-Supported Microcomputer in the World!

TRS-80 computers are backed with a wide selection of accessories, software, and service, available at over 6100 Radio Shack stores and dealers, and 185 Computer Centers nationwide. Stop by and see what's really new in personal computers today!

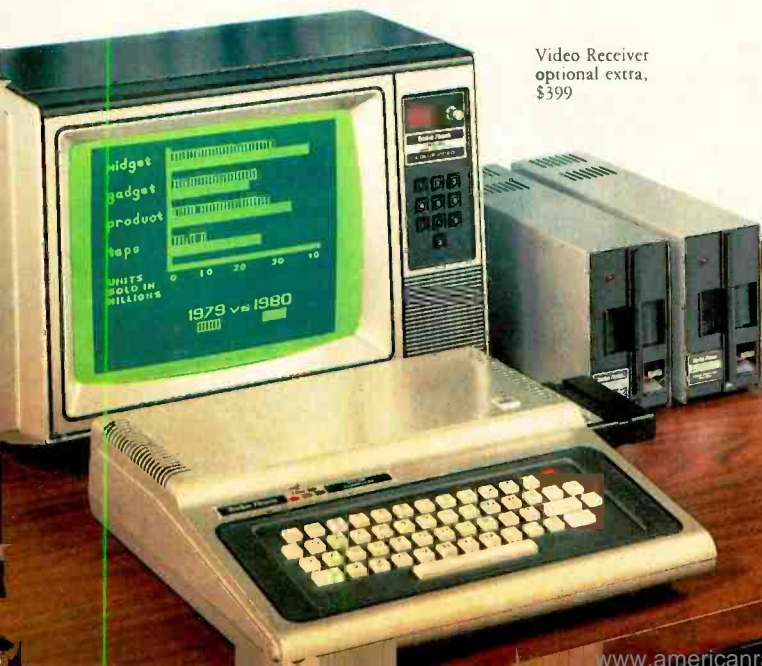

Video Receiver optional extra, \$399

Radio Shack®

The biggest name in little computers™

A DIVISION OF TANDY CORPORATION

Retail prices may vary at individual stores and dealers

To learn even more about the TRS-80 Color Disk System send for the Free New RSC-6 Computer Catalog.

Radio Shack, Dept. 82-A-94
1300 One Tandy Center
Fort Worth, Texas 76102

NAME _____

STREET _____

CITY _____

STATE _____

ZIP _____

PHONE _____

**WHY K40
BECAME THE
LARGEST
SELLING
CB ANTENNA
IN JUST
ONE YEAR!**

Because

K40

**OFFERS A
MONEY BACK**

DOUBLE GUARANTEE

- TRANSMITS FARTHER
- RECEIVES CLEARER

**...THAN ANY ANTENNA
IT REPLACES!**



**AN AMERICAN MADE PRODUCT
FROM AN AMERICAN COMPANY.**

Call your local CB Dealer



For a FREE demo!

AMERICAN ANTENNA

© Copyright 1979 American Antenna Elgin, Illinois

CIRCLE NO. 4 ON FREE INFORMATION CARD

8

LETTERS

A Vote for the Current Convention

I was extremely pleased to see, in his first "Fundamental Facts" column (December 1981), that Walter Buchsbaum used conventional "positive current" notation in choosing the directions of the branch and loop currents in his analyses. The matter of current convention is of concern to me because it is so fundamental to the way a person learns to conceptualize circuit operation (as opposed to using electron flow). A great many schools train electronic technicians to use the electron-flow idea. One of the most frustrating consequences of this arises when an engineer and a technician, both of somewhat limited experience, sit down to analyze a circuit and each concludes the other is ignorant of basic circuit functions.—Lucias B. Day, Jr., Lakewood, CO.

Automatic Dialer Erratum

Enjoyed your article on automatic telephone dialers in the February issue. I note, however, that there are some errors in the Table for Webcor's ZIP 757. The following features were omitted: redials number automatically when there's a busy signal, and has programmable chained memory locations for automatic redialing of MCI and SPRING systems. Also, the suggested retail price is \$129.95, not \$150.00.—Nancy S. Joseph, Webcor Electronics, Inc., Plainview, NY.

Liquid-Crystal Displays

The December "Solid-State Developments" column showed how to generate the 30-Hz ac needed to drive an LCD using two gates of a CD4011. I have experimented with this and similar circuits for the same purpose and found some startling differences in current consumption. If the old CD4011A is used, it will draw as much as 9 mA. Either of the newer CD4011B or CD4011C units draws only 3 mA. The same circuit using a CD4093 Schmitt trigger NAND gate will draw only 0.3 mA. And a CD4047 low-power oscillator pulls only 0.05 mA. Also, the latter contains a flip-flop to produce the perfect 50% duty-cycle square wave needed to avoid the destruction of the LCD display. With this circuit, it is possible to build CMOS-LCD circuits with a battery life of thousands of hours.—D. J. Salomon, Montreal, Can.

Computer Language Popular

Your last article on computer language (December 1981) was great for me. I am a draftsman in an electrical engineering firm, and I noticed that the computer engineers in our company kept the article for about three weeks when it first came out.—R. M. Holberg, Lansing, MI.

Source for PC Boards

I read with great interest the article, "Electronic Bass Boost for Woofers," in your November 1981 issue. Unfortunately, no pc board pattern was published and since I have limited ability in setting up a circuit board, I am at a disadvantage when it comes to building such a project. Please publish pc board patterns as often as is practically possible, or list a source where such a board can be obtained at a reasonable cost.—S. B. Roy, Boston, MA.

As stated in the article, this circuit was simple enough that we felt most readers would prefer to construct it on perf board. A pc board could, of course, be designed; but in this case it would not be practical for us to find a source for the board (which we normally do for projects of sufficient complexity).—Ed.

OUT OF TUNE

In "Build a Diode Temperature Probe" (February 1981), the value of R_2 to give Celsius readings should be 120 kilohms in the Parts List, as it is on the schematic. Also, in the schematic, the bottom of the bridge should be connected to the negative side of 1.35 V.

In "Electronic Bass Boost for Woofers" (November 1981), in the schematic, the lower end of R_5 should be connected to the circuit ground instead of the negative supply.

In "Fundamental Facts" for December 1981 ("The Basic Network Laws"), in Fig. 3, R_1 should have been given as 27 kilohms, not 2.7. This results in a base bias of 1.7 V, and collector and emitter voltages of 2 and 1 V respectively. The collector current is then 10 mA, base current is 0.13 mA and emitter current is 10.13 mA.

In "Add a Safe, Convenient Shutoff to Smoke Detectors" (January 1982), LED1 is shown in the schematic with its polarity reversed.



Wall plate not included.

NEWEST THIEF STOPPER. A LIGHT SWITCH WITH EARS.

Imagine entering a darkened room that lights up at the sound of your footsteps. A room that's also 'smart' enough to flick off lights when it's empty.

Imagine too, an intruder attempting to pry open your window at midnight. Suddenly, room lights are ablaze, frightening him off—and your home and family remain untouched.

And who's your fearless protector? A light switch named AudioLite.

An invention that offers security and remote convenience straight from the pages of science fiction.

A slave to your every move.

AudioLite is also a wall switch you never have to touch—because it's sound activated. It turns on lights the second someone enters a room and turns them off when they leave (works outside too—in driveways, patios, porches).

How much sound does it take? You can adjust AudioLite's sound sensor to precisely any level. At high sensitivity even the clicking of a key in a lock or the opening of a door will turn on the lights. You can also lower its sensitivity so an extremely loud verbal command or noise will be required. Or choose an infinite number of adjustments in between.

Once activated, lights remain on for the time duration you set, anywhere from 7 seconds to 7 minutes.

Don't worry about lights going off when you need them. Each time AudioLite hears a new sound, it resets and begins counting over—keeping lights on without interruption. For quiet read-

ing, simply use the manual On/Off override. Easily adjustable timer and sensitivity controls are recessed and child proof.

Save money in more ways than you'd think.

Hall lights usually left on for hours are now on only when you need them. Likewise bathrooms, closets, garages and patios. You'll find about half the light usage in such areas is saved—lowering your utility bill accordingly.

Because AudioLite is also a full range dimmer, you use exactly the amount of light you need—as well as extend bulb life by 15 times or more.

And you needn't turn AudioLite off during the day—a daylight-sensitive photocell assures no unnecessary lights get turned on during daytime hours.

Magic that won't fade.

From the first snap of your fingers, AudioLite will be a constant source of amazement to you and your friends. And because it's solid state electronics—with few moving parts to wear out—it will outlast conventional light switches by many years. Its micro-computer circuitry is so

reliable there's a one year total replacement warranty: should anything go wrong, the manufacturer will send you a new one, free of charge. After a year, prompt service is available by mail—but it's unlikely you'll ever need it.

AudioLite replaces your present light switch in minutes. All you need is a screwdriver. Works with any incandescent bulb up to 300 watts.

As soon as you try one, you'll want to replace all your conventional wall switches with AudioLite. That's why there's a special price if you order four at a time—\$99. (For one only, the price is \$34.)

However, you may order four on trial. If not perfectly satisfied after trying one, return them all within 30 days for a prompt, courteous refund. You're protected by The Sharper Image guarantee of satisfaction.

Call now toll-free, and protect your home with this newest brainchild of remote control technology. Be among the first to own a light switch with ears, eyes and brains.

ORDER TOLL FREE.

Credit card holders use our toll-free numbers. Or send a check. Order product #SM653 for the package of four: \$99 plus \$4.50 delivery. Order #SM652 for one: \$34 plus \$2.50 delivery. Add 6% sales tax in CA. And please mention this magazine.

800 227-3436

In California 800 622-0733

In Alaska and Hawaii 800 227-3826

THE SHARPER IMAGE™

755 Davis Street Dept. 8314
San Francisco, CA 94111


©1981 The Sharper Image

For a year's subscription to our catalog of innovative products, send a dollar with your address.

NEW PRODUCTS

Additional information on new products covered in this section is available from the manufacturers. Either circle the item's code number on the Free Information Card or write to the manufacturer at the address given.

Lightweight Base Antenna

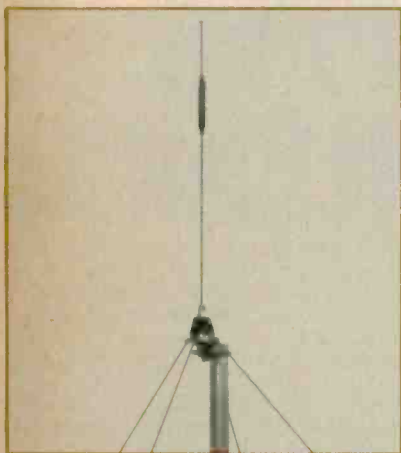

The MON-38 rooftop antenna from the Antenna Specialists Co. covers all of the popular scanner low-band, vhf, uhf, and T-band frequencies. The antenna weighs 1 lb and is said to be simple to assemble and install—mounting on any pipe or tubing up to 1 1/4" dia. The MON-38 terminates in an SO-239 receptacle (cable not provided). \$20.95.

CIRCLE NO. 88 ON FREE INFORMATION CARD

Probe DMM



The 3 1/2-digit hand-held multimeter from Steinel, called "Digi-Check," differs from other hand-held or pocket DMMs by utilizing two probe tips interconnected by one-meter cable. The probes, slightly

longer than conventional test probes, contain the LCD display, range and function selector slide switches, NiCd storage batteries, and an integral battery charger. No other cables, clips, or test leads are said to be required. Five ac and dc voltage ranges cover potential from 200 mV to 500 V with a basic accuracy given as $\pm 0.3\%$ dc and $\pm 1.0\%$ ac. Resistance is measured in six ranges from 200 ohms to 20 megohms with an accuracy of $\pm 0.5\%$. All ranges are protected against overload. A push-button memory permits the user to store a specific reading. The Digi-Check is claimed to have an operating life of 12 hours per charge. Recharging is accomplished from any ac outlet. \$169.

CIRCLE NO. 89 ON FREE INFORMATION CARD

Tubeless TV Camera



Hitachi has introduced what it claims is the first solid-state color video camera for the consumer market. Called the VK-C1000, the camera uses a single-chip CCD MOS image sensor instead of a vidicon tube. The system also features four

additive complementary color filters, NTSC compatibility, internal sync, and an f 1.4 C-mount lens with automatic iris and 6X zoom capability. Also, a uni-directional (up to 30° to either side of the camera), boom-type electret condenser microphone; and a 1 1/2" black-and-white electronic viewfinder. The CCD image sensor is said to eliminate the light-lag and burn-in that often result when a video camera is pointed at a bright light, i.e., exposure response is almost instantaneous. The on-wafer color filters are claimed to achieve high resolution (260 horizontal lines) while suppressing fixed-pattern noise. Other specs: video S/N, 46 dB; sensitivity, 100–100,000 lux; mic input, -67 dB; power requirement, 12 V dc; power consumption, 5.3 W; dimensions, 2 1/2" x 4 1/2" x 6" without viewfinder or lens; weight, 3.96 lb. The VK-C1000 is compatible with all VCRs. \$2000.

CIRCLE NO. 91 ON FREE INFORMATION CARD

Digital Tuner



The GFT-1 AM/FM digitally synthesized quartz tuner from ADCOM is claimed to have a tuning accuracy of 0.00025%. It can program up to 12 stations (six AM; six FM) for instant retrieval. A five-stage LED indicates the strength of incoming signals. A built-in record oscillator delivers a 400-Hz test tone, at 50% FM modulation, for setting tape deck levels for off-the-air recordings. Additionally, the GFT-1 features a high-blend switch to reduce out-of-phase high-frequency noise, and a muting switch to suppress inter-station noise. Specs: THD,

0.22% (stereo at 1 kHz); S/N, 70 dB (stereo); alternate channel selectivity, 70 dB; antenna impedance, 75 or 300 ohms; power requirements, 17 W. \$375.

CIRCLE NO. 87 ON FREE INFORMATION CARD

Color Printer



The Prism Printer from Integral Data Systems uses a four-band ribbon (cyan, magenta, yellow and black) to produce eight colors in a dot matrix format. The printer employs a nine-wire print head with two staggered rows of print needles for creating vertically overlapping dots in a single pass. Claimed to be well-suited for graphics, the unit features proportional spacing, horizontal and vertical tabbing, and reverse paper feed. Other capabilities: semi-automatic cut sheet feed, bold text printing, print densities of 10, 12, or 16.7 cpi, adjustable pitch for line lengths up to 220 columns on standard EDP paper, automatic text justification, and fine-positioning of characters to tolerances of 1/120 inch. Speed is selectable: In the high density mode (24 x 9 dots per character), the print rate is 150 cps; in the standard mode, over 200 cps. The Prism Printer uses the usual ASCII upper- and lower-case 96-character set. Up to four different such sets can reside in the unit at one time, for foreign language or custom character printing. Microprocessor controlled, the printer uses a standard RS-

Save on Scanners! NEW Rebates!

Communications Electronics™, the world's largest distributor of radio scanners, celebrates 1982 with big savings on Bearcat scanners. Electra Company, the manufacturers of Bearcat scanners is offering consumer rebates on their great line of scanners, when purchased between February 1 and March 15, 1982.

With your scanner, you can monitor the exciting two-way radio conversations of police and fire departments, intelligence agencies, mobile telephones, energy/oil exploration crews, and more. Some scanners can even monitor aircraft transmissions! You can actually hear the news before it's news. If you do not own a scanner for yourself, now's the time to buy your new scanner from Communications Electronics. Choose the scanner that's right for you, then call our toll-free number to place your order with your Visa or Master Card.

We give you excellent service because CE distributes more scanners worldwide than anyone else. Our warehouse facilities are equipped to process thousands of scanner orders every week. We also export scanners to over 300 countries and military installations. Almost all items are in stock for quick shipment, so if you're a person who prefers fact to fantasy and who needs to know what's really happening around you, order your scanner today from CE!

NEW! Bearcat® 350

The Ultimate Synthesized Scanner!

List price \$599.95/CE price \$399.00/\$50.00 rebate
Your final cost is a low \$349.00

7-Band, 50 Channel • Alpha-Numeric • No-crystal scanner • AM Aircraft and Public Service bands. • Priority Channel • AC/DC Bands: 30-50, 118-136 AM, 144-174, 421-512 MHz. The new Bearcat 350 introduces an incredible breakthrough in synthesized scanning: Alpha-Numeric Display. Push a button—and the Vacuum Fluorescent Display switches from "numeric" to word descriptions of what's being monitored. 50 channels in 5 banks. Plus, Auto & Manual Search, Search Direction, Limit & Count, Direct Channel Access, Selective Scan Delay, Dual Scan Speeds, Automatic Lockout, Automatic Squelch, Non-Volatile Memory. Order your Bearcat 350 today!

Bearcat® 300

List price \$549.95/CE price \$349.00/\$50.00 rebate
Your final cost is a low \$299.00

7-Band, 50 Channel • Service Search • No-crystal scanner • AM Aircraft and Public Service bands. • Priority Channel • AC/DC Bands: 32-50, 118-136 AM, 144-174, 421-512 MHz. The Bearcat 300 is the most advanced automatic scanning radio that has ever been offered to the public. The Bearcat 300 uses a bright green fluorescent digital display, so it's ideal for mobile applications. The Bearcat 300 now has these added features: Service Search, Display Intensity Control, Hold Search and Resume Search keys, Separate Band keys to permit lock-in/lock-out of any band for more efficient service search.



NEW! Bearcat® 350

FREE Bearcat® Rebate Offer

Get a coupon good for a \$50 rebate when you purchase a Bearcat 350 or 300. \$25 rebate on model 250 or 20/20. \$15 rebate on model 210XL. \$10 rebate on model 160 or 4-6 Thin Scan. To get your rebate, mail rebate coupon with your original dated sales receipt and the Bearcat model number from the carton to Electra. You'll receive your rebate in four to six weeks. Offer valid only on purchases made between February 1, 1982 and March 15, 1982. All requests must be postmarked by March 31, 1982. Limit of one rebate per household. Coupon must accompany all rebate requests and may not be reproduced. Offer good only in the U.S.A. Void where taxed or prohibited by law. Resellers, companies, clubs and organizations—both profit and non-profit—are not eligible for rebates. Employees of Electra Company, their advertising agencies, distributors and retailers of Bearcat Scanners are also not eligible for rebates. Please be sure to send in the correct amount for your scanner. Pay the listed CE price in this ad. Do not deduct the rebate amount since your rebate will be sent directly to you from Electra. Orders received with insufficient payments will not be processed and will be returned. Offer subject to change without notice.

Bearcat® 250

List price \$429.95/CE price \$279.00/\$25.00 rebate
Your final cost is a low \$254.00

6-Band, 50 Channel • Crystallines • Searches Stores • Recalls • Digital clock • AC/DC Priority Channel • 3-Band • Count Feature. Frequency range 32-50, 146-174, 420-512 MHz. The Bearcat 250 performs any scanning function you could possibly want. With push button ease you can program up to 50 channels for automatic monitoring. Push another button and search for new frequencies. There are no crystals to limit what you want to hear. A special search feature of the Bearcat 250 actually stores 64 frequencies and recalls them, one at a time, at your convenience.

NEW! Bearcat® 20/20

List price \$449.95/CE price \$289.00/\$25.00 rebate
Your final cost is a low \$264.00

7-Band, 40 Channel • Crystallines • Searches AM Aircraft and Public Service bands • AC/DC Priority Channel • Direct Channel Access • Delay Frequency range 32-50, 118-136 AM, 144-174, 420-512 MHz. The Bearcat 20/20 automatic scanning radio replaces the Bearcat 220 and monitors 40 frequencies from 7 bands, including aircraft. A two-position switch, located on the front panel, allows monitoring of 20 channels at a time.

Bearcat® 210XL

List price \$349.95/CE price \$229.00/\$15.00 rebate
Your final cost is a low \$214.00

6-Band, 18 Channel • Crystallines • AC/DC Frequency range: 32-50, 144-174, 421-512 MHz. The Bearcat 210XL scanning radio is the second generation scanner that replaces the popular Bearcat 210 and 211. It has almost twice the scanning capacity of the Bearcat 210 with 18 channels plus dual scanning speeds and a bright green fluorescent display. Automatic search finds new frequencies. Features scan delay, single antenna, patented track tuning and more!

Bearcat® 160

List price \$299.95/CE price \$194.00/\$10.00 rebate
Your final cost is a low \$184.00

5-Band, 16 Channel • AC only • Priority Dual Scan Speeds • Direct Channel Access Frequency range: 32-50, 144-174, 440-512 MHz. The Bearcat 160 is the least expensive Bearcat crystal-less scanner. Smooth keyboard. No buttons to punch. No knobs to turn. Instead, finger-lip pads provide control of all scanning operations.

NEW! Bearcat® 100

The first no-crystal programmable handheld scanner.

Allow 30-120 days for delivery after receipt of order due to the high demand for this product.

List price \$449.95/CE price \$299.00

8-Band, 16 Channel • Liquid Crystal Display Search • Limit • Hold • Lockout • AC/DC Frequency range 30-50, 138-174, 406-512 MHz.

The world's first no-crystal handheld scanner has compressed into a 3" x 7" x 1 1/4" case more scanning power than is found in many base or mobile scanners. The Bearcat 100 has a full 16 channels with frequency coverage that includes all public service bands (Low, High, UHF and "T" bands), the 2-Meter and 70 cm. Amateur bands, plus Military and Federal Government frequencies. It has chrome-plated keys for functions that are user controlled, such as lockout, manual and automatic scan. Even search is provided, both manual and automatic. Wow... what a scanner!

The Bearcat 100 produces audio power output of 300 milliwatts, is track-tuned and has selectivity of better than 50 dB down and sensitivity of 0.6 microvolts on VHF and 1.0 microvolts on UHF. Power consumption is kept extremely low by using a liquid crystal display and exclusive low power integrated circuits.

Included in our low CE price is a sturdy carrying case, earphone, battery charger/AC adapter, six AA ni-cad batteries and flexible antenna. For earliest delivery from CE, reserve your Bearcat 100 today.

TEST ANY SCANNER

Test any scanner purchased from Communications Electronics™ for 31 days before you decide to keep it. If for any reason you are not completely satisfied, return it in original condition with all parts in 31 days, for a prompt refund (less shipping/handling charges and rebate credits).

CIRCLE NO. 1 ON FREE INFORMATION CARD

www.americanradiohistory.com

Bearcat® Four-Six ThinScan™

List price \$189.95/CE price \$124.00/\$10.00 rebate
Your final cost is a low \$114.00

Frequency range: 33-47, 152-164, 450-508 MHz. The incredible, Bearcat Four-Six Thin Scan™ is like having an information center in your pocket. This four band, 6 channel crystal controlled scanner has patented Track Tuning on UHF. Scan Delay and Channel Lockout. Measures 2 3/4 x 6 1/4 x 1 1/2". Includes rubber ducky antenna. Order crystal certificate for each channel. Made in Japan.

Fanon Slimline 6-HLU

List price \$169.95/CE price \$109.00

Low cost 6-channel, 3-band scanner!

The Fanon Slimline 6-HLU gives you six channels of crystal controlled excitement! Unique Automatic Peak Tuning Circuit adjusts the receiver front end for maximum sensitivity across the entire UHF band. Individual channel lockout switches. Frequency range 30-50, 146-175 and 450-512 MHz. Size 2 3/4 x 6 1/4 x 1". Includes rubber ducky antenna. If you don't need the UHF band, get the Fanon model 6-HL for \$99.00 each, and save money. Same high performance and features as the model HLU without the UHF band. Order crystal certificates for each channel. Made in Japan.

OTHER SCANNERS & ACCESSORIES

NEW! Regency † D810 Scanner	\$319.00
NEW! Regency † D300 Scanner	\$219.00
NEW! Regency † D100 Scanner	\$169.00
NEW! Regency † H604 Scanner	\$129.00
Regency † M400 Scanner	\$259.00
Regency † M100 Scanner	\$199.00
Regency † R1040 Scanner	\$149.00
SCMA-6 Fanon Mobile Adapter/Battery Charger	\$49.00
CHB-6 Fanon AC Adapter/Battery Charger	\$15.00
CAT-6 Fanon carrying case with belt clip	\$15.00
AUC-3 Fanon auto lighter adapter/Battery Charger	\$15.00
PSK-6 Base Power Supply/Bracket for SCMA-6	\$20.00
SP50 Bearcat AC Adapter	\$9.00
SP51 Bearcat Battery Charger	\$9.00
SP58 Bearcat 4-6 ThinScan carrying case	\$12.00
MA506 Regency carrying case for H604	\$15.00
FB-E Frequency Directory for Eastern U.S.A.	\$12.00
FB-W Frequency Directory for Western U.S.A.	\$12.00
FFD Federal Frequency Directory for U.S.A.	\$12.00
TSG "Top Secret" Registry of U.S. Government Freq.	\$10.00
ASD Frequency Directory for Aircraft Band	\$10.00
B-4 1.2 V AAA Ni-Cad batteries (set of four)	\$9.00
A-135cc Crystal Certificate	\$3.00

Add \$3.00 shipping for all accessories ordered at the same time.

INCREASED PERFORMANCE ANTENNAS

If you want the utmost in performance from your scanner, it is essential that you use an external antenna. We have six base and mobile antennas specifically designed for receiving all bands. Order #A60 is a magnet mount mobile antenna. Order #A61 is a gutter clip mobile antenna. Order #A62 is a trunk-lip mobile antenna. Order #A63 is a 3/4 inch hole mount. Order #A64 is a 3/8 inch snap-in mount. and #A70 is an all band base station antenna. All antennas are \$35.00 and \$3.00 for UPS shipping in the continental United States.

BUY WITH CONFIDENCE

To get the fastest delivery from CE of any scanner, send or phone your order directly to our Scanner Distribution Center. Be sure to calculate your price using the CE prices in this ad. Michigan residents please add 4% sales tax. Written purchase orders are accepted from approved government agencies and most well rated firms at a 10% surcharge for net 10 billing. All sales are subject to availability acceptance and verification. All sales on accessories are final. Prices, terms and specifications are subject to change without notice. Out of stock items will be placed on backorder automatically unless CE is instructed differently. Most products that we sell have a manufacturer's warranty. Free copies of warranties on these products are available prior to purchase by writing to CE. International orders are invited with a \$20.00 surcharge for special handling in addition to shipping charges. All shipments are F.O.B. Ann Arbor, Michigan. No COD's please. Non-certified and foreign checks require bank clearance. Minimum order \$35.00.

Mail orders to: Communications Electronics, Box 1002, Ann Arbor, Michigan 48106 U.S.A. Add \$7.00 per scanner or phone product for U.P.S. ground shipping and handling, or \$14.00 for faster U.P.S. air shipping to some locations. If you have a Visa or Master Card, you may call anytime and place a credit card order. Order toll free in the U.S.A. Dial 800-521-4414. If you are outside the U.S. or in Michigan, dial 313-994-4444. Dealer inquiries invited. Order without obligation today!

Scanner Distribution Center™ and CE logos are trademarks of Communications Electronics. † Bearcat is a federally registered trademark of Electra Company, a Division of Masco Corporation of Indiana. ‡ Regency is a federally registered trademark of Regency Electronics Inc. AD #1121081

Copyright © 1982 Communications Electronics™



854 Phoenix □ Box 1002 □ Ann Arbor, Michigan 48106 U.S.A.
Call TOLL-FREE (800) 521-4414 or outside U.S.A. (313) 994-4444

232C serial interface, as well as a Centronics-compatible parallel interface. Serial transmission rates from 300 to 9600 baud are switch selectable. \$1995.

CIRCLE NO. 92 ON FREE INFORMATION CARD

Desktop Computer With Full Graphics

Northstar Computers has an integrated desktop stand-alone system offering mini-computer-grade graphics. Called the Advantage, it includes a 12" display, two 5 1/4" high-capacity floppy-disk drives, an 87-key Selectric-style keyboard, and a wide range of operating and applications software. The unit is built around a 4-MHz Z80A and 60K bytes of RAM. It features a 12" bit-mapped CRT display that produces bar charts, pie diagrams, plotted graphics, and 3D visuals. It can be operated as a 1,920-character display (24 lines by 80 characters wide), or in a 240 X 640 pixel bit-mapped format. In addition to the double-sided, double-density floppy disks, the chassis contains six slots for plug-in options. Dimensions are 19" X 20" X 12 1/2". Weight is 43 lb. \$3,999.

CIRCLE NO. 93 ON FREE INFORMATION CARD

Vacuum-Disc Turntable



The Luxman PD-300 is a double-insulated, two-speed, belt-driven turntable that uses a brushless, slotless dc servo motor. The unit features a system that literally vacuums the air from between the record and the high-inertia platter via grooves and a relief hole on the platter's surface; thereby, it is claimed, reducing wow and flutter (0.03%) and eliminating low-frequency rumble completely. A lever on the front of the turntable activates and deactivates the vacuum. The PD-300 has a unified chassis insulated with natural rubber from the cabinet. The legs, too, have sub-insulators. A stroboscopic quartz oscillator fine-tunes the platter, and a heavy arm-base, made of planed aluminum, is available as an option. S/N is given as 72 dB. The turntable weighs 39.9 lb. \$1000.

CIRCLE NO. 94 ON FREE INFORMATION CARD

Car Equalizer


Radio Shack is offering a 40-W Graphic Equalizer/Booster, the Realistic Model 12-1864. The unit connects between the speakers and the output of most car stereos and tape players. It is claimed to boost



the power of an existing system by as much as 20 W/ch. The equalizer section is comprised of five audio bands centered around 60, 250, 1000, 3500, and 12,000 Hz. Each slide-action control provides a +12-dB adjustment. THD is given as 1% at 30 W. A front/rear fader control is included for four-speaker systems. Dimensions: 1 1/4" x 5 1/2" x 6 1/2". \$70.

CIRCLE NO. 95 ON FREE INFORMATION CARD

Solar Water Heater

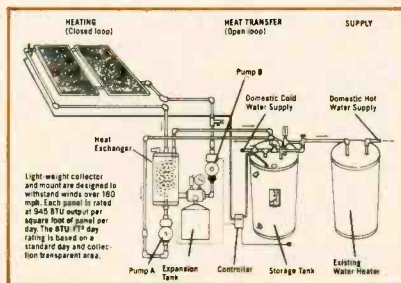

Designed to augment your existing water heater, the NS-1100 from Heath is said to be able to save 50 to 80 percent of the hot water costs for an average home. Light-weight solar collectors (claimed to withstand winds over 180 mph and rated at 945 BTU per square foot of panel) mount on the roof, while the heat exchanger mounts on the outside of the water tank to reduce weight. The closed-loop system ensures that the working fluid does not contact the water being heated, i.e., the risk of freezing and corrosion is reduced. The NS-1100 is a kit whose assembly time is projected to be "from two to three weekends," according to Heath. The kit comes with the components needed for installation, except for the 3/4" copper pipe and insulation. Tax credits for purchasing the unit are available from the Federal Government and from many states. \$2840.

CIRCLE NO. 90 ON FREE INFORMATION CARD

Record Cleaner



The Allsop 3 Orbitrac Record Cleaning System uses a dual-disc cleaning action that is claimed to make record cleaning simple and thorough. According to the manufacturer, the cleaning pad's soft fibers align with the record grooves when the pivot arm is placed into the record spindle hole. The cleaning disc, attached via an internal bearing to a control disc, is spun around the record by the user. Thus, the cleaning pad remains in contact with the record grooves while the disc pivots freely with the motion of the user's hand. The Orbitrac comes with storage case, anti-static mat, convertible pivot point, solution spray dispenser bottle, and pad cleaning brush. \$25.

CIRCLE NO. 96 ON FREE INFORMATION CARD

Scanner Gain Booster



The Power Ant from Grove Enterprises increases the gain from a scanner or short-wave antenna, and allows a user to vary the strength of the signal. Equipped with a telescoping whip, the unit may be used in conjunction with another antenna or in a stand-alone mode as the sole antenna for scanner and shortwave frequencies. The Power Ant is said to cover the entire spectrum between 30 and 960 MHz. A gain of 25 dB is claimed for low and high band, 15 dB at uhf, and 10 dB at 800 MHz. It is designed for mobile, portable, or base operation; housed in an all-metal cabinet; and weighs less than 1 lb. It comes with a 12 V dc/ac adapter, and all interconnecting cables.

CIRCLE NO. 97 ON FREE INFORMATION CARD

Logic Monitor

The LM-4, a 40-channel logic display designed to monitor up to 40 pins of a DIP IC, has been introduced by Global Specialties Corp. Compatible with any device using TTL or CMOS, the monitor has an LCD screen that is said to instantly display the logic status of each pin in a

PEOPLE WHO OWN A FOX SCANNER...



LOVE ITS SIZE

The Fox BMP 10/60 is the smallest, lightest base station on the market today.



USE IT ANYWHERE

The Fox BMP 10/60 is the most versatile scanner in the world. With our optional Porta-Pac, it can be easily carried over your shoulder.* With our optional Mobile Mounting Bracket, it's a snap to attach it to your car.

TURN ON TO ADVENTURE

Because it's pre-programmed to the 60 hottest police, fire, mobile phone and other frequencies, even beginners are surprised how easy the BMP 10/60 is to operate. Just as soon as the Fox is out of the box, it has its ear tuned to the action.



LOVE ITS FEATURES

The Fox BMP 10/60 is packed with professional features — Skip, Action and Pause capabilities, two full watts of audio, complete 10 channel programmability and lots more. Scanning has never been easier, or more fun. Call 800-543-7892 for the dealer nearest you, or ask about ordering directly from our factory.



Fox Marketing, Inc.

4518 Taylorsville Road • Dayton, Ohio 45424

*Some states may prohibit use of scanners in mobile or portable applications. Check your local laws.



ROM, RAM, microprocessor, or MSI/LSI chip. The LM-4 can also be used for comparison testing when wired into a computer bus fitted with two optional 16-pin IC test clips. Another use for the device, according to the manufacturer, is as a clip-on display during testing and troubleshooting. The 40-conductor input cable has an impedance of one megohm. An optional Universal Cable Kit is available for special interfacing requirements. \$199.

CIRCLE NO. 98 ON FREE INFORMATION CARD

Interface Board for Printers

The Integrator from Intek is a Z80-based interface board that connects most popular printers to any computer via an RS-232 or Centronics parallel I/O port. The unit features 24 switch-selectable functions, auto bi-directional printing, sheet-feeder and graphics modes, auto proportional spacing and tab setting, complete word-processing features, and 1K of RAM with an optional expansion to 16 or 48K RAM. Baud rate accommodation ranges from 50 to 19,200 baud. \$650. Address: Intek Manufacturing Co., 780 Charcot Ave., San Jose, CA 95131.

Double-Density Disk Controller

The Percom Data Company announces availability of a double-density, four-drive mini-disk controller for the Heath/Zenith H/Z-89 computer. The controller, designated the ZFD-C, allows a user to add approximately 1.5M bytes to an on-line storage system. The ZFD-C works in conjunction with the Heath minidisk controller—the Heath unit handling the hard-

sectored diskettes, and the Percom handling the soft disks. This scheme is said to permit the user to mix diskettes and drives; the system will automatically select the right controller. The ZFD-C includes an on-card parallel port for interfacing dot-matrix printers, and a diskette that includes software to modify the H/Z-89 operating system. \$250.

CIRCLE NO. 99 ON FREE INFORMATION CARD

DMM Kit



Tomar Ltd. announces the availability of its 3½-digit multimeter in kit form. Intended for field and laboratory use, the DMM813 is designed around the industry-standard ICL7106 A/D converter IC from Intersil. Readout is LCD, and includes parameter and polarity indication, and low-battery warning. A diode-transistor network protects against overload. Dc voltage range is from 2 V (1 mV resolution) to 1999 V (1 V resolution), with 0.8% accuracy. Ac voltage is measured to the 500-V level at 1 V resolution, with accuracy to 1%. Resistance measurement range is from 2 kilohms to 2 megohms (1 ohm to 1 kilohm resolution), with accuracy to 0.5%. Dc amperage is measured over a range from 200 μA to 200 mA, with a resolution from 100 nA to 100 μA, at an accuracy of 1%. Power source is one 9-V battery. \$50 (\$55 fully assembled).

CIRCLE NO. 100 ON FREE INFORMATION CARD



MUSIC LIVES ON TDK

Music sets the tone in your life. Creates a world of enjoyment all your own. If you want nothing to interfere, choose TDK.

TDK cassettes make music live. With a performance as full and vibrant as the original. In its special way TDK does more than record. It recreates. Music is magic. Don't lose any of it, now that you know where it lives.




©1991 TDK Electronics Corp.

CIRCLE NO. 47 ON FREE INFORMATION CARD

Electronic Dipstick

An electronic probe can be used to replace a conventional dipstick, according to Levelonics, manufacturer of the Model S1. A solid-state display installed in a standard mounting panel or in the dash flashes yellow or green—yellow for ADD, green for OK—depending on the level of oil in the crankcase. An ON/OFF switch permits either instantaneous or continuous reading. The stick can also be read manually in the usual way (stick length is adjustable). If the lead wire breaks or shorts out, the display will indicate an "attention needed" condition. \$34.50. Address: Levelonics, 2623 Virginia, P.O. Box 5667, Everett, WA 98201.

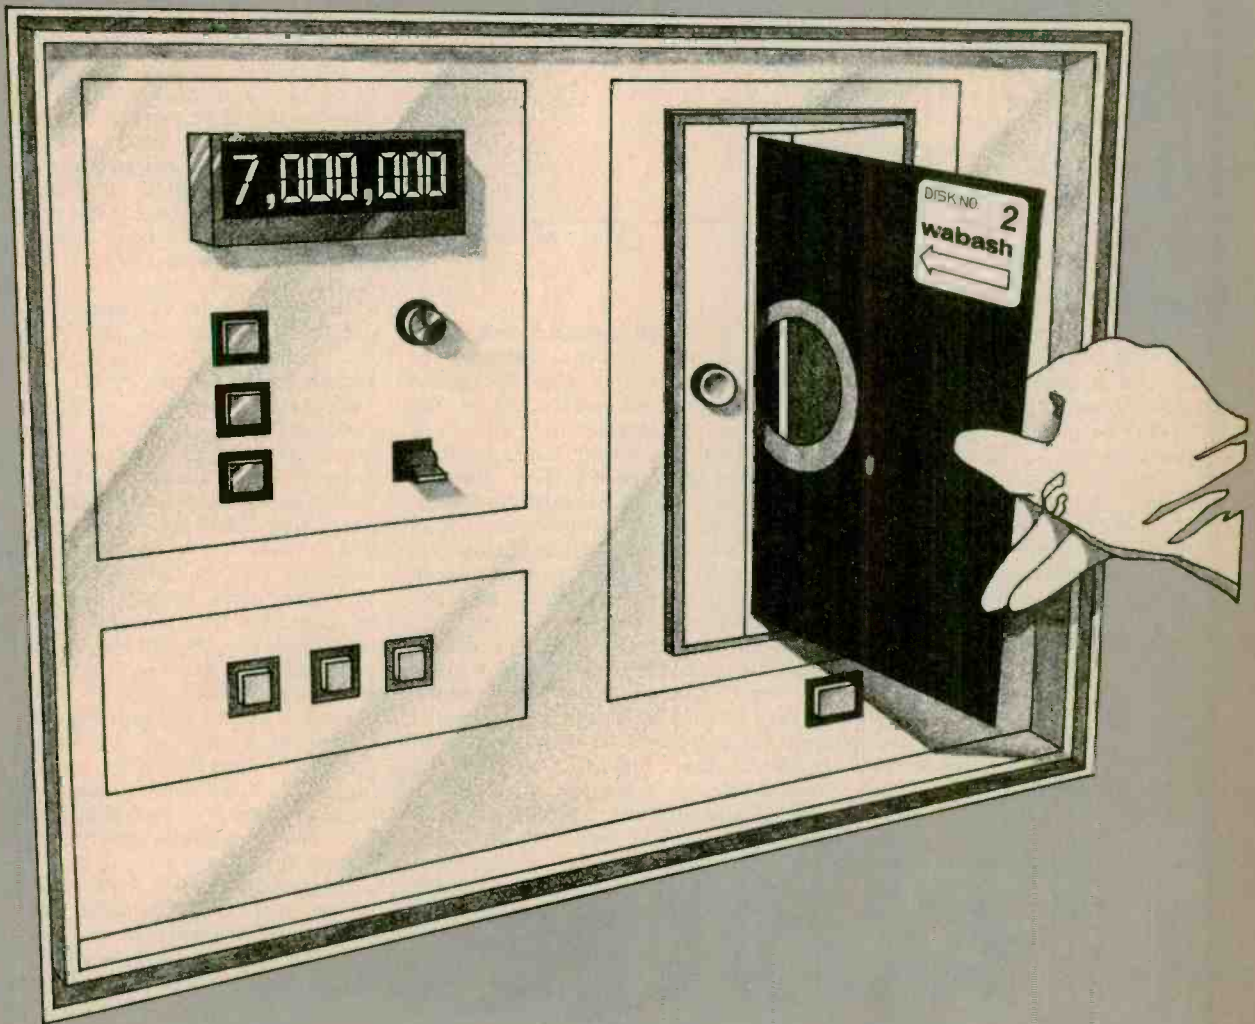

Seven Million Test Passes Later...

Wabash Diskettes Are Still Running Strong!


It takes a lot to be a winner in the computer industry these days. When it comes to magnetic media it takes a successful magnetic coating formulation and expert manufacturing skills. It takes steady performance in critical applications, and endurance over the long run.

Wabash MAXI-MYTE™ 8" diskettes and MINI-MYTE™ 5¼" diskettes are a quality buy no matter what your criteria. In standards testing performed by 25 prestigious drive manufacturers (including the world's largest) Wabash diskettes emerged a sure winner... with the papers to prove it.

The fact is, Wabash quality is unsurpassed in the industry, with a five year usage warranty that will keep your customers satisfied for years to come.

So the next time you're faced with a purchasing decision, don't take chances. Any way you look at it, Wabash diskettes are your best bet for the long run.

wabash



Wabash Tape Corporation 2700 Des Plaines Avenue, Des Plaines, IL 60018 800-323-9868 Illinois Call: 312-298-8585

ENTERTAINMENT ELECTRONICS

By Ivan Berger

Microtape and Music

FOR MONTHS, now, I've been walking around with a complete stereo system in my pocket: Sony's M-1000 portable stereo microcassette recorder. I haven't been using it for music, though—just speech.

A stereo recorder makes a great dictating machine. That's chiefly due to a side benefit of stereo: directional microphones. And directional microphones can make a major difference in sound clarity when you're recording in noisy surroundings.

There are times when I do take direct advantage of the M-1000's stereo capability, even in recording speech. When I'm taping meetings or conversation under very noisy conditions, it's much easier to tell who's saying what if I listen in stereo through headphones. (Sony supplies a pair with the M-1000.) Even though I didn't buy the M-1000 as a music machine, Sony seems to have that possibility in mind. Besides its headphone and a case, the M-1000 kit includes a patch cord for taping music from a stereo system. The cord has phono plugs at one end, a 3.5-mm stereo miniphone plug at the other (to fit the recorder's MIC input), and an attenuating resistance somewhere in between, so the line-level signal from the stereo system won't overload the mike-level input.

I never put much credence in that cord. I've used the same arrangement with standard-cassette portables, and I've never been entranced by the results. But that's not the only way to tape music onto microcassettes these days. You can tape live or off the air with an FM/AM/micro portable. (Aiwa, Fisher, Panasonic and Sanyo make mono or stereo FM/AM/Microcassette ones.) And you can tape from a stereo system with Fisher's CR-M500 deck. The latter is as state-of-the-art as it could be, considering it was first shown over a year ago. It has Dolby HX and the ability to record on metal tape.

Fisher's deck gave me an idea. If I could make good tapes on it to play back through the Sony, I'd be able to carry my favorite music with me just by slipping a few tiny cassettes and a pair of headphones into my pockets. So I borrowed the Fisher deck to try the idea.

The M500 causes lots of double-takes. It's styled to look like any other cassette deck, so it sometimes takes a moment to realize that it's built on a much smaller scale ($2\frac{3}{4}'' \times 8\frac{3}{4}'' \times 9\frac{3}{4}''$). For all its tiny size, there's not much missing. As

on most full-sized cassette decks, the POWER and TIMER STANDBY switches are on the far left, together with the counter and the headphone jack. Just to the right is the tape compartment and seven feather-touch, solenoid logic control buttons for the tape transport. Further to the right is a 13-LED peak level indicator that covers the range from -20 to $+6$ dB; below that are the buttons for EJECT, DOLBY ON/OFF, METAL/NORMAL tape select, MIC/LINE select, and the COAXIAL INPUT LEVEL controls.

The only features to strike me offhand as different about the deck were that the MIC inputs were at the rear (which makes the MIC/LINE switch a necessity) and that there was no memory rewind on the counter. Since it's hard to tell from a distance what that tiny tape is doing, I also appreciated the mode indicators next to the recording-level display. They light up green for PLAY, red for REC and PAUSE, and flashing red for REC MUTE (which records blank spots on the tape, for editing or just for silence between tunes).

The deck's performance is like a full-sized tape deck's, too—but a deck from the days before Dolby and CrO₂ tape. Specifically, I compared the CR-M500's recording/playback performance (using TDK "MA" metal microcassette tape and Dolby HX) to the Akai GX-F95's (using a very old Sony normal-bias cassette, and no Dolby), and got nearly the same results—equally low distortion, equally high hiss, equally compressed dynamic range, and almost equal frequency response (the micro had noticeably more high-end response). When I switched to a more modern normal-bias cassette (TDK "D" Dynamic), the Akai gave me less compression and more even frequency response than the micro deck.

If Dolby HX and metal only bring microcassette performance up to the level of normal cassettes without Dolby, then microcassettes don't pose too much of a threat to the manufacturers of regular-cassette tapes and players (especially as the same manufacturers, by and large, make both). That's not the Fisher's fault, but the medium's. When you run tape at half the already-low speed of a standard cassette, getting good sound becomes a major challenge. On the other hand, the cassette probably seemed just as idle a threat to the open-reel market ten years back. I was able to get quite listenable results from the Fisher by switching in my Carver

preamp's Autocorrelator (which got rid of most hiss) and Peak Unlimiter (which got rid of much compression). All it would take to make microcassettes really popular as a mass-music medium, I suspect, would be a hotter grade of tape than today's metal formulations, and a more potent form of noise reduction—Dolby "C", perhaps, or more likely dbx. That would bring microcassette quality to about where most home compact-cassette systems (with Dolby B and non-metal tape) are now.

But who needs it? People who want maximum portability, that's who. So far, the portables are lagging behind the Fisher deck since they lack metal-tape equalization and have no Dolby NR. (Dolby IC's available so far require higher power-supply voltages than microportables provide.) As a result, metal Dolby tapes made on the deck sound over-bright and super-hissy on my little Sony. Non-Dolby tapes made on normal-bias TDK and Olympus tapes with the Fisher deck gave far better results on the M-1000 than the metal HX recordings did, though still too hissy for me. And tapes made on the Sony itself, with its patch cord, fell right in the middle as far as hiss and sound quality were concerned. There was also some apparent loss of dynamic range when recording on the Sony, mainly due to the portable's automatic recording-level control. There was some apparent high-frequency loss, too.

So the only tapes I could enjoy listening to on the Sony portable were those made without Dolby, on standard tape, with the Fisher deck. (I suspect I could have done still better with Panasonic's metal-deposited, normal-bias Angrom tape, but my one Angrom cassette seems to have disappeared.) If it weren't for the hiss problem, I could live happily with this combination as a way of adding music to my travels. And if Dolby isn't available on a suitable low-voltage chip, National Semiconductor's LM1894 DNR noise reducer IC can operate on voltages as low as 4.5 V, about the highest voltage available from a compact battery supply. I expect microcassette portables with DNR will be coming in the next year or two.

Meanwhile, there is some definite news of what's to come in micro music machines. Prerecorded micro tapes are already available in Japan. Cetec Gauss has just announced metal-capable microcassette duplicating equipment here. And Matsushita last year made two micro-music announcements in Japan: first, a tape deck combining both standard and microcassette transports; then a set of three micro components that included a player with FM and AM reception for car dashboards, an underdash player, and a home system with FM, AM and micro recording deck. Fisher is now advertising a portable in Japan that can play and record regular and microcassettes. If microcassettes gain any popularity for musical use here, we'll probably be offered the same products. ◇

WHAT'S THE KEY TO BUYING A COMPUTER?

Look beyond the computer. Look at how the total system—hardware, software, support, service—meets your needs, today and tomorrow. That's the key. When you choose a computer source, you choose a long term partner who must stand by you with total support. And no one stands by you like Heath/Zenith.

Software

Including word processing, business applications, versatile utility programs, and the Heath Users' Group library of over 500 low-cost programs for home, work or play.

And a choice of three operating systems, including CP/M by Digital Research for compatibility with thousands of popular CP/M programs.

Languages

For your own custom programs, Microsoft languages are available in BASIC (compiler and interpreter), FORTRAN and COBOL.

Self-Study Courses

Learn at your own pace with *Programming Courses* that teach you to write and run your own programs in Assembly, BASIC, Pascal or COBOL.

For the business person, *Computer Concepts for Small Business* helps you evaluate the ways a computer can benefit your business. And for the novice, *Personal Computing* is a complete introduction to computer fundamentals and BASIC Programming.

Support

Before and after the sale we work with you to configure the system that serves you best. We help you get your system up and running smoothly. Assistance is always just a phone call away.

Service

Friendly, experienced technicians are available, either over the phone or at any of the 56 Heathkit Electronic Centers nationwide.

Visit your Heathkit Electronic Center*

See your telephone white pages for the store nearest you. And stop in today for a demonstration of how Heath/Zenith Computer Systems can serve you. If you can't get to a store, send \$1.00 for the latest Heathkit Catalog and the new Zenith Data Systems Catalog of assembled commercial computers. Write to Heath Co., Dept. 010-874, Benton Harbor, MI 49022.

Pick a strong partner.
Heath/Zenith & You.

HEATH/ZENITH

Your strong partner



*Units of Veritechnology Electronics Corporation in the U.S.
Specifications subject to change without notice.

Audio Product of the Month

CHOSEN BY THE EDITORS OF POPULAR ELECTRONICS

Crown State-of-the-Art SL2 Preamplifier

THE Crown "Straight Line Two" is a compact, full-featured preamplifier whose size and style match those of companion Crown power amplifier and tuner components. The Straight Line Two (SL2) is only 1 $\frac{3}{4}$ inches high, and has a rack mounting (19-inch wide) panel fitted with handles. It is 11 $\frac{1}{2}$ inches deep and weighs approximately 11 pounds. The SL2 can be installed in an optional walnut-finish wooden cabinet, or in a common cabinet with the other two units to form a functional "receiver" of exceptional quality. Suggested retail price is \$479.

General Description. Published specifications of the Crown Straight Line Two are unusually detailed, including graphs covering frequency response, crosstalk, and phase response over a range far exceeding the audio frequency band. Harmonic distortion is rated at less than 0.009% from 20 to 20,000 Hz at the rated output of 2.5 V. The output impedance of 600 ohms makes the SL2 compatible with the input of any power amplifier. Its audio outputs are muted

by a relay for 7 seconds after power is turned on to prevent any turn-on transients from reaching the power amplifier and speakers.

According to the block diagram of the preamplifier, the overload warning circuits monitor voltage levels at a number of points in the signal path, including immediately following the phono preamplifier, between the FILTER and the LEVEL controls, and immediately following the tone control circuits. Thus, the warning function takes account of any tone-control response modifications, phono preamplifier overload, or excessive LEVEL settings. The signal presence indicators and the rumble indicator monitor levels at the output of the preamplifier's active circuits.

Laboratory Measurements. The output of the Crown SL2 was terminated in an IHF standard load of 10,000 ohms in parallel with 1000 pF. At 1000 Hz the output clipped at 11.0 V (the OVLD light came on at 10.2 V). At a maximum LEVEL setting, an input of 48 mV at a high level input, or 0.45 mV at

the PHONO input, was required for a reference output of 0.5 V. The unweighted hum and noise in the output was below our 100- μ V measurement threshold, which corresponds to 74 dB below 0.5 V, or 88 dB below the preamplifier's rated 2.5-V output. It seems highly probable from these measurements that the SL2 can meet its ratings of A-weighted S/N of 103 dB (high level) or 93 dB (phono), although a meter capable of measurement in the sub-microvolt range would be needed to verify them.


We measured the phono gain with the factory-set values, and they should be quite satisfactory for almost any situation. To adjust the gain through the access holes in the rear of the preamplifier requires a screwdriver with a very narrow and long blade. No screwdriver in our collection was both narrow enough and long enough for this purpose.

The phono preamplifier overloaded at 105 mV at 1000 Hz and 106 mV at 20 Hz (the latter referred to the equivalent 1000-Hz reading). It was only slightly lower at 20,000 Hz, where it measured



SATURN V

STATE-OF-THE-ART

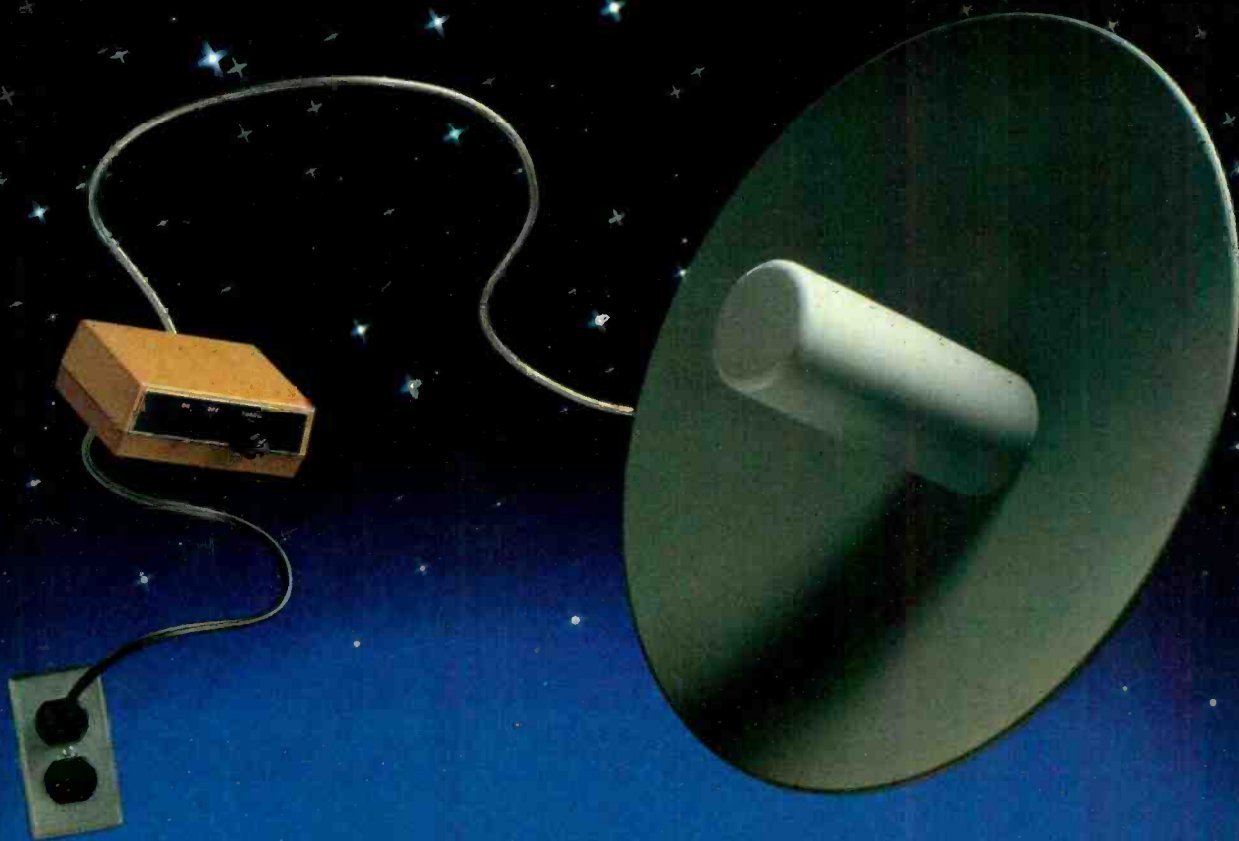

The latest in micro-stripline design and the highest quality materials modern technology can provide are utilized to their greatest advantage in the manufacture of the Saturn-V downconverter. System gains and noise figures approaching the theoretical limit have been achieved with this fully integrated frequency agile microwave receiver. Advanced micro-strip antenna techniques have allowed the full integration of the receiver-antenna into a sealed injection molded RF probe securely mounted in the focus of a parabolic dish with adjustable polarization. Matched diodes quiet a high-conversion mixer fed by a low phase-noise precision voltage-controlled oscillator coupled between an ultra-low-noise analyzer-matched RF front and a high gain IF amplifier impedance matched to drive one or more televisions or communication receivers.

Design/Performance features:

- High Gain: 40 db typical • Low Noise: 2-2.5 db
- Tuning Range: 2-2.5 Ghz • High Selectivity: 30 db
- Dynamic Range: 60 dbmv • Output Impedance:

75 ohms • Range: Line of Sight: 200 miles • Tunes 54 thru 75 Mhz IF Frequency (channels 2-6) • 20' Dia. Parabolic Antenna • No-drift temperature compensated VCO • Dish mounted downconverter eliminates external antenna • Precision regulated power supply • All cable, cable adapters, brackets and hardware included • 6 month warranty

Quantity discount price structures available upon request for dealers. Dealerships, both domestic and foreign available in many areas. For further information, please contact John Michaels, Sales Manager. Telephone hours: Monday thru Thursday, 10-4.

hi-gain

Electronics

4558 Auburn Blvd., Sacramento, CA 95840
(916) 452-0193

CIRCLE 8 ON READER SERVICE CARD

OPERATING FEATURES

(Front Panel)

KNOB CONTROLS

- COPY** Controls signal fed to one or two tape decks. In **NORMAL**, the selected input program can be heard or recorded. In **PHONO**, a record can be recorded while listening to any other source. The two remaining positions are for dubbing tapes from one deck to another.
- INPUT** Selects program source. Positions for **PHONO**, **TUNER**, **AUX 1**, **AUX 2**.
- BASS** 32-position detented tone control.
- TREBLE** 32-position detented tone control.
- BALANCE MODE** Center-detented control. **MUTE** silences audio outputs. **STEREO** is normal operating condition. **REV** interchanges left and right channels. **MONO** sums left and right channels and supplies sum signal to both outputs.
- LEVEL** 32-position detented volume control.

PUSHBUTTON CONTROLS

- POWER TAPE** Controls preamplifier and five rear outlets. Two buttons for monitoring or playback from either tape deck.
- ACTUATE** Small button between controls. When depressed, inserts tone-control circuits in signal path.

- LOUDNESS** Adds bass boost at low volume control settings.
- FILTER** Inserts an 18-dB/octave rolloff below 33 Hz.
- MONITOR** Stereo headphone jack.

LIGHTS

- POWER ACTUATE** Orange pilot light. Yellow light between tone controls. Indicates when controls are in circuit.
- SPI** Signal Presence Indicator. Two green lights above **LEVEL** control to show presence of signal greater than 0.6 volts RMS at outputs.
- OVLD** Overload Indicator. Two red lights above **LEVEL** knob to indicate overload in any stage of the preamplifier.
- RUMBLE INDICATOR** A yellow light above **FILTER** button that shows presence of sufficient rumble to require use of **FILTER**.

OPERATING FEATURES

(Rear Apron)

- PHONO JACKS** For all **INPUT** sources.
- PHONO JACKS PROCESSOR LOOP** For **TAPE 1** and **TAPE 2** input and output input and output phono jacks, joined by removable links. For connecting an external device such as equalizer or expander into signal path.
- GAIN** Two screwdriver adjustments for phono preamplifier gain (20 dB range).
- GND OUTLETS** Binding post. Six convenience outlets, five of them switched. Total power capacity 1200 watts.

94 mV. The measured phono input impedance was 33 kilohms in parallel with 50 pF. Lacking a schematic, we could not account for the lower than rated phono input resistance (it is specified as 47 kilohms).

The RIAA phono equalization was unusually accurate, measuring well within ± 0.5 dB from 20 to 20,000 Hz. When measured through the inductance of typical magnetic phono cartridges, the high-frequency phono response fell off very slightly, dropping about 0.5 dB between 4000 and 20,000 Hz.

Tone controls had a maximum boost or cut of ± 14 dB at 20 and 20,000 Hz. The bass turnover frequency varied from lower than 200 Hz to a maximum of 500 Hz, depending on the control setting. The treble curves were hinged at about 1500 Hz. The loudness compensation, which follows the Robinson-Dadson criteria instead of the older Fletcher-Munson equal loudness contours, boosts only the low frequencies as the **LEVEL** is reduced, with a maximum boost of about 14 dB at 20 Hz, and a turnover frequency that moves between 60 and 200 Hz as the **LEVEL** setting is

reduced. The **FILTER** has no effect on the response above 50 Hz, but cuts it rapidly at lower frequencies to -3 dB at 34 Hz and -13.5 dB at 20 Hz.

We measured the "response" of the rumble indicator circuit to see how it responded to different frequencies. Since 70 Hz was about the highest frequency that could make the rumble light come on, we used that level as our 0 dB reference. The indicator sensitivity increased 8 dB at 40 Hz, 18 dB at 20 Hz, 26 dB at 10 Hz, and 31.4 dB at 5 Hz (the lowest frequency obtainable from our signal generator). According to Crown, the signal presence lights require at least 0.6 V rms at the preamplifier outputs to turn them on.

The 1000-Hz harmonic distortion was 0.0003% (our measurement residual) for outputs from 1 to 10 V, increasing to 0.002 to 0.003% in the 0.1-to-1-V range. Harmonic distortion was also measured at 15,000 Hz, where it was from 0.0016 to 0.002% between 0.3 and 10 V output, and 0.009% at 0.1 V output.

User Comment. It should hardly be necessary to say that the Crown SL2 is a

superb control center. Its electrical characteristics are nearly ideal, and it both looks and feels like the precision instrument it is.

Reassuring as the various warning lights may be, we never managed to get an indication from the rumble indicator when using a reasonably good turntable (and anything less than that would be unworthy of this preamplifier, in our view). The signal presence lights could only be lit at very high levels, corresponding to more than 100 W from the power amplifier we were using, which made the indication rather superfluous. It was not possible to overload the preamplifier with available signal sources (program) and with the amplifier and speakers on hand.

Still, these features *do* work and very well at that. With a less sensitive amplifier (such as one of those having an input level control) it is conceivable that the preamplifier could overload before the rest of the system, and the lights could then serve as a visual backup to the listeners' ears (which might be in a state of paralysis by that time!). Without complicating or confusing the operation of the SL2, Crown has made it nearly impossible to operate it incorrectly (unknowingly).

The silence of the SL2—its total lack of audible noise, either steady state or transient—was soon very apparent. Every possible switching transient has been eliminated at its source or otherwise suppressed. Even the loudness compensation is highly listenable, so much so that its presence was never detectable except by an A-B comparison between the in and out position of its button.

Our only reservations, which developed early in our acquaintance with the Crown SL2, concerned the row of control knobs, identical in size, shape, and color, that occupy most of its front panel. At first, it was necessary to look closely to find a specific control, since they are not distinguished by size, shape, or color. Fortunately, that procedure soon became unnecessary as I grew familiar with the control placement. In compensation, the "feel" of the knobs was excellent, with opposing flat surfaces that gave both a visual and tactile sense of their settings.

The "bottom line" in our evaluation of this product is that the Crown Straight Line Two, though not inexpensive, is representative of the state-of-the-art in its performance. It does everything most people would ever require, and it does them in a near-ideal manner. It is about as compact as such a versatile product can be, and its trim appearance would complement any system or home decor, especially if it were mounted in a common cabinet with the similarly-styled Crown amplifier and tuner.

Not only can we not find any significant criticism of the Straight Line Two, but our extended use of it leaves us with overwhelmingly positive feelings. It would be hard to surpass for its intended application.—*Julian D. Hirsch*

CIRCLE NO. 101 ON FREE INFORMATION CARD



What makes this radar detector so desirable that people used to willingly wait months for it?

Anyone who has used a conventional passive radar detector knows that they don't work over hills, around corners, or from behind. The ESCORT® radar warning receiver does. Its uncanny sensitivity enables it to pick up radar traps 3 to 5 times farther than common detectors. It detects the thinly scattered residue of a radar beam like the glow of headlights on a dark, foggy road. You don't need to be in the direct beam. Conventional detectors do. Plus, ESCORT's extraordinary range doesn't come at the expense of more false alarms. In fact, ESCORT has fewer types and sources of false alarms than do the lower technology units. Here's how we do it.

The unfair advantage

ESCORT's secret weapon is its superheterodyne receiving circuitry. The technique was discovered by Signal Corps Capt. Edwin H. Armstrong in the military's quest for more sensitive receiving equipment. ESCORT's Varactor-Tuned Gunn Oscillator singles out X and K band (10.525 and 24.150Hz) radar frequencies for close, careful, and timely examination. Only ESCORT uses this costly, exacting component. But now the dilemma.

The Lady or the Tiger

At the instant of contact, how can you tell a faint glimmer from an intense radar beam? Is it a far away glint or a trigger type radar dead ahead? With ESCORT it's easy: smooth, accurate signal strength information. A soothing, variable speed beep reacts to radar like a Geiger counter, while an illuminated meter registers fine gradations. You'll know whether the radar is miles away or right next to you. In addition, the sound you'll hear is different for each radar band. K band doesn't travel as far, so its sound is more urgent. ESCORT keeps you totally informed.

The right stuff

ESCORT looks and feels right. Its inconspicuous size (1.5Hx5.25Wx5D), cigalighter power connector and hook and loop or visor clip mounting make installation easy, flexible, and attractive. The aural alarm is volume adjustable and the alert lamp is photoelectrically dimmed after dark to preserve your night vision. And, a unique city/highway switch adjusts X band sensitivity for fewer distractions from radar burglar alarms that share the police frequency while leaving K band at full strength.

Made in Cincinnati

Another nice thing about owning an ESCORT is that you deal directly with the factory. You get the advantage

of speaking with the most knowledgeable experts available and saving us both money at the same time. Further, in the unlikely event that your ESCORT ever needs repair, our service professionals are at your personal disposal. Everything you need is only a phone call or parcel delivery away.



Carrying case and visor clip included

Corroborating evidence

CAR and DRIVER . . . "Ranked according to performance, the ESCORT is first choice . . . it looks like precision equipment, has a convenient visor mount, and has the most informative warning system of any unit on the market . . . the ESCORT boasts the most careful and clever planning, the most pleasing packaging, and the most solid construction of the lot."

BMWCCA ROUNDEL . . . "The volume control has a silky feel to it; in fact, the entire unit does. If you want the best, this is it. There is nothing else like it."

PLAYBOY . . . "ESCORT radar detectors . . . (are) generally acknowledged to be the finest, most sensitive, most uncompromising effort at high technology in the field."

PENTHOUSE . . . "ESCORT's performance stood out like an F-15 in a covey of Sabrajets."

AUTOWEEK . . . "The ESCORT detector by Cincinnati Microwave . . . is still the most sensitive, versatile detector of the lot."

The acid test

There's only one way to really find out what ESCORT is all about. We'll give you 30 days to test it for yourself. If you're not absolutely satisfied, we'll refund

your purchase as well as pay for your postage costs to return it. In fact, try an ESCORT and any other detector of your choice. Test them both for 30 days and return the one you don't like. We're not worried because we know which one you'll keep. As further insurance for your investment, ESCORT comes with a full one year limited warranty on both parts and labor. This doesn't worry us either because ESCORT has a reputation for reliability. We know that once you try an ESCORT, radar will never be the same again. So go ahead and do it. Order today.

You don't have to wait

Just send the following to the address below:

- Your name and complete street address.
- How many ESCORTs you want.
- Any special shipping instructions.
- Your daytime telephone number.
- A check or money order.



Visa and MasterCard buyers may substitute their credit card number and expiration date for the check. Or call us toll free and save the trip to the mail box.

CALL TOLL FREE . . . 800-543-1608
IN OHIO CALL . . . 800-582-2696

ESCORT (Includes everything) . . . \$245.00
Ohio residents add \$13.48 sales tax.

Extra speedy delivery

If you order with a bank check, money order, Visa, or MasterCard, your order is processed for shipping immediately. Personal or company checks require an additional 18 days.

ESCORT®

RADAR WARNING RECEIVER

- CINCINNATI MICROWAVE
Department 531
255 Northland Boulevard
Cincinnati, Ohio 45246

Popular Electronics Tests



Zenith Explorer TV/AM/FM Clock Radio

IMAGINE (in one component) a 5" picture that's sharp as one could wish, an AM/FM radio, a liquid-crystal clock with snooze control and alarm, an ear-phone jack, and an audio system with nice performance. That's the Zenith monochrome portable for 1982, the NO52S Explorer.

Measuring 7¼"H x 6¾"W x 11¼"D (weight is 6 lb) and encased in an oblong silver cabinet with black accents, the Explorer has a rectangular screen; lighted, continuous-tuning uhf/vhf and AM/FM dials; and a telescoping antenna. Using 12 volts (battery-operated or isolated from the ac line by a stepdown transformer and full-wave bridge rectifier), the set delivers a full 4 MHz of baseband video to the picture tube, with quality in both TV and radio that's surprising for a receiver this size. Suggested retail price is \$200.

General Description. The radio and clock circuits for the Explorer are fairly straightforward. In addition to the modular tuner circuits, it uses only three ICs and 16 transistors—and most of the latter are in the power-supply regulators.

The signal from the antenna is used for both the AM/FM and uhf/vhf tuners. The sound from the different channels is eventually switched by the master

SELECTOR switch and applied through the VOLUME control to the loudspeaker. The VOLUME control is of the loudness variety, making possible treble and bass boost without overload at high frequencies, as well as loudness tone compensation at lower levels. There is a final audio amplifier IC between the control and the 3.5" 8-ohm speaker.

The uhf/vhf tuners are a miniature, fully transistorized matched pair. Varactor controlled, they are bandswitched for low/high vhf and uhf. Both tuners have 26 dB gain, and noise figures of 8 dB and 10 dB, respectively.

The power supplies provide +6.5, +9.5, and +12 V dc. They operate on the ac line, through a 12-volt converter, or on a rechargeable battery or six D cells.

The LCD clock is supplied by a separate 1.5-V AA battery. Mode switches select the timing alarm or snooze functions. The alarm is a series of pleasant, low-frequency tone bursts. Or the radio can be used as an alarm.

The Micromax IC. The large-scale integrated circuit (Fig. 1) that is the heart of the receiver represents a significant first in the area of the total signal and sync processing. Intercarrier 4.5-MHz sound (the beat difference between au-

dio and video carriers) is heterodyned and transmitted to the sound detector. Automatic gain control is derived after video detection; sync countdown produces both vertical and horizontal drive; and a luminance signal stripped of sync is routed to the video output and then the cathode ray tube.

Differential inputs that minimize external electric fields enter the video i-f block and untuned four-stage differential feedback amplifier, of which two stages are sequentially gain controlled for minimum noise and a gain reduction of 50 dB. Our measurements showed 57 dB before sync or white/black-level clipping.

Demodulation of i-f intelligence occurs in a current drive-balanced low-level detector that, according to Zenith, minimizes harmonic and intermodulation distortion. Outputs go to the sound demodulator, video processor, and agc loop that controls both i-f and r-f gain. Keyed agc action results from noise-gated composite sync and flyback pulses ANDed for minimum strobe pulse width. Should extraordinary noise pulses cause noise canceller lockup, internal logic defeats the combined gated system, permitting only regular flyback pulses to flow. The noise processor

(continued on page 30)

Improve your video image

Does what looked good on two-hour look not-so-good on six? Or what looked great on your original videotape end up hard-to-look-at when you dub a copy? Maybe the picture's a little soft; or smeary; lacks contrast; or the color's a little off. You may not even be sure what it is — it's just not up to snuff.

But you live with it. Because six-hour is more economical and more convenient than two-hour. Because a mediocre copy is better than no copy at all.

All the same, wouldn't it be nice if you could somehow improve the quality?

At Vidicraft, improving video quality is our business. Our video processing components are to video what graphic equalizers and metal tape are to audio. They help you get the most out of your system.

Take the Detailer II image enhancer, for instance. By amplifying high frequency picture information, the Detailer II can actually increase apparent resolution. Translated, that means improved sharpness and greater picture detail. A crisper, more lifelike image. Better dubs. Better original recordings. Even better playback of programs you already own.

Basic features include individual controls for detail and sharpness, plus Vidicraft's exclusive VNX™ control for enhancement noise reduction. For convenience, we've also included three switchable inputs and a four-output distribution amplifier — for interconnecting multiple VCRs, as well as other video components. And for making multiple copies.

The Proc Amp is another example. It gives you the ability -electronically- to regulate chroma level and phase, and overall luminance level. This means you can correct color saturation and hue for greater color accuracy. And adjust overall video signal level for optimum contrast and brightness. Not simply upon playback - where it may be too late - but in making the recording itself.

That's not to mention some of the small things you can do with our Proc Amp. Like eliminate color all together - to rid a black and white program of color fringing, for example. Or create fade outs and fade ins - to make nice, smooth, professional looking transitions.

Features include center-detent controls, a luminance level meter, and a four-output distribution amplifier.

A bypass feature is also provided - both on the Proc Amp and Detailer II - to give you instant picture-before and picture-after comparisons. So you can accurately judge the results.

Even a small touch like that can be an important consideration in getting the best image.

For a close look at what we mean, visit your Vidicraft dealer. Where you can see our complete line of video components. For the location nearest you, dial toll free: 1-800-547-1491.




vidicraft

0704 S.W. Bancroft St. Portland, OR 97201

CIRCLE NO. 60 ON FREE INFORMATION CARD

www.americanradiohistory.com

“If you’re going to learn electronics, you might as well learn it right!”

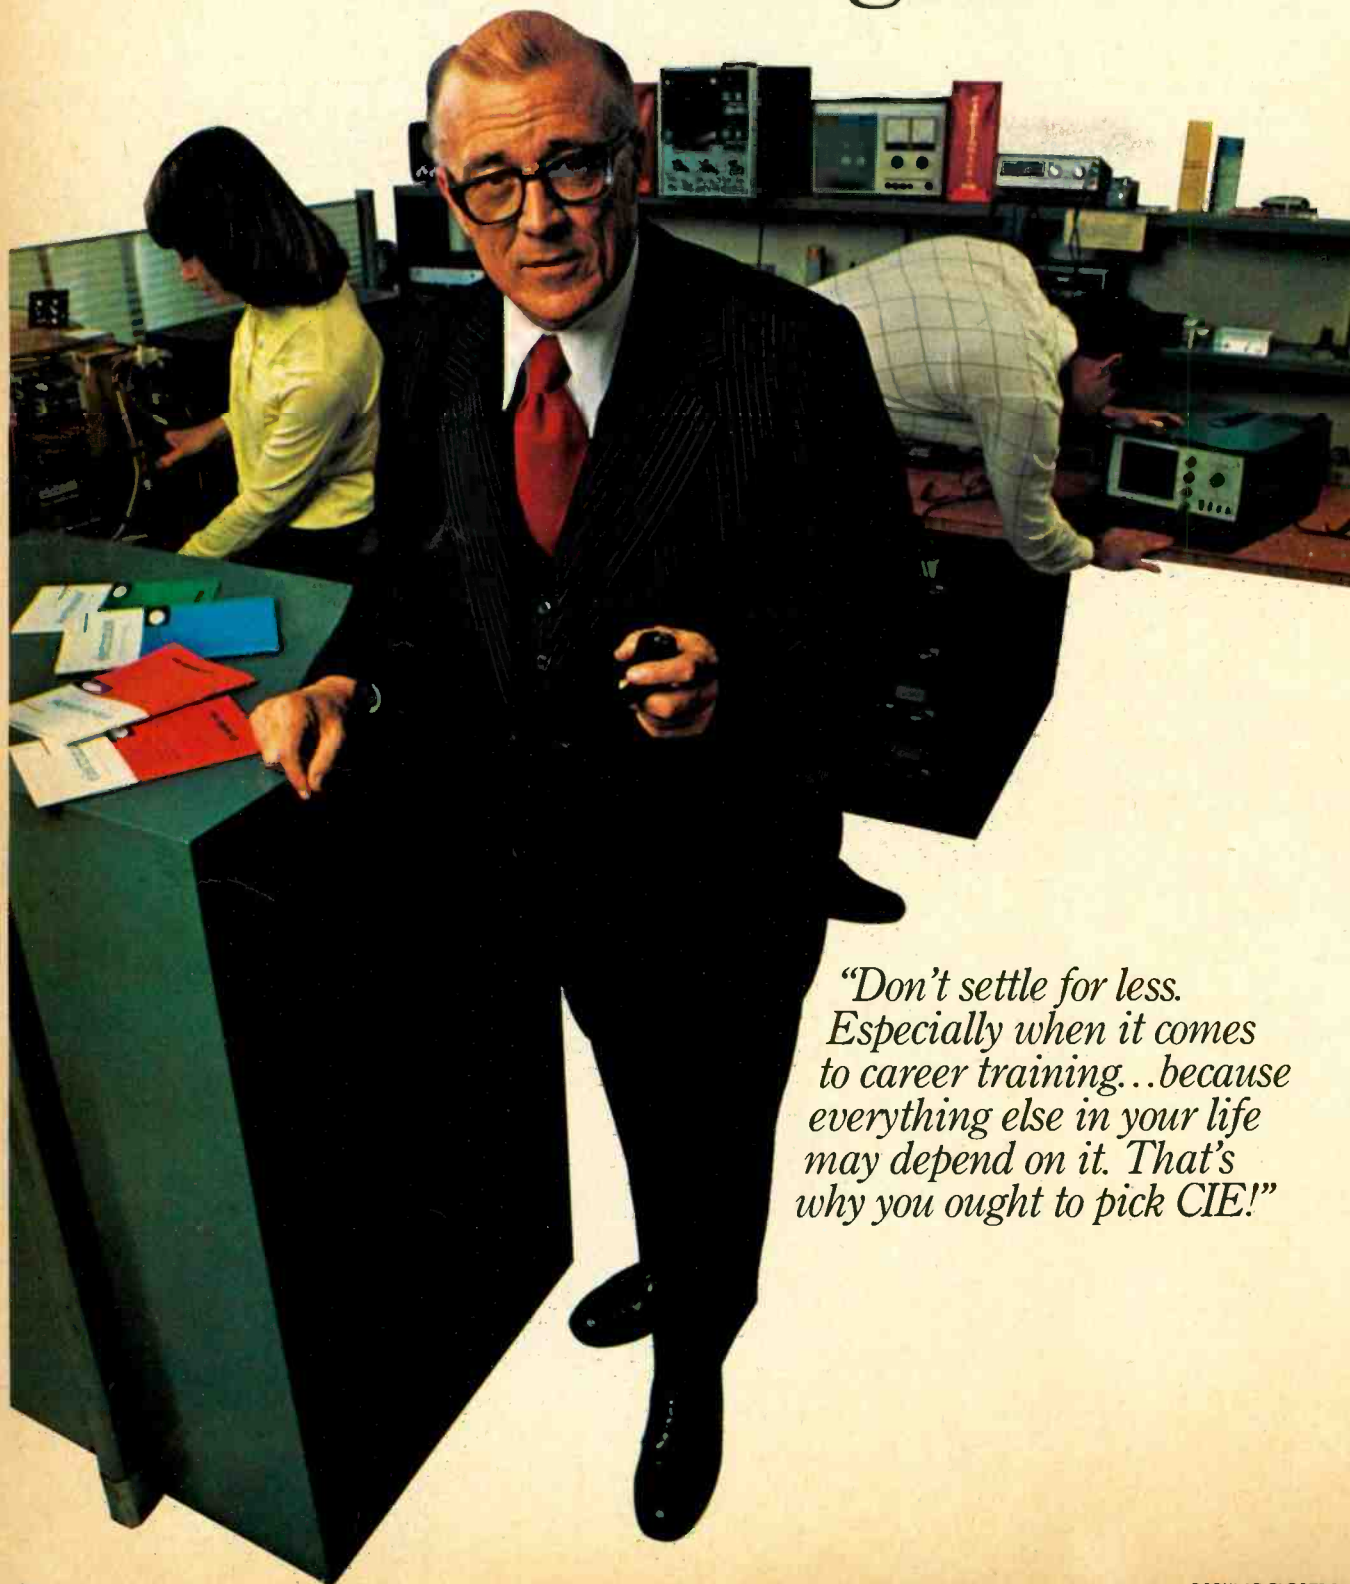

“Don’t settle for less. Especially when it comes to career training...because everything else in your life may depend on it. That’s why you ought to pick CIE!”

You've probably seen advertisements from other electronics schools. Maybe you think they're all the same. They're not!

CIE is the largest independent home study school in the world that specializes exclusively in electronics.

Meet the Electronics Specialists.

When you pick an electronics school, you're getting ready to invest some time and money. And your whole future depends on the education you get in return.

That's why it makes so much sense to go with number one... with the specialists... with CIE!

There's no such thing as bargain education.

If you talked with some of our graduates, chances are you'd find a lot of them shopped around for their training. Not for the lowest priced but for the best. They pretty much knew what was available when they picked CIE as number one.

We don't promise you the moon. We do promise you a proven way to build valuable career skills. The CIE faculty and staff are dedicated to that. When you graduate, your diploma shows employers you know what you're about. Today, it's pretty hard to put a price on that.

Because we're specialists, we have to stay ahead.

At CIE, we've got a position of leadership to maintain. Here are some of the ways we hang onto it...

Our step-by-step learning includes "hands-on" training.

At CIE, we believe theory is important. And our famous Auto-Programmed® Lessons teach you the principles in logical steps.

But professionals need more than theory. That's why some of our courses train you to use tools of the trade like a 5 MHz triggered-sweep, solid-state oscilloscope you build yourself—and use to practice troubleshooting. Or a Digital Learning Laboratory to apply the digital theory essential to keep pace with electronics in the eighties.

Our specialists offer you personal attention.

Sometimes, you may even have a question about a specific lesson. Fine. Write it down and mail it in. Our experts will answer you promptly in writing. You may even get the specialized knowledge of all the CIE specialists. And the answer you get becomes a part of your permanent reference file. You may find this even better than having a classroom teacher.

Pick the pace that's right for you.

CIE understands people need to learn at their own pace. There's no pressure to keep up... no slow learners hold you back. If you're a beginner, you start with the basics. If you already know some electronics, you move ahead to your own level.

Enjoy the promptness of CIE's "same day" grading cycle.

When we receive your lesson before noon Monday through Saturday, we grade it and mail it back—the same day. You find out quickly how well you're doing!

CIE can prepare you for your FCC License.

For some electronics jobs, you must have your FCC License. For others, employers often consider it a mark in your favor. Either way, it's government-certified proof of your specific knowledge and skills!

More than half of CIE's courses prepare you to pass the government-administered exam. In continuing surveys, nearly 4 out of 5 CIE graduates who take the exam get their Licenses!

Associate Degree

Now, CIE offers an Associate in Applied Science Degree in Electronics Engineering Technology. In fact, all or most of every CIE Career Course is directly creditable towards the Associate Degree.

Send for more details and a FREE school catalog.

Mail the card today. If it's gone, cut out and mail the coupon. You'll get a FREE school catalog plus complete information on independent home study. For your convenience, we'll try to have a CIE representative contact you to answer any questions you may have.

Mail the card or the coupon or write CIE (mentioning name and date of this magazine) at: 1776 East 17th Street, Cleveland, Ohio 44114.



CIE **Cleveland Institute of Electronics, Inc.** PE-58
1776 East 17th Street, Cleveland, Ohio 44114

YES... I want the best of everything! Send me my FREE CIE school catalog — including details about the Associate Degree program — plus my FREE package of home study information.

Print Name _____

Address _____ Apt. _____

City _____

State _____ Zip _____

Age _____ Phone (area code) _____

Check box for G.I. Bill information: Veteran Active Duty

MAIL TODAY!


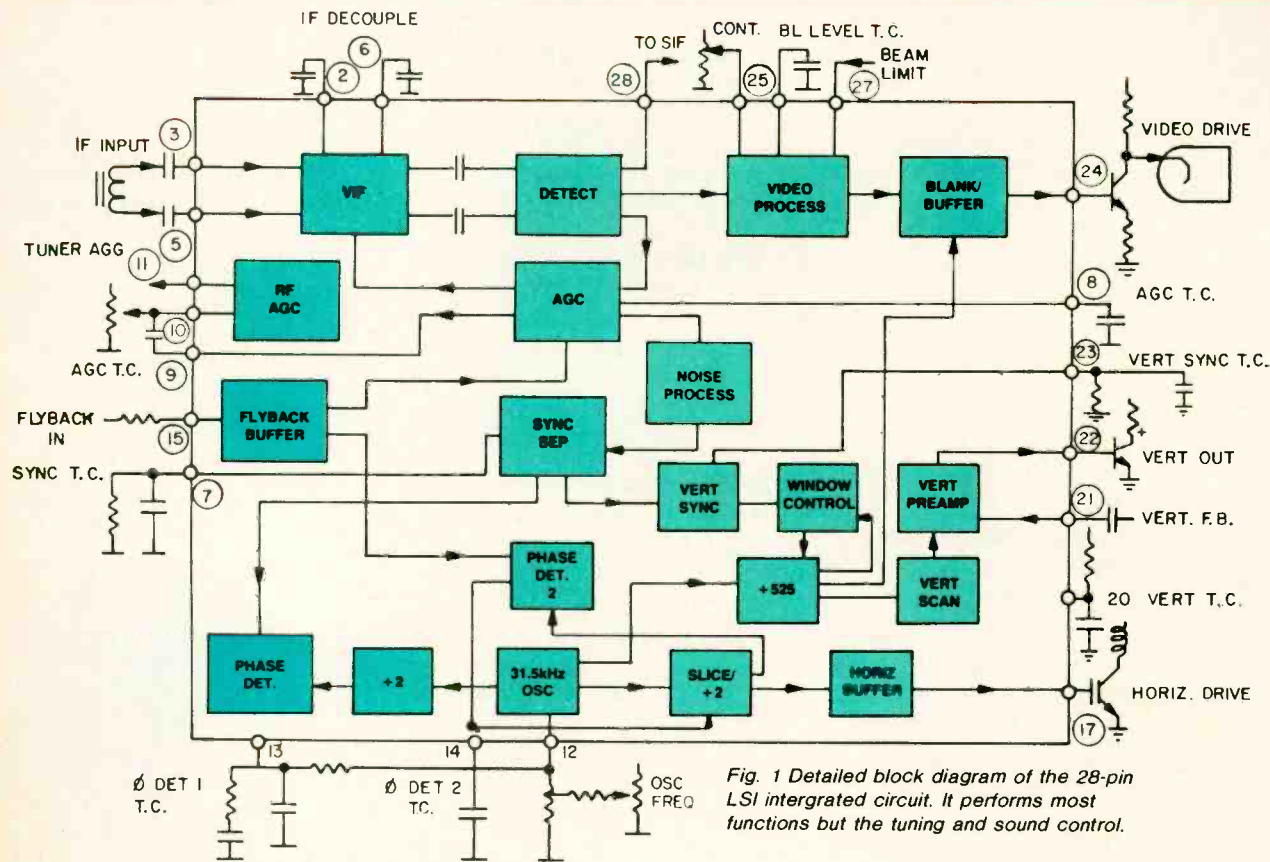


Fig. 1 Detailed block diagram of the 28-pin LSI integrated circuit. It performs most functions but the tuning and sound control.



Controls for the TV and radio tuning, volume and function selections are on the side of the cabinet.

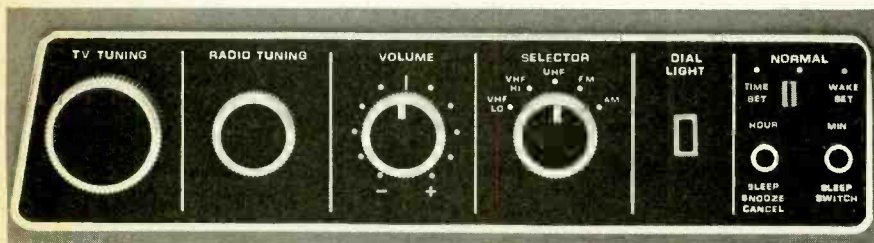

Pushbuttons control the alarm functions on the front of the cabinet and the dials and clock are just below the CRT.

removes video passing into the sync separator above a certain level. Normal sync pulses are then separated and routed to both vertical and horizontal circuits.

According to Zenith, video demodula-

tion is synchronous, but without the usual carrier coil. About all that's visible in the video area of the chip are several filter capacitors and a dc contrast control. Small i-f signals, however, keep beat products to a minimum; e.g., 920

kHz, i-f harmonics, and intercarrier spikes. These low-level voltages are then substantially amplified within the chip, so that overall video output gain amounts to 74 dB. Our examination of the video signal shows it to be both clean and linear.

Should excessive beam currents threaten, the large IC has a sensing port from a turn on the flyback transformer's secondary—reducing any overdrive to a manageable amount. Thereafter, the back porch of the horizontal sync pulse is clamped at a fixed level and vertical and horizontal blanking becomes part of the video signal in the blanking buffer before it enters the final video driver. Coupling is dc to and through the single-stage video output and into the cathode ray tube.

The sync chain is formed at 31.5 kHz from a programmed current source, a 50-pF nitride capacitor and internal oscillator. A frequency divider drops this to the black and white line rate of 15,750 Hz, while dual phase detectors keep the horizontal oscillator in sync via feedback from the horizontal output. Because of this dual phase comparison, a traditionally integrated sawtooth from the flyback is not used.

Pulses from the horizontal oscillator drive both the discrete transistor horizontal output as well as internal chip 546-count logic, which then becomes a control system for all vertical circuits. Divided by 525, the 31.5-kHz oscillator produces 60 fields, or 30 frames per second, and retrace is triggered directly by received sync pulses through gating cir-

ZENITH NO52S B & W TV/CLOCK/RADIO
LABORATORY DATA

Parameter	Measurement
Tuner/receiver sensitivity (min. signal for snow-free picture):	vhf (Ch. 6): -5 dBmV uhf (Ch. 30): -3 dBmV
Voltage regulation w/signal input (line varied from 100 to 130 VAC)	Low voltage: 6-V supply—99% 12-V supply—99% High voltage: 7-kV supply—99%
Video bandpass at CRT:	Over 4 MHz
S/N ratio at CRT:	38 dB
Horizontal overscan	17%
AGC response (before sync clipping or black level shift):	57 dB
Dc restoration:	83.7%
Auxiliary earphone audio output Z:	8 ohms
Ac power requirement (signal applied):	12.6 W

NOTE: Test instruments used in these measurements are: Tektronix 7L12 spectrum analyzer, Tektronix/Teletop D67A oscilloscope; Winegard DX-300 vhf amplifier; Sadelco FS-3D-VU f/s meter; Data Precision 245 and 1750 multimeters; Sencore PR57 variable power supply; and Tektronix C5-A and Minolta XD-11 cameras.

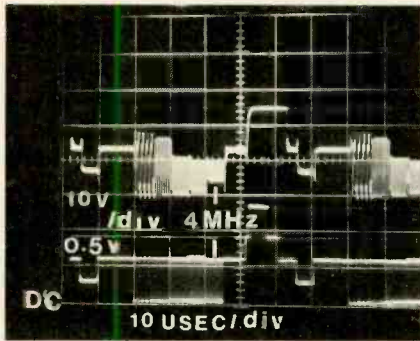


Fig. 2. Multiburst pattern from 0.75 to 4 MHz shows wide bandpass at CRT.

cuts in the countdown network. Initially dividing by 386, a wide gate opens thereafter, at which time the count down, now triggering on sync, continues to 546 and then self-triggers. With sync present, the gate count stops between 514 and 526. Should sync become lost, auto triggering goes beyond the count of 526 for eight fields, at which point the counter reverts to the wide gate and customary countdown.

The vertical output consists of a pair

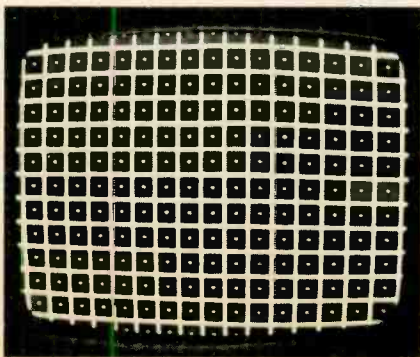


Fig. 3. Bow at top of dothatch pattern will be corrected by new speaker design.

of complementary push-pull, class B discrete transistors, with driver, feedback and dc-coupling to the vertical deflection coils. Ramp drive voltage for the output is traditionally capacitor-generated and amounts to approximately five volts.

The usual tuning, volume and function settings are on the side, while black level and contrast controls are on the back.

User Comment. Waveforms and raster display (Figs. 2 and 3) show the bandpass and linearity of the receiver. The nonlinearity at the dothatch's top results from the prototype speaker's magnetic pull, but this will be changed to Alnico 5 material in the production runs. Multiburst directly out of the signal-injecting test equipment (bottom trace) at 0.5 V/div. and the resultant through the receiver (top trace) at 10 V/div are shown in Fig. 2. In each instance, a full 4 MHz is evident and horizontal blanking is a clean 10 μ s, as it should be. Multiburst begins on the left at 0.75 MHz and extends, via the fifth oscillation, to 4.08 MHz. With an extended voltage frequency, the set might even be able to produce a bit more.

Contrast is good; the 7 kV of brightness in the CRT drive is satisfactory; and the diode-switched varactor tuning is broad and sufficient. The FM radio gives the 3.5" speaker all the sound it can handle. The picture is steady, and raster size remains constant between ac power input swings of 100 to 130 V.

When all's said and done, you will find a great deal of innovative engineering in this one, making the unit ideal for anyone who wishes to watch TV at the beach, on a boat, in a trailer, or in a small vacation cottage. Add AM-FM radio and a clock with alarm provisions, and you have a handy entertainment radio-TV package that's truly portable.

—Stan Prentiss

CIRCLE NO. 103 ON FREE INFORMATION CARD

NO. 2 IN A SERIES

GUARDING YOUR MILITARY EXPERIENCE

FRINGE BENEFITS

If you have experience in any branch of the Armed Forces, you could not only be earning a good extra income—but enjoying some valuable fringe benefits—while you hold one of the most important jobs in America. In an Army Guard unit close to home.

Here are some of the many fringe benefits you get for serving just two days a month and two weeks annual training each year (after an initial training period) in the Guard:

Free air travel: is available to you as a service member anywhere in the continental U.S., Alaska, Hawaii or Puerto Rico, on a space available basis.

Education Assistance: depending on the state in which you serve, you may be eligible for tuition aid, college loan repayment and other types of education assistance. Your local recruiter has complete details.

A bigger pension: you'll earn extra retirement credits, and you can start collecting your pension at age 60.

PX Privileges: up to 48 visits a year.

Low-cost life insurance: up to \$20,000 in coverage for just pennies a day.

You'll also be helping people in your community and state when natural disasters or other emergencies strike. We think you'll find that's the biggest "fringe benefit" of all.

Fringe benefits. Just one more reason to Guard your military experience in the Army National Guard.

To learn about other reasons—from cash bonuses to new skills—see your local recruiter, or call toll-free 800-638-7600.*

*In Hawaii: 737-5255; Puerto Rico: 723-4450; Virgin Islands (St. Croix): 773-6438; Maryland: 728-3388; in Alaska, consult local phone directory.

The Guard is America at its best.



CIRCLE NO. 33 ON FREE INFORMATION CARD

Popular Electronics Tests



Sinclair ZX81 Personal Computer

THE very small Sinclair ZX80 computer introduced a year ago cost \$200 and had some 21 chips, 1K of user RAM, and a 4K ROM incorporating the operating system and BASIC. It had some drawbacks, low price notwithstanding, as observed in our report last year (August 1981). Now we have the Sinclair ZX81 for \$149.95 and a kit version for \$99.95.

This updated version of the ZX80 has 8K of ROM that allows some 30 additional BASIC functions to be included. (The 8K BASIC chip is also available to update the older ZX80.) It also has an expansion bus for the ZX printer (soon to be available), 16K RAM plug-in modules, and implementation in only four (yes, 4) chips! Eighteen of the ZX80 chips are replaced by a single custom chip made by Ferranti (England). The other three chips are the Z80A CPU operating at 3.5 MHz, the ROM and the RAM. A built-in r-f modulator having switch-selectable outputs for either channel 2 or 3 is provided, and its predecessor's RFI problem seems to have been overcome. Numbers are stored as five data bytes in a floating-point format, with a range of 3×10^{-39} to 7×10^{38} , accurate to better than nine decimal digits. The BASIC now includes full log, trig, and inverse trig functions, and has the ability to handle multi-dimensional numeric and string arrays. No color facilities are provided.

Description. The ZX81 is even a little smaller than its older brother, measuring 6½" W x 6¾" H x 1½" D (at the thickest point at the rear), and weighing only 12 ounces.

The underprinted plastic membrane keyboard features only 40 keys, but has a total of 151 different functions, of which 55 are single-stroke BASIC statements, while 12 keys have five functions each. Color-coding and a change in cursor identification keeps things in line.

There are several physical differences between this new keyboard and the older ZX80. The black ABS plastic case is hard instead of the soft white plastic of the ZX80, and there is a bus connector accessible via an opening at the rear. The left side supports the cassette EAR and MIC connectors, the 9-V power plug, and an RCA jack for r-f output. The underside contains a channel selector switch (2 or 3).

The computer requires an external TV receiver for use as a video monitor, and a cassette recorder for mass storage. The TV screen displays 24 lines of 32 characters each (upper case only), but the display is limited to 22 lines. The lower two lines are used for inputting commands and data, program lines, and for displaying what Sinclair calls "reports." The graphics mode uses discrete points in a 44 by 64 matrix. Some 20 graphics and 54 inverse characters can be called.

The "reports" previously mentioned appear on the bottom line of the display after a program is run. There are 15 such report codes (0 through F), each having a particular meaning as explained in the manual. For example, report "0" means successful completion of a "run;" "3" stands for a subscript out of range; "7" means no corresponding GOSUB for a RETURN statement; etc. Each report is followed by a slash and the number of the last BASIC line executed. The BASIC is also syntax edited as it is entered (like the Apple) and cursor movement keys allow editing a wrong line. A special cursor symbol indicates where the problem is. Programs are saved and loaded from the cassette by name, and the ZX81 will search the tape for a named file.

The 8K BASIC is remarkably complete (see the Table). Besides a full complement of commands, it includes such features as LLIST, LPRINT, and COPY (for the upcoming printer with COPY printing an image of the video screen), PAUSE, PLOT, UNPLOT, SCROLL, and two functions called SLOW and FAST.

In the FAST mode, the video display makes the screen flicker like the old ZX80, but the system operates at high speed. The SLOW mode keeps the screen refreshed all the time, making the display easy to read. The SCROLL feature removes the top line and moves each line

Order Direct! Commodore VIC-20...The Friendly Computer.

"The first honest-to-goodness full color computer you can buy for only \$299.95" – William Shatner

Complete Line of Hardware and Software Available to Expand your VIC-20

VIC-20 — Commodore's revolutionary personal computer features color, sound, graphics, programmable function keys, built-in BASIC, expandable memory, low-priced peripherals and more! Connects to any TV or monitor. Includes RF Modulator, switchbox, cables and self-teaching instruction book. / \$299.95 (See coupon below)

Commodore Datassette — Provides handy economical storage of user-written or pre-recorded programs. / \$75.00

VIC Graphic Printer — Economical dot matrix printer makes paper copies of BASIC programs, letters, business data. / \$395.00

VIC-3K Memory Expander Cartridge / \$39.95

VIC-8K Memory Expander Cartridge / \$59.95

VIC-20 Super Expander — 3K RAM memory expansion, high resolution graphics plotting, color, and sound commands. / \$69.95

Programmers Aid Cartridge — More than 20 new BASIC commands help new and experienced programmers. / \$59.95

RECREATIONAL GAME CARTRIDGES:

VIC AVENGERS • SUPERSLOT • VIC SUPER ALIEN • SUPER LANDER / \$29.95 each

COMPUTER PROGRAM TAPES:

(Requires Commodore Datassette)

Recreation Program Pack A — Car Chase; VIC-21; Blue Meanies from Outer Space; Biorhythm/Compatibility; Spacemath; Slither/Super Slither. / \$59.95

Home Calculation Program Pack A — Personal Finance I - Home budget; Personal Finance II - Home budget; VIC Typewriter - Word processor for home use; Expense Calendar - income, expenses, appointments; Loan & Mortgage Calculator - Decision-making aid; Home Inventory - Home belongings list / \$59.95

Programmable Character Set/Gamegraphics Editor — Lets the VIC user create up to 64 programmable characters and use them in BASIC programs. / \$14.95

Introduction to BASIC Programming — A gentle but thorough introduction to BASIC programming. Excellent first book for any new computerist. / \$24.95

VIC-20 Programmers Reference Guide — Master VIC-20 reference manual includes information on VIC BASIC, programming and much more. / \$16.95

To order accessories simply list on separate sheet and clip to coupon.

Product Features	Commodore VIC-20	Atari 400	TI 99/4A	TRS-80 Color Computer
Price*	\$299.95	\$399.95	\$525.00	\$399.50
Total Memory Standard (ROM & RAM)	25K	26K	42K	12K
Memory (RAM) Expansion to...	32K	Not Available	Not Available	32K
Keyboard Style	Full-Size Typewriter Style	Flat Plastic Membrane	Half-Size Typewriter	Calculator Style
Programmable Function Keys	4	0	0	0
Basic Language	Microsoft Basic	\$59.95 Extra	TI Basic	Radio Shack Basic
Upper/Lower Case Characters	Yes	Yes	No	No
RS232 Interface	\$49.95	\$219.95	\$225.00	\$19.95
Number of Keys	66	57	40	53
Graphic Symbols on Keyboard	62	0	0	0
Displayable Characters	512	256	64	256

*Manufacturers suggested retail price September 1, 1981

A computer like this would have been science fiction a few years ago. Now it's a reality. It's the new VIC-20 by Commodore, a full fledged expandable color computer that costs little more than video games. And it's so easy to use you can be writing your first program in 15 minutes!

Everybody loves video games and the Commodore VIC-20 has some of the best. But the VIC-20 can also help children with their homework. Mom can use it for home budgeting. Dad can even take the lightweight, portable VIC-20 to the office for financial and business application.

The Friendly Computer at a Friendly Price: At \$299.95 the Commodore VIC-20 is the friendliest way we know to learn computing. It has a full computer keyboard even a small child can operate.

The VIC-20 also plays music, has exciting graphics, lets you create pictures. It even tells you when you've made a mistake and how to correct it. (That's very friendly!)

The VIC-20 can take your children from preschool through post-graduate studies.

Why get just another game that could end up in the closet? Get an honest-to-goodness computer for just \$299.95.

Free with every VIC-20 computer
This 164 page guide tells you everything you need to know about your VIC-20 and how to operate it. Written for the beginner, you'll be programming on your VIC-20 in minutes!

Order now. We'll ship your new VIC-20 computer directly to you. 15 day free trial.

Contemporary Marketing, Inc.

790 Maple Lane, Bensenville, IL 60106

Faster Service for Credit Card Customers

Call Toll Free 800-648-5600 (In Nevada call: 800-992-5710)
24 hours a day



Yes, I want to start using the new VIC-20 personal computer right away.

Please send me:

Commodore VIC-20 computer(s) at \$299.95 each.

(Item No. 2000). Add \$4.95 per computer for shipping and insurance.

Illinois residents include 5 1/4% sales tax.

Check/M.O. Enclosed Charge my credit card:
 MasterCard Visa American Express Diners Club

Card No. _____ Exp. Date _____

Name _____

Address _____

City _____ State _____ Zip _____

Signature _____

Contemporary Marketing, Inc.

790 Maple Lane, Bensenville, IL 60106

© CMI1982-263

PEMF-060

BASIC TABLE FOR SINCLAIR ZX81

Functions

ABS	ACS	AND	ASN	ATN
CHR\$	CODE	COS	EXP	INT
INKEY\$	LEN	LN	NOT	OR
PEEK	PI	RND	SGN	SIN
SQR	STR\$	TAN	USR	VAL

Binary Operations

+	-	*	/	** (raise to a power)	
=	>	<	<=	>=	<>

Statements

All statements except INPUT can be used as commands.

CLEAR	CLS	CONT	COPY	DIM
FAST	FOR..TO (STEP)	GOSUB	GOTO	
IF..THEN	INPUT	LET	LIST	LLIST
LOAD	LPRINT	NEW	NEXT	PAUSE
PLOT	POKE	PRINT(TAB)		RAND
REM	RETURN	RUN	SAVE	SCROLL
SLOW	STOP	UNPLOT		

up. Without this command, the display freezes when the bottom line is displayed. The PLOT and UNPLOT functions are for the graphics mode (entered by operating the GRAPHICS key) and allow use of 44 by 64 screen elements, each one-quarter the size of a normal character. SAVE and LOAD commands are used for the cassette recorder. When saving or loading a program, the screen display changes to a series of slanting lines to let you know that data is flowing. All the trigonometric functions are in radians and the Pi key inserts 3.14159265 in the program. Unfortunately, there are no DATA or READ instructions.

String variable names are limited to A\$ through Z\$ and a character string of any length can be used, providing it starts with a letter. String and numeric

arrays are limited by free memory.

Machine-language code can be entered using the USR, PEEK, and POKE functions.

Comments. We were surprised at the amount of computing power that Sinclair packed into such a small computer (you can carry this little wonder in a jacket pocket without making a bulge). The BASIC is as good as anything around in small computers, and has commands that others do not have. One has to get used to the single-keystroke BASIC entries, but through familiarity eventually it becomes easy to use. Sinclair even includes automatic spacing for "pretty printing," so even sloppily entered programs look good when listed.

You should recognize that the keyboard's small membrane keys are excellent for small fingers, but in no way can a touch typist work them. So forget about word processing for a secretarial operator. The ZX81, however, is a "hunt and peck" typist's dream. Getting used to the multi-function keys takes a bit of practice, of course. The block cursor changes its internal reverse letter depending on the function, and this makes life easier.

The 164-page manual is one of the best we have seen, and assumes that the reader knows almost nothing about computers or the BASIC language. There are many typically British expressions, but most readers will readily understand them.

Since our offices are located in midtown Manhattan, just a couple of blocks away from TV transmitters that put out many megawatts of power, any system we test that uses a TV receiver as a video display invariably displays heavy moiré patterns due to primary and adjacent channel breakthrough. This is usually heavy enough to make even an excellent system look bad. Therefore we test in a suburban area where the r-f at TV frequencies is greatly reduced. Although the ZX81 looked bad in the office, in our suburban test site, on an unused TV channel, it looked rather good. This is a function of the TV receiver, which also determines video clarity, and how its contrast and brightness are adjusted.

The alphanumerics looked very good, while the block graphic symbols, like those of most other computers, need to be "assembled" in proper order to create the desired visual image. Sinclair provides a good assortment of graphic symbols, not very high in resolution, but useful for most learning experiences.

The Sinclair ZX81 looks like a winner for those who want a low-cost way to learn BASIC programming or a small, inexpensive, yet powerful computer to start out on. Accessories include a 16-K byte plug-in RAM module at \$99.95 and a printer soon to be announced at a price of about \$100.

Having the bus structure available (all signals are explained in the manual) could be the beginning of a "cottage industry" built on this bus. One simple extension would be as an EPROM burner module controller at a really low price. After all, most of us can use BASIC a lot more easily than we can machine language. There is no reason, either, why peripherals (how about a disk?) can't be attached—and with a Z-80 processor, why not CP/M?

Interestingly, the ZX81 is manufactured by the Timex Corporation of Scotland, the same people who make watches and the Sinclair miniature TV receiver. The old saw about good things coming in small packages is true in the case of the Sinclair ZX81. It's a big computer in a small package—at remarkably low cost.

—Les Solomon

CIRCLE NO. 102 ON FREE INFORMATION CARD

We've got it all together.



Weller



Weller



Xcelite



Wiss



Nicholson



Boker

**Boker
Crescent
Lufkin
Nicholson
Plumb
Weller, Wiss
Xcelite**



Lufkin



Crescent



Plumb

Take a good look round this ad and you'll agree that "All together" is no exaggeration. Whether you're making or mending, cutting or joining, striking, measuring or stripping, there's a Cooper tool that's just right for the job. Don't take chances on tools. Specify Cooper and get 'em right the first time!

from Cooper The Toolmaker. ^{T.M.}




The Cooper Group

BOKER * CRESCENT * LUFKIN * NICHOLSON * PLUMB * WELLER * WISS * XCELITE

P.O. Box 728, Apex, North Carolina 27502. Tel: (919) 362-7510 Telex: 579497

CIRCLE NO. 12 ON FREE INFORMATION CARD

www.americanradiohistory.com

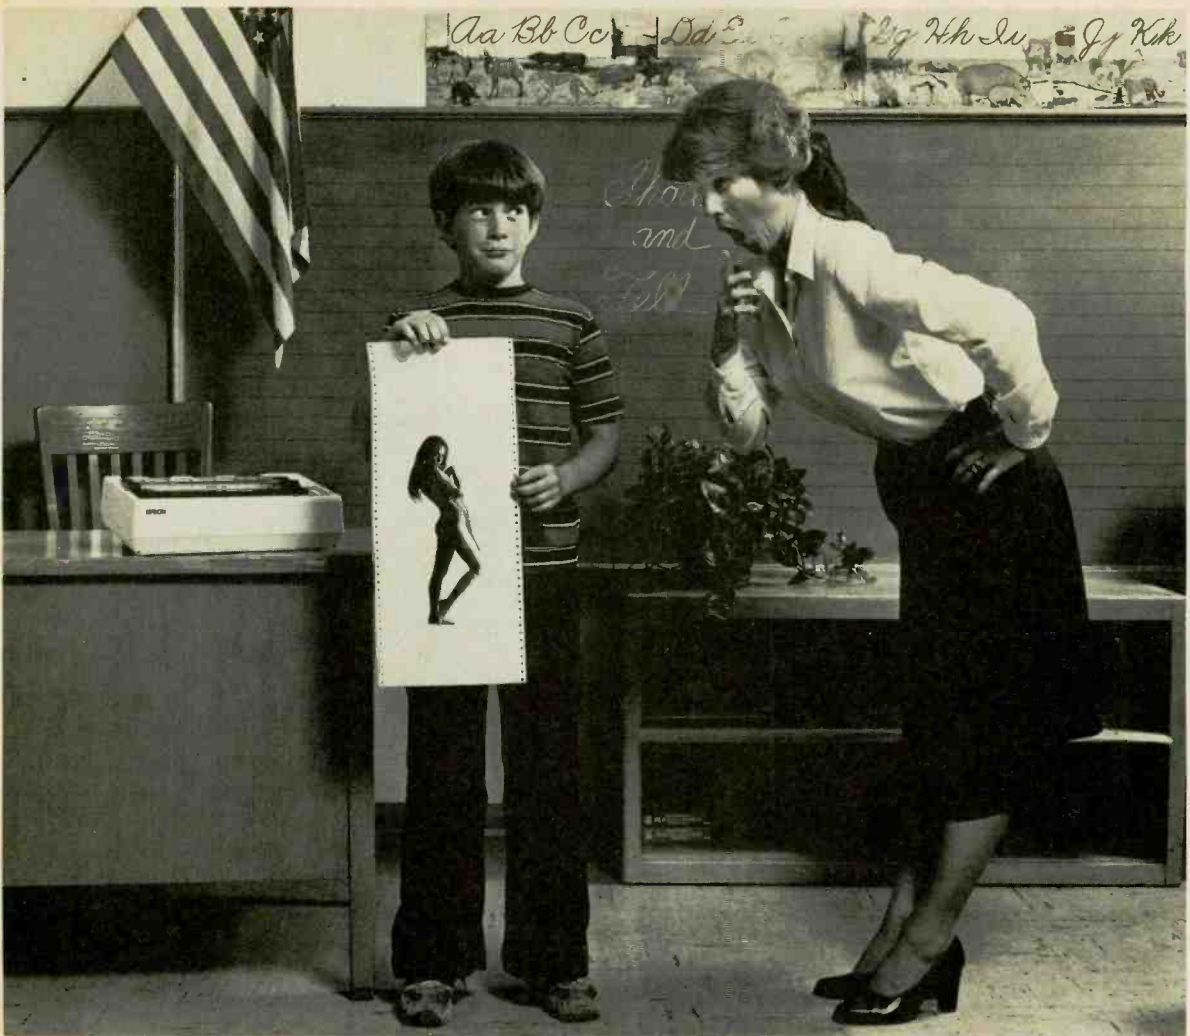

...And my dad says GRAFTRAX 80
does better graphics than anybody.

Epson.

You might say it's the head of its class. GRAFTRAX 80 gives you the highest resolution dot matrix in the world — up to 120 dots per inch horizontally and 216 dots per inch vertically. Which makes our MX-80 and MX-80 F/T work more like a plotter than a printer.

And that's just for starters.

GRAFTRAX 80 more than doubles the features available in an Epson MX-80 or MX-80 F/T. For instance, we've added nice little touches like an italic character set — which doubles the number of font types to 24. And with GRAFTRAX 80, you can change style, size and density anywhere in the line. And backspace the head. And use block graphics with *any* computer. And redefine all escape codes under software control.

Up to now, you couldn't get some of these features at *any* price. With GRAFTRAX 80, you get 'em all. And more. Lots more.

Best of all, we haven't forgotten all those people who already own an MX-80 or MX-80 F/T. You own the printer that set the standards all the others are following. And you can install GRAFTRAX 80 PROMs yourself, for less than \$100. And make the best even better.

You can see why we say GRAFTRAX 80 is the head of its class. There's nothing *else* in its class.



EPSON
EPSON AMERICA, INC.

3415 Kashiwa Street • Torrance, California 90505 • (213) 539-9140

CIRCLE NO. 16 ON FREE INFORMATION CARD

www.americanradiohistory.com

CHOOSING A PRINTER FOR A SMALL COMPUTER

How the different computer printer formats work and the advantages of each for different applications

BY ALEXANDER W. BURAWA

CHOOSING a low-to-moderate-priced printer for a small-business or home computer has become a relatively easy task. Now that the initial haste to supply printers to the budding small-computer market is over, manufacturers have settled down to providing logical designs that offer what users most want and need in a hard-copy computer printer.

With the weeding-out of exotic, expensive, or unreliable printers that use thermal, electrosensitive, ink-jet, and laser media from the low-end printer market, we see a bright new era in computer printers. Spurred on by the rapid growth of word-processing and business applications as the main use for the


small computer, manufacturers have in recent years concentrated their design and marketing efforts on a hardy range of reliable and flexible impact printers. Except in very rare cases nowadays, electro- and thermosensitive paper is a thing of the past, and with it are the problems of expensive, fragile, and often poor-contrast print quality. Also, these "exotic" types of printers cannot make more than one copy at a time, while an impact printer can make several copies at one stroke.

Although the task of actually choosing a given make and model printer has been simplified, the choice must be based on intelligent weighing of all possibilities before making an actual pur-

chase. A computer printer, after all, isn't a plug-it-in-and-turn-it-on appliance. It should be matched to your computer's hardware considerations and take into account demands of the software with which you'll be using it, as well as your intended and anticipated applications.

In this article, we'll explore the various aspects of modern computer printers, focusing our attention on only impact serial models that print character by character instead of a full line of type at a time.

Printing Approaches. There are basically two categories of impact printers—dot-matrix and formed-character.

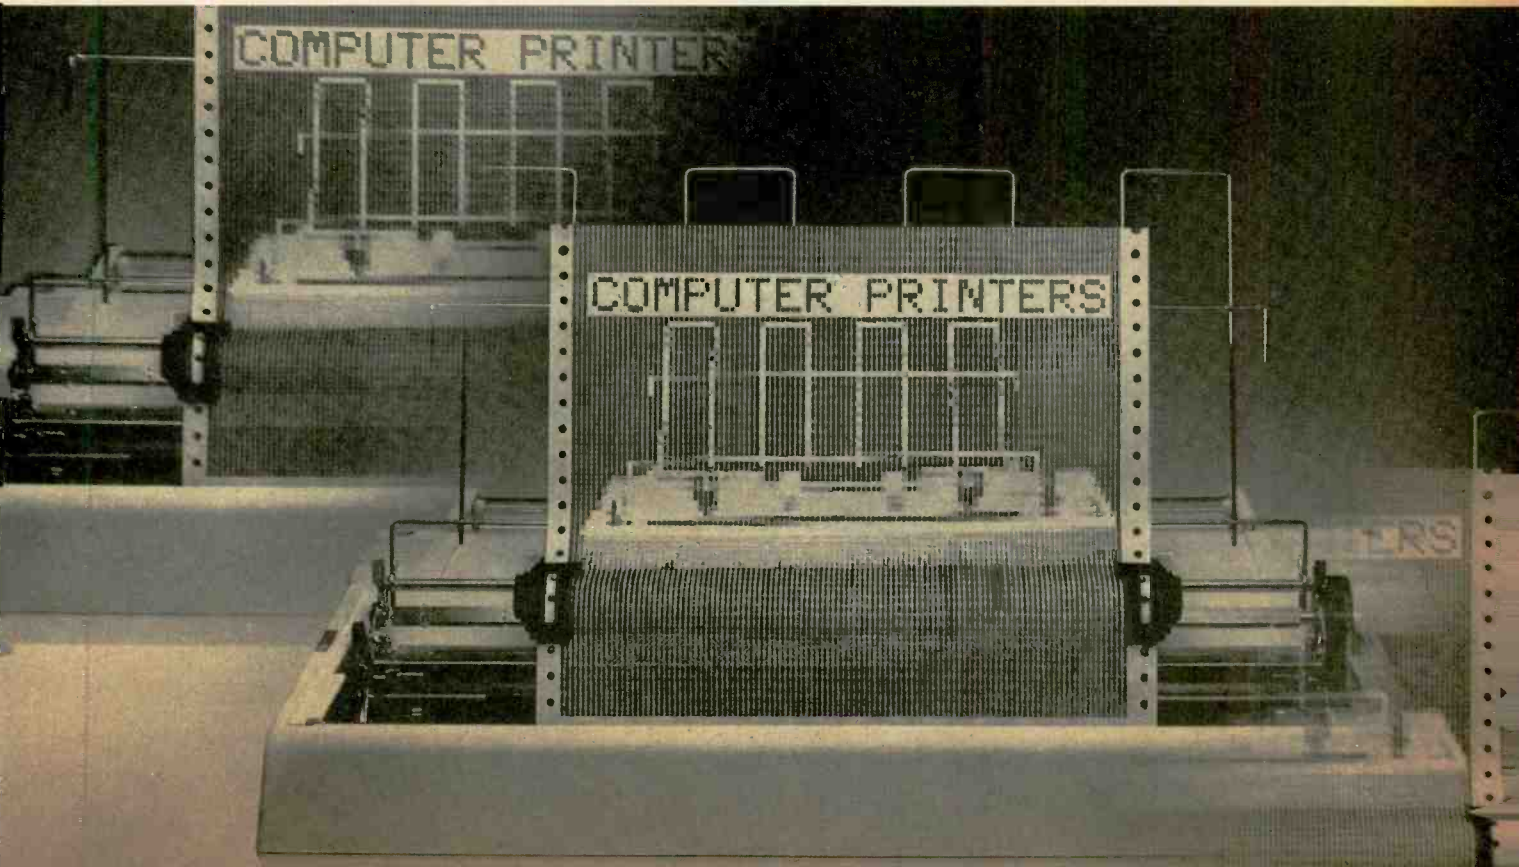

In both types, print is transferred to paper in a manner similar to that used in a typewriter. That is, a slug or dot matrix for the desired character strikes through (impacts) an inked ribbon to deposit the character's impression on the paper.

By far the most popular type of printer available is the dot-matrix variety, due mostly to its low price and high speed when compared to formed-character printers. The dot-matrix printer is also potentially the most flexible. Many models are capable of producing compressed, standard, and expanded characters; standard and bold print; and a wide variety of graphics characters. Using appropriate software commands, it can even be used to create custom upper- and lower-case alphanumeric characters, punctuation, and foreign-language characters.

The only real drawback to the dot-matrix print is that character appearance (and sometimes legibility) is only fair to moderately good as compared to a conventional typewriter. With some models, characters may appear to be discontinuous or distorted. And although legibility can be vastly improved by overstriking and boldfacing, sharpness will never quite come up to the quality obtained from a formed-character printer.

Each character in a dot-matrix printer is created in a matrix of dot patterns. The per-character matrix in a given printer is fixed by the geometry of the printhead and is defined by the numbers of horizontal and vertical dots within the matrix. While the number of vertical dots is invariably fixed, the number horizontally can be varied to permit compressed and expanded characters. The matrix, therefore, defines the character

field for a "standard" character. Typical matrix examples are 5×7 , 7×9 , 9×12 , etc., as shown in Fig. 1A.

The dot-matrix printhead does not contain the full point-by-point matrix. Instead, it typically consists of a single vertical column of print pins that are selectively "fired" by solenoids, as illustrated in Fig. 1B. (Our example in Fig. 1B assumes a view through the paper, head travel from right to left, and a 5×9 standard matrix.) Hence, to print an entire character the print pins must be fired as many as five times as the printhead sweeps across the character field.

A matrix consists of columns and rows. A line of matrix print consists of continuous matrices arranged side by side. Therefore, a line of print can be viewed as a matrix of y number of rows (horizontally) and x number of columns (vertically). Viewed in this light, it's easy to see how the system knows exactly which print pins to fire in each column as the printhead sweeps across the page. In Fig. 1B, the numbers at the top of each column are the row numbers to be fired at each location.

The example shown in Fig. 1B demonstrates a simple single-strike character printing technique. To improve legibility, columns are often struck twice, with the printhead shifted slightly to allow the second strike to fill in the gaps between dots. The result is an apparently continuous character with rough edges. This is the technique used to obtain what is known as "correspondence-quality" printing.

If you need truly professional-quality printing, like that of a typewriter and the print used to compose this text, you have no alternative but to move up to a formed-character printer.


At this writing, there are basically

two kinds of formed-character printers available at low to moderate prices. One is the "daisywheel" printer developed by Xerox and first used in that company's Diablo printers and printing terminals. The daisywheel, the actual printing element, gets its name from its resemblance to the daisy flower (Fig. 2A). Arranged radially around a solid hub are 96 or more spokes that resemble petals. At the end of each spoke is a single alphabetic, numeric, punctuation, or special symbol character that is unique to all other spoke characters. Hence, the daisywheel printing element can accommodate the entire 96 ASCII characters. Moreover, type faces can be easily changed by substituting from a wide range of 96-character elements.

If you look at the Sampler Table of Printers presented in this article, you will note that almost every manufacturer of formed-character printers uses the daisywheel printing element approach. The only exception is NEC Information Systems, which employs its proprietary "thimble" element, the second basic type available for formed-character printers. The thimble element (Fig. 2B) differs from the daisywheel element in more than just its appearance. It contains two characters per spoke, the second accessed by a shift function similar to that used in typewriters to access the upper-case characters. Another difference is that the thimble's standard character count is 128, enough to accommodate the full 96-character ASCII set as well as 32 additional special and/or graphics characters.

Formed-character printers lack the speed and flexibility of the typical dot-matrix printer, particularly in printing graphics characters. However, the formed-character printer has the advan-

Fig. 1. At (A) are typical matrices for dot-matrix printers. Diagram at (B) shows a dot-matrix printhead printing a row of type.

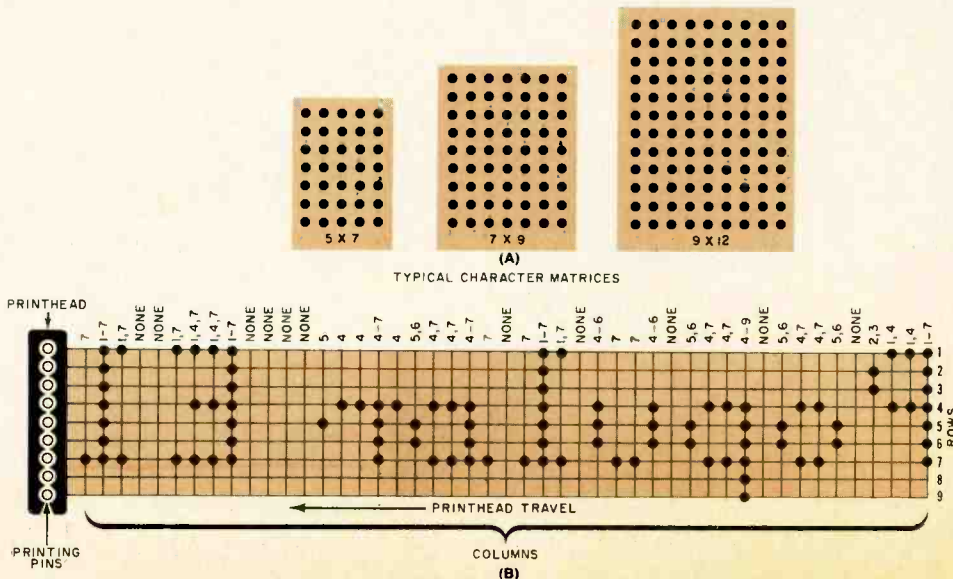

tage that type style (font) and size (pica or elite) can be changed quickly. If you wish to change font and/or size, you simply snap out the daisywheel or thimble and replace it with the desired one. Daisywheel and thimble printing elements are available in a wide variety of styles, including special foreign-language symbols and characters, APL characters, and OCR (optical character recognition) characters. Plastic daisywheel print elements from Diablo and Qume range in price from \$8.50 to \$12.00 each, while metal daisywheel print elements for Diablo printers range in price from \$40 to \$46. Thimble printing elements from NEC, all nylon-reinforced fiberglass, cost about \$14 each.

The most important advantage obtained from daisywheel and thimble printers is the professional quality (so-called "letter quality") of the printed characters. Just as important can be the printer's proportional-spacing ability (requires "proportional-spacing" element). Any printer can be made to justify the left and right margins. The dot-matrix printer can do this only by adding extra spaces to lines that don't print to full width. The formed-character printer, however, can be programmed to adjust spacing for the width of the characters being printed. Proportional spacing simply means that less horizontal spacing is given to narrow characters like *i*, *l*, and *I*, while more space is given to wide characters like *M*, *W*, *m*, and *w*.

Advantages of proportional spacing are two-fold. First, printed material looks much more professional—like the copy you're now reading. Secondly, you can get more characters on a page, for an overall saving in paper.

The major disadvantages of formed-character printers are their relatively high cost and low printing speed.

The choice between dot-matrix and formed-character printer must be based on your printing needs. If you require fast printing speed or low initial cost and can tolerate less-than-letter-quality print (such as in billing statements, accounts forms, etc.), you'll probably be best off with a dot-matrix printer. Too, if you have an urgent need to print graphics, the dot-matrix printer is more desirable. On the other hand, if professional-quality printing is of paramount importance in your operation, you have no alternative but to choose the formed-character printer.

Paper Feed. There are two basic types of paper used in most printers. One looks like conventional sheets, and one has holes on tear-off sides. The type and width of the paper used depends on the

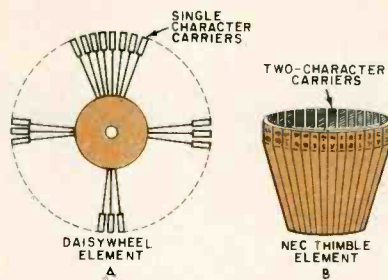


Fig. 2. A daisywheel element is shown at left; an NEC thimble at right.

paper feed mechanism. Friction feed, as its name implies, is similar to the approach used in conventional typewriters where the paper is fed through the device by friction between a moving platen and its associated rollers. The other approach uses "pins" molded into metal or plastic wheels that engage the holes in the paper. These wheels are located on each side of the platen and, in most cases, the physical position of the pin wheels can be positioned along an axle to correspond to the width of the paper being used.

Pin-feed paper usually comes as multiple sheets with some form of "carbon paper" between forms to produce multiple copies. This is excellent for generating mailing labels, and for other accurate print position requirements. Pin-feed paper usually comes as "fan fold," where each sheet is folded against its neighbor. Friction-feed paper can range from single sheets to rolls.

Friction-feed machines are less expensive than pin-and-tractor machines, as is the paper used for the respective types.

The ribbon can also take many forms ranging from conventional rolls, to unique "plug-ins" that not only can be self-inking, but can be changed with a minimum of fuss and effort (and making the fingers dirty).

Printer noise level should also be considered. This can range from the "clickety-clack" of the old-fashioned teletypewriter (as used for audio background on many radio and TV news programs), to the relatively quiet "hiss" of a modern printer with quiet mechanism. This choice should be made dependent on the area where the printer will eventually be used.

By The Numbers. As with any other electronic device—and more so with a computer peripheral—the numbers given in tables of specifications are extremely important. Much of your decision to buy a given printer make and model will rely heavily on specifications figures. For this reason, we've included

the Sampler Table of Printers, which gives you an opportunity to compare models available by type, price, specifications, and features. All models listed are print-only devices, having no originating keyboards as in printing "terminals." All are also impact printers. Let's take a look at what some of the column headings mean.

Type simply tells you whether the printer uses a formed-character or dot-matrix printing mechanism and, if the latter, its matrix arrangement. Note that dot-matrix models offer from as small a matrix as 5×7 to as much as 18×18 .

The smaller matrices usually do not produce full descenders on certain lower-case letters (*y*, *p*, *g*, *j*), and where needed, cannot produce an underline. Keep this in mind when examining printing examples of the selected printer. Larger matrices produce a much "smoother" printed character, and in many cases allowed the user to specify (and print) unique graphics, foreign language letters, etc.

Print Speed is the number of characters per second (cps) the model can print out. The typical formed-character printer can provide about 55 cps. Print speed can also be as low as 17 cps or as high as 80 cps, depending on printer cost. Dot-matrix models, on the other hand, typically offer speeds in the range of 100 to 200 cps. High speed in our tabulation for dot-matrix printers is 200 cps and low speed is 30 cps, again reflecting price.

Character Set tells you how many characters (alphanumerics, punctuation, special, and graphics) are available. Most printers offer the full 96-character ASCII set and many provide even more, allowing you a high degree of flexibility in printing.

Characters Per Line tells you the maximum number of characters you can print on a line with a given printer. Double entries mean that you can select either of two character counts, usually by flipping a switch or through console command.

Lines Per Inch tells you the maximum number of lines of type you can have per vertical inch. Again, double entries offer you a choice of either of two quantities, usually selected by the software or by console command.

Interface is the means by which the printer connects to the computer. No computer peripheral, including the printer, can directly connect to the computer. Connection is accomplished by way of either a parallel or serial interface module that provides the physical port required. Each port assigned by the computer's operating system/hardware

SAMPLER TABLE OF PRINTERS

Manufacturer Name/Address	Model	Price	Type	Print Speed (cps)	Character Set	Characters per line	Lines per inch	Drive	Paper	Interface
Anadex, Inc. 9825 DeSoto Ave. Chatsworth, CA 91311	DP-8000	\$1125	9x7 Dot Matrix	112	96	80	6	Sprocket	Fan fold, Forms	Serial Parallel
	DP-9000	\$1550	9x9 Dot Matrix	150/200	96	80/132	6/8	Tractor	Fan fold	Serial Parallel
Axiom Corp. 5932 San Fernando Rd. Glendale, CA 91202	GP-80M	\$399	5x7 Dot Matrix	30	NA	80	6/9	Tractor	Fan fold, Forms	Serial Parallel
Centronics Data Computer One Wall St. Hudson, NH 03051	739	\$995	7x8 Dot Matrix	100	96	80/132	6	NA	Roll, Fan fold, Form	Serial Parallel
Diablo Systems, Inc. Hayward, CA	1640	\$3195	Daisywheel	NA	NA	NA	NA	Tractor	Sheet, Roll	NA
	630	\$2295	Daisywheel	35-40	96	NA	NA	Friction	Roll	NA
Epson America 23844 Hawthorne Blvd. Torrance, CA 90505	MX-80	\$645	9x9 Dot Matrix	80	96	80	6-10	Tractor	Fan fold	Serial Parallel
	MX-100	\$995	18x18 Dot Matrix	80	96	233	6	Tractor, Friction	Sheet, Roll Fan fold	Serial Parallel
Heath Co. Benton Harbor, MI 49022	Z-25	\$1595	Dot Matrix 5x7	150	96	222	6/8	Tractor	Fan fold, Sheet	Serial
	H-14	\$395	Dot Matrix	75	96	80/96/132	6/8	Tractor	Fan fold	Serial
C. Itoh Electronics 5301 Beethoven St. Los Angeles, CA 90066	Stanwriter	\$1750	Daisywheel	25	96	136	48	NA	NA	Serial Parallel
Micro Peripherals Inc. 2099 W. 2200 S. Salt Lake City, UT 84119	88G	\$748	11x7 Dot Matrix	100	96	80-132	6/8	NA	Roll, Fan fold, Cut sheet	NA
Microtek 9514 Chesapeake Dr. San Diego, CA 92111	Microline 82A	\$299	7x7 Dot Matrix	NA	NA	80	NA	NA	Sheet, Roll	Apple Atari TRS-80
NEC Personal Computer Div. 1401 Estes Ave. Elk Grove Village, IL 60007	5510RD	\$3055	Thumbie	55	128	163	6/8	Friction, Tractor	Sheet, Fan fold	Serial
Okidata Corp. 111 Garther Dr. Mt. Laurel, NJ 08054	Microline 82A	\$840	9x9 Dot Matrix	120	96	80/132	6/8	Friction, Tractor	Fan fold, Sheet	Serial Parallel
Printerm Printer Terminals Corp. 124 Tenth St. Ramona, CA 92065	879	\$1290	7x9 Dot Matrix	180	95	80/132	8	Sprocket, Friction	Roll, Fan fold	Serial Parallel
Qume Corp. 2350 Qume Dr. San Jose, CA 95131	Sprint 9/56	\$2830	Daisywheel	55	125	132-198	3-8	Friction, Tractor	Sheet, Fan fold	Serial
Radio Shack 1800 One Tandy Center Fort Worth, TX 76102	Line Printer V	\$1860	Dot Matrix	160	152	NA	10	Tractor	Fan fold	NA
	Line Printer VI	\$1160	Dot Matrix	100	132	NA	NA	Tractor	Fan fold, Sheet	NA
	Line Printer VII	\$300	5x7 Dot Matrix	30	96	40/80	8	Sprocket	Fan fold	Serial, Parallel
	Line Printer VIII	\$799	Dot Matrix	40-160	158	NA	NA	NA	Fan fold, Roll, Sheet	Serial, Parallel
Star Micronics 200 Park Ave. Suite 2308 New York, NY 10166	DP-8480	\$495	7x9 Dot Matrix	80	96	132	NA	Friction, Tractor	NA	Serial Parallel
TEL, Inc. 5075 South Loop E. Houston, TX 77033	3431	\$1895	9x9 Dot Matrix	150	94	136	6/8	Tractor	Fan fold	Serial Parallel

OKIDATA

The Microlines:


A remarkable family of printers for people who want more printer for their investment.

Stored-energy print head with a full year's guarantee. The full 96 ASCII character set. Block or dot-addressable graphics. A choice of print speeds, from 80 to 200 cps. In fact, all the full-featured performance of a big printer. At a small printer price. And the quality and reliability you have a right to demand.

Contact us at 111 Gaither Drive, Mt. Laurel, N.J. 08054 (609) 235-2600 for more information on the incomparable Microline family of fine printers. Also available through authorized Okidata distributors.



ML-80: Prints unidirectionally at 80 cps. Business-quality printing and reliability at a price attractive even for personal use.

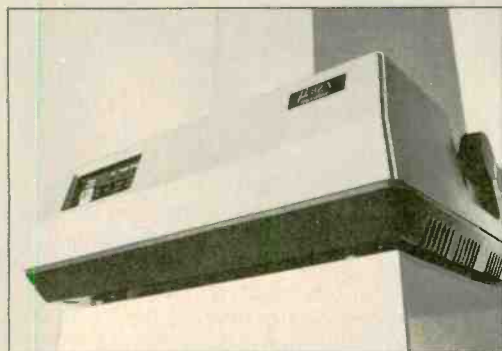

ML-82A: Prints 80 columns bidirectionally at 120 cps, has 9-pin head for true descenders. Short line seeking logic increases throughput by 80 percent.



ML-83A: All the features of the 82A, including double-width and bold characters. The 136-column-wide carriage can handle paper up to 16 inches wide.



ML-84: Correspondence quality and data processing throughput. Prints bidirectionally at up to 200 cps, including charts, illustrations, forms, or dot-addressable graphics.

Making small printers for people who think big

Okidata is a subsidiary of Oki Electric Industry Company, Ltd.

is designed to accommodate a specific type of peripheral. Ports are configured for either data communication equipment (DCE) or data terminal equipment (DTE). DCE ports have only one-way data flow and are ordinarily used for printer peripherals. DTE ports, on the other hand, are designed to allow data to flow in both directions and are generally used for printing terminals, video terminals, modems, and any other peripheral that both sends and receives data. Although the printer usually connects to a DCE port, it can also connect to a DTE port, following instructions supplied in the operating manual. Thus, it's possible to connect two (or more) printers into a computer system, each with its own port assignment.

For all practical purposes, it makes no difference to the printing operation whether you select a parallel- or a serial-feed printer, using the printers we have listed in the Sampler Table. The only consideration to take into account here is that you must use a parallel interface with a parallel-feed printer and a serial interface with a serial-feed printer.

Parallel ports are much faster than serial ports. However, given the slow-speed limitations of the character-by-character printers listed, there is little

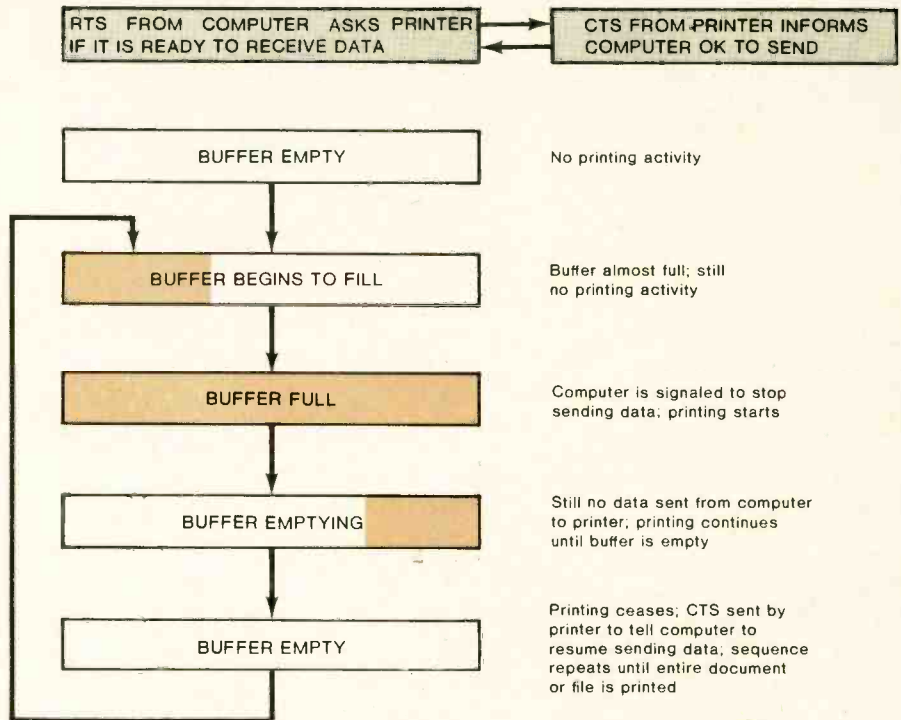


Fig. 3. Diagram shows how data coming into the printer is steered to the buffer, which accepts only as much as it can store. The printer then sends a message back to the computer to stop sending data. The printer starts to print, continuing until buffer is empty.

advantage in opting for a parallel printer, since even the serial port is sufficiently fast, even at 9600 baud, for the printing mechanism.

An important factor in considering the type of interface is the communicating speed (also called port speed or baud rate) at which the printer can be programmed to accept data. Baud rate is generally selectable at both the computer and printer ends. The only important thing to remember here is that the computer and printer must be set to the same rate; otherwise, the computer won't be able to communicate with the printer. The faster the baud rate, the faster the printer's input can accept data. It is *not* a reflection on the print speed, which is a function of how fast the printing mechanism can operate.

Almost all of the printers in the table are capable of bidirectional printing. What this means is that as the printing element comes to the end of the line in a left-to-right direction, it feeds the paper up, via a line-feed (LF) command, for the next line of print without initiating a carriage return (CR). Printing then resumes from right to left. This process is repeated at the end of each line. By eliminating the CR command and the need for the printing element to return to the left margin for every line to be typed, the printer operates at its optimum speed.

Most printers also have built into them a "paper-out" alarm that informs


TODAY

TODAY's just another good reason to be a subscriber to the CompuServe Information Service. Because TODAY is a magazine published free-of-charge for our customers and also offered to others interested in the latest developments in the growing videotex industry.

TODAY includes new and current product and service offerings on the System, technological developments at CompuServe and in the industry, customer profiles, features on information providers and announcements of special events. An extensive subject index appears in each issue.

Ask for a demonstration of the CompuServe Information Service at a Radio Shack® Computer Center. Videotex software is available for various brands of personal computers. CompuServe Information Service, 5000 Arlington Centre Blvd., Columbus, Ohio 43220. (614) 457-8650

CompuServe

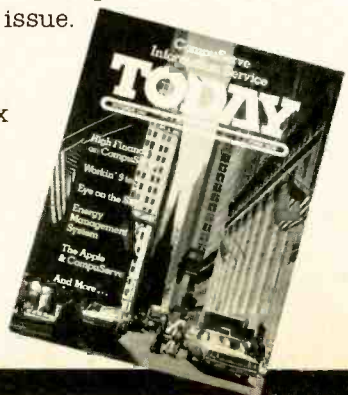

you that the paper is running out and simultaneously suspends printing. After you reload with paper, you can tell the system to resume printing where it left off. If the printer doesn't have a paper-out alarm and doesn't suspend printing until you reload, you risk losing copy during unattended printing operations.

Another almost-standard feature you'll find in today's printers is a "self-test" function. Activating self test causes the printer to continuously print out its entire character set until the function is disabled. In almost all cases, print-out starts with the upper-case alphabet, proceeds through the lower-case alphabet, and is followed by the numerals 0 to 9, ending with punctuation and special characters.

"Intelligence." Like video terminals, there are "dumb" and "smart" printers. A "dumb" printer is one that simply prints a line of text, performs a CRLF (carriage return/line feed) and continues along its merry way churning out copy. There are various levels of "intelligence" with "smart" printers, ranging from those that have backspace, overprint (for highlighting), character pitch change, etc., to those having a very broad array of printing modifications. Before purchasing a printer, make up a list of what you intend to print, keeping in mind that some printers can even change colors in mid-stream. If you also intend to print sketches, there are printer/plotters that can perform both alphanumeric and graphic operations, with color changes if desired.

Logic-seeking carriages are especially desirable when a printer is used for word processing since carriage return is initiated at the end of a short typed line instead of moving to the margin. Thus, throughput is improved.

System Operation. Once a printer is connected to a computer through the appropriate interface, the printing capability of the system can be called up at any time from the console terminal. Typical call instructions are the LPRINT statement in BASIC and pressing the PRINTER ON key when operating from a word-processing package.

With the printer activated, data from the computer flows through the interface port, which translates the data to be printed into a form usable by the printer. The computer sends a request to send (RTS) query to the printer to determine if the printer is ready to accept data. In turn, if the printer is ready



"Believe me, Mr. Walker, you're not the only person in the world who can't understand BASIC!"

STARTING YOUR OWN MICROCOMPUTER BUSINESS

Starting your own microcomputer business is easy if you know the right steps to take. Two volumes of the new book **Your Fortune In The Microcomputer Business** describe the things you should know to start right and to build your business successfully.


Many people have good ideas for a successful microcomputer business. But they don't know how to put their ideas into action. These people are plenty smart. That's not the problem. The problem is in knowing simple things: How to analyze the market. How to select the right product or service. How to get enough startup money. How to plan your growth and success.

The answers to these problems are not hard to understand. All you need is the right information. **Your Fortune In The Microcomputer Business** gives you the knowledge tools to start right, grow and prosper.

This practical reference manual has no hocus-pocus. It does not tell you how to do astrology or dating services. It does give you clear, complete, step-by-step instructions on how to get started right and insure your success!


Volume I Includes:

- The hottest trends in the market
- The seven best test markets
- How to read between the lines at a trade show
- 107 ways to reach your market
- Examples of the best ads in the business
- How to get free advertising
- The 21 steps to set up your business
- How to start a manufacturing business
- How to write a newsletter
- How to give a seminar
- How to start a service business
- How to package software for the mass market
- How to be a highly paid consultant
- Franchising—the good, the bad and the ugly
- Interviews with six successful microcomputer businesses
- How to use the RLC factor to be street smart, lean, mean and successful



Volume II Includes:

- Strategies for growth
- Straight facts on incorporation
- How to build your organization
- How to manage cash flow
- How to develop your accounting system
- How to manage employees, wages and salaries
- How to survive a cash crunch
- What to do if things get really bad
- How to maximize your profits
- How to grow by acquisition
- How to value your business
- How and when to sell your business



WRITE OR CALL—DON'T WAIT!

Wildfire Publishing, 326 DH Toro Canyon
Carpinteria, CA 93013 Ph. (805) 684-1489

Please send the following book(s) by return mail. I understand if I want to return them for any reason within 90 days of receipt, I can do so and get a prompt full refund.

Your Fortune In The Microcomputer Business
Vol. I, Getting Started, \$20.00.

Your Fortune In The Microcomputer Business
Vol. II, Growth, Survival and Success, \$20.00.

Please add \$1.50 per book for shipping, Calif. residents please add \$1.20 each sales tax.

Name _____

Street _____

City _____ State _____ Zip _____

Enclosed is _____ or charge my MasterCard or Visa

Card # _____

Ex. Dt. _____ MCInterbank # _____

Signature _____ © 1982 Wildfire Pub.

to receive data, it sends a clear to send (CTS) acknowledgement back to the computer. Upon receipt of the CTS, the computer sends its first line of data to be printed. The whole process takes only microseconds to complete.

Data entering the printer isn't acted upon directly by the printing mechanism for the simple reason that the computer spews out data at a rate hundreds of times faster than the mechanism can accommodate. Therefore, incoming data is stored in a "buffer," which feeds the data to the printing mechanism at a rate the mechanism can handle.

Buffers built into modern-day printers can generally accommodate at least one line of data to be printed. Some printers have buffers that can handle several lines of text data, while still others have buffer capacities of a full page or more of text data. Regardless of how much buffer storage is available, the buffer will accept and store data at the maximum speed (baud rate) to which the computer and printer are set and releases the data at a rate no faster than the printing mechanism can handle (cps). In effect, the buffer acts like an electronic "reduction-gear" system that assures smooth and error-free printing operation.

Referring to Fig. 3, data coming into the printer from the computer is steered to the buffer. The buffer accepts only as much data as it can store, at which time, the printer sends a signal back to the computer to have the latter suspend sending data. Now, data in the buffer is fed to the printing mechanism character-by-character until the buffer is once again empty. When data for the last character is sent to the printing mechanism, the printer informs the computer that it is ready to accept data again. This process is repeated until the entire document is printed.

During the printing operation, the computer spends most of its time in a "standby" mode, waiting for the printer

to complete the printing operation for the data stored in its buffer. The only time the computer is fully active is when it is sending data to the printer. Considering the fact that the computer operates at microsecond speeds and the typical printer speed is in the range of a millisecond per character, the computer will be idle more than 95% of the time during any printing operation.

Making a Buying Decision. Computer printers are by no means inexpensive items to add to a small-computer system. Even at the lowest end of the scale, expect to spend about \$600 to \$700 for a relatively flexible dot-matrix printer, while high-quality formed-character printers go for as much as \$3000. In fact, the *average* suggested retail price for printers as a whole is more than \$1000. (Our Sampler Table gives manufacturer suggested retail prices. Most retailers, however, give discounted prices. Even so, expect to pay a premium for printing capability.) So, your wisest approach to selecting a printer to go with your small computer is to bone up on what the technical specifications mean and how they relate to your printing requirements.

Perhaps the most intelligent step you can take in the choosing process is to draw up a list of your current and near-future needs, based on the reasonable useful life of the printer. Items to include on this list are print quality (formed-character or dot-matrix), printing speed, versatility, reliability, simplicity of operation, availability of service, and manufacturer's reputation.

Don't be lulled into topping your list with a price. If you do, you're likely to make an error in judgement and select a printer with a very attractive price but one that's barely adequate to fill your current needs. After all, even if you spend only \$400 for a printer that lacks essential capabilities, that's \$400 down the drain when you consider that you'll

eventually have to move up to a more expensive printer. To make a really objective choice of available printers you shouldn't even consider putting a price down on your list until you've compared all the features listed against your needs and have come up with several possible models from which to make your selection. Then and only then should you narrow down the possible models to the price range you can afford. A word of advice: If your budget is too limited to allow you to buy the printer you need now, delay buying your printer for a few months until you can afford the one that best suits your requirements.

Print quality is probably the most important factor in the final selection process and, fortunately, is the easiest to handle. By this time, you'll already know if the printing format must be letter-quality formed character or dot matrix. Therefore, if you decide on one format, you can immediately eliminate all models of the other format.

Printing speed is a matter that requires careful consideration. Here, you'll have to assess your printing volume carefully with a view toward meeting reasonable goals. Keep in mind that the faster the printer, the more expensive will be its purchase price. If your computer/printer system is to be used professionally for large printing volumes that require a very fast printer, don't view the selling price of the printer as too expensive. Remember that the faster printer saves time and that time saved is money saved. And the more money the increased speed saves, the faster will your investment pay for itself.

If you take the time and effort to learn all you can about computer printers, weigh all the advantages and disadvantages of each model possibility against your master list of needs, and don't jump into a buying decision until you're ready, you'll be rewarded with a reliable system that can grow with your growing needs. ♦

TRS-80™ DISCOUNT

WE CARRY THE FULL LINE OF TRS-80's

MODEL II

26-4002 64K 1 Drive..... \$3279
Ask About Hard Drives

MODEL III

26-1062 16K..... \$839
26-1066 48K with
2 Drives, RS232..... \$2059

TM - TANDY CORPORATION
FREE COPY OF WARRANTY UPON REQUEST



BUY DIRECT

AT WHOLESALE PRICES
1-800-841-0860

COLOR COMPUTER

26-3001 4K..... \$318
26-3002 16K Ext. Basic..... \$469
26-3003 32K Ext. Basic..... \$569
26-3022 Color Drive # 1..... \$498

WRITE FOR FREE CATALOG
MICRO MANAGEMENT

SYSTEMS, INC.
DEPT. NO. 12A
Downtown Plaza Shopping Center
115C Second Ave. S.W. • Cairo, Georgia 31728
912-377 7120 Ga. Phone No.

CIRCLE NO. 30 ON FREE INFORMATION CARD

Cut your road in life here...people will notice.

There's a good reason for that. It's our reputation for being one tough outfit. A hard team to make. If you can make it with us, you'll have proven you're a cut above the rest. You'll be one of the few who's got what it takes to be a Marine. People respect that. Be noticed. Cut your road in life where it counts. Mail the card or call toll-free, 800-423-2600. In California, 800-252-0241.





Marines

Maybe you can be one of us. The few. The proud. The Marines.

CIRCLE NO. 49 ON FREE INFORMATION CARD

www.americanradiohistory.com

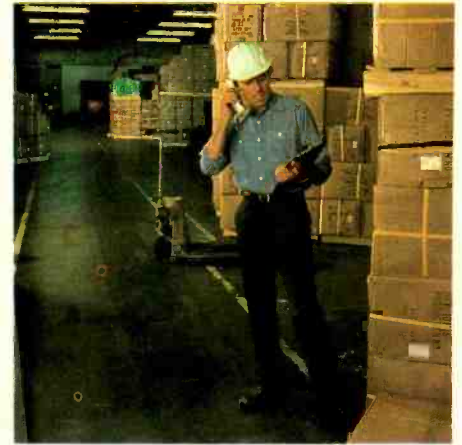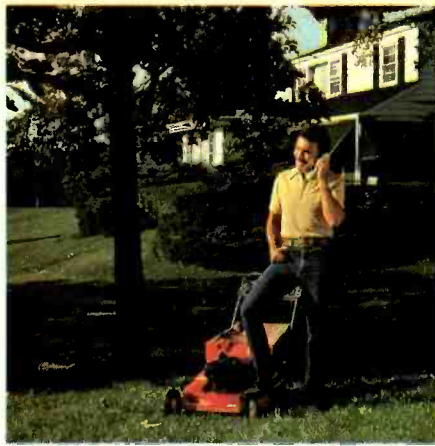

Cobraphone® adds 2-way intercom to the joys of cordless phoning

Not only can you contact Hong Kong while mowing your lawn...you can now talk to your wife in the kitchen.

No cords, wires or plugs to tie you down, so your Cobraphone can go wherever you go — indoors or out. Yet it functions like a conventional phone — and then some. Lets you make or receive phone calls up to 600 ft. from the base unit, the length of 2 football fields* And now the newest Cobraphone also gives you full intercom operation, so you can talk back and forth from the remote to the base unit.

Cobraphone cordless phoning is an extraordinary convenience. Take a call while you're trimming a hedge or lounging on the patio or poolside. Place one from your garage or basement workroom. Keep your Cobraphone handy when you're watching TV or at dinner — no one needs to budge to answer a call. Even take calls safely from the bathtub. When you're away leave it with your next door neighbor, they can answer your phone — a nice added security measure.

Cobraphone is also a blessing for re-



cuperating patients or invalids, a practical business tool at a warehouse or construction site.

As for the intercom function, order your refreshment in advance when you're about to quit mowing...decide whether or not you want to take a call that's been picked up in the house.

Your Cobraphone installs in seconds without tools. Just plug it into an AC outlet and phone jack and you're in business. There are several models to choose from.

Discover the joys of Cobraphone cordless phoning at your local department or electronics specialty store, or catalog showroom.

Write for free color brochure.

*Tests show range varies according to local conditions.




Conversation Loud and Clear

Cobra Communications Product Group
DYNASCAN CORPORATION

6460 W. Cortland St. Chicago, Illinois 60635

CIRCLE NO. 14 ON FREE INFORMATION CARD

POPULAR ELECTRONICS

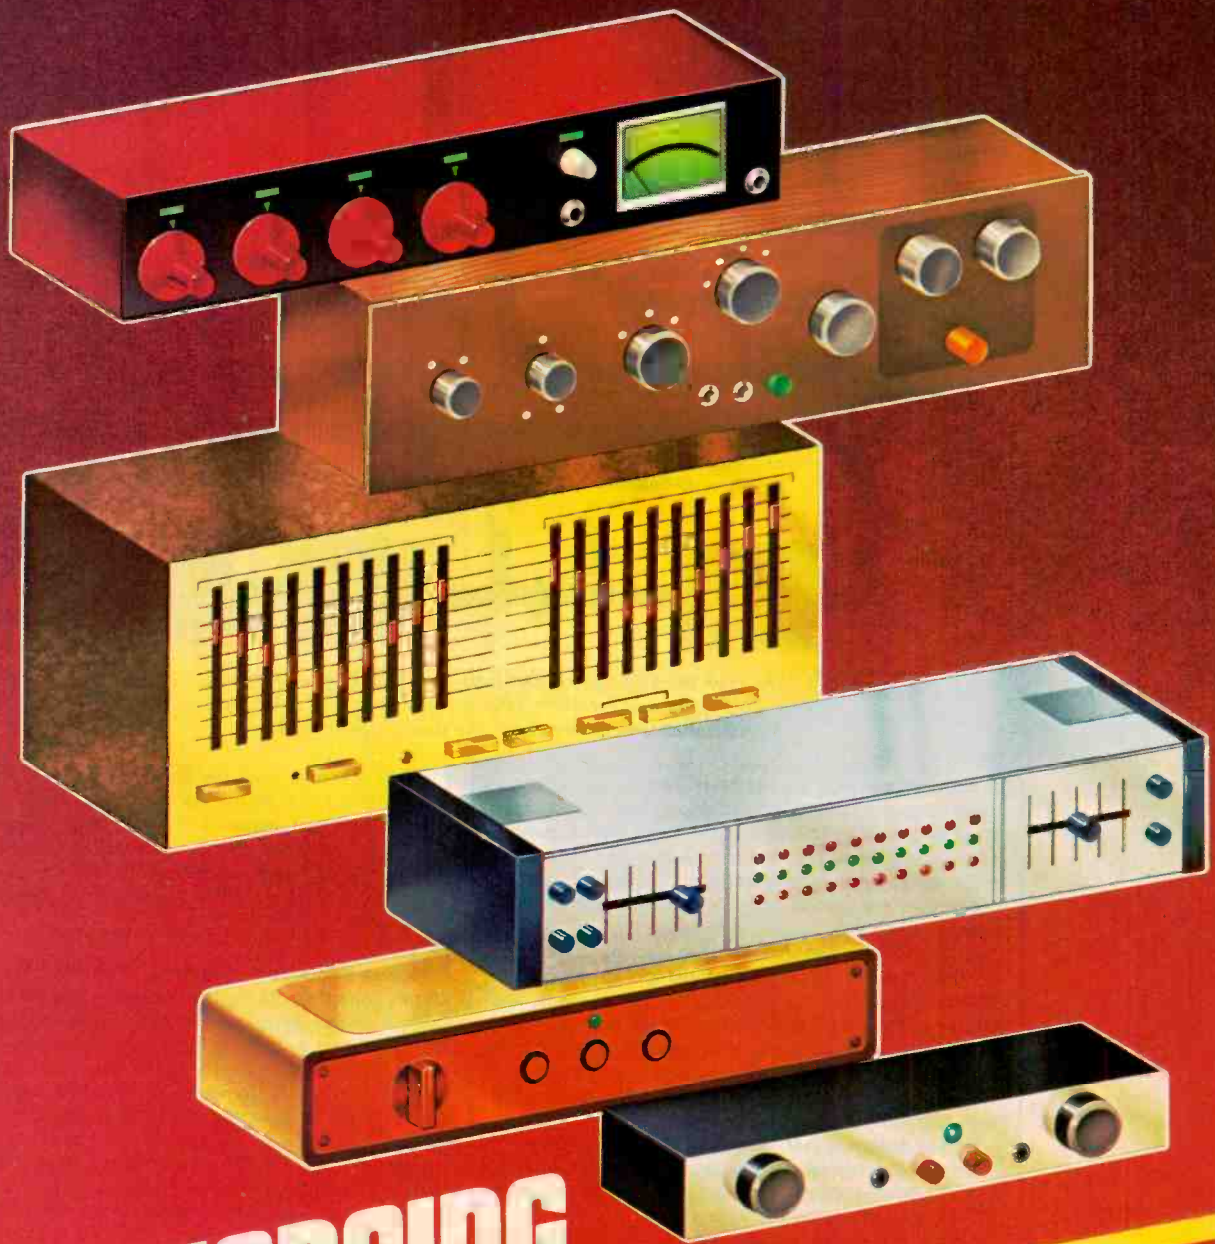


ENHANCING STEREO SOUND WITH SIGNAL PROCESSORS

BY LEONARD FELDMAN

Audio quality is more controllable than you might suspect. Here's how you can eliminate tape hiss and other noises, increase dynamic range, remove annoying frequency peaks, and add more presence in your listening environment.

(over)


ENHANCING STEREO SOUND WITH SIGNAL PROCESSORS

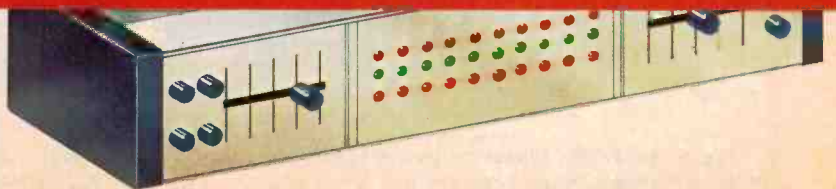

INPUTS PHONO SELECTOR TAPE MONITOR TAPE OUT TAPE IN

THE ELECTRONIC WORLD

ENHANCING STEREO SOUND WITH SIGNAL PROCESSORS

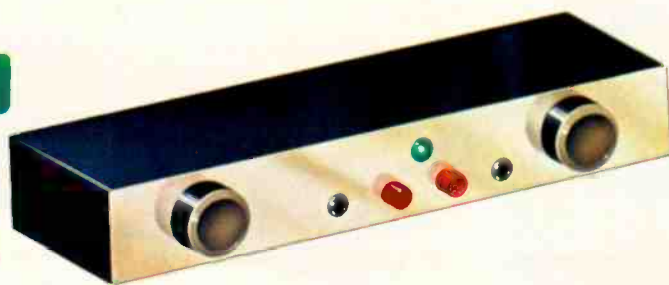

sharply attenuating high-frequency response, tape hiss and record surface noise are greatly reduced. Unfortunately, such attenuation also alters tonal balance, since most musical harmonics (and some fundamentals) fall in the same frequency range as the unwanted noise.

If a high-pass filter's cut-off frequency varied with the needs of the program material, from moment to moment, it would do a much better job at reducing audible noise. Such "dynamic filters" have been around for years now, but only recently have the active elements been available on an integrated circuit (National Semiconductor's LM1894).

The DNR™ system, also devised by National Semiconductor, provides up to 14 dB of noise reduction in stereo program material and is based upon two principles. First, noise output is proportional to system bandwidth (reduce bandwidth and you reduce noise). For example, if bandwidth is reduced from 30 kHz to 1 kHz, system signal-to-noise ratio will improve by 14.8 dB. Second, whenever one sound is heard (music), that sound decreases the ear's ability to hear another (noise). DNR system designers found that if program material is always at least 29 dB above the system noise, adequate masking can usually be obtained.

The DNR system consists of one low-pass filter per stereo channel placed in the signal path with its cut-off point controlled by the amplitude and frequencies of the incoming signals (Fig. 11). Each filter passband is flat,

with a smooth roll-off above its cut-off frequency for any control setting (Fig. 12). The filters have a slope of 6 dB per octave, which has been found best for music.

Steeper slopes can be achieved by using two filters in cascade, an arrangement suited to material that lacks substantial high-frequency content. Attack and decay times for the active filter's control circuit have been carefully selected so that very short ticks or noise bursts cannot "open up" the bandwidth of the system. Attack time for the DNR system is 0.5 milliseconds, while decay time is 50 milliseconds (to 10% of maximum value).

The DNR system is finding its way into the audio channels of videodisc players, video cassette recorders, and add-on devices. Other significant single-ended dynamic noise filters have been developed, including the KLH DNF 1201A dynamic noise filter and the Phase Linear 1000 Series Two noise reducer. The Series Two operates on the principle of autocorrelation to provide about 10 dB of single-ended noise reduction.

Eliminating Transients. All of the noise-reduction systems described so far work best with continuous noise levels. However, some of the most annoying distractions are caused by record groove scratches (transients). These familiar ticks, clicks, and pops get through because their attack time is so fast. But a few manufacturers make devices that actually remove those annoying pops and clicks.

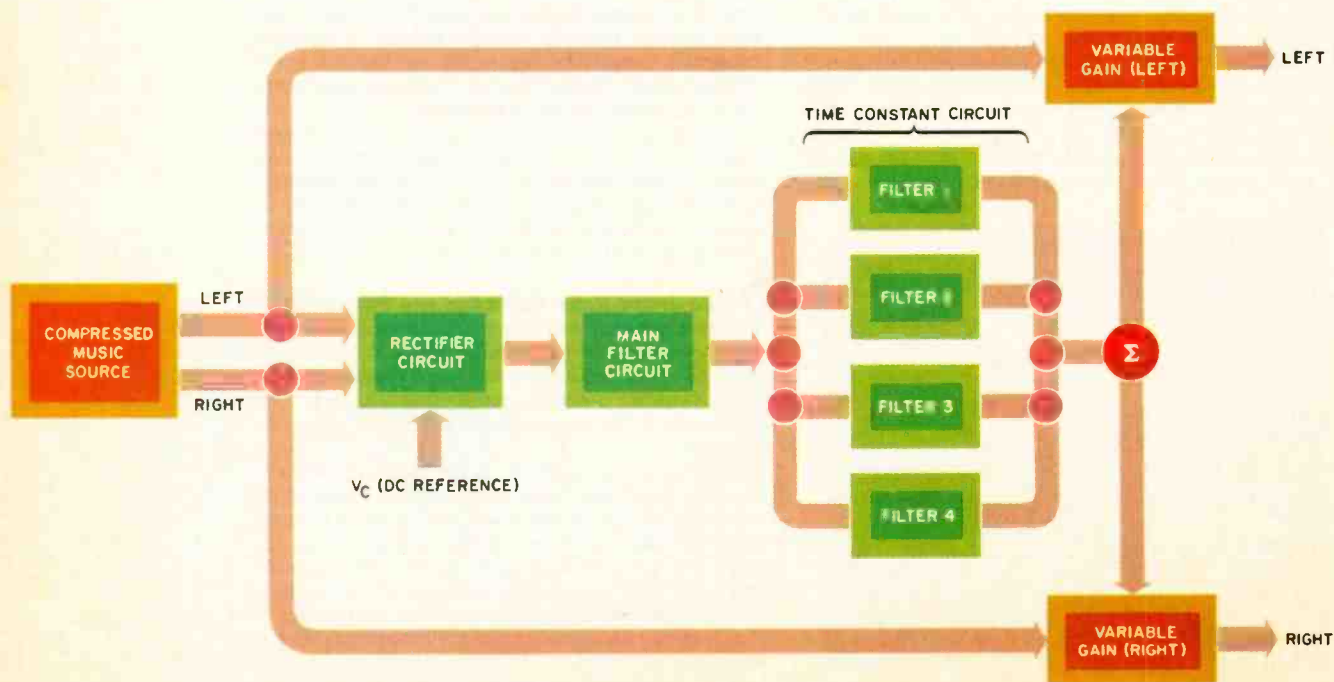


Fig. 9. In the CX decoder, the control of variable gain in the two channels is provided by a rectifier, a main filter, and time-constant circuits.

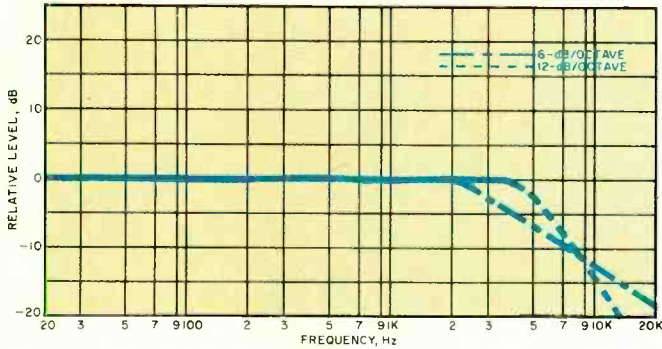


Fig. 10. Typical response of the high-cut filter found in most stereo amplifiers and receivers.

These devices generally operate by placing a short time-delay in the program signal. A sensing circuit detects any sharp clicks, and the delayed program signal path is automatically shut down when such transients are present.

In the more sophisticated units, program material that came just before the pop is substituted to "fill in" during the shut-down period. The whole process typically takes place in less than a millisecond. Examples of available transient noise eliminators include the KLH Corporation TNE-7000 and SAE's Model 5000A.

Single-Ended Expanders. Just as single-ended noise-reduction devices reduce noise in noncoded program sources, it is also possible to expand noncoded program material that has been arbitrarily compressed, thereby simulating the dynamic range of the original music. Single-ended expanders work on the same variable-gain principle as the expander portion of a two-sided compander.

However, with single-ended expanders, it is necessary to set "thresholds"—arbitrary signal levels above which the signals are made louder and below which the signals are made smaller. Perhaps the most elaborate unit of this type is the dbx model 3BX in which bass, mid-range, and treble frequencies are processed individually. With this approach, the possibility of audible "pumping" or "breathing" is significantly reduced.

As an example, consider a loud bass drum beat in a

single-band system. The drum beat tells the system to increase gain so that the drum will be even louder. If, at the same time, other instruments are playing along (flutes and piccolos or brass), the intensity of these latter instruments also will increase. If the same music was processed through a three-band expander, only the channel involving bass frequencies would have increased gain. Also available from dbx is the model 2BX, which divides the frequency spectrum into two bands before applying expansion, and the much less costly single-band model 1BX.

All dynamic-range expanders provide some noise reduction, too, since they make soft passages (including noise) softer. Other companies who manufacture dynamic-range expanders include RG Dynamics, MXR, Pioneer, and the Heath Company. The Heath model AD-1706 is a dynamic expander noise reducer in kit form.

Variable Bias Enhances Cassettes. Although Dolby is best known for noise-reduction systems, it has also developed an interesting circuit that improves cassette tape dynamic range, particularly at high frequencies when high-level signals are being recorded. A general problem with tape recording is that the recording bias that's best for middle and low frequencies is too great for high frequencies, while optimum for high frequencies is too low for middle and low frequencies.

Dolby reasoned that the "sensing signal" already used to alter high-frequency response (as in the Dolby B

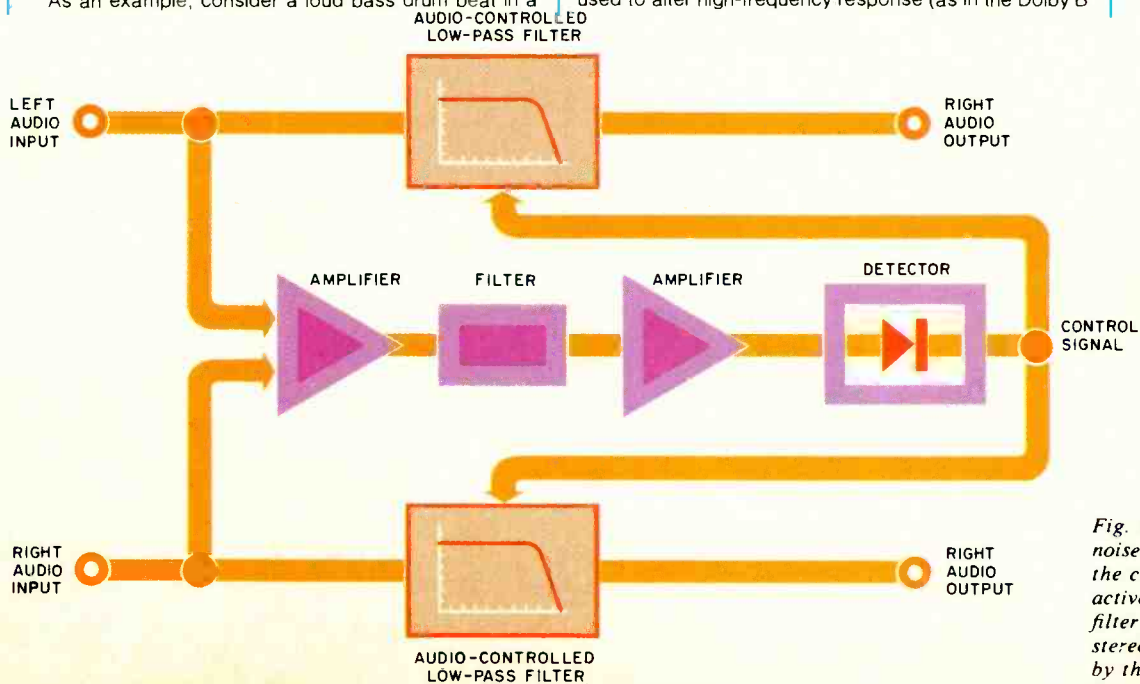


Fig. 11. In the DNR noise-reduction system, the cut-off point of an active low-pass filter in each stereo channel is controlled by the amplitude and frequencies of incoming signals.

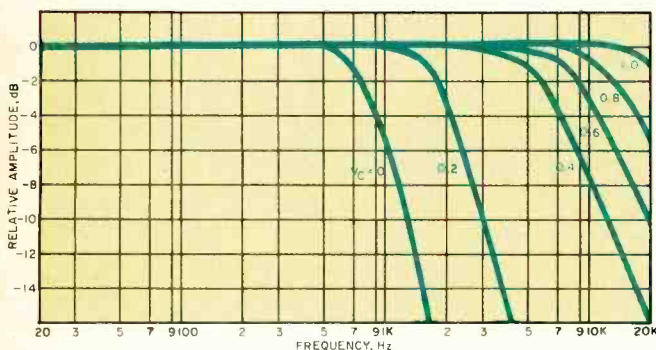


Fig. 12. Audio controlled filter responses for the DNR system relative to various control voltage levels.

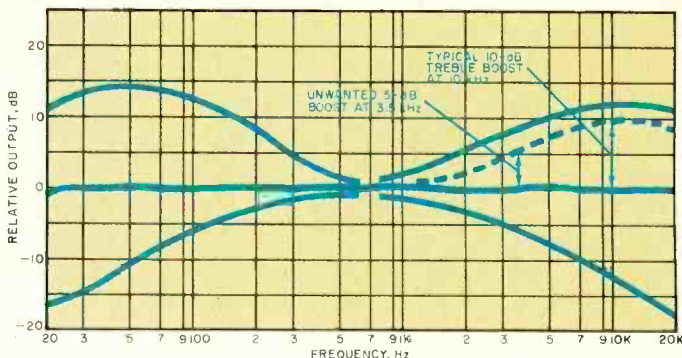


Fig. 13. Solid curves are typical responses of stereo bass and treble controls. Note that any adjustment to correct a particular deficiency affects a wide range of frequencies.

system) could also dynamically vary the recording bias levels, and the best bias level could be maintained for all recorded signals. This bias-varying system (which also alters recording equalization to some degree) is called Dolby HX (for "headroom extension"). It continuously monitors signal content during recording, increasing the bias only when low- and mid-frequency signals are present, and decreasing the bias only when high-level, high-frequency signals are present. It has not been adopted by many audio manufacturers, though.

Bang & Olufsen, the well-known Danish producer of stereo components, recently improved upon Dolby HX (with the blessing of Dr. Dolby) so that the system would not degrade low- and mid-frequency program content while improving high-frequency headroom. The new variation is called Dolby HX Professional and can be found in B & O's latest stereo cassette deck, Model 8002.

Beyond Tone Controls. The typical bass and treble controls found on stereo amplifiers, preamplifiers, and receivers have serious limitations. Ideally, there should be no need for tone controls of any sort. Unfortunately, speakers, listening rooms, and stereo components are not always perfect. That being the case, you must adjust your stereo system response to compensate for one or more noticeable defects.

For example, your loudspeaker system just isn't "putting out enough" from about 8 kHz up. You reach for the treble control, only to find that the upper mid-frequency content of the music has become overpowering (Fig. 13). In attempting to boost the treble by 10 dB (where you thought the tweeters needed help) you have also boosted frequencies around 2 or 3 kHz by as much

as 5 dB. Mid-range boosting wasn't called for, but "all or nothing" tone controls aren't very selective.

Such problems inspired development of the graphic equalizer as an add-on component for home stereo. A graphic equalizer is nothing more than an elaborate tone-control system. Instead of toying with half the audio spectrum, each control on a graphic equalizer may control just one or two octaves, or perhaps half an octave or even one-third of an octave, depending upon the number of controls offered.

Figure 14 illustrates the range available to each of the eight controls per channel of an eight-band stereo equalizer. Any complex curve within the upper and lower bounds of these response plots can be created (Fig. 15). No simple bass and treble controls could have produced this response. Yet such a curve is exactly what is needed to produce a "flat" response in the typical listening environment.

One of the problems inherent in using a graphic equalizer is trying to adjust all of its controls by ear to achieve the desired results. Trying this, some people end up with systems that sound a lot worse than before the equalizer was added.

Because the ear can be deceived without a reference, various methods for adjusting an equalizer have been devised, including special test records, meters, complex real-time spectrum analyzers, calibrated microphones, and oscilloscope displays. Until recently, these sophisticated adjustment methods were so expensive they were primarily the tools of professional sound contractors.

**ENHANCING
STEREO SOUND
WITH SIGNAL
PROCESSORS**



THE ELECTRONIC WORLD

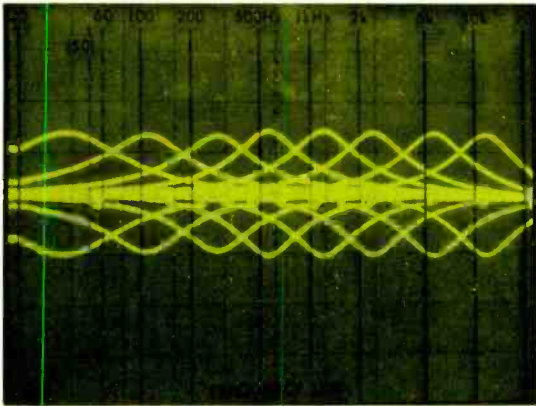


Fig. 14. Multiple response plots show range of control of 8 bands of a graphic equalizer. Horizontal sweep is 20 to 20,000 Hz; vertical sensitivity is 10 dB/div.

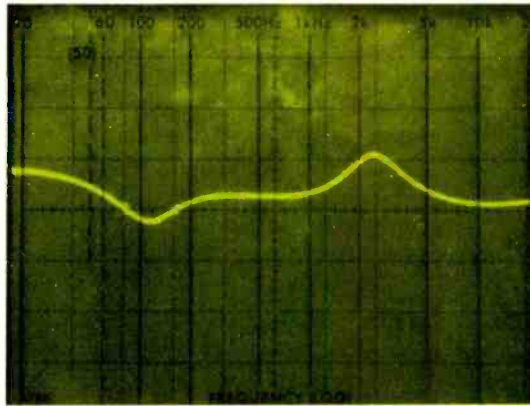


Fig. 15. Complex response curve achieved with the aid of a graphic equalizer could never be accomplished with simple bass and treble controls.

But now there are equalizers which incorporate noise generators, calibrated microphones, and displays that can equalize a system fairly rapidly and inexpensively. Examples are Audio Control's Model C-101 and Soundcraftsmen's AE2420-R, which offer everything needed (built-in) to adjust to their ten-band graphic equalizer.

There are even graphic equalizer/analyzers available that will do all the adjusting by themselves. For instance, Sansui recently introduced its model SE-9—an eight-band-per-channel unit, complete with a spectrum analyzer display, electret microphone and pink noise source (pink noise contains equal energy in each audio octave). Just position the microphone where you intend to listen, push a button, and sit back as tiny motors adjust each control's position for a flat response (as perceived by the microphone).

The whole operation takes less than half a minute. And the SE-9 can memorize the curve it has established for up to four locations about your listening room. It can recall any one at the touch of a button.

Another self-adjusting equalizer/analyzer is the Model 20/20 offered by dbx. This unit features an electronically adjusted 10-band equalizer (no moving slider controls), with the final setting appearing on a large LED grid—the same grid used for real-time spectrum analysis when the device is going through its microprocessor-controlled self-adjustment routine. The 20/20 will remember ten different equalization curves (one can even be the average setting based on the other nine responses), and it comes complete with a calibration microphone and a built-in pink noise source. A special feature is the unit's built-in sound pressure level meter. It reads directly in decibels for an exact measure of how loud the program is at a particular listening location.

Acoustic Research has shown a prototype model of a digital signal processor that uses a Texas Instruments TMS-9995 16-bit CPU. With a built-in dedicated comput-

er, it is said to automatically adapt music signals to the needs of the loudspeaker and room it's correcting.

Fewer Bands, More Adjustment. There is another type of equalizer which is also used in conjunction with home stereo: the parametric equalizer. A parametric equalizer may have far fewer frequency bands than a graphic equalizer (usually only three or four), but each of these bands can have three degrees of adjustability.

Like a graphic equalizer, the amount of boost or cut at the center frequency of any given band is adjustable. However, you can also move the center frequency of each band over a substantial range. Furthermore, you can adjust the range of frequencies affected by each control (Fig. 16).

Audio experts who favor parametric over the graphic equalizer argue that, in most audio systems, there are only two or three frequency regions that require compensation. While the center frequencies of such response aberrations may not be exactly predictable, the number of such aberrations is never enough to justify ten or more separate control bands. By providing just a few bands, with the center frequency of each adjustable over a fairly wide range, parametric equalizers are said to accomplish what is needed without unnecessary complication.

The ability to change the frequency range within each band (variable filter "Q") makes parametric equalizers particularly flexible. It is not unusual for the peaks and valleys in a system's overall response curve to be extremely narrow. In the bass region, for example, there can be a resonance caused by room dimensions involving just a few hertz of bandwidth. The Q adjustment permits compensation for such a narrow deviation without affecting nearby frequencies.

Parametric equalizers for consumer use are available from Phase Linear, Rotel, SAE, and Superex. ADC Pro-

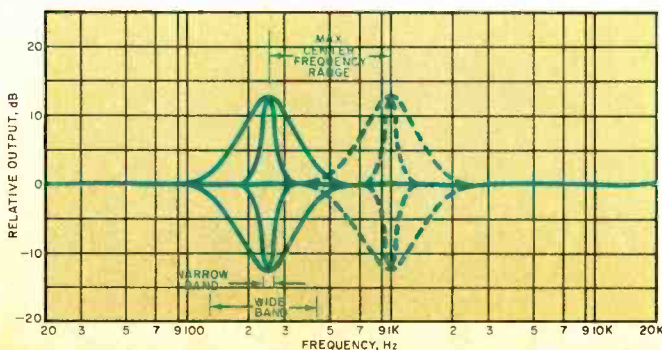


Fig. 16. The parametric equalizer has active filters whose center frequency, gain, and Q (bandwidth) can be independently adjusted over a wide range.

ENHANCING STEREO SOUND WITH SIGNAL PROCESSORS



Professional Products (Division of BSR) manufactures a "Paraphonic" equalizer (Model Three IC) which combines the features of both parametric and graphic equalizers. This company also makes a relatively inexpensive real-time spectrum analyzer with a built-in pink-noise generator and calibrated microphone that can be used to adjust any type of equalizer. Real-time analyzers with similar price and performance specs are also available from Crown International, Rotel, H.H. Scott, and Soundcraftsmen.

Ambience and Stereo Enhancers. The last major group of audio enhancement devices surveyed here embraces two basic product types: those that electronically alter the listening room acoustics and those that enrich the stereo effect of a two-channel program. In the first category are audio time-delay units. They introduce a 20-100-ms time delay (often variable) to the stereo signals and then feed the delayed signal to an auxiliary speaker pair (usually positioned behind or to the extreme left and right of the listener).

In any concert hall of reasonable size, sounds reach the listener's ears a few milliseconds after they leave the performers' instruments. Those sounds also reach various reflecting surfaces (walls, balcony, ceiling), then return to the listener delayed and attenuated; and the first set of reflections is not the last. Additional reflections reach the listener even later—and at a progressively diminishing amplitude (Fig. 17). All these reflections (beyond the first early reflection) determine the building's reverberation characteristics and are unique to each concert hall.

It is easy to appreciate that when a record, tape, or radio program is played at home in a small room, the sense of space cannot be conveyed with two speakers mounted against one wall. This is true even if the rever-

berance of the concert hall has been "mixed in" with the stage sounds in the stereo recording. In real life, reflected sound would reach the listener from directions other than "stage front" and arrive delayed relative to the sounds emanating from the two primary speakers in a typical stereo system.


Early attempts at recreating the ambience of an original performance were made with rather crude "reverb" units that used metal springs with transducers at one end and pickups at the other to artificially create the missing time delays. Expensive reverbs often performed quite well (some recording studios use such systems today), but most imparted a metallic, "twangy" sound to the program. Now, thanks to microcircuitry, audio time delays can be created electronically. Two basic devices are used: one involves digital electronics, the other charge-coupled devices (CCDs).

With the digital approach, program signal amplitudes are translated to numerical pulse codes with an analog-to-digital converter. In this coded form, the information can be stored in short-term memory and then released after a few milliseconds for conversion (by means of a digital-to-analog converter) back into audio.

The CCD approach to audio time delay involves solid-state devices that act much like a chain of small capacitors connected in cascade. Signals applied at one end of the chain make their way down the line bucket-brigade style from one "capacitor" to another, taking a discrete amount of transition time. The CCD technique is in the analog realm, but delivers the same result as a digital time-delay system.

Of course, to completely replicate the reflection pattern depicted in Fig. 17 requires that signals be fed back again and again, circulating the early reflections as well as the original signals around and around to create "concert hall" ambience. Some manufacturers have

Fig. 17. This reflection and reverberation pattern must be generated electronically to simulate "live" music in a large concert hall.

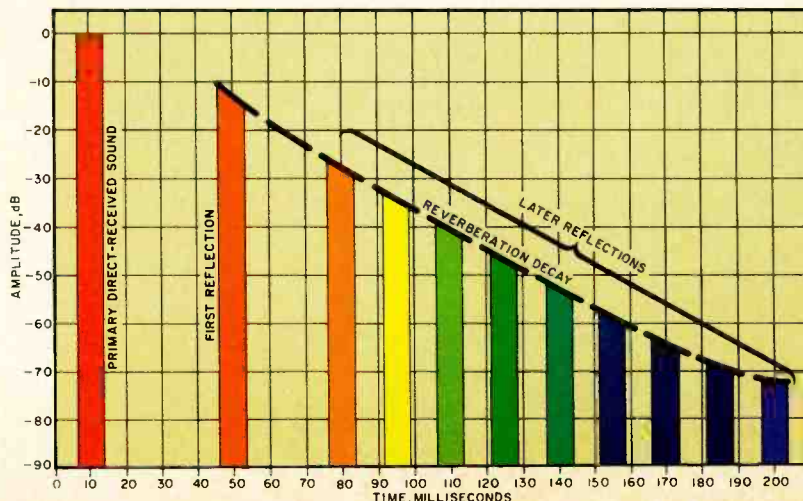

In a world where sound reaches new levels every day, ADC delivers the ultimate high.

The ultimate high is total control. And an ADC Sound Shaper® Frequency Equalizer lets you control your sound and custom-tailor your music with the mastery of a pro.

And no better way demonstrates the benefits of an ADC Sound Shaper than taping. Even without a studio environment, you can recreate your personal recordings by changing the frequency response curve of the source material — making the sound more like the original and more agreeable to your ears.

Our complete ADC Sound Shaper ICline* has an equalizer that is right for you and your system. The SS-110 ten-band full octave equalizer, a step up from our SS-1, features LED-lit slide controls and one-way tape dubbing. If you desire even more control, our twelve-band SS-II and top-of-the-line SS-III include two-way tape dubbing and sub-sonic filters. Our SS-III Paragrophic™ with 24 ancillary switches that enable you to control 36 bands per channel combines



the ease and control of a graphic equalizer with the precision and versatility of a parametric. All at a price you can afford.

All of our equalizers feature LED-lit slide controls allowing for visual

plotting of the equalization curve. And all ADC Sound Shapers embody the outstanding ADC technology that has made us the leaders in the industry.

To really complete your custom-tailored control-ability, our ADC Real Time Spectrum Analyzer is a must. Equipped with its own pink noise generator and calibrated microphone, the SA-1 provides a visual presentation of the changing spectrum through 132 LED displays. So you can actually see proof of the equalized sound you've achieved.

With an ADC Sound Shaper and an ADC Real Time Spectrum Analyzer, you can attain a new level of control. And ultimately, isn't that the musical high you've always wanted?

Sound Shaper®
Frequency Equalizers
and Spectrum Analyzer



ADC
A BSR COMPANY

Sound thinking has moved us even further ahead.

Write for a free 24-page booklet. "Shaping Sound at Home: A Guide to Equalization" (A \$2.50 value.)

BSR (USA) Ltd., Blauvelt, N.Y. 10913, BSR (Canada) Ltd., Rexdale Ontario

*Sound Shaper is a registered trademark of Audio Dynamics Corporation. *IC indicates new Sound Shaper® series.

CIRCLE NO. 64 ON FREE INFORMATION CARD

www.americanradiohistory.com

THE ELECTRONIC WORLD

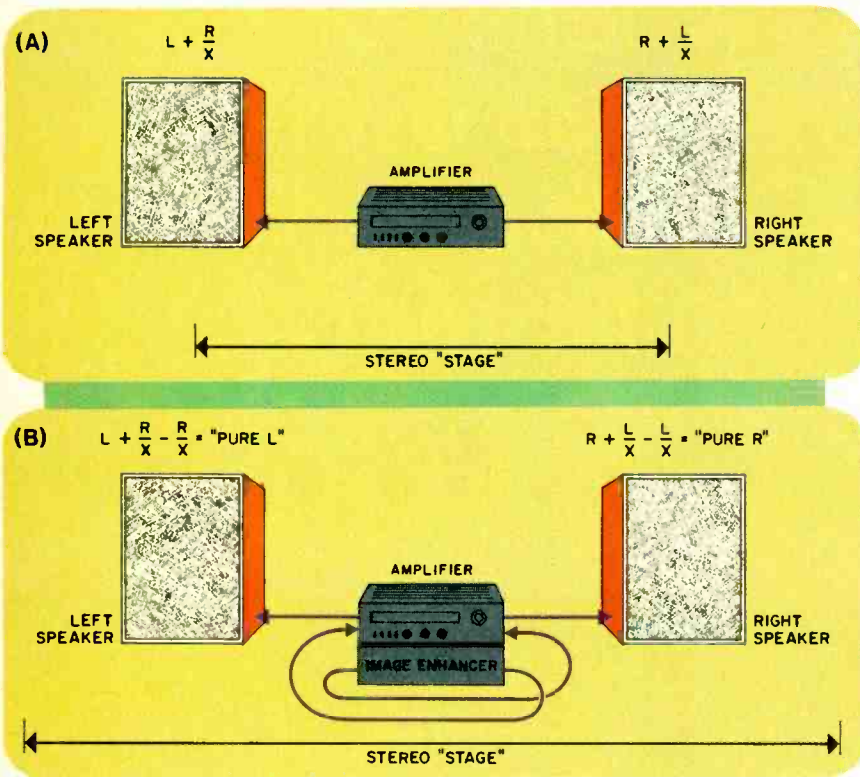


Fig. 18. The basic principle of stereo image enhancement involves adding out-of-phase cross-channel signals to each main stereo channel.

introduced devices that fulfill these requirements in varying degrees. All use a second pair of speakers, and some systems provide the extra stereo amplifier that's required.

Many companies produce audio time-delay units. Though some use descriptive names, such as the Sound-Space Control by Advent and the Ambience Restoration System by Sound Concepts, they all accomplish much the same result. There are differences in adjustments and range of control, of course. The ADS Company offers Model ADS 10, a digital delay system that includes a 100-W/channel stereo amplifier plus an extra pair of speakers. (The same product—minus the amplifier and speakers—is available as Model 1001). Other units include the Koss Corporation's digital (16K RAM) Model K-4DS, Phase Linear's analog Model 6000, SAE's Model 4100, the Bose CCD Spatial Expander, Pioneer's SR303, and Sansui's RA-700 reverberation amplifiers. Sound Concepts makes a version of its Ambience Restoration System for use in automobiles. Prices for audio time-delay units vary greatly, with basic units (not including the extra amplifier or extra pair of speakers) starting at about \$400, and complete systems costing well over \$1000.


Related to the audio time-delay units, but simpler (and very different) in terms of circuitry, are the stereo image-

enhancement devices. These devices attempt to broaden the apparent "sound stage" from side to side (and, in some instances, even from front to back), giving a "third dimension" to stereo music reproduction. Space does not permit a detailed description of all these devices, but a brief analysis of one general approach gives an idea of what's involved.

In a typical stereo program, the left speaker reproduces the signal that was "picked up" by the left studio microphone (or microphones) plus some small amount of sound that was intended for the right microphone (or microphones). The converse is true at the right loudspeaker—"Right" information coming from the left speaker and "left" information from the right speaker reduce the apparent separation. If both speakers reproduced equal amounts of left and right information (the extreme case), sound would be "heard" only from a midpoint between the two speakers, and there would be no stereo separation at all.

In the early days of stereo, it was discovered that by adding some out-of-phase "left" information to the right-channel signal and some out-of-phase "right" informa-

**ENHANCING
STEREO SOUND
WITH SIGNAL
PROCESSORS**

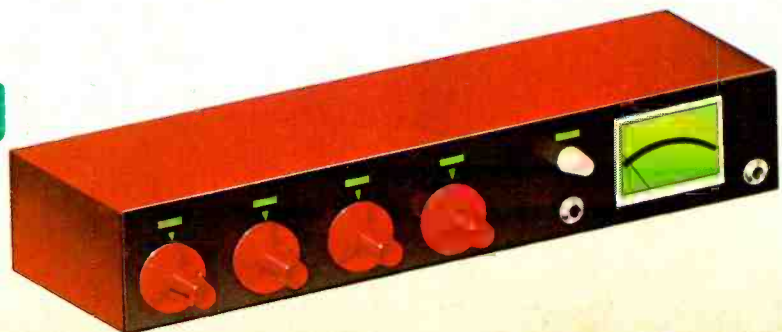

THE LOWER YOUR RECORDING SPEED, THE MORE YOU NEED MAXELL HIGH GRADE.

Whenever you use your video cassette recorder for slow motion, freeze frame or in the six-hour mode, it must operate at a lower speed. Even though most recorders are designed to handle this, most videocassettes aren't.

Lower recording speeds place a lot more pressure on the video tape, which can cause the magnetic oxide particles on the tape's surface to loosen and eventually fall off. And once a tape starts to lose its oxide particles, you start to lose your picture quality.

Unlike ordinary video tape, Maxell High Grade is designed to give you a clear, sharp picture at any recording speed. Our oxide particles are smaller

and more densely packed on the tape surface.

Which is why we have better color resolution, frequency response and signal-to-noise ratio, especially at the lower speeds.

And, because of our unique binding process and calendaring system, the oxide particles on Maxell High Grade stay put. This drastically reduces friction and video recorder head wear. So not only will you get better picture quality, but you'll also be able to enjoy it a lot longer.

And you thought all video tape was pretty much the same. **maxell**
IT'S WORTH IT.



CIRCLE 40, 58 ON FREE INFORMATION CARD

Maxell Corporation of America, 60 Cleard Drive, Moonachie, N.J. 07074

MOBILE FIDELITY
SOUND LAB'S

Believe It
or Not!



PRE-RECORDED
CASSETTES

THAT CAN **OUTPERFORM**
THE WORLD'S FINEST
AUDIOPHILE LP'S!!!

Our Original Master Recording™ LP's have been universally acclaimed as the world's finest sonic reproductions. But wait until you hear our new Original Master Recording™ High Fidelity Cassettes. Listen and compare.

Exclusive real-time (1:1) transfers from the original studio master tape. Dolby B/Dolby C* High bias Chromium Dioxide tape. Ultra-protective cassette shell. Superstar recording artists. Limited Editions.

They will markedly improve the audio performance of any cassette playback system: home, auto or portable.

If you have ever doubted the high fidelity potential of pre-recorded cassettes, we challenge you to listen to one of ours. At a discriminating audio, record or auto-sound store near you.

Our Artists Include

THE BEATLES, SOLTI & THE LONDON PHILHARMONIC
THE ROLLING STONES, GEORGE BENSON, GENESIS
REINER & THE CHICAGO SYMPHONY, PINK FLOYD
CAT STEVENS, KENNY ROGERS, SUPERTRAMP
MEHTA & THE L.A. PHILHARMONIC, STEELY DAN
AL STEWART, EARL KLUGH, JOHN KLEMMER, "THE
POWER & THE MAJESTY" and many more to come.

ORIGINAL MASTER RECORDING™ HIGH FIDELITY CASSETTES

For a **FREE** copy of our new 1982 cassette and LP catalogue plus exclusive information on upcoming new releases, please circle the reader response card at the back of this magazine or write:
Mobile Fidelity Sound Lab, Dept. PE3, P.O. Box 919, Chatsworth, CA 91311. (213) 709-8440.

*Dolby C cassettes will be available in limited quantities as of February, 1982. Dolby is a trademark of Dolby Laboratories.
CIRCLE NO. 31 ON FREE INFORMATION CARD

THE
ELECTRONIC WORLD

tion to the left-channel signal, apparent stereo separation increases dramatically. This is because the out-of-phase components (having opposite polarity compared with in-phase signals) cancel the unwanted opposite-channel sound components which were present in the original program material (Fig. 18).

When more out-of-phase opposite-channel material than necessary to cause this cancellation is crossfed, it becomes possible to greatly exaggerate the stereo effect. Now sounds seem to originate from points beyond the space between the two speakers.

This explanation is, admittedly, oversimplified. Some stereo-enhancement devices go far beyond simple phase inversion, employing angular phase shifts and time delay, in combination with other electronic manipulation. An example of such a stereo image-enhancement device is incorporated in the Carver C-4000 Sonic Hologram Generator Control Console, which includes "Auto Correlator" noise reduction, dynamic range expansion, time-delay features, and a power amplifier. The Sonic Hologram Generator feature alone is also available as the Carver C-9 at only moderate cost.

Omnisonix, Ltd. offers both its Model 801 Imager for in-home use and the 801-A for in-automobile image enhancement. Other stereo image devices currently available include the Audionics Space and Image Composer, the JVC BN-5 Biponic Processor, and the Sound Concepts IR-2100 Image Restoration System. Also, Phase Linear has a device, the Model 180, designed for use with headphones to reduce the "in-head" localization effect so common with headphone listening.

Sony's recently introduced SEH-10 combines a graphic equalizer with an echo/reverb system, a stereo image enhancer, and a microphone mixing input. Pioneer Electronics of America, too, recently announced a new signal processor, its BP-520 (replacing its AD-30). Designed for car use, it's a seven-band graphic equalizer with built-in variable echo.

Mixers Make a Difference. Once you go beyond recording off-the-air or copying records, you will soon discover that a single microphone—or even two for stereo—will not deliver a professional-sounding live recording. That's when it's time to look into microphone mixers—devices that accept several microphone signals while controlling the relative levels of each independently. Sounds are mixed together to create one composite output signal for each stereo channel.

Though most home users would be intimidated by the 24-, 32-, or even 48-track consoles found in professional recording studios (they're really just mixers, too), mixers sold for home use have just 2 to 16 inputs. They may include line-level input capability so that you can mix several microphone inputs with outputs from preamplifiers (tapes, records, broadcasts). Among the better-known compa-

FREE McIntosh
STEREO CATALOG
and FM DIRECTORY

Get all the newest and latest information on the new McIntosh catalog. In addition you will receive an FM station directory that covers all of North America.



**SEND
TODAY!**

McIntosh Laboratory, Inc. PE
East Side Station P.O. Box 96
Binghamton, N.Y. 13904

NAME _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____

If you are in a hurry for your catalog please send the coupon to McIntosh.
For non rush service send the Reader Service Card to the magazine.

CIRCLE NO. 28 ON FREE INFORMATION CARD

This is no drill. This is the Air National Guard. The professionals who keep watch on the skies over America. All day. Every day.

It's serious business, because it's for real. And everyone from the jet engine mechanic to

the weather technician knows it. That's why they're here. They know every time a pilot leaves the ground, they're riding with him. Their communications network, his ears. Their radar scopes, his eyes. Their aircraft maintenance, his life.

And whether it's a ground check on an

When you're responsible for millions of miles of sky, you don't fly it alone.

electronic circuit. Or a steady hand on a refueling boom nine miles high, everything they do brings a special satisfaction. Because it counts.

If you're looking for the chance to do something meaningful. If you've got what it takes to take on a real job. If you get that tingle down your spine when a jet engine fires up. Then maybe you

should help us do what we do. We Guard America's Skies.

See your local Air National Guard recruiter. Or call us toll-free

800-638-0936 (except in Alaska, Hawaii and Puerto Rico); in Maryland call 301-981-3610.

We Guard America's Skies.




The Guard belongs



Charles Santore
1979

CIRCLE NO. 40 ON FREE INFORMATION CARD

DISCOVER THE REAL MUSIC IN YOUR COLLECTION.

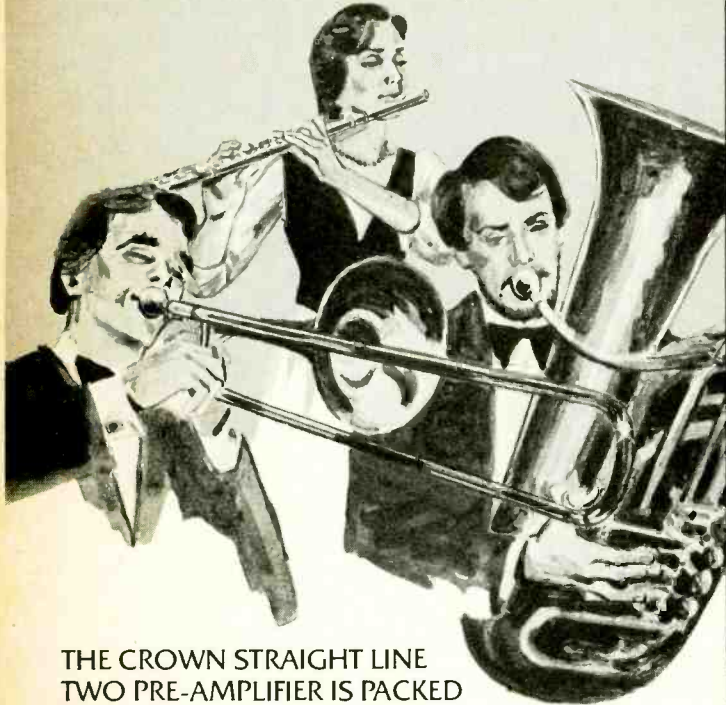

THE CROWN STRAIGHT LINE TWO PRE-AMPLIFIER IS PACKED FULL OF UNIQUE TECHNOLOGY.


How much real music, how many delightful music details, are hidden in your records or tapes? Uncover it all with the superb signal processing, and convenient display-and-control, of the STRAIGHT LINE TWO.

Ask your Crown dealer for an audition. Learn how computer-aided design brings you a refreshing level of sonic accuracy, with optimized bias in the phono pre-amp that puts the S/N floor at the thermal noise level of your best cartridge.

Discover new sparkle and clarity in your music library, as the high gain FET input op-amp puts its better transient response to work. There's even more enjoyment from softer music with Crown's unique level-control circuit.

Use the new "Rumble" display to detect and remove sub-audio before it distorts the output. Try out the versatile tape-copy control. Note the five switched outlets, the distortion indicator, the seven inputs and a processor loop - all designed to bring the real music out of hiding.

Send five dollars for the latest Crown Information Package, full of data on the STRAIGHT LINE TWO and other Crown home audio components. Money-back guaranteed to satisfy your hunger for straight facts on Crown. Brochures, tech reports, reprints, prices, dealer listings - your ticket to audio reality.

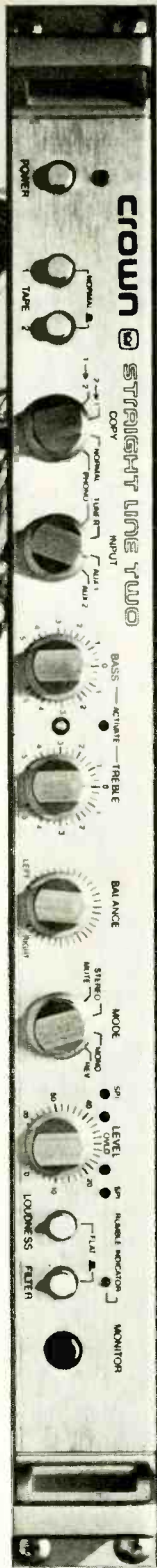

THE ELECTRONIC WORLD


nies manufacturing small consumer-type audio mixers are JVC, Pioneer, Sansui, Shure Brothers, Sony and Teac (through its TASCAM division).

With the aid of a small mixer, you can make live recordings sound a lot more professional than they would if just the left and right "mic inputs" on your cassette or reel-to-reel machine were used.

Conclusion. Several other interesting outboard and built-in circuits for enhancing the home stereo music system are available. For example, no discussion of stereo enhancement would be complete without a brief mention of what is affectionately known as the "boom box" - officially designated the Model 110 Subharmonic Synthesizer by its maker, dbx, Inc.

This ingenious device actually "creates" subharmonics of any bass frequencies present in the program material. If the device is fed a 100-Hz signal, for example, it delivers not only 100 Hz, but significant amounts of 50 Hz (the subharmonic) which wasn't present in the original program. While some audio purists frown upon adding anything to recorded music that wasn't there to begin with, others find the effect pleasing. (Hard rock and disco usually benefit from a bit of bass boost).

From the foregoing, it's clear that you are not tied to what your basic stereo system can produce in a given listening area. Electronic signal processors offer many ways to let personal taste shape reproduced sound. ♦

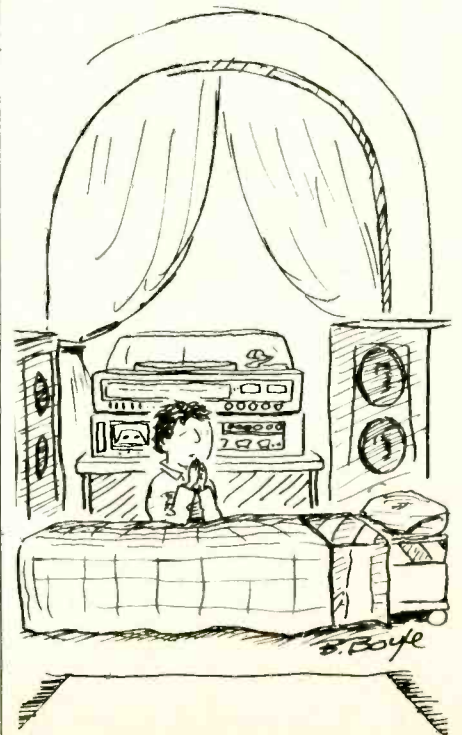

"And thank you for the miracle of ambient sound."

CIRCLE NO. 55 ON FREE INFORMATION CARD



CROWN®

...WHEN YOU'RE READY FOR REAL!

The Crown Information Package is also available free from your dealer. If you need a list of Crown dealers, use the Reader Service Card number, or call 219/294-5571.

CROWN INTERNATIONAL, Dept. SL
1718 W. Mishawaka Road, Elkhart, Indiana 46517
Here's my \$5 (outside U.S. and Canada, \$8). Send my Crown Information Package, with money-back guarantee.

Name _____

Address _____

City _____ State _____ Zip _____

Phone _____

POPULAR ELECTRONICS

Servicing Solderless Sockets


Contacts and holes should be cleaned periodically

BY JOHN T. BAILEY

SOLDERLESS molded circuit boards, often called solderless sockets, made by a number of manufacturers, are excellent devices for breadboarding circuits. However, after long use, they may develop faults, the two most usual being poor electrical contacts and holes plugged with wire inserts that have broken off flush with the board. Another problem that arises from time to time is internal short circuits for no apparent reason.

Poor electrical contacts result from deformation of internal pin connectors after many cycles of use. Plugged holes occur when wire is nicked during insulation stripping so that, with flexure, it breaks off slightly below the upper surface of the board and is almost impossible to remove. Intermittent shorts, as we shall see, arise in a more complex way.

Cures. A typical solderless socket (see drawing) has a backing paper and an adhesive sheet covering its underside. Carefully remove both of these to expose the electrical connectors. Then use a pin

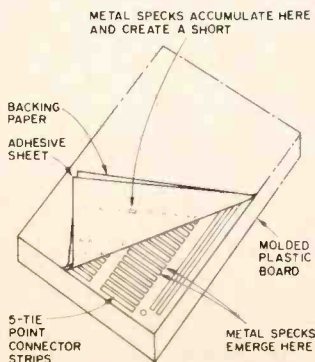

A typical solderless socket has a backing paper and an adhesive sheet covering its underside.

to push out any short lengths of wire stuck in connectors. Long-nose pliers can be used to pinch each connector prong very gently to improve contact. Then use a fine brush to clean the underside of the socket.

Examine the side of the adhesive sheet that faced the contacts. There may be small islands of metallic specks adhering to the sheet in some places. These specks, apparently soft metal scraped from wire jumpers or IC pins during insertion and removal, drop into the

internal troughs and pile up to short adjacent contacts. Solve this problem by turning the adhesive sheet over so that its clean side is against the connector strips. Then restore the backing paper to its place.

By performing these simple maintenance steps regularly, you can reduce the chances that a serious breadboarding session will be interrupted by a malfunctioning solderless socket. And each socket should have a longer useful lifetime as well. ◇



The Koss K/4DS represents the best value today for a complete digital delay system.

According to articles and test reports printed in *Popular Electronics*, *Stereo Review* and *High Fidelity* magazines, the Koss K/4DS represents a good buy for anyone interested in a time delay system. Koss will be happy to send these reprints to anyone requesting them.

Of course, the fact that the Koss K/4DS offers a remarkable value shouldn't surprise anyone who has priced the competition. After all, the Koss K/4DS is a complete system with a built-in amplifier and two matching ambience speakers for a

suggested retail price of just \$459.

But what should surprise any music lover is how the K/4DS turns ordinary stereo into a whole new listening experience. With four computerized ideal environment selections—club, theater, concert hall, and auditorium—the K/4DS offers the most life-like and realistic portrayal of a live performance you've ever heard.

Stop in at your audio dealer, today, and experience the Koss K/4DS Digital Delay System for yourself. We think you'll agree with the experts.

© 1981 Koss Corp.

KOSS K/4DS Digital Delay System
hearing is believing™

KOSS CORPORATION, 4129 N. Port Washington Ave., Milwaukee, WI 53212/Facilities Worldwide

CIRCLE NO. 61 ON FREE INFORMATION CARD

4-TO 3-WIRE TAILLIGHT CONVERSION

Connect brake and turn signal lights of trailers to foreign cars

BY MICHAEL S. CRANMER

VIRTUALLY all foreign cars and trucks have taillights that use separate bulbs for the turn signals and brakes. This type of system uses a 4-wire configuration, which makes it possible to have the turn-signal light blinking and the brake light on at the same time on the same side. A problem occurs, however, if you want to hook up a U.S.-made trailer to the foreign car or truck. Trailer lights are usually wired on a standard 3-wire system. That is, the turn signal and

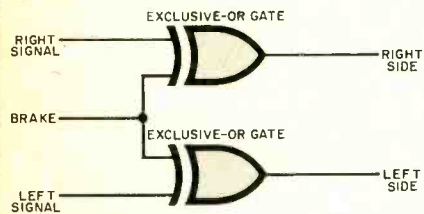


Fig. 1. Basic signal connections to the EXCLUSIVE-OR logic gates.

brake light share the same bulb. With this configuration, if the brake is on and the right signal is on, the right bulb blinks while the left bulb indicates brake operation.

The problem of connecting a 4-wire signal system to a 3-wire system can be solved by using an EXCLUSIVE-OR gate between the two systems. The truth table for this logic gate is given in Table I while the basic connections to the gate are shown in Fig. 1. Figure 2 shows all possible input conditions of left or right signal and brake light with the resultant output of the EXCLUSIVE-OR gate. Note that the ground wire is not shown in Fig. 2. The complete schematic of the circuit is shown in Fig. 3.

PARTS LIST

- D1-D3—1N4004 diode
- IC1—quad 2-input exclusive-or gate
- R1-R5—1-k Ω , 1/4-watt resistor
- Q1, Q2—2N6388 power Darlington, (Radio Shack 276-2068 or similar)
- Misc.—Case, perfboard.

Fig. 3. Complete schematic of the circuit between car and trailer lights.

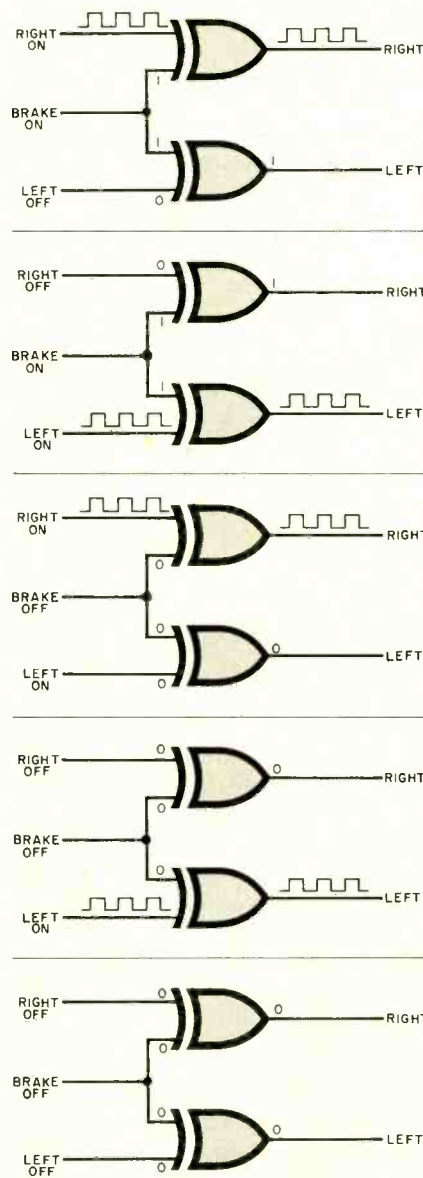


Fig. 2. All possible input conditions of directional and brake signals.


Circuit Operation. The circuit is powered by the signal display system on the foreign car or truck. The three diodes, in parallel with the inputs, conduct current to the power Darlington and the EX-OR power supply pin. The diodes also prevent current from conducting back to another gate input. (These diodes are not needed if a separate 12-volt line is run from the battery.) The three 1-kilohm resistors, tied to the inputs of the gates, are used to pull to ground the input gate voltage. (This is needed to keep the gate inputs from floating high.) The other


TABLE I—EXCLUSIVE-OR TRUTH TABLE

Inputs		Output
0	0	0
0	1	1
1	0	1
1	1	0

1-kilohm resistors are used as current limiters. Unused input pins on each gate must be tied to V_{CC} or ground. Also it would be advisable to place an in-line fuse on the 12-volt supply.

Construction. Building this circuit is simple and inexpensive. Most of the parts can be mounted on a piece of perfboard with the power Darlington mounted on heat sinks. Usual care should be taken with the CMOS IC to insure that it is not damaged by static electricity. \diamond

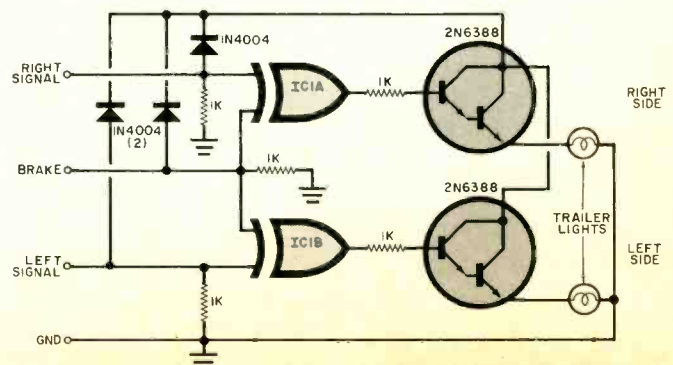

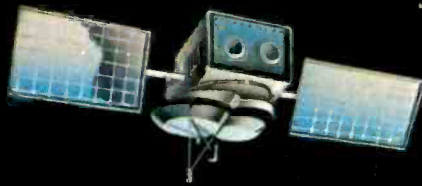

Enter the new age of TV entertainment with the state-of-the-art
Heathkit®
HOME EARTH STATION SYSTEM

The stars are now within your reach – and within the reach of your budget. Priced as low as \$6,995, the Heathkit SRS-8100 Home Earth Station System puts a wide variety of TV entertainment at your fingertips. Geosynchronous satellites offer many channels programming movies, nightclub acts, concerts, musical specials, Broadway plays, news and more* – most free of cuts, censorship and commercial interruptions.



Simulated TV picture

This home earth station system comes with the Heathkit trademark of quality and reliability.

The specially-prepared, do-it-yourself SRA-8100-10 Site Survey Kit helps find the correct location for the satellite receiving antenna. Step-by-step assembly manuals and technical assistance from Heathkit Electronic Centers make our Earth Station System easy to assemble and install. The SRA-8100-2 Integrated Low-Noise Amplifier/Down-Converter, SRA-8100-1 Three-Meter Satellite Receiving Antenna and satellite receiver electronics are made by Scientific-Atlanta, one of the world's foremost manufacturers of satellite telecommunications equipment.

The Heathkit SRA-8100-3 Satellite Receiver Kit features a special Zenith Space Command Remote Control. It features 24-channel electronic tuning, drift-free reception, built-in memory, a built-in security circuit (alarm not included) and an attractively-styled walnut-finish cabinet.

View exciting satellite programs on the new, state-of-the-art Heathkit GR-2500 Color Television. It features maximum picture sharpness with 330 lines of resolution, exceptional 112-channel tuning capability (for cable signals), rich four-speaker sound, remote control, optional Space Phone, easy 15-hour kitbuilding and a great low kit/cabinet system price.

**SEE THE LATEST IN HIGH-TECHNOLOGY,
 EASY-TO-BUILD KIT-FORM ELECTRONICS**

— It's all in our new, 104-page Heathkit Catalog.

For your FREE Catalog, write:

Heath Company, Dept. 010-876, Benton Harbor, MI 49022

— or pick up your copy at any of the conveniently-located Heathkit Electronic Centers throughout the U.S.



*Federal Communications Commission equipment authorization relating to the sale of the Heathkit Earth Station requires the following disclosure: "Use of this device may violate Section 605 of the Communications Act of 1934, as amended, through the unauthorized interception and divulgence of radio communications for one's own benefit where there is no entitlement to its receipt."

Viewing of some satellite TV channels may require the customer to obtain permission from, or make payments to, the programming company. Some programmers may not grant permission. Some local, state and foreign laws may now or in the future limit the use of this device. The customer is responsible for compliance with all applicable laws and regulations.

ADD **DOUBLES** TO YOUR COMPUTER

BY JAMES BARBARELLO

Peripheral allows two to play computer games without crowding the keyboard.

MICROCOMPUTERS can be programmed to play many interesting games, especially those involving two human players (as opposed to one person playing against the computer). Usually, this involves each player, in turn, operating a specific key on the keyboard. Some systems use two joysticks with associated pushbuttons so that two players can compete without getting in each other's way. However, many systems do not include joysticks, so two-person games played on a keyboard become a little difficult when the action gets hot and heavy.

The Doubles peripheral presented here (Fig. 1), consists of a battery-powered two-IC circuit with two independent pushbutton switches, each at the end of a length of slender two-con-

ductor cable. When connected to a cassette port, for example, and used with a simple BASIC program, the two players can now participate without interference in any game that requires only a simple key closure as an input. Although designed for a TRS-80 Model I, the approach can be adapted to almost any system whose BASIC includes OUT and INP (or their equivalents), with the "called" port easily accessible.

In the case of the TRS-80, when the BASIC command OUT 255,1 is issued, a logic-1 voltage level is present at output port 255 (cassette), while OUT 255,0 drops this voltage to the logic-0 level.


The command INP(255) senses the voltage level between the tip and ring of the cassette plug. If a logic 0 is

present, the command will return the number 127. If a logic 1 is present at the cassette plug, the number 255 is returned.


Thus, by choice of OUT and INP commands, it is possible to communicate with an external circuit connected to the cassette port, and receive back its current status.

Circuit Operation. Two identical flip-flops, each having independent data, set, reset, and clock inputs, and Q and \bar{Q} outputs, are contained in IC1. The logic level present at the D input is transferred to the Q output during the positive-going transition of the clock pulse.

When power is first applied (via S3), C1 and R3 produce a momentary pulse that loads input D of IC1A with

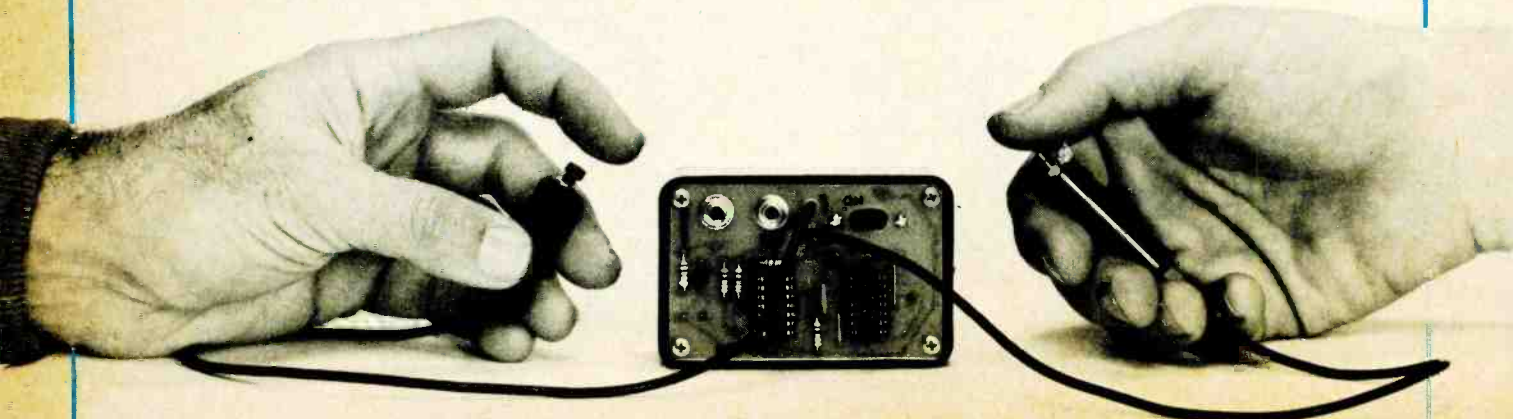

“This year, I’m taking 2,000 people sailing. I wouldn’t trust the travel arrangements to anything less than Scotch® Brand Diskettes.”

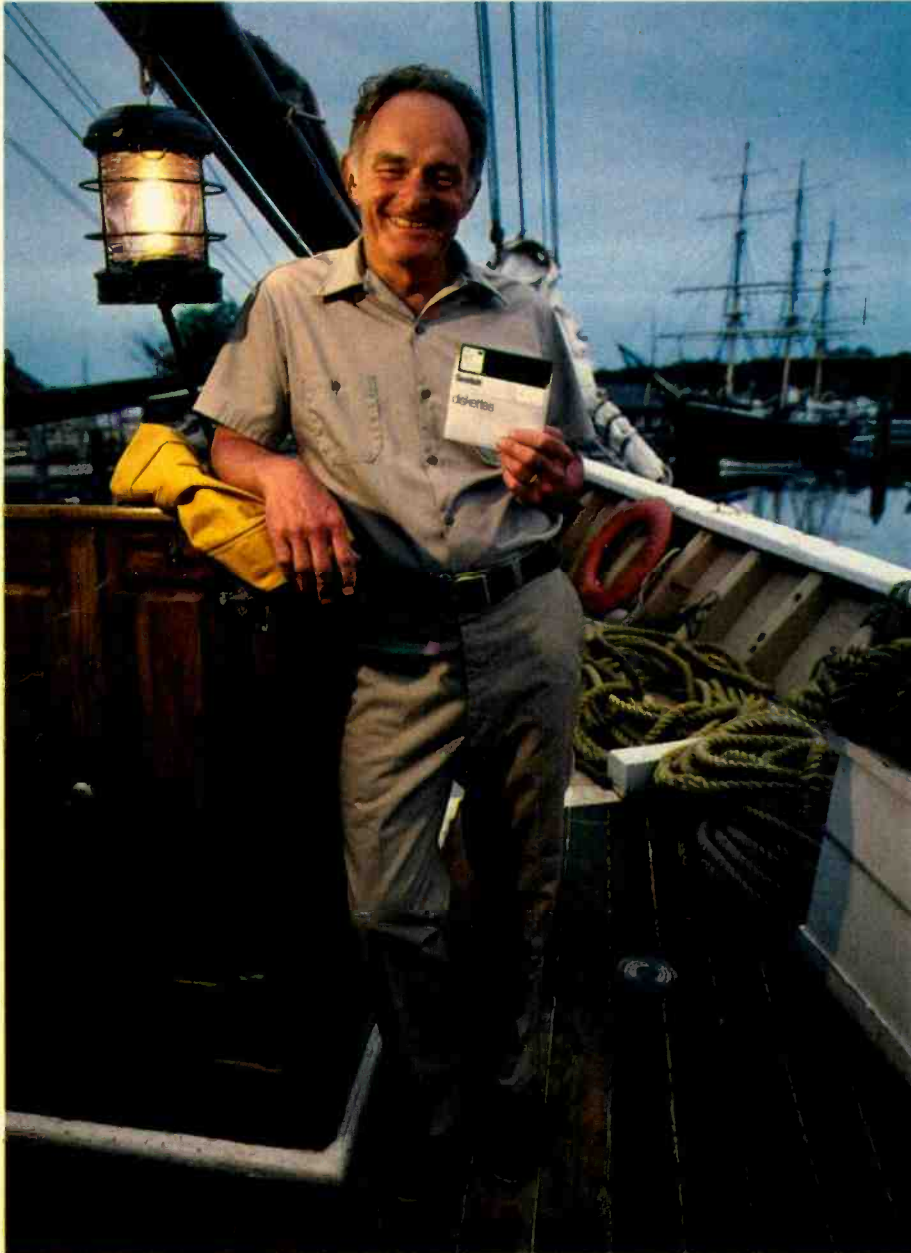

Eben Whitcomb, Owner-Operator, Dirigo Cruise Company, Clinton, CT

Eben Whitcomb runs the largest windjammer cruise business using American flag ships. He uses Scotch diskettes to keep track of thousands of names, bookings, sailing times, manifests and general ledger. While his computer saves time and repetition, Scotch diskettes assure him that vital information will be there when he needs it.

Dependable Scotch media can work just as hard for you. Each Scotch diskette is tested before it leaves our factory, and guaranteed error-free. So you can expect it to perform exactly right.

Scotch 8" and 5¼" diskettes are compatible with computer/diskette systems like TRS-80, Apple, PET, Wang and many others. Get them from your local 3M distributor. For the one nearest you, call toll-free: 800/328-1300. (In Minnesota, call collect: 612/736-9625.) Ask for the Data Recording Products Division. In Canada, contact 3M Canada, Inc., Ontario.

**If it's worth remembering,
it's worth Scotch
Data Recording Products.**



3M Hears You...

The future belongs to the creative electronics technician.

NEW FROM NRI. DESIGN TECHNO

Be prepared to grow with the world's biggest growth industry. Enroll now in this exciting career program from the leader in electronics training.

There are a lot of good jobs out there in electronics. But the best jobs go to the people who can think and work creatively. Those who can conceive and design circuits and equipment... those who can initiate ideas and carry them through... those who can turn theoretical concepts into reality. These are the people commanding up to \$18,000 as starting salaries, earning \$30,000 or more with experience and ability. And NRI can help you join their company.

The First Complete Program of Its Kind

Now, for the first time in the history of home study, NRI offers you a new and exciting course in Electronic Design Technology. A course that starts with the fundamentals and builds from there to prepare you for an electronic career where the growth is. You're trained for exciting jobs in the creation of communications equipment, computers, consumer products, anything that needs electronic circuits.


Only NRI gives you such complete and concentrated training in the design of electronic circuits. And you learn at home in your spare time, without quitting your job or wasting time, travel, and gas going to night school. You learn with NRI-developed training methods that combine knowledge with practical experience.



NRI Circuit Designer Gives Hands-On Experience

You learn by doing. No ivory-tower, strictly theoretical course here. You actually design and build modern electronic circuits, run tests, and verify specs. You learn how various systems interact, design your own circuits to perform specific tasks, learn to look for better ways and new ideas.

The NRI Circuit Designer is a totally unique instrument with full breadboarding capability, built-in multiple power supplies and a multi-function signal generator for circuit testing. Fast, simple connections let you build up prototype

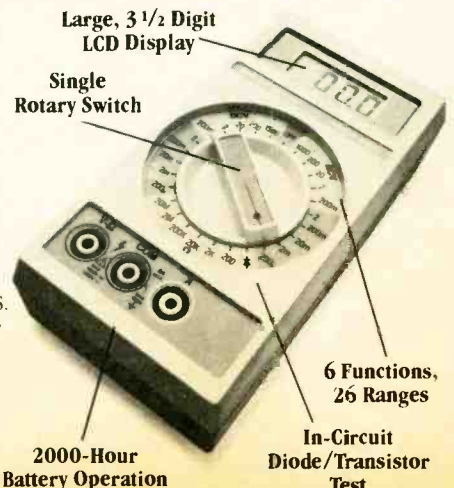

Large, 3 1/2 Digit LCD Display

Single Rotary Switch


2000-Hour Battery Operation

6 Functions, 26 Ranges

In-Circuit Diode/Transistor Test

POPULAR ELECTRONICS

ELECTRONIC LOGY TRAINING

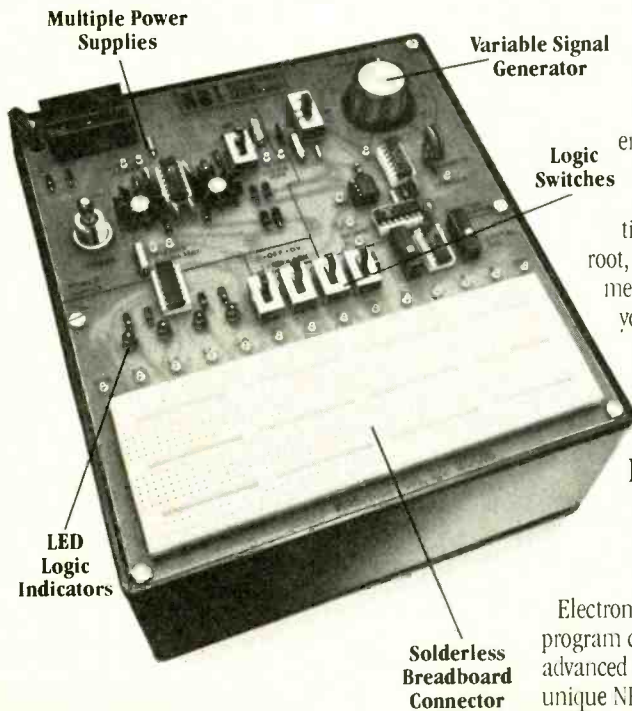

engineering instrument that includes trigonometric functions as well as square root, logarithms, and memory. Together with your Circuit Designer, they work to give you a sound basis of practical experience.

NRI Fast-Track Training

Although the NRI Electronic Design Technology program carries you through advanced electronics, the unique NRI lesson concept simplifies and speeds learning.

Especially written for individual instruction, each lesson covers its subject fully and thoroughly. But extraneous material is eliminated, language is clear and to the point, organization is logical and effective.

You'll start with subjects like Fundamentals of Electronic Circuits, progress rapidly through Circuit Theory to Solid-State Electronics and on to Digital Electronics, Computers, and Microprocessors. Hand in hand with your theory will be practical Design Lab experiments, circuit demonstrations, and test/measurement procedures that make it all come to life.


No Experience Necessary

You need absolutely no electronic experience to be successful with this modern course. If you're a high school graduate with some algebra, you should handle it without any trouble. We even include, at no extra charge, the NRI Math Refresher Module, designed to help you

brush up on your math and teach you any new concepts you may need from basic algebra through phasors and circuit analysis.

Free Catalog, No Salesman Will Call

There's so much to tell you about

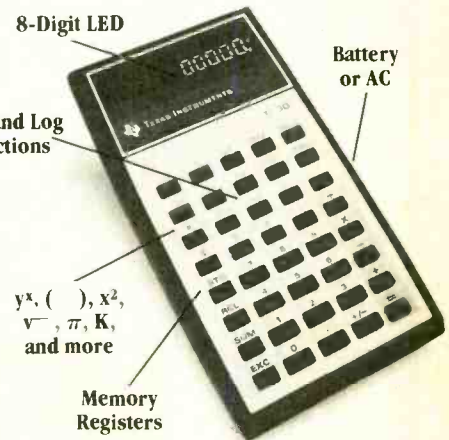

circuits, immediately check them out for function or faults. It handles both linear and digital integrated circuits as well as discrete components such as transistors and diodes. Six practical lab units carry you through both the theoretical and practical world of electronic circuit design.

Professional Working Instruments

Your course also includes the choice of the professionals...the 6-function, 26-range Beckman digital multimeter for fast, accurate voltage, current, and resistance measurements. It features accurate LCD readout and full portability. You also get the famous Texas Instruments TI-30 scientific calculator to speed and simplify circuit analysis and design. It's a true

this exciting new course for the electronic 80's, we can't do it all here. Send the postage-paid card for our free, 100-page catalog with all the facts about this and other NRI electronics courses. We'll rush it right to you without obligation. Look it over and discover for yourself why only NRI can prepare you so well for your future. If card has been removed, please write to us.



NRI SCHOOLS
McGraw-Hill Continuing
Education Center
3939 Wisconsin Ave.
Washington, D.C. 20016

We'll train you for the good jobs.

a logic 1 and input D of IC1B with a logic 0. This occurs because of the set/reset action. Each time a clock pulse is applied to the clock inputs, the data on pin 5 is shifted through the Q output to the data input of IC2B, and the Q output of IC1B is loaded into the D input of IC1A. The net result is that, with clock pulses, a logic 1 alternates between the \bar{Q} outputs of IC1.

Clock pulses from the computer output port are fed via J1 and R1 to the base of Q1. The output of Q1 is connected to IC2D which acts as an inverter. The output drives the clock inputs of IC1 and pin 9 of NAND gate IC2C.

The two inputs of gate IC2B are tied high via R4 and R5. If both S1 and S2 (the player switches) are open, the output of IC2B is low and IC2C is high. With both inputs of IC2A high, a low is present at J2.

Without connections to the computer, if either player closes his switch, the logic states change and a high appears at J2.

When the circuit is connected to the computer and power applied, the circuit defaults with a logic 1 in IC1A. The simple software has made the computer aware that this condition has occurred, and from then on, each time the computer issues a clock pulse, it "knows" which flip-flop is being used. Since the computer can issue clock pulses very fast, both operators appear to be on-line at once.

Construction: The Doubles circuit can be built up on a perfboard, or a

printed-circuit board constructed using the pattern of Fig. 2. Before handling the CMOS ICs, touch a ground point (such as the screw holding an outlet cover) to remove any static charge you might have. Mount jacks J1, J2, and switch S3 on the pc board as shown in Fig. 3. Connect battery clip B1 at this time.

The final step is to construct and attach two switch assemblies. Each of these consists of a normally open pushbutton switch, about 18" of thin (1/8" diameter) coaxial cable and a 1/4" plastic phono plug cover. Strip one end of the coax cable and solder the center conductor to either switch lug. Solder the outer braid to the remaining switch lug. Make a knot in the cable about 1" from the switch lugs and pass the free end of the coax cable through the phono plug cover so that it exits the smaller end. Tighten the nut on the switch and then coat the sides of the switch with epoxy or a similar adhesive and push it into the large end of the cover as far as it will go. Wipe off any excess adhesive and let set. Repeat for the other switch.

When both switch assemblies are complete, pass the cables through the two 1/8" holes in the pc board (so that the cable ends are on the foil side). Strip the cable ends and attach to the board as shown in Fig. 3.

Attach a 9-volt battery to the battery clip. The unit can be used "as is" or can be mounted in a cabinet. (The pc board has been designed to replace the top cover of Radio Shack's Experimenter Box #270-231. The battery is taped to the inside of the box.)

Testing. Using the TRS-80 Model I or III as an example, connect the grey (large) cassette plug to J1, and the black plug to J2.

Enter the following short program into the TRS-80:

```
10 CLS
20 OUT 255,1: OUT 255,0
30 OUT 255,1: OUT 255,0:
   IF INP(255)=255 THEN PRINT "1",
40 OUT 255,1: OUT 255,0:
   IF INP(255)=255 THEN PRINT "2",
50 GOTO 30
```

Line 10 clears the screen, and line 20 initializes the Doubles circuit. Lines 30 and 40 alternately check for a closure of S1 and S2 respectively. Line 50 loops back to line 30, thus creating an endless loop that continuously checks the status of the switches. Turn switch S3 ON and RUN the program.

Press switch S1 and note that a series of 1s appears on screen as long as this switch is depressed. Release S1 and close S2. Note that a series of 2s now appear. Holding both switches down simultaneously will cause alternating 1s and 2s. You can now identify and mark S1 and S2 for future use in playing.

Using the Circuit. To use the Doubler effectively, the computer must know which switch was operated, which was depressed first, and wheth-

PARTS LIST

- B1—9-volt battery
 - C1—0.1- μ F disk capacitor
 - IC1—4013 dual D flip-flop
 - IC2—4011 quad 2-input NAND gate
 - J1,J2—1/8" phono jack
 - Q1—2N222A or similar
 - R1 through R5—10,000-ohm, 1/4-watt resistor
 - S1,S2—Normally open pushbutton switch (Radio Shack 275-1547 or similar)
 - S3—Spst switch
 - Misc.—Suitable lengths of 1/8" diameter coaxial cable, plastic enclosures for switches, epoxy, battery holder, suitable enclosure, etc.
- Note: A complete kit of parts (less case and adhesive), including a game called DogRace that uses a program similar to that illustrated in this article, is available for \$20 from J.J. Barbarello, RD 1, Box 241 H, Tennent Rd., Englishtown, NJ 07726.

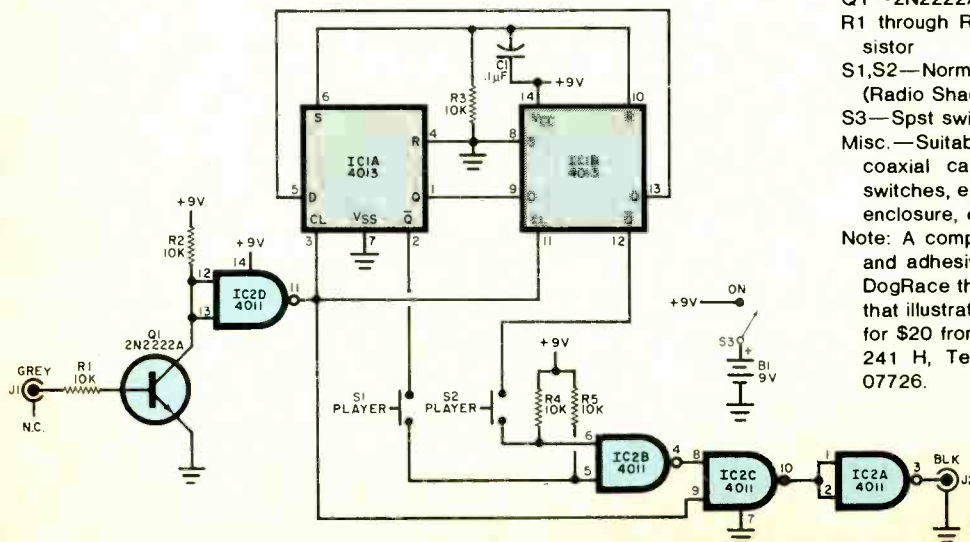


Fig. 1. The circuit consists of two IC flip-flops with the pushbuttons attached.

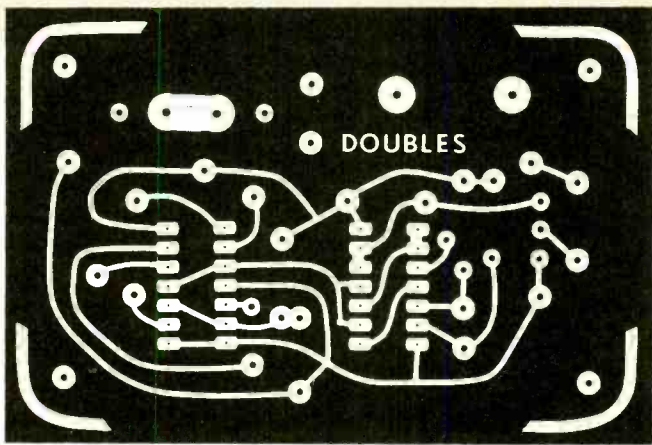


Fig. 2. Use this same-size foil pattern for the pc board.

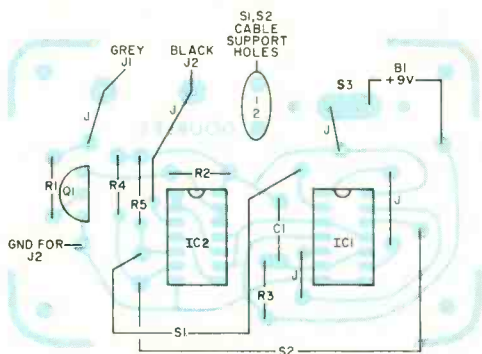


Fig. 3. Component layout for the pc board.

er a switch was depressed when it should not have been.

Enter the following sample program:

```

10 CLS: OUT 255,1: OUT 255,0
20 PRINT @ 408, "*** GO ***"
30 FOR J = 1 TO 20
40 FOR I = 1 TO 2: OUT 255,1: OUT 255,0
50 IF P(I)<>255 THEN P(I) = INP(255)
60 IF P(I)=255 AND P(0)=0 THEN P(0)=I
70 NEXT I,J: PRINT @ 408, STRING$(8,32)
80 IF P(1) = 255 THEN PRINT "#1",
90 IF P(2) = 255 THEN PRINT "#2",
100 PRINT "#";P(0);"FIRST"
110 FOR I=0 TO 2: P(I)=0: NEXT I
120 FOR J = 1 TO 10 + RND(30)
130 FOR I = 1 TO 2: OUT 255,1: OUT 255,0
140 IF P(I)<>255 THEN P(I) = INP(255)
150 NEXT I
160 IF P(1)=255 THEN PRINT@408, "FOUL #1":P(1)=0
170 IF P(2)=255 THEN PRINT@408, "FOUL #2":P(2)=0
180 NEXT J
190 FOR I = 0 TO 2: P(I)=0: NEXT I
200 GOTO 20

```


Lines 20 through 110 are the scoring lines, after line 20 prints ** GO **, line 30 causes the computer to loop through lines 40 through 70 twenty times. Each time line 40 "clocks" the Doubles circuit, line 50

"looks" for a switch closure. If a switch closure has been made, line 60 checks to see if it is the first. If it is, that switch number is stored as variable P(0). Lines 80 through 100 print out the number of the depressed switches, as well as which was closed first. Line 110 clears the variable P(0), which was first; P(1), switch 1 indicator; and P(2), switch 2 indicator.

Lines 120 through 180 are similar to lines 30 through 70, but these check for foul. The number of circuit scans is randomly chosen in line 120. Since there is no need to know which switch closed first in a foul situation, P(0) is not used. On each scan of the circuit, lines 160 and 170 check for a foul. If so, this information is printed. Line 190 clears variables P(0), P(1), and P(2), while line 200 loops the program back to the beginning.

To use the program, enter and run it. When ** GO ** appears on the video display, either or both switches may be operated. The switch number as well as which switch was operated first will appear on screen. If a switch was depressed before the ** GO ** appeared, then the "foul" indicator will appear. This short program can be used as the basis for many game programs, with scoring and graphics added if desired. ◇

Introducing the first no-crystal hand-held scanner.

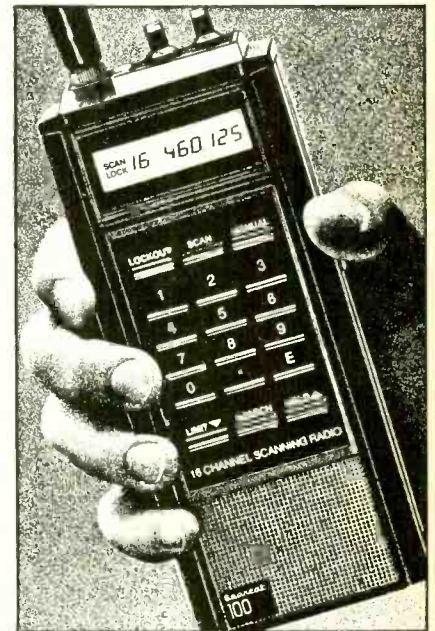

The Bearcat® 100.

Now! The one scanner you've always wanted—a no-crystal, fully synthesized hand-held scanner. The incredible, new Bearcat 100.

Push button controls tune in all police calls, fire calls, weather warnings, and emergency information broadcasts, the split second they happen. Automatically.

16 channels for storing frequencies. 8 band coverage—including high, low UHF and "T" public service bands; both the 70 cm and 2 meter amateur bands. Automatic and manual search, lockout, scan delay. Direct channel access. Flexible antenna, earphone, AC adapter/battery charger and carry case are included.

Dial 800-SCANNER (800-722-5555 in Indiana) for your nearest Bearcat Scanner dealer, and go see the world's one and only hand-held, no-crystal scanner.

BEARCAT® SCANNERS

Electra Company International Business Office
Division of Masco Corp. of Indiana Suite 102, 1828 Swift
300 East County Line Road North Kansas City, Missouri 64116
Cumberland, Indiana 46229 © 1981 Masco Corp. of Indiana

CIRCLE NO. 15 ON FREE INFORMATION CARD

CONTROLLING AC POWER

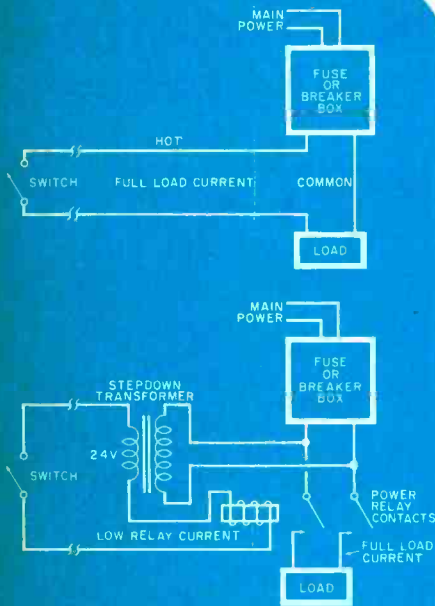


Fig. 1. Line-voltage control (A).
Low-voltage system using a relay (B).




Fig. 2. Symbols for the SCR and triac (A). Two SCRs operating in an inverse parallel connection (B).

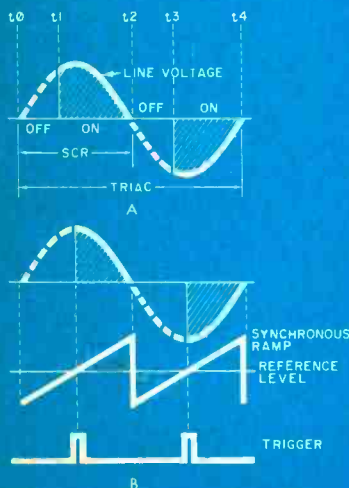


Fig. 3. Shaded areas in (A) show amount of time the SCR and triac are on. Waveforms in (B) show how to generate trigger.

BY RALPH TENNY

Different methods of power control from simple on/off switching through digital and computer operation

ELECTRIC power supplied to a load can be controlled either by switching it on and off in discrete amounts or by using some means of continuously varying the amount. An example of the first type of control is the simple wall switch used to turn a room light on and off. The second type of control can be represented by the dimmer switch now commonly used to vary the same room light slowly and evenly.

In this article, we will discuss both on/off switching and also give the details of some techniques used in variable control systems.

On/Off Control. The simplest method of controlling electric power is a single-pole, single-throw switch connected in series with the load. A more elegant form of on/off switch is one that can be controlled by some event; i.e. a light that can be turned on and off by a timer, or a photoelectric scheme that controls a light by the rising and setting of the sun. In both cases, control is automatic and requires no human intervention except for the setting of the timer or the sensitivity of the photoelectric sensor.

On/off switching schemes are either line- or low-voltage systems. In line-voltage control, such as that shown in Fig. 1A, both the contacts of the switch and the wiring must carry the full line voltage and current required by the load. A

low-voltage system (Fig. 1B) reduces the voltage by transformer action (usually to 16 to 24 volts) and operates at the low current required by the associated relay coil. The relay contacts, in turn, carry the heavy current required by the load. Also note that there is very little shock hazard in the low-voltage approach to power control.

One example of the low-voltage approach is that of thermostats (essentially a temperature-controlled on/off switch) in heating or cooling installations. Any type of on/off switch that responds to a stimulus (light, heat, humidity, smoke, fire, etc.) can be used to control the relay in the low-voltage application.

Variable Control. One of the earliest means of applying a variable voltage to a load was the rheostat, or variable resistor, connected in series with the load. Although this approach works, when a substantial load current is demanded, the I^2R losses in the rheostat produce a considerable amount of waste heat. This means the use of high-wattage, expensive rheostats; and lots of wasted energy in the form of heat. So the approach is inconvenient, wasteful, and dangerous.

The introduction of the autotransformer offered an improvement since the voltage across the load could be set between zero and some higher-than-line

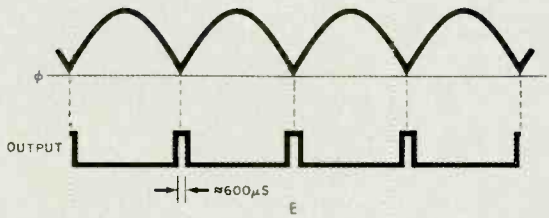

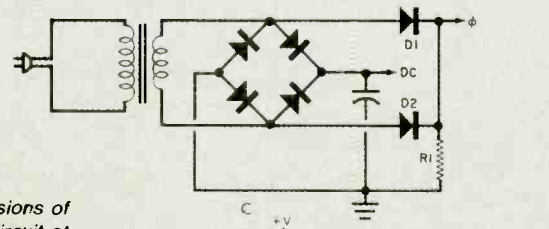
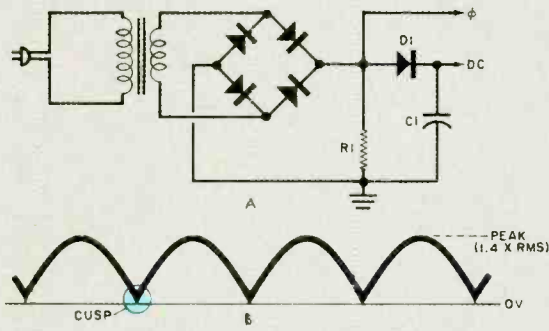


Fig. 4. Two versions of basic control. Circuit at (A) provides the rectified signal at (B). Circuit at (C) does a similar job but the load is split between diodes. Circuit at (D) provides a train of pulses (E).

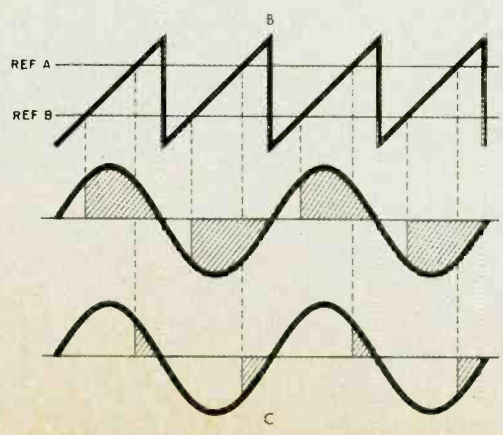
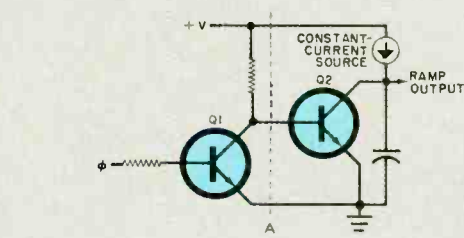


Fig. 5. A single ramp generator is shown at (A). Waveform at (B) is its output. Waveforms in (C) show variation in power using different reference levels on the ramp.

value as determined by the type of auto-transformer used. However, in most cases, there is no isolation between the load and the power line, thus presenting a serious shock hazard to the user. Even an open fuse is no protection in some cases.

Semiconductor Control. It was the introduction of the semiconductor that allowed a more efficient control of power to a load. The SCR and triac are the workhorses here. Figure 2A shows the symbols for these two devices. Note that they are similar in that each has two power leads and one gate lead. Since both are formed from diodes, they conduct when the diodes are forward-biased. In the case of the single-diode SCR, a signal to the gate lead will cause conduction only when the anode is positive with respect to the cathode. Since the triac has two "back-to-back" diodes, it can conduct when either diode is forward-biased. In ac operation, the SCR conducts only on each positive-going half cycle, where the triac conducts on both half cycles.

When not gated on, both devices present a high impedance to the circuit. Once enough current is injected into the gate, conduction starts, the device internal resistance drops very low, and the semiconductor will remain in this state until the current it is passing drops below some low (holding) level.

The best way to cause an SCR or triac to stop conducting is to reduce its anode voltage to zero—something that happens automatically twice during each power-line cycle. If the gate trigger signal is delayed and turned on at some point during the cycle, the device will conduct for the remainder of that cycle. Thus, controlling gate turn-on time determines the power applied to the load. Figure 2B illustrates how two SCRs can be connected to simulate a triac. Operation is illustrated in Fig. 3A.

At time t_0 , the power line is zero, so the device is not conducting. As it goes into the positive-going direction, the semiconductor is turned on at time t_1 . Both the SCR and triac will then conduct for the remainder of the positive-going cycle. At time t_2 , the applied voltage drops to zero and the device shuts off. The SCR will not conduct for the following negative half cycle, but the triac will if triggered at time t_3 . It remains conducting for the rest of the cycle. At the next zero crossing (t_4), the device shuts off.

The power delivered to the load is proportional to the shaded area under the curve of Fig. 3A. Moving t_1 within the cycle controls this area and, hence, the power to the load. Note that the SCR is

power control

capable only of half power, while the triac delivers twice as much. (Note also, that the device turn-on is very sharp and such a harmonic-rich waveform can produce transients that may interfere with radio and TV reception or, in some cases, produce line-voltage surges and spikes that can damage other sensitive devices coupled to the same power line.)

This approach is called phase control since the power controller is switched in phase, or synchronism, with the applied line voltage. Figure 3B shows one method of generating the T1 trigger signal. In this approach, a trigger signal having a certain amplitude is compared with a reference level formed from a ramp voltage synchronized with the power line. When the trigger amplitude exceeds the reference level, the trigger gates the associated power semiconductor on. In the case of an SCR, the power remains on until the next zero crossing. In the case of the triac, the power is turned on during both halves of the power-line cycle.

Some means must be found to sense the power-line zero crossing and turn on the trigger at the desired time. Two versions of basic concept for doing this are shown in Fig. 4. In 4A, the diode bridge and resistor $R1$ derive the full-wave rectified signal labelled ϕ with $R1$ ensuring that the cusps (Fig. 4B) drop below 0.6 volt. Diode $D1$ and capacitor $C1$ develop the rectified dc operating voltage. Diodes $D1$ and $D2$ in Fig. 4C work with $R1$ to produce ϕ in that circuit. The advantage of Fig. 4C over Fig. 4A is that $D1$ in Fig. 4A must carry the entire load current.

The zero-crossing signal is shaped by a circuit such as that shown in Fig. 4D. Using this simple circuit, the cusps (zero crossing) appear as a train of pulses about 0.6 ms wide (Fig. 4E).

The zero-crossing pulses can be used to control a simple ramp generator such as that shown in Fig. 5A. The output of this generator (Fig. 5B) is a series of voltage ramps synchronized with the power-line frequency. Since the ramp is linear, its level can be compared to some dc level and a trigger can be generated when the ramp voltage equals the selected dc voltage. Fig. 5C illustrates the phase delay resulting from two different reference levels with the shaded areas showing when power is applied to the load.

A typical circuit to mechanize this approach is shown in Fig. 6A. This circuit uses an IC comparator (a cousin to the op amp) to compare the ramp to some desired dc level. The waveforms are shown in Fig. 6B. Note that the transformer ($T1$) pulse can be moved up or down the ramp contingent on the set-

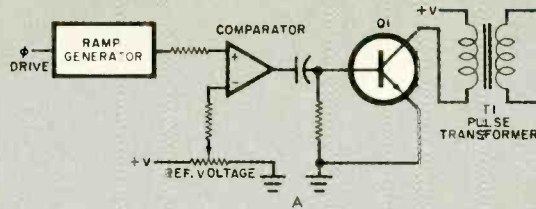


Fig. 6. Circuit at (A) generates a pulse as shown at (B). Circuit at (C) uses this output to drive the load.

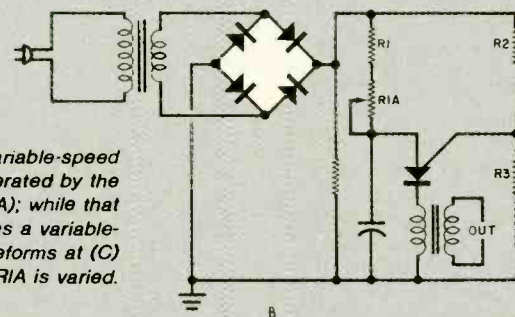
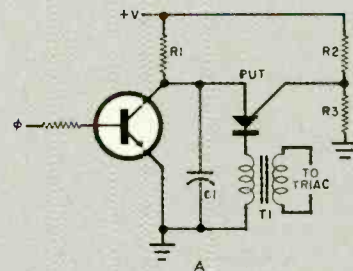
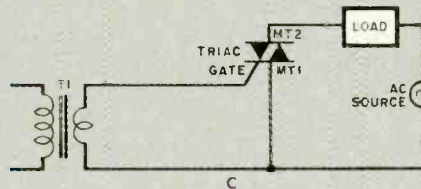
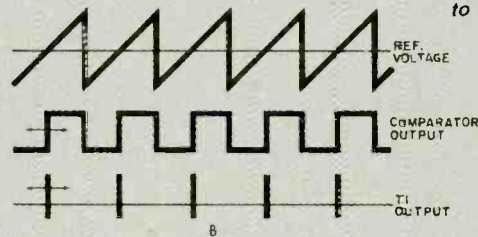


Fig. 7. A variable-speed ramp is generated by the circuit at (A); while that at (B) generates a variable-phase trigger. Waveforms at (C) show output as $R1A$ is varied.

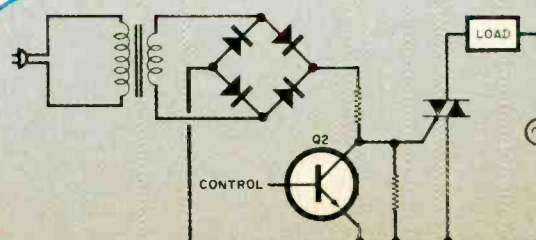
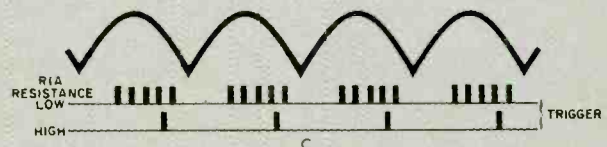


Fig. 8. A dc triggering circuit using a transistor to control the triac.

ting of the reference voltage control. Transformer *T1* is a pulse transformer, a specialized device that produces fast high-energy pulses capable of triggering SCRs or triacs.

A typical operating circuit, using a triac, is shown in Fig. 6C. It uses the output of Fig. 6A to drive the load. However, a form of variable-speed ramp can be generated by the circuit shown in Fig. 7. In Fig. 7A, a PUT (programmable unijunction transistor) is used as the trigger element. Resistor *R1* and capacitor *C1* generate a nonlinear ramp voltage while resistors *R2* and *R3* provide the dc reference point. When the ramp voltage exceeds the dc reference, the PUT discharges *C1* through the primary of pulse transformer *T1*. If this circuit is powered by a full-wave but unfiltered voltage, and *R1* is supplemented by *R1A*, the circuit of Fig. 7B is created. This is a variable-phase trigger that allows manual control (via *R1A*) of load power. Fig. 7C illustrates the waveforms as *R1A* is varied. Note that when *R1A* is a high resistance, only one trigger pulse is produced. The lower resistance values produce multiple triggers. In effect, the variable reference voltage of Fig. 6A has been replaced by a variable-speed ramp.

There is one more technique for operating a triac—called dc triggering. If a dc current of about 100 mA is applied to the triac gate, the triac will remain on and conduct full power until the end of the half cycle during which the dc drive is removed. The circuit shown in Fig. 8 uses a medium-power transistor to turn the triac on at the selected time during each power line cycle.

A triac can also be turned on by a relay (Fig. 9A), but this is not fast enough for phase control. An optical coupler (Fig. 9B) can replace the relay, but is still not fast enough for proper phase control.

Multiple Remote Control. Relatively simple digital techniques can be used for multiple remote control as shown in Fig. 10.

Two of the leads (A and B) are used for the digital signals, while lead C is the ground return for both leads. The waveforms in the lower portion of the illustration show how three independent outputs are generated from two input signals simply by wiring the transistors as various types of simple gates. Of course, other logic forms such as ICs can be used. Since each output is momentary, a suitable flip-flop at each output will keep the remote appliance turned on until the receipt of another digital signal that will reverse the state of the flip-flop. The output of the circuit (D,E,F)

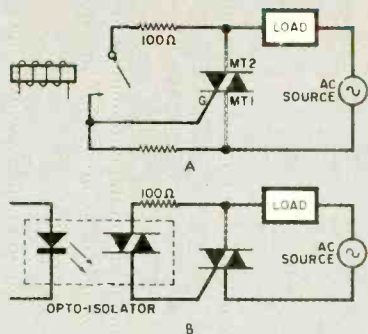


Fig. 9. A triac can be turned on by a relay (A) or an opto-isolator as at (B).

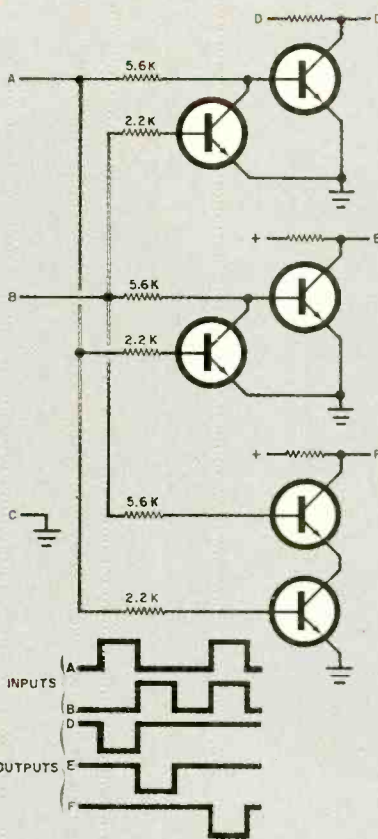


Fig. 10. A simple multiple remote control circuit using digital techniques.

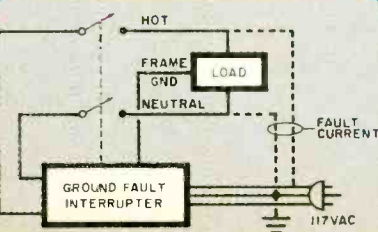


Fig. 11. How to connect a ground-fault interrupter for best protection.

or the outputs of any associated flip-flop can be used to drive the “appliance on” circuit—for example, a relay driver consisting of a transistor and relay.

Let you think that a pair of leads can transmit only two signals, consider the current loop (or RS-232 loop) as used in computer technology. In this approach, a considerable number of data bits are transmitted on a pair of leads. If a code has *n* bits, then 2^n characters can be defined. For example, ASCII uses seven bits to define a character and control signal, while reserving the eighth bit for parity. Therefore, ASCII-like signals can have 2^7 or 128 (decimal) different codes. This means that if an ASCII-like transmission is used (which would require several ICs including a UART), up to 128 different functions can be controlled over a single pair of leads. If the eighth bit is used, 256 functions can be manipulated. Using this computer-like scheme, it is also possible for a remote device to “answer” a command to notify the controlling device of the status (on or off) of the remote device.

Other Control Methods. Since all buildings using electricity are internally interconnected via the electric lines, another method of remote control has been created. This involves the use of high-frequency audio tones transmitted along the line (similar to a “bus” system as used in a computer).

In this mode, the digital signal is converted into an audio tone with a high represented by one tone and a low as a different, non-harmonically related tone. These tones modulate a “carrier” signal that is placed on the power lines. Suitable decoders are used to demodulate the carrier and separate the two tones at each remote location. The tones are then decoded into appropriate digital levels to perform the actual control.

This method is called “carrier current” and is limited to locations that are on the same power-line transformer. In most cases, commercially available wireless intercoms can be used as the communications medium. This type of installation is inexpensive in an existing structure, since no additional wiring is required.

Remote control by radio can be used if you keep in mind that malfunctions can occur if radio interference is encountered. Also, a limited number of control applications permit the use of ultrasonic sound or infrared light to carry control commands. However, these techniques require line-of-sight conditions and little or no physical motion can occur within the area or malfunction will result. Like radio control, these two approaches do allow freedom of motion to the controlled device (a robot, or a

EQUIPMENT AND TRAINING NO OTHER SCHOOL CAN MATCH.

**NTS HOME TRAINING INVITES YOU TO EXPLORE MICROCOMPUTERS,
DIGITAL SYSTEMS AND MORE, WITH STATE-OF-THE-ART EQUIPMENT
YOU ASSEMBLE AND KEEP.**

Without question, microcomputers are the state of the art in electronics. And NTS is the only home study school that enables you to train for this booming field by working with your own production-model microcomputer.

We'll explain the principles of troubleshooting and testing your microcomputer and, best of all, we'll show you how to program it to do what you want.

You'll use a digital multimeter, a digital logic probe and other sophisticated testing gear to learn how to localize problems and solve them.

Send for the full color catalog in the electronics area of your choice—discover *all* the advantages of home study with NTS!

NTS also offers courses in Auto Mechanics, Air Conditioning and Home Appliances. Check card for more information.

1.



2.



We believe that training on production-model equipment, rather than home-made learning devices, makes home study more exciting and relevant. That's why you'll find such gear in most of NTS's electronics programs.

For instance, to learn Color TV Servicing you'll build and keep the 25-inch (diagonal) NTS/HEATH digital color TV.

In Communications Electronics you'll be able to assemble and keep your own NTS/HEATH 2-meter FM transceiver, plus test equipment.

But no matter which program you choose, NTS's Project Method of instruction helps you quickly to acquire practical know-how.



Simulated TV Reception

4.

3.

1. The NTS/Rockwell AIM 65

Microcomputer A single board unit with on-board 20 column alphanumeric printer and 20 character display. A 6502-based unit 4K RAM, expandable.

2. The NTS/KIM-1 Microcomputer A single board unit with 6 digit LED display and on-board 24 key hexadecimal calculator-type keyboard. A 6502 based microcomputer with 1K RAM, expandable.

3. The NTS/HEATH H-89 Microcomputer features floppy disk storage, "smart" video terminal, two Z80 micro-processors, 16K RAM memory, expandable to 48K. **4. The NTS/HEATH GR-2001 Digital Color TV (25" diagonal)** features specialized AGC-SYNC muting, filtered color and new solid-state high voltage tripler rectifier.

NTS NATIONAL TECHNICAL SCHOOLS

TECHNICAL TRADE TRAINING SINCE 1905
Resident and Home-Study Schools
4000 SO. FIGUEROA ST., LOS ANGELES, CA. 90037

NTS Training Programs
in Consumer and
Industrial Electronics



NATIONAL TECHNICAL SCHOOLS

4000 South Figueroa Street Dept. 205-032
Los Angeles, California 90037

Please rush FREE color catalog on course checked below

- | | |
|---|---|
| <input type="checkbox"/> MicroComputers/MicroProcessors | <input type="checkbox"/> Auto Mechanics |
| <input type="checkbox"/> Communications Electronics | <input type="checkbox"/> Air Conditioning |
| <input type="checkbox"/> Digital Electronics | <input type="checkbox"/> Home Appliances |
| <input type="checkbox"/> Industrial Technology | <input type="checkbox"/> Color TV Servicing |

Name _____ Age _____

Address _____

Apt. _____ City _____

State _____ Zip _____

- Check if interested in G.I. information.
 Check if interested ONLY in classroom training in Los Angeles.

INTRODUCING OUR NEW STVA 14 ELEMENT CORNER REFLECTOR YAGI ANTENNA



Features:

- LONG RANGE
- 14.5 dB GAIN
- SELECTABLE 75 or 300 Ohm IMPEDANCE
- NARROW PATTERN for adjacent interference rejection
- ANODIZED FINISH
- STURDY CONSTRUCTION

STVA-3 14.5 dB Selectable Corner Yagi
Cut for Channels 60 thru 68. . . . \$16.95

STVA-4 14.5 dB Selectable Corner Yagi
Cut for Channels 44 thru 52. . . . \$16.95

VTR ACCESSORIES

SIMPLE SIMON VIDEO STABILIZER



Model
VS-125

Simple Simon Video Stabilizer, Model VS-125, eliminates the vertical roll and jitter from "copy guard" video tapes when playing through large screen projectors or on another VTR. Simple to use, just adjust the lock control for a stable picture. Once the control is set, the tape will play all the way through without further adjustments. Includes 12V power supply.

VS-125 Video Stabilizer wired \$54.95

SIMPLE SIMON VIDEO SWITCHING BOX



Model VSB-300

The
Affordable
Video
Control Center!

Excellent in isolation and no loss routing system. Simple Simons VSB-300 Video Switching Box enables you to bring a variety of video components together for easy viewing/dubbing. Also you gain the ability to record one channel while viewing another. Unit includes two F-type quick connector ended cables.


VSB-300 Video Switching Box wired . . . \$19.95

SIMPLE SIMON ELECTRONIC KITS, Inc.

7 + 11 SWD PARTS KITS

MITSUMI VARACTOR UHF TUNER Model UES-A56F \$34.95

Freq. Range UHF470 - 889MHz
Antenna Input 75 ohms
Channels 14-83 Output Channel 3




KIT NO	PART NO	DESCRIPTION	PRICE
1	VT1-SW	Varactor UHF Tuner, Model UES-A56F	\$34.95
2	CB1-SW	Printed Circuit Board, Pre-Drilled	18.95
3	TP7-SW	P.C.B. Potentiometers, 1-20K, 1-1K, and 5-10K ohms, 7-pieces	5.95
4	FR35-SW	Resistor Kit, 1/4 Watt, 5% Carbon Film, 32-pieces	4.95
5	PT1-SW	Power Transformer, PRI-117VAC, SEC-24VAC, 250ma	6.95
6	PP2-SW	Panel Mount Potentiometers and Knobs, 1-1KBT and 1-5KAT w/Switch	5.95
7	SS14-SW	IC's 7-pcs. Diodes 4-pcs. Regulators 2-pcs Heat Sink 1-piece	29.95
8	CE9-SW	Electrolytic Capacitor Kit, 9-pieces	5.95
9	CC33-SW	Ceramic Disk Capacitor Kit, 50 W.V., 33-pieces	7.95
10	CT-SW	Variable Ceramic Trimmer Capacitor Kit, 5-65pfd, 6-pieces	5.95
11	L4-SW	Coil Kit, 18mhs 2-pieces, 22uhs 1-piece (prewound inductors) and 1 T37-12 Ferrite Torroid Core with 3 ft. of #26 wire	5.00
12	ICS-SW	I.C. Sockets, Tin Inlay, 8-pin 5-pieces and 14-pin 2-pieces	1.95
13	SR-SW	Speaker, 4x6" Oval and Prepunched Wood Enclosure	14.95
14	MISC-SW	Misc. Parts Kit Includes Hardware, (6/32, 8/32 Nuts, 8 Bolts), Hookup Wire, Ant. Terms: DPDT Ant. Switch, Fuse, Fuseholder, etc.	9.95
When Ordering All Items, (1 thru 14), Total Price			139.95

UHF ANTENNAS and ACCESSORIES

ZYZX

VHF-UHF WIDEBAND ANTENNA AMPLIFIER

MODEL ALL-1
50 MHz — 900 MHz
12 dB GAIN ± 0.5dB



A Revolutionary New One Stage HYBRID IC Broadband Amplifier

This unit is not available anywhere else in the world. One unit serves many purposes and is available in Kit or Assembled form. Ideal for outdoor or indoor use. Input-output impedance is 75 ohms. Amplifier includes separate co-ax feed power supply. Easily assembled in 25 minutes. No coils, capacitors etc. to tune or adjust.

ALL-1 Complete Kit with power supply \$24.95

ALL-1 Wired and Tested with power supply \$34.95

Our New STVA 14.5 dB GAIN, 14 ELEMENT CORNER REFLECTOR YAGI ANTENNA



STVA-3 Yagi Antenna
14.5 dB, 75 ohm, Chan 60-68 . . . \$16.95

STVA-4 Yagi Antenna
14.5 dB, 75 ohm, Chan 44-52 . . . \$16.95



STVA-1 Yagi Antenna, 11.5 dB, 75 ohm, Chan. 42-54 . . . \$9.95

STVA-2 Yagi Antenna, 11.5 dB, 75 ohm, Chan. 20-28 . . . \$9.95

RG-59/U 75 ohm Low Loss Coax Cable \$12 p/ft

F-59 Coaxial Connectors, ea. \$0.39

MT-1 Special UHF 75-300 ohm Matching Transformer, ea. \$1.45

ALL-1 HYBRID IC Wideband VHF-UHF-FM Antenna Amplifier Kit \$24.95

ALL-1 HYBRID IC Wideband VHF-UHF-FM Ant. Amp. Assembled \$34.95

Available by Mail Order Only — Send Check or Money Order To:

SIMPLE SIMON ELECTRONIC KITS, Inc.

Calif. Orders: 3871 S. Valley View, Suite 12
Las Vegas, Nevada 89103
Tel: (702) 322-5273

All Other Orders: 11850 S. Hawthorne, Blvd.
Hawthorne, Calif. 90250
Tel: (213) 675-3347

Minimum Order: \$16.95. Add 10% Shipping and Handling on orders under \$40.00. For orders over \$40.00, add 5%. Minimum Shipping and Handling \$2.00. Catalog \$1.00. — VISA and Mastercard Acceptable —

power control

boat, for example) within a prescribed area, and they offer a challenge to a serious experimenter.

Safety Precautions. Modification of existing electrical wiring is regulated by one or more governmental bodies; therefore, any such work must be performed by trained and licensed personnel.

When constructing electrical interfaces, complete power-line isolation must be observed in the interest of safety. Devices that handle high power must be adequately rated, all possible failure modes must be anticipated, and the design refined to "fail safe." Do not overlook failures external to the control system. For example, if the power line fails and then returns, will the system run amok without being manually reset? Any remote control system must have provisions for checking its integrity.

Keep in mind that conventional 117-volt household electrical power can injure or kill if precautions are not taken. Fuses or circuit breakers and a ground-fault interrupter (GFI) should be used. Such a device is connected between the device being controlled, the power lines and ground as shown in Fig. 11.

The two leads connecting power to the appliance are the "hot" and neutral, with the third wire connected to ground. The "hot" lead is energized with a voltage measured with respect to the neutral, while the neutral wire is maintained at essentially zero voltage with respect to ground. All load current is intended to flow from the hot wire, through the load, and back to the source via the neutral wire. No current, however small, should flow from either power line or the appliance to ground. If this does occur, since the ground lead is usually connected to the frame of the appliance, a possibly fatal voltage can be present between the frame and the ground. If a person completes the circuit between the now "hot" frame and earth ground, a serious reaction can take place. A GFI can detect this condition, and if it occurs, will immediately turn off the power to the appliance. Such a condition can occur (for example) in a household laundry room that uses an electric washer and/or dryer. These appliances usually have metal enclosures; and in many cases, the floor is cement and possibly damp (conductive to ground). If the metal enclosure is not grounded and a fault occurs, a possibly dangerous shock hazard exists for the person contacting the metal enclosure.

With the above considerations kept in mind, it is possible for the serious experimenter to design and construct a number of remote appliance controls that can save steps and time and bring his household into the electronic age. ♦

New LM-4. The 40-Channel Logic Monitor you hold in your hand.


Now, there's a unique new way to speed and simplify your work with complex digital circuits. By simultaneously monitoring up to 40 points in a logic system with a compact, easy-to-use instrument that's faster than a scope and safer than a voltmeter. It's our new multi-family LM-4. At our factory introductory price of \$199.00*, one of the best buys in logic today!

Simply slip its 40-pin IC test clip over your CMOS or TTL ROM, RAM, microprocessor or MSI/LSI chip and instantly see the logic state of each pin on a big, easy-to-read liquid crystal display.

But that's only the beginning. You can wire the LM-4 into a computer bus; fit it with two 16-pin test clips or sockets for comparing known good and questionable ICs; use it as a clip-on display for micros, minis and other computers during design, setup, testing, troubleshooting... there's no limit to the ways LM-4 can save you time and money!

Measuring just 5.9 x 3.2 x 1.2", the pocket-sized LM-4 comes with a 24" 40-conductor ribbon cable terminated in a 40-pin IC test clip, plus instructions/applications manual and high-impact carrying case. (An optional Universal Cable Kit is also available for special interfacing requirements, priced at \$75.00!)

So whatever the job—in design, production or service—simplify your testing with the power of 40-channel monitoring: Order your LM-4 today.



Call toll-free 1-800-243-6077
8:30AM-5PM EST, Mon-Fri

GLOBAL SPECIALTIES CORPORATION

70 Fulton Terr., New Haven, CT 06509 (203) 624-3103, TWX 710-465-1227.
OTHER OFFICES: San Francisco (415) 648-0611, TWX 910-372-7992.
Europe: Phone Saffron-Walden 0799-21682, TLX 817477.
Canada: Len Finkler Ltd., Downsview, Ontario.

*U.S. Resale only; price, specifications subject to change without notice.
© Copyright 1981 Global Specialties Corporation.

***FACTORY
INTRODUCTION SPECIAL:
ONLY \$199.00**



CIRCLE NO. 54 ON FREE INFORMATION CARD

www.americanradiohistory.com

Popular Electronics Tests

The Heathkit Model IO-4550 Dual-Trace Oscilloscope



ALL THE instruments we have tested so far have been commercial types that were factory wired and tested before sale. This month, however, we are trying a new tack.

Since many readers build kits, we wanted to see if a kit instrument could be built and aligned satisfactorily according to its construction manuals. The instrument selected and reviewed here was the Heathkit Model IO-4550 10-MHz Dual-Trace Oscilloscope. It's designed for TV service and for modest circuit-design work.

The kit was assembled in accordance with the assembly manual and took approximately 27 hours to finish. We used a bench multimeter and function generator for calibration purposes, though a Heath oscilloscope calibrator kit is available separately for \$17.95. The scope measures approximately 7"H x 13"W x 19 1/4"D. Kit price is \$439.95.

General Description. The IO-4550 is a dual-trace, dc-to-10-MHz instrument. It has a nice, "modern" appearance. The two input channels and their controls are mounted on the left side of the cabinet adjacent to the CRT bezel, while all sweep controls are grouped on the right side of the enclosure. INTENSITY and FOCUS controls, along with the

CAL feedthrough, are located along the bottom of the front panel. The rear apron holds the power cord supports and the submerged ASTIGMATISM control. Four skidproof rubber feet are on the bottom. A carrying handle/tilt stand is provided.

All controls are clearly marked with color coding, where required, and are spaced sufficiently far apart to allow easy access to each without disturbing the adjacent control.

Each vertical channel has three controls: the AC/GND/DC input selector, an 11-step (arranged in a 1-2-5 sequence) VOLTS/CM selector rotary switch with a

coaxial VARIABLE vernier that permits adjustment of sensitivity from 10 mV/cm to 20 V/cm, and a vertical POSITION control that has a provision to turn the channel off. Each channel also has a recessed DC BAL adjustment. BNC input connectors are used for the signals applied to both channels.

The horizontal sweep TIME/CM selector switch has 19 steps from 0.2 s/cm to 200 ns/cm, also arranged in a 1-2-5 sequence. The coaxial-sweep VARIABLE control can be pulled out for $\times 5$ magnification to expand sweep speeds to 40 ns/cm. An EXT input is provided with a BNC connector. The TRIG LEVEL can be selected from EXT, Y1, Y2 or LINE—all either + or -. The TRIG MODE can be selected from DC, AC, or TV. The HORIZ POS control is coaxial with the TRIG MODE switch.

The INTENSITY control includes a PWR OFF position, which is indicated by a red LED adjacent to this control.

The 5" round CRT is enclosed by a square bezel having an 8 x 10-cm graticule. Complete specifications for the IO-4550 Oscilloscope are shown in the accompanying Table.

Comment. After assembly, the instrument was aligned in accordance with the operation manual supplied with the kit. Using our bench instruments, we



MANUFACTURER'S SPECIFICATIONS

VERTICAL

Deflection Factor:

Sensitivity: 10 mV/cm to 20 V/cm
Variable: Continuous between steps to approximately 60 V/cm
Accuracy: Within 3% (10° to 40° C)

Response:

DC Coupling: DC to 10 MHz (-3 dB) at 6 cm
AC Coupling: 2 Hz to 10 MHz (-3 dB) at 6 cm
Rise Time: 35 ns
Overshoot: Less than 5%

Input:

Impedance: 1 megohm shunted by 38 pF
Maximum: 400 V peak combined ac and dc

Modes:

Single: Y1 or Y2 selected by POSITION control
Dual: Chopped (200 kHz) or alternate automatically selected by TIME/CM switch

HORIZONTAL

Time Base:

Ramp: 0.2 s/cm to 200 ns/cm
Variable: Continuous between ranges to approximately 0.6 s/cm
Accuracy: Within 3% (20° to 30° C). 5% (10° to 40° C), referenced to 1 ms/cm at 25° C

External:

Sensitivity: 0.1 V/cm (approx.)
Impedance: 100 kilohms (approx.)
Polarity: Positive input causes right-hand deflection.
Frequency response: DC to 1 MHz (-3 dB)

TRIGGER

Internal:

Automatic: Adjustable over 10 div.
Normal: Adjustable over 10 div.
Slope Selection: + or -
Sensitivity/Bandwidth:
DC mode (auto/norm.):
1 or 1.5 cm, dc to 20 MHz
AC mode (auto/norm.):
1 or 1.5 cm, 20 Hz to 20 MHz
TV mode (auto/norm.):
1 cm, 20 Hz to 1 kHz
1.5 cm, 15 Hz to 2 kHz

External:

Automatic: Adjustable over 0.8 V
Normal: Adjustable over 0.8 V
Slope Selection: + or -
Sensitivity/Bandwidth:
DC mode (auto/norm.):
1.5 or 1.0 cm, dc to 20 MHz
AC mode (auto/norm.):
0.5 or 1.0 cm, 20 Hz to 20 MHz
TV mode (auto/norm.):
0.5 cm, 20 Hz to 1 kHz
1.0 cm, 20 Hz to 2 kHz

Impedance: 1 megohm shunted by 40 pF
X-Y

Y Channel: Same as vertical

X Channel: Same as vertical except response limited to 1 MHz

Phase Shift: Less than 8 degrees at 100 kHz

GENERAL

CRT:

Type: 5-inch round, mono-accelerator
Acceleration Potential: 1.8 kV reg.

Power:

Voltage: 105/130 AC or 210/260 AC switch selectable; 70 W at 120 V.

"tweaked" each circuit to the best of our ability, and some excellent "book" waveforms were seen.

The IO-4450 10-MHz, Dual-Trace Oscilloscope was tested by the Lockheed Electronics Instrumentation Laboratory (Plainfield, N.J.) against standards traceable to the National Bureau of Standards, and it was verified that the instrument met or exceeded its claimed specifications.

Since we knew that the Heath scope had passed its electrical tests with flying colors, we decided to test it against our bench scope, which had better specifications (and cost a few hundred dollars more than the Heath model). We expected our bench scope to outperform the Heath, and indeed it did. But it was not sufficiently better to be worth the extra hundreds of dollars.

The IO-4550 triggers very solidly on low-level, high-frequency waveforms with excellent sync lock. Sync was good to about 20 MHz. The TV triggering is also excellent, and the trace brightness is good even at very high writing speeds. Both focus and astigmatism are excellent, and there was no difficulty in observing the trace in detail with the X5 magnifier provided. We found the X-Y mode (used mostly in chroma alignment) on the Heath slightly better than

the more expensive "house" scope, primarily due to the small differential phase shift between the two channels.

The IO-4550 runs cool, even after many hours of use, and there were little or no observable changes with the normal variation of line voltage we encounter during our working day. Both magnetic and r-f shielding are good, and no trace distortion was seen when operating a ham and CB rig in close proximity to the scope.

Physically, the IO-4550 is easy to handle as each control "fits" the fingers, and each is clearly identified. Since the controls are properly grouped as to function, the hand automatically goes to the right control. Even our left-handed technician had no problem.

We have been using the Heath IO-4550 for almost a month, and the consensus of the users is that it is an excellent scope, and well worth the money and time put into the kit. When assembled and calibrated by Heath, the cost is \$670. So there's a \$230 savings right there. Moreover, kit assembly is simplified through the use of only four printed-circuit boards. So the project has proved that, if the kit is built, it is possible to have a superior instrument at a reasonable cost. —Les Solomon

CIRCLE NO. 104 ON FREE INFORMATION CARD

Lowest Prices on Personal Computers



800™ **\$749**
*Limited time only
ATARI® List \$1080

ATARI® 400 **\$359**

- Atari 830 Acoustic Modem \$159
- Atari 825 80 Col. Impt. Pkr. \$569
- Atari 16K Ram Mem. Mod. \$79
- Atari 410 Prog. Recorder \$69
- Atari 810 Disk Drive \$439



HEWLETT
PACKARD
HP-85
\$2189

NEW LOW PRICE!
New HP-125 CP/M™ based. **\$2,589**
HP-83 **\$1600**

HP-85 Accessories

- 5 1/4 Dual Master Disk Drive List \$2500 \$2025
- 5 1/4 Single Master Disk Drive List \$1500 \$1275
- HP-85 Application pacs standard List \$95 \$85
- Serial (RS232C) Interface Mod. List \$395 \$355
- GPIO Interface Module List \$495 \$389

NEW! HP-41CV with five times more memory

built in.
List \$325
\$249
HP-41C
List \$250
\$189

- HP-41CV Printer List \$385 \$289.00
- HP-41CV Quad Mem. \$83.95
- HP-41CV Card Reader \$167.95
- HP-12C \$127.00
- HP-11C \$115.00
- HP-33C \$74.95
- HP-34C \$117.95

Personal PCs systems
Box 1073
Syracuse, N.Y. 13201


(800) 448-5259
In N.Y. call: (315) 475-6800

Prices do not include shipping by UPS.
All prices and offers subject to change without notice

CIRCLE NO. 36 ON FREE INFORMATION CARD

QUALITY parts at DISCOUNT PRICES!

B.S.R. FULLY AUTOMATIC RECORD CHANGER



- * FULL SIZE CHANGER
- * B.S.R. MODEL C198
- * CERAMIC CARTRIDGE
- * PLAYS 33, 45 & 78 RPM RECORDS...
- * CUE/PAUSE LEVER
- * ADJ. TRACKING FORCE

RECORD CHANGER DOES NOT INCLUDE BASE OR A.C. CORD.

\$25.00 EACH 4 for \$90.00

4PDT RELAY

- * 14 pin style
- * 3 amp contacts
- * 24 volt d.c. or 120 volt a.c. (30)
- * Used but fully tested

\$1.70 EACH


Specify coil voltage

LARGE QUANTITIES AVAILABLE

SOCKETS FOR RELAY 50¢ each

JOYSTICK

PRECISION DEVICE... CONTAINS 4 50K CENTER TAPPED ALPS POTS...



\$4.75 each

MINI SIZE BUZZERS


1/2 to 3 volts 75¢ ea WITH WIRE LEADS

1/2 to 3 volts 75¢ ea WITH PIN TERMINALS

3 to 7 volts WITH PIN TERMINALS 75¢ each

RFI/EMI FILTER

FOR NOISE SUPPRESSION C/D# APF540W RATED: 5 AMPS 250 VAC



\$3.50 each

MITSUMI MODEL UES-A55F VARACTOR UHF TUNER

FREQ. RANGE 470 - 889 MHz

ANTENNA INPUT 300 OHMS

\$25.00 each

10 for \$220.00


1000 MFD 25 VOLT 2 FOR \$1.00

FLAT LEVER MINI-TOGGLE S.P.D.T. (ON-ON)

5 AMP @ 120 VAC CSK # 7105

\$1.00 EACH

10 for \$8.50
100 for \$75.00



SEND FOR NEW 1982 Free! 40 PAGE CATALOG Free!

COMPUTER GRADE CAPACITOR

1700 mfd. 150VDC \$2.00
2 1/2" DIA X 4 3/4" HIGH
3,600 mfd. 40VDC \$1.00
1 3/8" DIA. X 3" HI

6,400 mfd. 60VDC \$2.50
1 3/8" DIA. X 4 1/4"

12,000 mfd. 40VDC \$3.00
2" DIA X 4 1/4" HIGH

18,000 mfd. 75VDC \$4.00
2 1/2" DIA X 4 1/2" HIGH

20,000 mfd. 25VDC 2" DIA. X 2 1/2" HIGH \$2.00

22,000 mfd. 15VDC 2" DIA X 2 1/2" HIGH \$2.00

22,000 mfd. 40VDC 2" DIA. X 6" HIGH \$3.00

25,000 mfd. 75VDC \$4.50
2" DIA X 4 3/8" HIGH

45,000 mfd. 25VDC 2" DIA. X 4" HIGH \$3.50

72,000 mfd. 15VDC 2" DIA. X 4" HIGH \$3.50

CLAMPS TO FIT CAPACITORS 50¢ ea

L.E.D.'s

STANDARD JUMBO DIFFUSED

RED 10 FOR \$1.50
GREEN 10 FOR \$2.00
YELLOW 10 FOR \$2.00

FLASHER LED 5 VOLT OPERATION JUMBO SIZE

2 FOR \$1.70

BI POLAR LED 2 FOR \$1.70


SUB MINI LED

.079" X .098" 20 mA at 1.75v 10 FOR \$1.00
200 FOR \$18.00

QUANTITY PRICES AVAILABLE

CANNON XLRA-3-13 CONNECTOR

3 PRONG CHASSIS MOUNT CONNECTOR \$2.00 EACH
10 FOR \$19.00



SUPER SMALL PHOTO-FLASH

170 MFD 330 VOLT

1 1/4" x 7/8" 2 for \$1.50
10 for \$7.00

BLACK LIGHT (ULTRAVIOLET)

G.E. # F6T5BL \$2.50 each

TRANSFORMERS

120 volt primaries

6 VOLTS at 150 mA \$1.25
12 V.C.T. at 500mA \$2.50
16.5 V. at 3 AMPS \$6.50
18 VOLTS at 1 AMP \$4.50
25.2 VCT at 2.8 AMP \$5.50

2" DIA. 1/2VDC BUZZER SPECIAL! 50¢ each
10 for \$4.00
100 for \$35.00

2" ALLIGATOR CLIPS
7 clips for \$1.00
100 clips for \$12.00
500 clips for \$50.00

SPECIAL MRF 901 MICROWAVE TRANSISTOR \$2.50 EA.



ALL ELECTRONICS CORP.

905 S. Vermont Ave.
P.O. BOX 20406
Los Angeles, Calif. 90006
(213) 380-8000

Mon. - Fri. Saturday
9 AM - 5 PM 10 AM - 3 PM

TERMS

- * Quantities Limited
- * Min. Order \$10.00
- * Add \$ 2.50 Shipping U.S.A.
- * Calif. Res. Add 6%
- * Prompt Shipping

COMPUTER BITS

By Carl Warren

Extend Your Apple

EXPANDABILITY is the Apple microcomputer's forte. You can easily add a Z-80 microprocessor with Microsoft's Softcard. And a wide variety of 80-column cards, bus expansion hardware, and other enhancement products are readily available.

One company that offers much for the Apple is Mountain Computer, Inc. (Scotts Valley, CA). Should you want to add a clock, Mountain offers two options. The first, called simply, The Clock, costs \$350, fits into any available peripheral slot on the motherboard, and has its own on-board 4-day battery to keep time when the computer is turned off. The Clock can be used for more than just keeping time. By adjusting the interrupt frequency, the interval clock can be set from 0.1 ms to 33,554,432 seconds depending on the application.

If you are short on space and need more than a clock, you might consider the CPS Multifunction card. Priced at \$239, this card contains a clock, plus serial and parallel ports. It can be configured to handle the Epson MX-80 or Diablo 630 printer, a modem, and clock functions—all at the same time.

Besides hardware, Mountain provides a series of software packages that allow using the CPS card in the Apple environment with Pascal or CP/M. And like the clock card, all you have to do is plug it in. However, the CPS card doesn't work with Computer Stop's DoubleVision 80-column card under CP/M. That's because of a software conflict that isn't easily resolvable. However, all is not lost. You can use the card easily with Sup-R-Term, or the Videx video card, and (reportedly) with Wesper Peripheral's new Whizzard-80 card.

The Expansion Chassis. With only 8 card slots, you may quickly run out of space on a basic Apple. Mountain has done something for that with the Expansion Chassis. This \$750 package allows eight more slots and is easily connected via an adapter card and cable.

The adapter card can be plugged into any slot, but three is a logical choice since it gives easy availability to a rear opening in the Apple cabinet. The expansion chassis comes with appropriate

software hints to aid in using it under software control. The chassis doesn't just augment the Apple but allows another bank of eight slots for adding peripherals. However, plug-ins like the Softcard and video cards must reside in the main Apple. In addition, when the chassis is selected (either by a front-panel switch or software), the video card won't work; but in most cases this doesn't really cause a problem.

The expansion chassis is a good location for such products as: ROMPlus, priced at \$155; A/D + D/A card for \$350; and possibly even RAMPlus for \$189. The latter item boosts the Apple memory to 80K bytes and can reside either in the Apple itself or the expansion chassis.

Because of its unique architecture, the expansion chassis can be used with other systems that allow access to the bus signals. All that is necessary is to design a bus adapter.

Should you use the ROMPlus card, either in the expansion chassis or the basic Apple, there will be 12K bytes of ROM available for any home-designed applications. The chassis design supports either six 2316 or 2716 EPROMs, and can be set up so the programs are accessed when the Apple is turned on.


Interestingly, you can couple the ROMPlus with the CPS multifunction capabilities and have an automatic communication system. And, if you have an application requiring the gathering of analog data, an A/D + D/A board can be used. This board gives 16 channels on either side and can be used for spectrum analysis, remote data gathering, curve tracing, temperature sensing, and a host of other applications.

The only problem we encountered with software was with the previously mentioned conflict between the Doublevision card and CP/M. Not really a problem, but something you need to be aware of, is that the expansion chassis may cause RFI, specifically on TV channels 2 and 3. However, no other problems were noticed, and no interference to the disk or display operation was observed. The RFI source appears to be the flat cable connecting the expansion chassis to the Apple. This RFI can be

ANNOUNCING TWO NEW TERMINALS

Smart • Fast • Graphics • Matching Modem and \$295 Printer

Netronics announces a state of the art breakthrough in terminals, now at prices you can afford, you can go on-line with data-bank and computer phone-line services. It's all yours: "electronic newspapers," educational services, Dow Jones stock reports, games, recipes, personal computing with any level language, program exchanges, electronic bulletin boards... and more every day!!!



Netronics offers two new terminals, both feature a full 56 key/128 character typewriter style keyboard, baud rates to 19.2 kilobaud, a rugged steel cabinet and power supply. The simplest one, FASTERM-64, is a 16 line by 64 or 32 character per line unit, with a serial printer port for making hard copy of all incoming data, and optional provisions for block and special character graphics. The "smart" version, SMARTERM-80, features either 24 line by 80 characters per line or 16 by 40 characters per line. It offers on-screen editing with page-at-a-time printing, 12,000 pixel graphics, line graphics, absolute cursor addressing, underlining, reverse video, one-half intensity and much more... simply plug them into your computer or our phone modem and be on-line instantly. Use your TV set (RF modulator required) or our deluxe green-phosphor monitor pictured above. For hard copy just add our matched printer.

Price breakthrough!!! Own the FASTERM-64, a complete terminal kit, ready to plug in for just \$199.95 or order the SMARTERM-80 kit for just \$299.95. (both available wired and tested). Be on-line with the million-dollar computers and data services today... we even supply the necessary subscription forms.

More good news: All the components in our terminals are available separately (see coupon), so you buy only what you need!!!

FASTERM-64 DISPLAY FORMAT: 64 or 32 characters/line by 16 lines... 96 displayable ASCII characters (upper & lower case)... 8 baud rates: 150, 300, 600, 1200, 2400, 4800, 9600, 19,200, (switch sel)... LINE OUTPUT RS232C or 20 mA current loop... VIDEO OUTPUT: IV PIP (EIA RS-170)... CURSOR MODES: home & clear screen, erase to end of line, erase cursor line, cursor up & down, auto carriage return/line feed at end of line & auto scrolling... REVERSE VIDEO... BLINKING CURSOR... PARITY: off, even or odd... STOP BITS: 1, 5, 2... DATA BITS PER CHARACTER: 5, 6, 7 or 8... CHARACTER OUTPUT: 5 by 7 dot matrix in a 7 by 12 cell... PRINT OUTPUT: RS232C or 20 mA current loop... VIDEO OUTPUT: IV PIP (EIA RS-170)... CRYSTAL CONTROLLED... COMPLETE WITH POWER SUPPLY... OPTIONAL GRAPHICS MODE: Includes 34 Greek & math characters plus 30 special graphics characters... ASCII ENCODED KEYBOARD: 56 key/128 characters.

SMARTERM-80 DISPLAY FORMAT: 80 characters by 24 lines or 40 characters by 16 lines... 128 displayable ASCII characters (upper & lower case)... 8 baud rates: 110, 300, 600, 1200, 2400, 4800, 9600, 19,200... LINE OUTPUT: RS232C or 20 mA current loop... VIDEO OUTPUT: IV PIP (EIA RS-170)... EDITING FEATURES: insert/delete line, insert/delete character, forward/back tab... LINE OR PAGE TRANSMIT... PAGE PRINT FUNCTION... CURSOR POSITIONING: up, down, right, left, plus absolute cursor positioning with read back... VISUAL ATTRIBUTES: underline, blink, reverse video, half intensity, & blank... GRAPHICS: 12,000 pixel resolution block plus line graphics... ON-SCREEN PARITY INDICATOR... PARITY: off, even or odd... STOP BITS: 1-10 baud 2, all others 1... CHAR. OUTPUT: 7 by 11 character in a 9 by 12 cell... PRINTER OUTPUT: 60 or 50 Hz VERTICAL REFRESH... BLINKING BLOCK CURSOR... CRYSTAL CONTROLLED... 2K ON BOARD RAM... ASCII ENCODED KEYBOARD: 56 key/128 character... 4K ON BOARD ROM... COMPLETE WITH POWER SUPPLY.

TELEPHONE MODEM 103 O/A FULL DUPLEX, FCC APPROVED... DATA RATE: 300 baud... INTERFACE: RS232C and TTY... CONTROLS: talk/data switch (no need to connect and disconnect phone), on/off/answer/switch on rear panel... NO POWER SUPPLY REQUIRED.

ASCII KEYBOARD ASCII-3 56 KEY/128 CHARACTER ASCII ENCODED... UPPER & LOWER CASE... FULLY DEBOUNDED... 2 KEY ROLL-OVER... POS OR NEG LOGIC WITH POS STROBE... REQUIRES +5 & -12V DC (SUPPLIED FROM VIDEO BOARDS)... **PRINTER COMET 1** SERIAL I/O TO 9600 BAUD... 80 CHARACTER COLUMN (132 COMPRESSED)... 10" TRACTOR FEED... UPPER/LOWER CASE... INDUSTRY STANDARD RIBBONS... 4 CHARACTER SIZES... 9 BY 7 DOT MATRIX... BI-DIRECTIONAL PRINTING.



Continental U.S.A. Credit Card Buyers Outside Connecticut

CALL TOLL FREE 800-243-7428

To Order From Connecticut Or For Tech. Assist. Call (203) 354-9375

NETRONICS R&D LTD. Dept. PE

333 Litchfield Road, New Milford, CT 06776

Please send the items checked below:

- COMPLETE FASTERM-64 TERMINAL (includes FASTVID-64 video board ASCII-3 keyboard, steel cabinet and power supply) ... kit \$199.95 plus \$3 P&I ... wired & tested \$249.95 plus \$3 P&I ... graphics option: add \$19.95 to each of above
- COMPLETE SMARTERM-80 TERMINAL (includes SMARTVID-80 video board, ASCII-3 keyboard, steel cabinet and power supply) ... kit \$299.95 plus \$3 P&I ... wired and tested \$369.95 plus \$3 P&I
- FASTVID-64 VIDEO BOARD (requires +5 & -12V DC) ... kit \$99.95 plus \$3 P&I ... graphics option add \$19.95 ... wired & tested \$129.95 plus \$3 P&I ... graphics option add \$19.95
- SMARTVID-80 VIDEO BOARD (requires +5 & +/-12V DC) ... kit \$199.95 plus \$3 P&I ... wired & tested \$249.95 plus \$3 P&I
- DELUXE STEEL TERMINAL CABINET ... \$19.95 plus \$3 P&I
- ASCII-3 KEYBOARD (requires +5 & -12VDC) ... kit \$69.95 plus \$3 P&I ... wired and tested \$89.95 plus \$3 P&I
- POWER SUPPLY (powers ASCII-3 keyboard & video boards) ... kit only \$19.95 plus \$2 P&I
- ZENITH VIDEO MONITOR (high resolution green phosphor) ... wired & tested \$149.95 plus \$6 P&I
- TELEPHONE MODEM MODEL 103 O/A ... wired & tested \$189.95 plus \$3 P&I
- DOT MATRIX PRINTER Comet 1 ... wired & tested \$299.95 plus \$10 P&I
- RF MODULATOR MOD RF-1 ... kit only \$8.95 plus \$1 P&I
- 3FT-25 LEAD MODEM/TERMINAL OR PRINTER/TERMINAL CONNECTOR CABLE ... \$14.95 ea plus \$2 P&I

For Canadian orders, double the postage. Conn. res. add sales tax.

Total Enclosed \$

Personal Check Cashier's Check/Money Order

VISA MasterCard (Bank No.)

Acct. No. Exp. Date

Signature

Print Name

Address

City

State

Zip

FOR ONLY \$129.95 Learn Computing From The Ground Up

Build a Computer kit that grows with you, and can expand to 64k RAM, Microsoft BASIC, Text Editor/Assembler, Word Processor, Floppy Disks and more.

EXPLORER/85

Here's the low cost way to learn the fundamentals of computing, the all-important basics you'll need more and more as you advance in computer skills. For just \$129.95 you get the advanced design Explorer/85 motherboard, with all the features you need to learn how to write and use programs. And can grow into a system that is a match for any personal computer on the market. Look at these features: 8085 Central Processing Unit, the microprocessor "heart" of the Explorer/85. (Join the millions who will buy and use the 8080/8085 this year alone.) 8-bit plus one 6-bit input/output ports from which you can input and output your programs, as well as control exterior switches, relays, lights, etc. a cassette interface that lets you store and reload programs you've learned to write. deluxe 2,000 byte operating system/monitor makes it easy to learn computing in several important ways. It allows simpler, faster writing and entering of programs. It permits access by you to all parts of the system so you can check on the status of any point in the program. It allows tracing each program step by step, with provision for displaying all the contents of the CPU (registers, flags, etc.) and it does much more!

You get all this in the starting level (Level A) of the Explorer/85 for only \$129.95. Incredible! To use, just plug in your 8VDC power supply and terminal or keyboard/display — if you don't have them, see our special offers below.

Level A computer kit (Terminal Version) ... \$129.95 plus \$3 P&I

Level A kit (Hex Keypad/Display Version) ... \$129.95 plus \$3 P&I

LEVEL B — This "building block" converts the motherboard into a two-slot \$100 bus (industry standard) computer. Now you can plug in any of the hundreds of \$100 cards available.

Level B kit ... \$49.95 plus \$2 P&I

\$100 bus connectors (two required) ... \$4.85 each, postpaid.

LEVEL C — Add still more computing power, this "building block" means directly to the motherboard and expands the \$100 bus to six slots.

Level C kit ... \$39.95 plus \$2 P&I

\$100 bus connectors (five required) ... \$4.85 each, postpaid.

LEVEL D — When you reach the point in learning that requires more memory, we offer two choices: either add 4k of a memory directly on the motherboard, or add 16k of a bank of memory by means of a single \$100 card, our famous "JAWS".

Level D kit (CHECK ONE): 4k on-board ... \$49.95 plus \$2 P&I

16k \$100 "JAWS" ... \$149.95 plus \$2 P&I

4k \$100 "JAWS" ... \$24.95 plus \$2 P&I

16k \$100 "JAWS" ... \$299.95 plus \$2 P&I

LEVEL E — An important "building block," it activates the 8k ROM/EPROM space on the motherboard. Now just plug in our 8k Microsoft BASIC or your own custom programs.

Level E kit ... \$5.95 plus \$2 P&I

MICROSOFT BASIC — It's the language that allows you to talk English to your computer. It is available three ways:

8k cassette version of Microsoft BASIC (requires Level B and 12k of RAM; minimum, we suggest a 16k \$100 "JAWS" — see above) ... \$64.95 postpaid

8k ROM version of Microsoft BASIC (requires Level B & Level E and 4k RAM; just plug into your Level E sockets. We suggest either the 4k Level D RAM expansion or a 16k \$100 "JAWS" ... \$99.95 plus \$2 P&I)

Disk version of Microsoft BASIC (requires Level B, 32k of ROM, floppy disk controller, 8" floppy disk drive) ... \$325 postpaid

TEXT EDITOR/ASSEMBLER — The editor/assembler is a software tool (a program) designed to simplify the task of writing programs. As your programs become longer and more complex, the assembler can save you many hours of programming time. This software includes an editor program that enters the programs you write, makes changes and saves the programs on cassettes. The assembler performs the clerical task of translating symbolic code into the computer-readable object code. The editor/assembler program is available either in cassette or a ROM version.

Editor/Assembler (Cassette version, requires Level B) and 8k (no kit) ... \$5.95 plus \$2 P&I

Editor/Assembler (ROM version, supplied on an \$100 card; requires Level B and 4k RAM (min.) — we suggest either Level D or 16k "JAWS") ... \$99.95 plus \$2 P&I

8" FLOPPY DISK — A remarkable "building block" that adds 8" floppy disk when you need faster operation, more convenient program storage, perhaps a business application, and access to the literally thousands of programs and program languages available today. You simply plug them into your Explorer/85 disk system — it accepts all IBM-formatted 5 1/4" programs.

8" Floppy Disk Drive ... \$499.95 plus \$12 P&I

Floppy Controller Card ... \$199.95 plus \$2 P&I

Disk Drive Cabinet & Power Supply ... \$69.95 plus \$3 P&I

Drive Cables (set up for two drives) ... \$25.00 plus \$1.50 P&I

CP/M 2.2 Disk Operating System; includes Text Editor/Assembler, dynamic debugger, and other features that give your Explorer/85 access to thousands of existing CP/M-based programs. \$150.00 postpaid

NEED A POWER SUPPLY? Consider our AP-1. It can supply all the power you need for a fully expanded Explorer/85 (note: disk drives have their own power supply). Plus the AP-1 fits neatly into the attractive Explorer steel cabinet (see below).

AP-1 Power Supply kit (8V @ 5 amps) in deluxe steel cabinet ... \$39.95 plus \$2 P&I



1. Plug in Netronics' Hex Keypad/Display
2. Add Level B to convert to \$100
3. Add 4k RAM
4. Plug in Level E hex; accepts Microsoft BASIC or Editor/Assembler in ROM
5. Add two \$100 boards
6. Add your own custom circuits (prototyping area)
7. Connect terminal

a CRT monitor or a TV set (if you have an RF modulator)

Hex Keypad/Display kit ... \$69.95 plus \$2 P&I

ASCII Keyboard/Computer Terminal kit featuring a full 128 character set, 4k1 case, full cursor control, 75 nhm video output, convertible to baudot output, selectable baud rate, RS 232-C or 20 mA I/O, 32 or 64 character by 16 line format ... \$149.95 plus \$3 P&I

Steel Cabinet for ASCII Keyboard/Terminal ... \$19.95

RF Modulator kit (allows you to use your TV set as a monitor) ... \$8.95 postpaid

12" Video Monitor (10MHz bandwidth) ... \$139.95 plus \$5 P&I

Explorer/85 Steel Cabinet for the Explorer/85 ... \$48.95 plus \$3 P&I

Fan for cabinet ... \$15.00 plus \$1.50 P&I

ORDER A SPECIAL-PRICE EXPLORER/85 PAK — THERE'S ONE FOR EVERY NEED.

Beginner Pak (Save \$26.00) — You get Level A (Terminal Version) with Monitor Source Listing (\$25 value) AP-1, 5-amp power supply, Intel 8085 Users Manual ... (Reg. \$199.95) SPECIAL: \$169.95 plus \$3 P&I

Experimenter Pak (Save \$53.00) — You get Level A (Hex Keypad/Display Version) with Hex Keypad/Display Intel 8085 User Manual, Level A Hex Monitor Source Listing, and AP-1, 5-amp power supply ... (Reg. \$279.95) SPECIAL: \$229.95 plus \$7 P&I

Special Microsoft BASIC Pak (Save \$103.00) — You get Level A (Terminal Version), B, D (4k RAM), E, 8k Microsoft in ROM, Intel 8085 User Manual, Level A Monitor Source Listing, and AP-1, 5-amp power supply ... (Reg. \$439.70) SPECIAL: \$329.95 plus \$7 P&I

Add a Rom-Version Text Editor/Assembler (Requires levels B and D or \$100 Memory) ... \$99.95 plus \$2 P&I

Starter 8" Disk System — Includes Level A, B floppy disk controller, one CDC 8" disk-drive, two drive cable, two \$100 connectors, just add your own power supplies, cabinets and hardware ... (Reg. \$1065.00) SPECIAL: \$999.95 plus \$13 P&I

32k Starter System ... \$1045.95 plus \$13 P&I

4k Starter System ... \$1095.95 plus \$13 P&I

64k Starter System ... \$1145.95 plus \$13 P&I

Add to any of above Explorer steel cabinet, AP-1 5-amp power supply, Level C with two \$100 connectors, disk drive cabinet and power supply, two sub-D connectors for connecting your printer and terminal ... (Reg. \$225.95) SPECIAL: \$199.95 plus \$13 P&I

Complete 64k System — Wired & Tested ... \$1650.00 plus \$26 P&I

Special! Complete Business Software Pak (Save \$625.00) — Includes CP/M 2.2 Microsoft BASIC, General Ledger, Accounts Receivable, Accounts Payable, Payroll Package ... (Reg. \$1325) SPECIAL: \$699.95 postpaid.

*P&I stands for "postage & insurance." For Canadian or des. double this amount.

Continental Credit Card Buyers Outside Connecticut:

TO ORDER
Call Toll Free:
800-243-7428

To Order From Connecticut, or For Technical Assistance, Call (203) 354-9375

CP/M is a reg. trademark of Digital Research

★ (Clip and mail entire ad) ★

SEND ME THE ITEMS CHECKED ABOVE
Total Enclosed (Conn. Residents add sales tax) \$

Paid by: Personal Check Cashier's Check/Money Order

VISA MASTER CARD (Bank No.)

Acct. No. Exp. Date

Signature

Print Name

Address

City

State Zip

NETRONICS Research & Development Ltd.
333 Litchfield Road, New Milford, CT 06776

damped by wrapping the cable with aluminum foil and grounding one end. We recommend using grounded three-wire power line to ensure proper system operation. We found that interference increased to where it did affect the CRT display when operating with a floating ground.

Other Software Systems. Some other software worth your attention comes from Datamost, 19273 Kenya St., Northridge, CA 91326 (213-366-7160). This software company supplies, for \$29.95 each, Thief and Snack Attack. The first is very much like the old game of Robots, but with some interesting twists—it lets you fight back. For those of you hooked on the famous arcade game Pacman, there is Snack Attack. The idea is to eat as many gumdrops as you can and avoid the guards. The action is very fast and it's a hard game to win.

Along the same line is a really classy program called Olympic Decathlon, from Microsoft Consumer Products. Based on the Olympic track-and-field events, the under-\$30 game uses both keyboard and game controls to let you try to win the Decathlon. What makes this package exciting is its full use of Apple's graphics and sound effects. Decathlon begins by presenting the Olympic rings and theme music. Then you're off after that elusive gold medal.

Should your Apple applications be more business oriented, consider Software Publishing Corporation's Personal Filing System (PFS) and Report. Both of these products are under \$100, and allow data handling as it suits you best. The PFS package lets you design a blank form and enter data in any way you desire. In addition, you can retrieve any data in the file without needing a special key file.

The Report program is similar in that you use a form that you design to specify how reported data is arranged. Unlike other report generators, Report adjusts the columns, and all you need to know is what data you want. Even if you purchase

an Apple III with a hard disk, Software Publishing has PFS and Report packages available, and they promise similar support for the new 68000-based Apple expected this June.

If you're using the Z-80 Softcard, and want to expand your Apple, I recommend (for starters) the CPS Multifunction card. This card, with the associated software, gives the functions necessary to access services such as Micronet.

Once you've got the system configured, sign into Micronet and request the CP/MIG users' group. You'll find CP/M programs for everything from games to complex calculations. A program you'll particularly want to look for is called Bye. It has several aliases, including H89/Bye, but all versions are basically the same.

What Bye does is allow your Apple (or any other CP/M-based machine) to be accessed from and then controlled by another system. We're currently using Bye on the Apple and other systems for this purpose, and have added XModem, which is also available on the Net. XModem is a program for uploading or downloading from a remote location.

To quickly see what's on a Micronet, run Access by typing R ACCESS. This program will tell you what's available and how to gain access. Remember that this software is public domain (i.e., free), except for the cost of using Micronet. You can reduce that time by getting SQ—the squeeze program. SQ reduces program size, thus conserving disk space and reducing download time.

Applefest/Boston. This is the second year for the Apple-Specific Computer Show (the largest of its kind in the country, with over two hundred displays and booths plus seminars and panel discussions). It will be held May 14 to 16 at Boston's Hynes Auditorium from 11 a.m. to 6 p.m. daily. Tickets are \$6 for one day or \$15 for all three days. For information, call or write National Computer Show, 824 Boylston St., Chestnut Hill, MA 02167. 617-739-2000. ♦

WHY PAY MORE!

PIONEER
Portable Stereo

\$139

SK-21



AKAI

Limited Quantities
Special Closeout

\$166

GX-F35



JENSEN

50 Watt System

\$217

T415 A60



Dual Fully Automatic
Including Cartridge

\$317

741Q-60



PIONEER

3 Heads with Dolby

\$419

CT9R



MAGNAVOX

V.H.S. 6 Hr. Programmable

\$499

8310



TOLL FREE 800-356-9514 Weekdays 9-9
Saturdays 9-5

Over 100 Brands like:

Technics	Maxell	Sony	Cerwin	Acutex
Pioneer	Empire	Teac	Vega	Craig
Marantz	Altec	Akai	Onkyo	Scotch
Kenwood	Sharp	Dual	Audio	B.I.C.
Sansui	Phillips	Koss	Technica	Stanton
Jensen	Shure	TDK	Clarion	Pickering

WDS

WISCONSIN DISCOUNT STEREO
2417 w. badger rd. madison, wi 53713

608-271-6889

SAVE!

MONEY • TIME • FREIGHT

QUALITY STEREO EQUIPMENT
AT LOWEST PRICES.

YOUR REQUEST FOR QUOTA-
TION RETURNED SAME DAY.

FACTORY SEALED CARTONS—
GUARANTEED AND INSURED.

SAVE ON NAME BRANDS LIKE:

PIONEER	JVC
KENWOOD	TEAC
MARANTZ	SANSUI
TECHNICS	SONY

AND MORE THAN 50 OTHERS
BUY THE MODERN WAY
BY MAIL—FROM

illinois audio


BANK CARDS ACCEPTED

12 East Delaware

Chicago, Illinois 60611

312-664-0020

800-621-8042

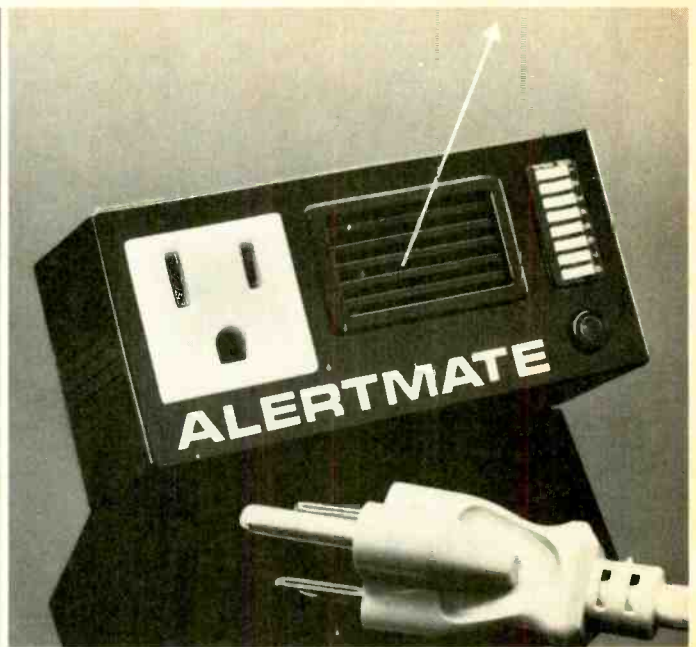

GET BURGLARS COMING AND GOING.

Every 10 seconds, a burglary takes place somewhere in the United States. There was a 20% rise in violent crime during 1980, the highest in 10 years.

Luckily, we have two unique products to help keep you from becoming another crime statistic.

1. Portable intrusion alarm

How can you protect your home or business without spending a fortune on a perimeter security system? How about when you're sleeping in a hotel room, an easy mark for the growing population of hotel burglars?

Simply place the pocket-sized SensAlert™ in any room, aiming the sensor towards doors or windows. As soon as an intruder enters, the movement triggers a piercing alarm.

At home, a SensAlert in every room protects you while you're in the house. It's different from (and less expensive than) perimeter security systems, which are turned on while you're away. Even place SensAlert at your backyard gate while you sunbathe; the tone tells you someone's arrived.

Carry a SensAlert in your briefcase or pocket when you travel, to protect the entire hotel room, not just the door.

There's no installation and no electric wire; SensAlert is battery-operated. It can be set to work either in the daytime or at night.

A free sign for your door knob is included with each order. It warns that the room is protected by SensAlert.

Put SensAlert in your desk drawer at the office. It will go off if anyone opens it while you're out.

A built-in light allows you to use SensAlert as an emergency flashlight. The alarm can also be triggered manually for a distress signal.

2. Plug-in theft protection

Valuable electrical equipment is at the top of a burglar's hit list. Typewriters, adding machines, TV's, stereos, tape recorders, power tools.

It only takes a few seconds to unplug and carry off a TV or typewriter. A quick, easy theft and resale. You're vulnerable at home and at the office.

Before Alertmate™, you had two choices: bolt appliances to furniture, or invest in a costly and complex security system.

Now, you can simply plug the Alertmate into the wall outlet, secure it with one screw, and plug in the appliance.

If a thief pulls out the plug, a piercing alarm goes off. And keeps going. A definite theft deterrent! The only way to deactivate the alarm is to plug the appliance back in, or dial the correct number code. The alarm will also ring if the cord is cut.

A free sticker is included. It states that the equipment is protected by Alertmate, and gives you a space to write in the name of an individual who has the combination.

When you want to move equipment

yourself, you simply deactivate the alarm with the combination. Protect each piece of expensive equipment inexpensively and easily with Alertmate.

30-day free trial

It could cost you over \$1,000 to install security systems giving you the same amount of protection as SensAlert and Alertmate.

1. Alertmate, the plug-in alarm for valuable equipment, is only \$24.95 including the free sticker plus \$2.50 postage and handling.

2. SensAlert, the portable intrusion alarm with flashlight, soft-tone feature, and free door hanger, is \$39.95 plus \$2.50 postage and handling.

Order both at \$64.90 and pay the \$2.50 postage and handling only once: (Total: \$67.40) Batteries not included. Credit card holders: use our toll free number.

Order Toll Free:
(800) 423-6383

In California: (800) 352-6207

**SUNSHINE
EXPRESS**

4357 Chase Avenue
Los Angeles, CA 90066

© Copyright 1981 Sunshine Express



Digital Multimeter

The Drake DM2350 Digital Multimeter is a convenient, small handheld liquid crystal display meter ideal for the serviceman or hobbyist. This 3 1/2 digit meter is auto-ranging, auto-zeroing, has polarity indication, and an over-range warning signal. Battery life is greater than 300 hours with a "low battery" indicator. A continuity test sounds a signal when circuit resistance is less than 20 ohms. DC accuracy is a basic 0.8%.

Batteries, probes, 20 amp current shunt, spare fuse and soft carrying case all included at \$95.95

Add \$2.50 shipping and handling per order.

Send check with order and provide street address for UPS shipment. Ohio residents add Sales Tax. Charge card buyers may call toll free:

1-800-543-5613



DRAKE

In Ohio, or for information call:
1-513-866-2421

R. L. DRAKE COMPANY

540 Richard Street, Miamisburg, Ohio 45342

INSTITUTIONAL AND DEALER INQUIRIES INVITED
CIRCLE NO. 13 ON FREE INFORMATION CARD

AMAZING DEVICES

«((((PHASERS))))»

PPF-1 PHASER PAIN FIELD — This device recently developed and patented in our labs is being evaluated by law enforcement agencies for riot and crowd control. It is now available but soon will come under the jurisdiction of weapons and internal machine control making it unavailable to the public. The device is hand-held and looks like a BUCK ROGERS ray gun. It is hazardous if not used with discretion.

PPF-1 PLANS \$15.00

IPG-1 INVISIBLE PAIN FIELD GENERATOR — This amazing, simple hand-held device is about the size of a pack of cigarettes and generates a directional field of moderate to intensive pain in the lower part of the head up to a range of 50'. Device is simple and economical to make.

IPG-3 PLANS \$7.00 IPG-3K ALL PARTS \$44.50
IPG-30 ASSEMBLED & TESTED FOR ANIMAL CONTROL \$59.50

LASERS

RUBY LASER RAY PISTOL — Produces highly intense red beam, capable of burning. A hazardous device. PLANS, PARTS, SOURCES \$15.00

HIGH POWERED CARBON DIOXIDE BURNING AND CUTTING. Complete plans and all parts sources \$15.00

SOLID STATE IR 12 WATTS with built in power supply plans \$8.00 Complete kit with collimator \$93.50

POCKET LASER pulsed, visible red plans \$6.00
Complete kit \$39.50 Also complete plans and parts sources for RUBY, YAG, NEODYMIUM, HeNe ARGON, DYE, NITROGEN and many more lasers.

SECURITY

SNP-2 SNOOPER PHONE — Dial home or office phone while on vacation activating sensitive mike without phone ringing. Excellent property protection and intrusion device.

SNP2 PLANS \$7.00

SNP2K ALL PARTS \$49.50

SNP20 ASSEMBLED AND TESTED \$99.50

LONG RANGE XMTR PLANS \$7.00

SEE-IN-THE-DARK PLANS \$10.00

DIRECTIONAL SHOTGUN MIKE PLANS \$8.00

SUPER SENSITIVE PARABOLIC MIKE PLANS \$8.00

SOUND & TELEPHONE OPERATED TAPE RECORDER \$7.00

CATALOG ON PLANS, KITS & FINISHED UNITS \$1.00

Send check or money order to:

SCIENTIFIC SYSTEMS, Dept. Q1, Box 718
AMHERST, N.H. 03031

CIRCLE NO. 43 ON FREE INFORMATION CARD

COMPUTER SOURCES

Hardware

NiCad Adapters. Using a conventional AA-size rechargeable nickel-cadmium cell, this novel system has an adapter sleeve to emulate a C-cell in applications requiring such a cell size. The C-cell sleeve can be inserted within a D-cell plastic sleeve to create that size cell. Thus, a single AA cell can be used in many applications. Four sets of sleeves are \$12.95 including cells. Optional recharger for 2 or 4 AA, or one 9-volt battery is \$6.95. AA cells are \$1.99 each, and adapter sleeves are \$1.50 per C and D set. Add \$2 postage/handling. Address: Burton Products Corp., Drawer E, Coram, NY 11727 (Tel: 516-698-1272).

Disk Emulator. The Disk Emulator simulates a disk drive for the Apple II. Its 64K RAM card can be accessed via the DOS 3.3 LOAD, SAVE, OPEN, READ, WRITE, etc., commands in BASIC, or the RWTS of machine language. A pseudo SLOT/DRIVE number accesses the emulated drive, and the emulator will not interfere with the operation of a peripheral card installed in that slot. Since there are no motor, step, nybble, or search delays, the emulator is faster than the disk. A single 64K card can simulate 256 disk sectors (tracks 3 through 18), in half-disk mode, or two 64K cards simulate 32 disk sectors (tracks 3 through 34). The Disk Emulator will support up to six 64K RAM cards to provide 384K bytes of online storage organized as three 128K-byte disk drives. It can copy the contents of a floppy diskette, or load the emulated diskette into the floppy, within 18 seconds. The package contains two 64K RAM cards, Disk Emulator 2.1, and demo. \$700. Address: Great Lakes Digital Resources, POB 32-133, Detroit, MI 48232.

STD I/O, Timer, Counter. The STD-VI08 board features eight programmable I/O ports, with each of its 64 I/O lines individually programmable as input or output. 16 handshake lines permit high-speed data transfer. Four 16-bit timers range from 2 μ s to hours, automatic pulse output on I/O line, and interrupt-on-time out capabilities are provided. Four 16-bit event counters monitor incoming I/O without CPU intervention. Four programmable shift registers permit serial data to be sent/

POPULAR ELECTRONICS


comptique comptique comptique



Texas Instruments

Full Spectrum of Libraries, Pakettes, Computer Peripherals and Software, including the NEW TI LOGO

TI-5010 Hand/Print	49.95	TI-40	28.95
TI-5135 Pnmt/Disp	79.95	TI-54	39.95
TI-5120 Pnmt	59.95	TI-55 II	44.95
TI-5130 Pnmt/Disp	79.95	TI-Programmer	59.95
TI-5142 Pnmt/Disp	99.95	TI-57	39.95
Speak & Spell, Read	59.95	TI-58C	89.95
Speak & Math	59.95	TI-59	179.95
Touch & Tell	49.95	PC-100C	189.95
Bus Anal II	44.95	99/4A Computer	CALL
Invest Anal	48.95		
MBA	54.95		



Your **hp** HEWLETT PACKARD Headquarters

THE HP-85!



COMPLETE ENHANCEMENTS, PERIPHERALS AND ACCESSORIES

HP-67/97	CALL	HP-12C NEW Bus	CALL
HP-33C	79.95	HP-41/41CV	CALL
HP-34C	114.95	HP-85 Computer	CALL
HP-38C	114.95	HP-125 NEW	CALL
HP-11C NEW Sci	CALL	Computer	CALL

CASIO

VL TONE Musical/Calc	69.95
CA-90 Cal/Game Watch	59.95
F-100 Depth Tested Alarm Chrono	39.95
CP-10 Pocket Printer	69.95
Fx-3600P Prog Sci	39.95
Fx-7100 Sci	49.95

Also SHARP, CANON, TOSHIBA, MATTEL, PEARLCORDER, PULSE, TACH, GTE, CODE-A-PHONE, RECORD A CALL, ITT, OLYMPIA, BSR, SEIKO, PHONE CONTROLLER, MURAPHONE, AND MANY OTHERS. ALL AT GREAT PRICES!

EPSON MX-80 CALL
MX-100 CALL

F CHESS CHALLENGER 7 89.95
SENSORY CHESS 129.95

SHARP 5813 SCI PROGRAMMABLE 34.95
1182A PRINT/DISPLAY 74.95
TALKING CLOCK 79.95
EL-6200 DIG EXEC SEC 89.95

ATARI TOUCH THE FUTURE
ATARI 400 (16K) 297.95
ATARI 800 (32K) 769.95

(714) 549-7373
INFORMATION LINE

(800) 432-7066
TOLL FREE (Within CA)

(800) 854-0523
TOLL FREE (Outside CA)

WE WILL MEET OR BEAT ANY COMPETITOR'S ADVERTISED PRICE ON MOST ITEMS IF HE HAS THE MOSE ON HAND. VISA, MASTERCARD, MONEY ORDER, PERS. CK. 114 WRKG DAYS TO CLR. COD ACCEPTED MIN \$4.95 SHIPPING. U.S.A. AIR ON REQUEST. CAL. RES. ADD 6% SALES TX. ALL MOSE SUBJ. TO AVAIL. PRICES SUBJ. TO CHANGE. POPEL-MB2

MAIL & PHONE ORDERS ONLY

WRITE OR CALL FOR FREE CATALOG



PASADENA (213) 795-3007
MIDWILSHIRE (213) 385-7777
TARZANA (213) 705-7507
LAWNDALE (213) 370-5795
WEST LOS ANGELES (213) 8200423
BREA (714) 990-6600

3211 SO. HARBOR BLVD.
SANTA ANA, CA 92704
NEWPORT
(714) 549-7373

PROFESSIONAL DISCOUNTS

CIRCLE NO. 8 ON FREE INFORMATION CARD

www.americanradiohistory.com

received, and programmable interrupts avoid overhead of software polling. Switch-selectable addressing and standard 50-pin headers are provided. \$199. Address: Forethought Products, 87070 Dukhobar Rd., Eugene, OR 97402 (Tel: 503-485-8575).

Color Computer Buffer. The Colour Buffer for the TRS-80 Color Computer gains access to the system bus via the game card slot. It terminates in a standard 22/44 card edge connector and provides fully buffered address, data, and control lines. It allows the user to plug in a variety of peripherals including this firm's upcoming RAM cartridge, serial and parallel I/O port, and an EPROM Programmer. \$59.95. Address: TBH Canada, 67-3691 Albion Rd., Ottawa, Ontario, Canada K1T 1P2.

Apple Printing. Apple AP PAK contains an AUTO PLOT printer control card, interface cable, and software programs to allow the Apple to use all graphics capability of the 88 or 89 graphics printer. An unlimited number of character fonts, large headlines, intermixed fonts, and graphics dumps of hi-res files can be performed. It can also generate individualized computer letters. FONT WRITER allows text, bold, or italics in three heights and six widths besides the conventional ASCII fonts resident in the printer. LETTER POST facilitates generation of letters to specified names in Apple Post or Mailing List Database programs. Graphics can be inserted in text. \$145. Address: MPI, 4426, South Century Drive, Salt Lake City, UT 84107 (Tel: 801-263-3081).

Software

ELF Pilot. The easy-to-use Pilot language for the ELF II requires 4K memory plus ASCII and video boards. Besides the usual Pilot instructions, it includes UP (move text pointer up xxx lines), DOWN (move text pointer down xxx lines), BEGIN (move text pointer to start of text and display new line), END (end of text), INSERT (one line of text), KILL (delete xxx line of text and display new line), TYPE (type xxx lines), CLEAR (delete text), SAVE (dump to cassette), APPEND (inputs from cassette appends to current text), MONITOR (returns control to system), RUN (execute), and LENGTH (text buffer length). Cassette is \$19.95. Address: Netronics R&D Ltd., 333 Litchfield Rd., New Milford, CT 06776 (Tel: 800-243-7428).

Color Computer Instructor. The TRS-80 Color Computer Learning Lab (26-3153) includes eight ready-to-run cassettes and a 30-lesson text to allow the user to gradually develop programming skills. The first section introduces the computer, programming, and self-grading lessons. The second section in-


Fast, Accurate, Transparent, Quiet . . . Affordable



PHOENIX SYSTEMS 91 ELM STREET
MANCHESTER CONNECTICUT 06040 203-643-4484
CIRCLE NO. 38 ON FREE INFORMATION CARD

Kit Makes Electricity Cheap

NEW TECHNOLOGY

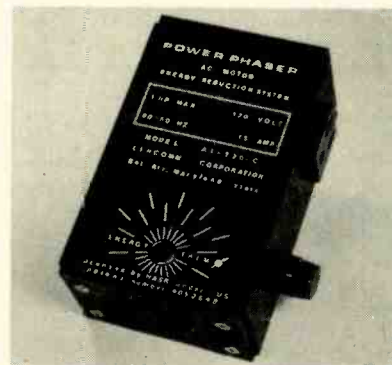

You'll be a little richer after building one of these...

Cut the cost of operating motor driven appliances and machinery AS MUCH AS 40%

\$36.⁹⁵ KIT

FACTORY WIRED \$59.95

- Reduces Your Electric Bill
- Save As Much As 40% on cost of operating Appliances & Machines
- Starts Paying For Itself as soon as it's installed
- Eligible for 15% Energy Tax Credit
- Appliances & Machines run quieter and cooler
- Protects Motors from Burn-out
- Simple Plug-in Installation
- Patented Solid State Electronics
- High Capacity 120 Volt 15 AMP, 1 HP Motor Rating
- Compact 3" x 5" x 2" Package
- Easy Assembly
- Typical Applications
 - Swimming Pool Filters
 - Furnace and Attic Fans
 - Clothes and Dishwashers
 - Freezers
 - Air Conditioners
 - Saws
 - Grinders
 - Any AC Motor Driven Device

USED BY A NATIONALLY ACCREDITED TECHNICAL SCHOOL IN THEIR TRAINING PROGRAM

Advanced SPACE AGE Technology now makes possible the ONLY electronic kit that **PAYS FOR ITSELF** and keeps on paying you a dividend by lowering your electric bill.

POWER PHASER is a patented, solid state analog mini-computer that constantly calculates the exact amount of power a motor requires to do work at any instant and automatically adjusts voltage to this precise level. Energy consumption is reduced, motor life is extended - **MONEY IS SAVED.**

PHONE ORDERS - Credit card or C.O.D. customers call 301-272-2860

Lincomm Corporation/Advanced Technology Systems

Dept. RE100/415 W. Bel Air Avenue, Aberdeen, Maryland 21001

Send _____ Factory Wired POWER PHASER(S)-\$59.95 ea.

Send _____ POWER PHASER KIT(S)-\$36.95 ea.

Include \$2.00 Shipping & Handling. Maryland Residents add 5% tax.

_____ Check or Money Order enclosed

Charge to: _____ Mastercard _____ Visa

Card No. _____ Expires _____

Bank No. (Above your name Mastercard only) _____


PLEASE PRINT CLEARLY

NAME _____ ADDRESS _____

CITY _____ STATE _____ ZIP _____

Free!

Edmund Scientific Catalog



4,000 Unique Items

Astronomy, Microscopy, Biofeedback, Weather, Alternate Energy, Binoculars, Optics, Magnets, Magnifiers, Tools, Unique Lighting, Lab Equipment, and much more. Over 4,000 unique and fascinating products. Send for our **FREE**, colorful 1982 Edmund Scientific Catalog. . . Today!

Rush me your free catalog!

Name

Address

City

State Zip

Clip And Mail Coupon Today To:
Edmund Scientific Co., Dept. 8211 AV06
Edscorp Bldg., Barrington, N.J. 08007

No. 3455 *1982 Edmund Scientific Co.

CALCULATOR SAVINGS

hp HEWLETT
PACKARD



HP-11C Slim Scientific \$107.95
HP-12C Slim Financial 117.95
HP-32E Scientific 42.95
HP-33C Programmable 68.95
HP-34C Advanced Program 114.95
HP-37E Financial 58.95
HP-38C Advanced Financial 114.95
HP-41C Alphamem Program 187.95
HP-41CV (Full Memory) 237.95
82104A Card Reader/41 164.95
82143A Printer/41 289.95
82153A Optical Wand/41 92.95
Dual Memory/41C 76.95
82180A Extended Function 62.95
82181A Extended Memory 62.95
HP-67 Card Programmable 287.95
HP-97 Desk Programmable 579.95
HP-83 Desk Computer	1495.00
HP-85 Desk Computer	1995.00
16K Memory Expansion	159.95
82901M Dual Disc Dr.	1999.00
82905A Dot Matrix Pr.	749.00
HP-125 Model 10 494.00

Call for Low Prices on all Accessories and New HP-IL Products

TI-55-II \$42.95	TI-99/4A Console \$367.95
TI-58C 89.95	Extended BASIC Module 76.95
TI-59 179.95	32K Memory Expansion 289.95
PC-100C 159.95	P-Code Peripheral for Pascal 299.95
LCD Prog 59.95	Call for low prices on all TI-99/4A products.	

Sharp	PC-1211 Handheld Computer, 1424 Steps \$149.95
	CE-121 Cassette Interface 29.95
	CE-122 Cassette Interface/Printer 109.95
	PC-1500 Advanced Handheld Computer 249.95
	CE-150 Cassette Int'l/4-color Printer-Plotter 199.95
	CE-151 4K Memory Expansion for PC-1500 64.95

Casio	FX-602P Slim Programmable, 512 Steps 99.95
	FX-702P Handheld Computer, 1690 Steps 159.95
	FA-2 Cassette Interface for 602/702 42.95
	FP-10 Printer for 602/702 79.95
	MT-31 Compact Musical Keyboard 134.95
	MT-40 Keyboard with Bass and Rhythms 159.95
	CT-403 Home Entertainment Keyboard 449.95
	CT-701 Advanced Electronic Organ with Memory 799.95
	CA-85 Calculator Alarm Chronograph Watch 34.95

Pearl-	S202 Microcassette Recorder, One Hour 79.95
corder	S802 Two-speed, Two Hour Recorder 99.95
	S801 Two-speed, Compact, Memory Rewind 139.95
	X-01 Ultra-thin All Electronic 199.95

Dilvetti	Praxis 35 Electronic Portable Typewriter \$49.95
----------	--	---------------

For faster delivery use cashier's check or money order. Add shipping 1% of your order (\$3.75 minimum) East of Missp Riv add \$1.50 CA res add 6% Subject to availability. USA and MC accepted. USA Prices

ORDER 800-421-5188 Outside
TOLL-FREE Information line (213) 633-3262 CA, AK, HI

tam's Tam's Inc, Dept. PE-3
INCORPORATED 14932 Garfield Ave.
Paramount, CA 90723
(213) 633-3262

CIRCLE NO. 46 ON FREE INFORMATION CARD

computers

volves games, formulas, music, sorting, art, and teaching. Each of the 10 lessons contains examples and experiments. The third section contains eight lessons covering programming guidelines that can be copied or modified, and take full advantage of color graphics and sound. It can be used with all versions of the TRS-80 Color Computer. \$49.95. Address: Radio Shack and participating dealers.

BASIC Tool. BPSXREF produces a formatted program listing and an alphabetized list of program variables and functions cross referenced to the line numbers where they are used. It is designed for Microsoft BASIC-80 5.x. The formatted listing allows for page titles, numbers, and skipped lines. A variety of options allow a simple listing or detailed cross-reference or a combination. It operates on ASCII formatted CP/M files as produced by MBASIC SAVE, with A option, or text editors such as ED, WORDMASTER, or MINCE. It requires a 48K CP/M system. \$124. Address: BPS, 82 Woods End Rd., Fairfield, CT 06430 (Tel: 203-254-1659).

6800/6809 Catalog. The White Catalog contains programs and hardware for 6800/6809 users including DOS Utilities 0 covering six transient commands, DOS Utilities 1 for the Smoke Signal DOS, FTRAN, a file transfer routine for CP/M, SCREDITOR II, a screen-oriented editor with 60 commands, MASTER, a multiple disk catalog indexing system, CONFORM, a form-controlled automatic I/O package, SCARF, a data transfer system, ADVENTURE, a game, and TREK-68, a real-time arcade-type game for DOS or FLEX systems. Address: UNITEK, POB 671, Emporia, VA 23847.

Pascal/Z. Version 4.0 of this firm's Pascal/Z compiler with overlays and SWAT (software analysis tool), an interactive symbolic debugger is now available. The Pascal/Z is pure Pascal optimized for speed, and yields object code that is both ROMable and re-entrant. Since no interpreter is needed, Pascal/Z runs 5-10 times faster than code run under interpretive pseudo-code implementations. The overlay capability allows programs larger than memory and uses a linking-loader. SWAT allows use of both absolute and conditional breakpoints, set a watch on variable or routine, display breakpoints and variables and statement/module numbers, display runtime requirements at any point, display the last 10 statements executed, and trace and display the procedure/function stack. The user can modify global and local variables including subscripts of arrays, fields of records and enumeration types. Address: Ithaca Intersystems Inc., 1650 Hanshaw Rd., Ithaca, NY 14850. ◇

NEW 23K PERSONAL COMPUTER

\$239

SPECIAL FACTORY SALE PRICE!!

You get this NEW APF IM-1 full size, extra featured computer: Includes a powerful 6800 motorola microprocessor, 14 thousand bytes ROM with a simplified LEVEL II BASIC built in, 9 thousand bytes user RAM, Color, Sound, Full 53 professional keyboard, two 10 key numeric pads, two controllers, high speed built in cassette that operates at 1200 baud, loads and reads 4 times faster than other computers, has built in speaker with volume control, microphone jack, and 3 digit counter, high resolution graphics 256 x 192 (LIKE APPLE). Text display is 16 lines, 32 characters. It has 8 colors. Will accept TAPE-DISK OR PLUG IN CARTRIDGES. Includes owners manual and BASIC language book. 90 days parts and labor warranty, UL listed, FCC approved. All this in a beautiful black and white CONSOLE CASE. Weighs 20 pounds, list price \$599.95.

15 DAY FREE TRIAL. Return within 15 days complete and undamaged for refund of purchase price.

DON'T MISS THIS FANTASTIC SALE!! Phone 312-382-5244 to order and get delivery in 7 days, or send a certified check, money order or personal check to: **Protecto Enterprises, Box 550, Barrington, Ill. 60010.** WE HONOR VISA AND MASTER CHARGE, ship C.O.D. Add \$15.00 for shipping, handling and insurance. Illinois residents ad 6% tax.

CIRCLE NO. 56 ON FREE INFORMATION CARD

SOLID-STATE DEVELOPMENTS

By Forrest M. Mims

Focus on CMOS

THANKS to new and better chip fabrication methods and design techniques, the consensus of many semiconductor manufacturers and users is that CMOS will soon become the most popular integrated circuit family. Conventional CMOS has a wide operating voltage range and is relatively immune to noise. Because of its very low current consumption, CMOS is almost universally used in digital watches and pocket calculators.

On the other hand, CMOS is slower than NMOS, its most important rival, and typically only a fourth as fast as TTL. Also, CMOS gates require more chip area and processing steps than those made using other MOS technologies. These drawbacks of CMOS technology have posed cost, speed and fabrication difficulties in the design of complex microprocessor and telecommunication chips.

These problems are beginning to disappear, however, with the new generation of CMOS chips. These chips have smaller gate dimensions and use clever design techniques. The smaller dimensions increase internal switching speeds, to, in some cases, those of TTL. Simpler circuitry also speeds up the new chips and makes possible a higher density of gates per chip.

Now that CMOS performance has been substantially upgraded, it's being considered for a wide range of large and very large scale integrated circuits. For example, a conventional 16K RAM made with NMOS technology is a power-hungry chip which consumes nearly a full watt while operating. The heat dissipated by such a chip almost reaches the thermal limit for inexpensive plastic DIPs. CMOS technology could provide a 16K RAM chip a standby power consumption of well under half a milliwatt!

An 8-Bit CMOS Microprocessor.

RCA has pioneered in CMOS technology. Its CDP1802 is an 8-bit microprocessor with a total instruction fetch-execute time as low as 2.5 microseconds. This chip forms the processing unit for RCA's CDP18S601 Microboard, a moderately priced computer develop-

ment system. More than forty CMOS expansion boards and hardware accessories have been designed to interface with the Microboard.

The CDP18S601 can, if desired, be powered by batteries. It can be programmed in BASIC and can be expanded to include a keyboard and CRT monitor. For more information about the Microboard and its accessories, write RCA (Solid State Division, Box 3200, Somerville, NJ 08876) or call RCA Microsystems Marketing toll-free (800-526-3862).

Netronics R&D Ltd. (333 Litchfield Road, New Milford, CT 06776) makes the Elf II, a microcomputer designed around the CDP1802 which is available for much less than the RCA Microboard. For details about this computer, write the company or read its ads in recent issues of this magazine.

A 32-Bit Microprocessor. Probably the most ambitious CMOS chip to date is the Bellmac-32, a full 32-bit single-chip microprocessor. This remarkable chip is the latest in a series of CMOS microprocessors developed at Bell Laboratories. Its instruction set is similar to that of a minicomputer which executes a million instructions per second.

The Bellmac-32 includes some 100,000 transistors on a chip having an area of only 1.45 square centimeters. Bell Labs plans to squeeze a new version of the Bellmac-32 onto a 1-square-centimeter chip by reducing the minimum fabrication dimension from 3.5 to 2.5 microns and by replacing space-consuming random and control logic with programmable logic arrays (PLAs).

One key to the Bellmac-32's 8-MHz operating speed is the so-called "twin-tub" structure shown in Fig. 1. In conventional CMOS either the n or p channel devices can be formed in appropriately doped regions which assume a tub-shaped profile. Twin-tub fabrication combines the advantages of the tub structure by allowing *both* n and p channel devices to be formed on the same substrate.

Another important feature of the Bellmac-32 is a form of circuitry called *domino-CMOS*. This new circuit ar-


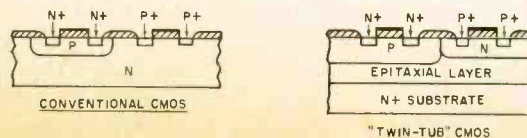


Fig. 1. Comparing traditional CMOS with the new "twin-tube" approach.

/// SILICON DIOXIDE INSULATION
■ ALUMINUM METALIZATION

MARCH SPECIAL

OKIDATA
MICROLINE
80A



\$329.00

PERSONAL COMPUTERS

NEC 7710 and 7730 Spinwriter	\$2345.00
NEC JB1201 M 12" Monitor	159.00
M & R Sup-R-Terminal	279.00
Okidata Microline-82A	499.00
Microsoft Soft Card (Z-80)	279.00
Diablo 630	1995.00
Televideo 912C	669.00
Televideo 920C	689.00
Televideo 950	929.00
CBM 8032 Computer	1149.00
CBM 8050 Disk Drive	1349.00
CBM VIC-20	269.00
Amdek 100G	159.00
Amdek Color - 113" Monitor	329.00
Qume Sprint 9/45 (Full Panel)	2295.00
Atari 400 16K	339.00
Atari 825 Printer	599.00
Atari 850 Interface	139.00
Atari 810 Disk Drive	429.00
Atari 800 16K	749.00
Epson MX-70	349.00
Epson MX-80	449.00
Epson MX-80 FT	549.00
Epson MX-100 FT	729.00

CALL TOLL FREE!
EAST COAST
1-800-556-7586
COMPUTER SHOPPING CENTER

12 Meeting St.
Cumberland, RI 02864
1-401-722-1027
TELEX 952106

WEST COAST
1-800-235-3581
COMPUTER SHOPPING CENTER

3533 Old Conejo Rd. #102
Newbury Park, CA 91320
1-805-499-3678
CA. TOLL FREE 1-800-322-1873
TELEX 182889

We Accept C.O.D.'s • Stock Shipments Same Day
or Next • No Surcharge for Credit Cards • All
Equipment Factory Fresh w/MFT Warranty • We
Carry the Complete Line of Personal Software •
Prices do not Reflect Shipping Charges
Sales Tax Where Applicable

COMPUTER SHOPPING CENTER

PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE

angement is responsible for *doubling* the speed of the Bellmac-32 over that which would have resulted from using standard circuitry.

Figure 2 shows a hypothetical domino-CMOS gate array. In operation, all the gate inputs and outputs go low when the clock signal is low. When the clock goes high, the logic signals present at the various inputs pass through the array a stage at a time in a manner reminiscent of a row of falling dominoes.

The Bellmac-32 is not commercially available, but it may one day become an important part of the Bell System's mas-

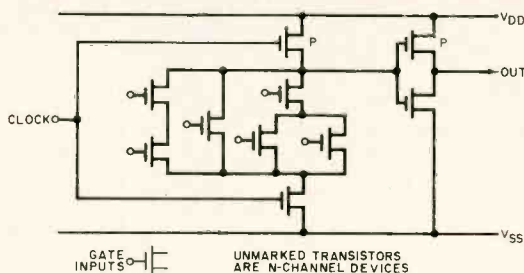


Fig. 2. Hypothetical domino-mode CMOS gate array.

sive network. For more information about this important new microprocessor, see the article written by several of its developers in the October 6, 1981 issue of *Electronics* (pp. 106-111). Or write Bell Telephone Laboratories (Murray Hill, NJ 07974). Bellmac-32 is a trademark of AT&T.

A CMOS Engine Controller. Though microprocessors are being used in various kinds of electronic ignition systems for automobiles, RCA thinks a relatively simple controller is a better approach. RCA selected CMOS for its new controller since it is far more tolerant of heat and electrical noise than conventional NMOS devices. This means the new controller can operate in the relatively harsh environment under the hood instead of behind the dash. The result is a considerable reduction in electrical wiring between the controller and its sensors and the various engine systems being controlled.

The new engine controller is called Rombic (*Read-only-memory-based ignition controller*). Rombic incorporates relatively standard CMOS construction in a two-chip set. The controller chip, which is designated TA11130, includes an on-board 5-bit analog-to-digital converter and a microprocessor-like arithmetic and logic unit.

A complete Rombic is formed by pairing the TA11130 with any standard CMOS 1K × 8-bit ROM as shown in Fig. 3. In operation, the TA11130 continually receives from engine sensors real-time engine speed and manifold pressure. Optimum spark timing information for all ranges of engine speed and pressure are stored in the ROM. The sensor data, when converted into digital form, specifies a ROM address containing the relevant timing data. This data is then processed by the arithmetic and logic unit in the TA11130 and sent through an appropriate driver circuit to the engine's ignition coil.

A major problem with electronic ignition systems is reliability. Some owners of 1981 Cadillacs with the 4-6-8 cylinder electronic control system have learned about the pitfalls of total electronic engine control the hard way. This highly sophisticated system uses twelve sensors to monitor temperature, throttle position, fuel flow, catalytic converter status and other parameters. The electronic control unit (ECU) then adjusts the fuel volume delivered to the fuel-injection system and decides how many

You've seen the rest... now try the best.



ACE.

All Circuit Evaluators
for solderless circuit
building and testing.

A P made the first solderless bread-board way back in 1968, and we still make them best. Because our experience taught us to avoid the pitfalls that can mean circuit errors. We do it by paying attention to details. Like using noncorrosive nickel-silver in our frankly superior terminals. And like sealing each contact cell with an adhesive-coated polyethylene foam that prevents short circuiting. That's why you can count on the reliability of our solderless boards when you specify any one of the 7 different ACE models that offer from 728 to 3648 tie points, and 2 to 36 buses.

A P made the first modern solderless breadboard, and we still make the best.

Call Toll Free 800-321-9668 for the name of the distributor nearest you. In Ohio, call collect (216) 354-2101.



A P PRODUCTS INCORPORATED
9450 Pineneedle Drive
P.O. Box 603
Mentor, Ohio 44060
(216) 354-2101
TWX: 810-425-2250

In Europe, contact A P PRODUCTS GmbH Baeumlesweg 21 • D-7031 Weil 1 • W. Germany

GET THE NEW GUIDE TO BUILDING ELECTRONICS PROJECTS!

If getting involved with electronics projects turns you on, get a copy of the new 1982 ELECTRONIC EXPERIMENTER'S HANDBOOK! The big new edition is filled with challenging projects for building practical, entertaining devices such as:

- NASA MOTOR CONTROLLER to save appliance power!
- AUDIO SOUND-EFFECTS MACHINE to liven up your tape recordings!
- AMPLIFIER CLIPPING INDICATOR for protecting your speakers from excess power!
- COMPUTER "CONTROL CENTER" that lets your small computer perform external operations!
- 55MPH "CRUISE ALERT" that warns you when you're speeding!
- ULTRASONIC SOUND DETECTOR that converts ultrasonic sounds to audio range!
- VIDEO ENHANCER to ensure tape copying quality!
- TRUE RMS VOLTMETER to measure true effective AC voltage instead of average!
- "WHITE SOUND" PROJECTOR to provide a soothing background for sleep or work!
- AM LOOP ANTENNA to extend AM reception with low-cost radio receivers!

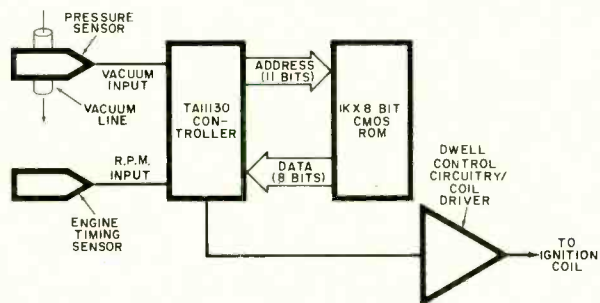


Fig. 3. RCA's Rombic automobile CMOS engine ignition control system.

cylinders (4, 6 or 8) are required for optimum fuel economy.

Cadillac's ECU is so sophisticated that the driver's foot controls a throttle transducer, not the fuel entering the carburetor. The system even records if the car travels in excess of 85 mph and whether it has been taken to a repair center within thirty engine starts following activation of a "Check Engine" warning lamp!

Rombic is considerably simpler than Cadillac's ECU. It has only two transducer requirements and it controls only the engine's timing. Furthermore, in the event of a problem, Rombic defaults and permits the engine to operate without its assistance.

RCA claims the two-chip Rombic can be purchased for as little as \$7 in volume. This compares to \$20 or more for more sophisticated microprocessor systems. For more information about Rombic, write RCA at the address above.

A CMOS Watch Chip. Most watch chips use CMOS fabrication because

other MOS families consume too much power. Though many CMOS clock and watch chips are available, space requirements limit this column to coverage of but one, Intersil's ICM7273. This six-function chip includes an on-chip oscillator, frequency divider, alarm register, segment decoders, voltage multiplier (for the liquid crystal display) and alarm driver. A watch can be assembled by adding a standard 32,768-Hz crystal, trimmer capacitor, two voltage-multiplier capacitors and a 3-volt liquid-crystal display. Several miniature switches, a 1.5-volt watch cell and an appropriate alarm transducer complete the watch.

Figure 4 is a simplified block diagram of the ICM7273. This highly complex circuit consumes a miniscule 3 microamperes when the power cell delivers 1.4 volts. Though you can buy the ICM7273 and similar CMOS watch chips separately, I suggest you first look into completely assembled watches or watch modules such as Radio Shack's PCIM-161 (catalog number 277-1005). The latter device includes easy access to the

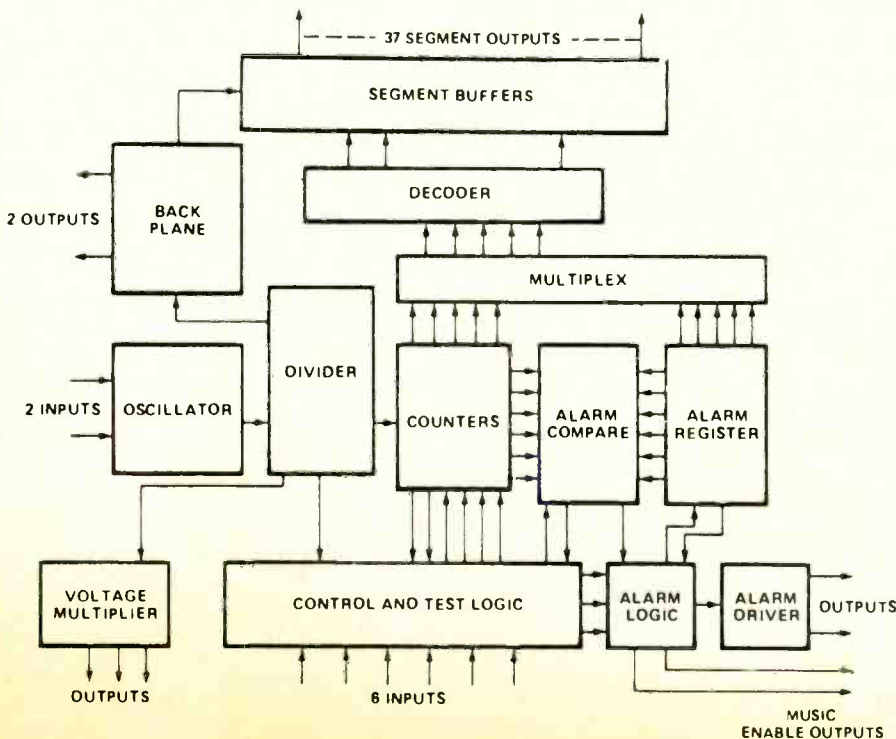


Fig. 4. Intersil's ICM7273 CMOS watch chip includes alarm and music enable.

—AND MUCH MORE:
Over 30 exciting, useful projects in all! Use the coupon to order your copy today!

From the editors of POPULAR ELECTRONICS!
ONLY \$2.95!



Electronic Experimenter's Handbook

P.O. Box 340, Bromall, PA 19008

YES! Send me the 1982 ELECTRONIC EXPERIMENTER'S HANDBOOK. Enclosed is \$3.95 (\$2.95* plus \$1.00 postage and handling). \$5.00 outside U.S.A.

Mr. _____
Mrs. _____
Ms. _____
(please print full name)
Address _____ Apt. _____
City _____
State/Zip _____

*Residents of CA, CO, DC, FL, IL, MA, MI, MO, NJ, NY, State, OH, SC, TN and VT add applicable sales tax.



FREE!
1982
DISCOUNT
ELECTRONICS
CATALOG

JOIN THE PAK!

Send for our Free catalog and become a member of our exclusive Pak. Our members receive Poly Paks' exciting catalog several times a year. We offer:

- Penny Sales, Free Premiums and Low, Low Prices on a wide variety of

Electronic Products such as Computer Peripherals, Integrated Circuits, Speakers, Audio Equipment, Rechargeable Batteries, Solar Products, Semiconductors, and much, much more! Take advantage of our 25 years as America's foremost Supplier of discount electronics.

Over 4.5 Million Satisfied Customers

RUSH ME YOUR FREE DISCOUNT CATALOG!

NAME: _____
ADDRESS: _____
CITY: _____
STATE: _____ ZIP: _____

CLIP AND MAIL COUPON TODAY TO:
POLY PAKS, INC.

P.O. BOX 942, PO-3
S. LYNNFIELD, MA. 01940 (617) 245-3828

CIRCLE NO. 39 ON FREE INFORMATION CARD

NEW INDOOR ACTIVE ANTENNA

Covers 300 KHz - 30 MHz.
For SWL, BCL, VLF DXers.

Rivals long wires

\$79.95
(+ \$4.00 shipping)



MFJ-1020 NEW INDOOR ACTIVE ANTENNA sits on your desk ready to listen to the world. Rivals, can often exceed, reception of outside long wire. Unique **Tuned** Active Antenna minimizes intermod, provides RF selectivity, reduces noise outside tuned band. Also use as preselector for external antenna. Covers 300 KHz to 30 MHz in five bands. Adjustable telescoping antenna. Controls: Tune, Band Selector. Gain, On-Off/Bypass. LED. FET, bipolar circuitry. Phono jack for external ant. 6x2x6 inches. 9.12 VDC or 9 V battery for portable use. 110 VAC with optional AC adapter, \$7.95.

Order from MFJ and try it. If not delighted, return within 30 days for refund (less shipping).

One year **unconditional** guarantee.

Order yours today. Call toll free 800-647-1800. Charge VISA, MC. Or mail check, money order.

CALL TOLL FREE ... 800-647-1800

MFJ Enterprises, Inc.
BOX 494, MISS. STATE, MS 39762

CIRCLE NO. 57 ON FREE INFORMATION CARD

solid-state developments

chip's control and output terminals and is easily interfaced to various alarms, solid-state switches and relays. If you wish to find out more details about Intersil's ICM7273, request a data sheet from an Intersil representative or write the company (10710 N. Tantau Avenue, Cupertino, CA 95014).

CMOS Calculators. Several years ago nearly all pocket calculators used NMOS technology and LED displays. Now many pocket calculators combine low-current CMOS processors with micro-power liquid-crystal displays.

Continuous memory is an important advantage of some CMOS calculators. Since power consumption of a CMOS memory chip is so low, it's possible to leave the memory turned on in a standby or idle mode while the processor chip and display are off. Continuous memory in a simple 4-function calculator is usually limited to the preservation of data in a single memory register. In more advanced CMOS calculators, continuous memory can store hundreds of program steps and the data in dozens of memory registers. Even the status of the calculator's operating condition when last turned on can be remembered.

Two recently introduced CMOS calculators, Hewlett-Packard's HP-11C and HP-12C, store all programs and data when the power switch is off. The HP-11C is designed primarily for scientific problem solving while the HP-12C is intended for financial calculations. Both will operate for about one year from a set of disposable button cells.

Other CMOS Chips. Many new telecommunications, electronic music, voice synthesizer and memory chips are being designed using CMOS technology. One interesting example is Commodore Semiconductor's new melody chip. This programmed tone generator is available in three versions which play either one or two tunes. In one of the dual tone versions, the user selects the tune to be played. In the other, the chip automatically alternates between tunes.

Tunes played by the melody chip last up to a full minute. "Happy Birthday" and other standard tunes are available but volume customers can have their own selections programmed into the chip's ROM. Price of the chip in 1000 quantities is 70¢ each. For more information, contact Commodore Semiconductor/Frontier Division (2955 Airway Avenue, Costa Mesa, CA 92626).

Finally, both National Semiconductor and Motorola are introducing a new family of CMOS logic chips which are functionally similar to standard TTL LS parts. The new family is designated 74HCXX. Speeds and pinouts will match those of equivalent LS devices. I predict these new chips will find widespread acceptance among hobbyists and experimenters as well as the engineering community. As for myself, I can hardly wait to try some in actual circuits. ♦

POPULAR ELECTRONICS

YOUR FORMULA FOR SUCCESS

Small Investment - Fast Pay Back - Big Profits

CASI™ Computer Portrait Systems are proven phenomenal money makers.



Being in the right place—at the right time—and getting in on the ground floor—has made people rich! It's happening again—right now—with **COMPUTER PORTRAITS**. In black and white and **VIBRANT LIVING COLOR**.

Imagine a business that's all cash and delivers profits in healthy gulps. No franchise fees or restrictions. Portable. Ready to go without expensive installations. Ideal full time, part time, or weekends. Perfect for absentee owners and families.

With this system, you "take" someone's picture with a TV camera and instantly print it out with a computer! Don't flinch about a TV camera and computer. You drive a car without knowing about engines. You switch on your TV without being an engineer. The same holds true for the Computer Portrait System. It's so push-button simple that a child can operate it. But the profits aren't kid stuff!

MAIL THE COUPON OR CALL: TOLL FREE 800-221-7660-Ext. P-32

CASI
COMPUTER AMUSEMENT SYSTEMS INC.

Send To: CASI, Computer Amusement Systems, Inc., Dept. P-32
915 Broadway, New York, N.Y. 10010

Name _____
Address _____
City _____ State _____ Zip _____
Tel. Home _____ Bus. _____

Corp. Headquarters:
915 Broadway,
New York, NY 10010

In N.Y. State Call Collect
212-929-8355
TWX: 220883 TAUR

Canadian residents only call toll free: 800-268-1950 or send coupon to
Computer Leisure Systems, 4035 Chesswood Dr., Downsview, Ontario M3J2R8

CIRCLE NO. 59 ON FREE INFORMATION CARD


HOBBY SCENE

Vehicular TTL

Q. I have a number of TTL circuits that I would like to use in my recreational vehicle. Can I use a 5-volt regulator with the 12-volt battery in the vehicle?—George Adamson, Wheeling, WV

A. You surely can since the 12 volts available in cars, trucks, recreational vehicles and most boats will easily drive a conventional 5-volt regulator circuit such as the one shown here. Only two

things to keep in mind. Don't run the vehicle battery down, and make sure that the load does not exceed the output level of the selected 5-volt regulator.




Audible Turn Signal

Q. I am one of those people who does not realize that the turn signal on my car is still operating long after I have made the turn. To avoid this, can you suggest an audible alarm system that will warn me that the turn signal is still blinking?—S. Shore, Brooklyn, NY

A. The audible alarm circuit shown here uses a Mallory SC1.5 Sonalert that operates at about 3500 Hz, and loud enough to be heard in a moving vehicle.

Connect one power lead to the right and left turn signal lamp circuits and the Sonalert minus terminal to chassis ground. Since the turn signal circuit is supplied with +12 volts when the turn switch is operated, the alarm sounds off. The diodes isolate each side from the other, while the resistors limit the alarm current. If you have a 6-volt system, reduce the value of the resistors. If you have a positive-ground vehicle, reverse the diodes and alarm.

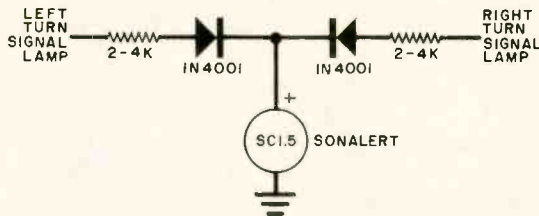


Elbow Switch

Q. I want to build a room light control system that does not use finger-operated wall switches. When one is carrying an armful of packages, it would be great to be able to turn on the lights with the elbow. Can I do this?—Arch Vallen, Montreal, Canada.

A. Most certainly. A simple touch-plate

circuit will work very well for this purpose. The sensor plate is a few inches square and connected to the input of a CMOS gate (almost any will work). The gate drives a 4013 retriggerable monostable whose output can be used to drive relays, SCRs, or other devices to control the lights. Sensitivity is determined by the size of the touch plate. Keep this circuit isolated from the ac lines!

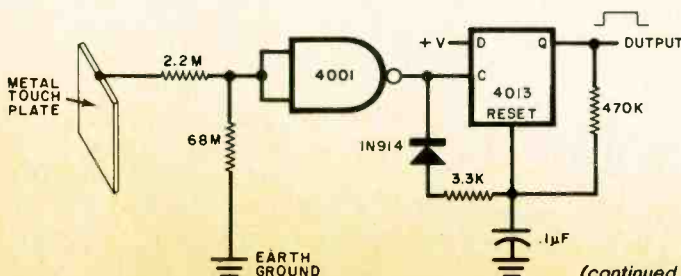

(continued on page 102)

Shelf Conscious?

Now you can organize
your copies of

Popular Electronics

Now your magazines can be a handsome addition to your decor, well organized, and easy to find, thanks to these durable library-quality cases or binders. They're made of luxury-look leatherette over high-quality binders board. And both styles are custom-designed for this or any magazine you save, with size, color, and imprint selected by the publisher. FREE transfer foil included for marking dates and volumes.



Magazine binders

hold a year's issues on individual snap-in rods, combining them into one volume. \$7.95 each; 3 for \$22.50; 6 for \$42.95. Mixed titles OK for quantity prices.



Open-back cases

store your issues for individual reference. \$6.95 each; 3 for \$19.75; 6 for \$37.50. Mixed titles OK for quantity prices.



CHARGE ORDERS ONLY—
for your convenience PHONE 24 HRS.
TOLL FREE 800-345-8112.
In Pennsylvania only 800-662-2444

USE THIS COUPON

Popular Electronics, P.O. Box 5120,
Philadelphia, PA 19141

Please send: Cases Binders
TITLE _____ QUANT. _____

Popular Electronics: _____
(Other): _____

ENCLOSED IS \$ _____ * Add \$1.00
per order for post. & handling. Outside USA
add \$2.50 per unit ordered. Send U.S.
funds only.

CHARGE (Min. \$10): VISA
 American Express Master Charge

Card # _____

Exp. Date _____

Signature _____

Print Name _____

Address _____

City/State/Zip _____

*Residents of CA, CO, DC, FL, IL, MA, MI, MO, NJ, NY
State, OH, SC, TN and VT add applicable sales tax.

J&R MUSIC WORLD

ORDER TOLL FREE: (800) 221-8180
IN NEW YORK: (212) 752-8600

RATED #1 FOR SERVICE & RELIABILITY

THIS MONTH'S SUPER SYSTEM

ONLY \$375 COMPLETE

SPECIALS VIDEO & AUDIO

<p>• VIDEO RECORDERS</p> <p>JVC HR-2200 (Port VHS) \$839</p> <p>SONY SL-2000 (Port Beta) \$879</p> <p>PANASONIC PV-4510 (Port VHS) \$995</p> <p>RCA VFT-450 (VHS Recorder) \$795</p> <p>SONY SL-5000 (Beta Recorder) \$649</p> <p>PANASONIC PV-1270 (VHS Recorder) \$779</p> <p>JVC HR-7300 (VHS Recorder) \$899</p>	<p>• HI-FI</p> <p>TECHNICS SL-10 (Turntable) \$384</p> <p>SANSUI 3900 Z (Receiver) \$249</p> <p>PIONEER 7 (Receiver) \$349</p> <p>PIONEER PLX-50 (Turntable) \$149</p> <p>TECHNICS RS-M 270 (Cassette Deck) \$309</p> <p>PIONEER SX-5 (Receiver) \$274</p>
<p>• COLOR T.V.</p> <p>SONY KV-1515 (15" Screen) \$399</p> <p>SONY KV-1746R (17" Remote) \$519</p> <p>SONY KV-1923 (19" Screen) \$499</p> <p>SHARP 19F-90 (19" Remote) \$469</p> <p>PANASONIC CT-9040 (19" Remote) \$834</p> <p>NOTE: Color TVs shipped Ref. Pack Collect.</p>	<p>• STEREO-TO-GO</p> <p>TOSHIBA HTS-1 99.90</p> <p>PANASONIC RS-1 (Cass Stereo) 99.90</p> <p>ALWA CS-1 (Cass Stereo/Rec) 155.90</p> <p>SONY TCS-310 (Cass Stereo) 134.90</p> <p>SONY Walkman II (Cass Stereo) 119.90</p>
<p>• HEADPHONES</p> <p>SONY MDR-3 (Micro) 24.90</p> <p>AUDIO TECHNICA ATH-5 19.00</p> <p>STANTON MICRO X 29.90</p> <p>PICKERING DA-4 29.90</p> <p>KOSS PRO-4/A 29.90</p>	<p>• CARTRIDGES</p> <p>SHURE V-15 Type IV 89.90</p> <p>SHURE M510 71.90</p> <p>SHURE M950 29.90</p> <p>PICKERING KSV-5000 34.90</p> <p>STANTON BR-10 39.90</p>
<p>• CAR STEREO</p> <p>IN-DASH CASSETTE</p> <p>MARANTZ CR-427 (Receiver) 259.90</p> <p>TRAC T-690 (Din) 89.90</p> <p>SANYO TC-18 (Din Tuning) 164.90</p> <p>AUDIOVOX AVA-780 (Din) 174.90</p> <p>PIONEER KE-2100 (AM/FM/CASS) 174.90</p> <p>JENSEN RE-512 (Din PB) 289.90</p> <p>PANASONIC CQ5-900 (CLOCK AM) 327.90</p>	<p>• CAR SPEAKERS</p> <p>PANASONIC EAR-920 (6x9 1/2 way) 99.90/Pr</p> <p>JENSEN J-1033 (6x9 Trax II) 94.90/PAIR</p> <p>JENSEN J-1037 (6x9 Coax II) 69.90/PAIR</p> <p>JENSEN J-1176 (4" Coax II) 53.90/PAIR</p> <p>PIONEER TS-168 (15" 3 Way) 79.90/PAIR</p> <p>AUDIOVOX CD-5120 (4" 2 Way) 34.90/Pr</p> <p>PIONEER TS-11 (5" Woofer/midbass) 189.90/PAIR</p> <p>PIONEER TS-696 (6x9 3 Way) 109.90/PAIR</p>
<p>• RADAR DETECTORS</p> <p>FUZZBUSTER III \$99</p> <p>FUZZBUSTER ELITE \$119</p> <p>FUZZBUSTER PRO-5 (Rem Wireless) \$134</p>	<p>• GAMES</p> <p>MATTEL Intellivision Game 229.95</p> <p>ALL MATTEL GAME CARTRIDGES 24.50</p> <p>ATARI VIDEO GAME 133.95</p> <p>ATARI ASTEROIDS 29.50</p> <p>ATARI SPACE INVADERS 29.50</p> <p>TI Speak & Spell 58.95</p> <p>TI Speak & Read 68.95</p> <p>TI Spelling B 33.95</p>
<p>• CALCULATORS</p> <p>CANON LC-611 (Clock Calc.) 23.90</p> <p>CANON P-7 D (Palm Printer) 53.90</p> <p>SHARP EL-1071S (Desk Printer) 58.90</p> <p>SHARP EL-8061 (Palm Printer) 27.90</p> <p>TI-5100 (Desk Calc.) 43.90</p> <p>TI-5135 (Desk Printer) 68.90</p> <p>TI-5102 (Printer Disp.) 98.90</p> <p>TI-5135 (Desk Printer) 43.90</p> <p>TI-533 (Scientific) 78.90</p> <p>PANASONIC JE-1435U (Palm Calc.) 28.90</p>	<p>• FIDELITY CHESS CHALLENGER</p> <p>Champion 268.95</p> <p>Sensory 108.95</p> <p>Voice Bridge 253.95</p> <p>Reversi 118.95</p>
<p>• ANSWERING MACHINES</p> <p>PANASONIC KXT-1530 (Rem w/Vox) 335</p> <p>RECORD-A-CALL 90 A (Change Message) 265</p> <p>SAVING TB-390A (VCR) 140</p> <p>CODE-A-PHONE 1550 (w/ Telephone) 229</p>	<p>• SCI-FI GAMES</p> <p>Chess Champion Mark V 328.95</p> <p>Chess Traveler 60.95</p> <p>Executive Chess 106.95</p>
<p>• WATCHES</p> <p>Game Time II (Games) 33.90</p> <p>CASIO CA-100 (Electronic Game) 39.90</p> <p>CASIO M-12 (Memory Watch) 44.90</p> <p>CASIO UC-50W (Quartz Watch) 39.90</p>	<p>• U.S. GAMES</p> <p>Super Football 43.95</p> <p>Air Drop 33.95</p> <p>Space Ship Battle 28.95</p>
<p>• SOUND ENHANCEMENT</p> <p>KOSS KAD5 (Din) 309.90</p> <p>AUC SOUNDMASTER IIC (12 Band EQ) 199.90</p> <p>NUMARK DM-1150 (Master) 154.90</p>	<p>• COMPUTERS</p> <p>ATARI 400 (Basic Computer) \$319</p> <p>ATARI 800 (Color Computer) \$759</p> <p>ATARI 810 (Disc Drive) \$409</p> <p>ATARI 825 (Printer) \$378</p> <p>EPSON MX-80 (Printer) \$499</p> <p>TI-PHC-006 (Home Computer) \$379</p> <p>TI-PHP-1800 (S Printer) \$398</p> <p>TI-PHP-1850 (Disk Drive) \$369</p>
<p>• TELEPHONES</p> <p>WEBCOR 727 (2 Phone) 34.90</p> <p>MURA MP-600 (W/Rem 600) 164.90</p> <p>WEBCOR 555 (Wireless 500) 159.90</p> <p>GTE FIFPHONE II 39.90</p>	<p>• CLOCK RADIOS</p> <p>SONY IC-12 (Cute Clock Dial) 33.90</p> <p>SONY IC-15 (AM/FM Dial) 42.90</p> <p>PANASONIC RC-64 (FM/AM/Dial) 31.90</p>

BLANK CASSETTES

• AUDIO MINIMUM ORDER: 12 AUDIO TAPES

<p>AMPEX Metal C-60 4.99</p> <p>BASF Pro II or III C-90 2.75</p> <p>FUJI F1 or F1 C-90 2.99</p> <p>SCOTCH Highlander C-90 3-Pak 2.99</p> <p>SCOTCH Mixer C-90 2.99</p> <p>SCOTCH Mixer II C-90 2-Pak 4.49</p> <p>MEMOREX Hi-Bias C-90 2.49</p> <p>SONY LW C-90 1.59</p> <p>SONY Rec C-90 2.79</p> <p>TDK HDG1 (Head Demagnetizer) 1.99</p> <p>TDK D-90 1.64</p> <p>TDK D-90 C 2.45</p> <p>TDK SA C-90 2.95</p> <p>TDK MA C-90 (Metal) 7.99</p> <p>TDK SA C-90 2.95</p> <p>TDK SA C-90 2.95</p> <p>MAXELL UDXL I or UDXL II C-60 4.25</p> <p>MAXELL UDXL I or UDXL II C-90 2.49</p> <p>MAXELL UD C-90 2.49</p> <p>MAXELL UD 35 90 1.99</p> <p>MAXELL WDM-110 (Wand Demag) 5.95</p> <p>MAXELL HE-44 (Cassette Demag) 16.95</p>	<p>• VIDEO</p> <p>WE CARRY VIDEO TAPES BY AMPEX, BASF, FUJI, JVC, MAXELL, MEMOREX, RASCAL, SCOTCH, SONY & TDK.</p> <p>ALL BETAL-750 10.95</p> <p>ALL BETAL-750 12.95</p> <p>ALL VHS-T120 (Export HGI) 14.95</p>
--	--

ADDITIONAL 5% DISCOUNT ON 100 OR MORE ASSORTED TAPES

WE STOCK B&W COLOR TV'S, VHS AND BETA VIDEO RECORDERS AND HOME MOVIES FROM ALL MAJOR HOLLYWOOD STUDIOS. SEND FOR FREE CATALOG

WE WILL MEET OR BEAT ANY COMPETITOR'S PRICE IF HE HAS THE MERCH ON HAND

HOW TO ORDER BY MAIL: FOR PROMPT AND COURTEOUS SHIPMENT, SEND MONEY ORDER (CERTIFIED CHECK, CASHIER'S CHECK, MASTERCARD, VISA, DISCOVER, CREDIT CARD, MONEY INTERBANK NO. expiration date and signature). **DO NOT SEND CASH** (PERSONAL AND BUSINESS CHECKS MUST CLEAR OUR BANK BEFORE PROCESSING, SHIPPING AND INSURANCE CHARGE 4.9% OF TOTAL ORDER WITH A \$3.99 MINIMUM CHARGE). NEW YORK STATE RESIDENTS MUST ADD SALES TAX. **WE SHIP TO CONTINENTAL U.S., ALASKA, HAWAII, PUERTO RICO AND CANADA ONLY.** ALL MERCHANDISE IS BRAND NEW, FACTORY FRESH AND 100% GUARANTEED.

23 PARK ROW, DEPT. PE, NEW YORK CITY 10038
SEND FOR FREE 280 PAGE AUDIO/VIDEO CATALOG


CIRCLE NO. 26 ON FREE INFORMATION CARD

hobby scene

In/Out Counting

Q. I am experimenting with ordinary 7490 TTL decade counters. Until now, I have been using a conventional clock circuit. Is there a simple way that I can build a circuit to detect and count the number of people entering a given area?—Jose Atranga, Isleta, NM


A. In the two circuits shown, the output can be coupled directly to the count input of the 7490. In (A), the counter will increment by one each time the photoresistor is darkened (this resistor should have a lit resistance of about 1000 to 3000 ohms and at least 100 kilohms when dark). In circuit (B), the opposite is true and one count is generated when the LDR is illuminated. The potentiometer can be used as a "sensitivity" control.

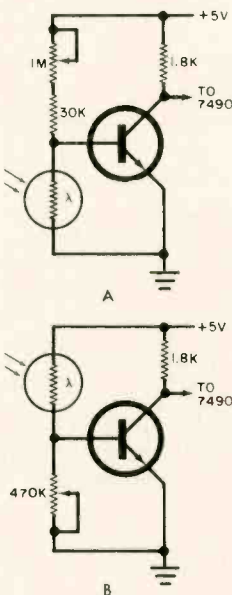

TTL Trigger

Q. How can I use the commercial power line to trigger TTL logic? I wish to sync the circuit to the 60-Hz power line.—Al Defson, Columbus, OH

A. The circuit shown here will condition a low-voltage ac signal (any power-line frequency from 25 Hz up) into a TTL-compatible signal. The 0.1- μ F capacitor reduces the effect of any line noise present, and this value can be changed as required. Keep the value of the input resistance as high as possible with circuit operation. Power may come from a calculator-type wall-mounted transformer or from the low-voltage tap of the power supply transformer.

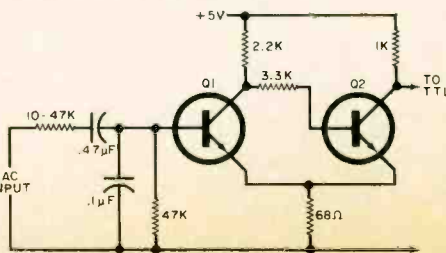

Power Line Filters



These filters protect any sensitive electronic equipment from power line transient damage and radio frequency interference. Both models offer common mode and differential mode surge suppression for power line "spikes". Rf interference is suppressed using both inductive and capacitive components. Ideal for computers, test equipment or TV.

LF2 a duplex outlet, 120V, 8 amps max ... \$39.95
LF6 three separately filtered duplex outlets, 120 V, total fused capacity 15 amps, power switch and indicator lamp ... \$59.95
Add \$2.50 shipping and handling per order.

Send check with order and provide street address for UPS shipment. Ohio residents add Sales Tax. Charge card buyers may call toll free:

1-800-543-5613




In Ohio, or for information call: 1-513-866-2421

R. L. DRAKE COMPANY
540 Richard Street, Miamisburg, Ohio 45342

INSTITUTIONAL AND DEALER INQUIRIES INVITED
CIRCLE NO. 11 ON FREE INFORMATION CARD

Put Professional Knowledge and a COLLEGE DEGREE in your Electronic Career through HOME STUDY

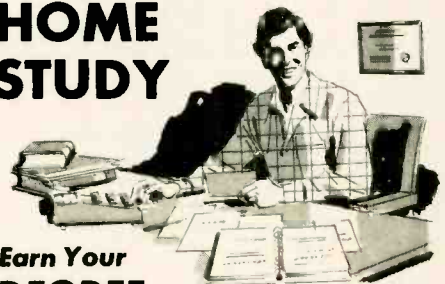

Earn Your DEGREE

No commuting to class. Study at your own pace, while continuing your present job. Learn from easy-to-understand lessons, with help from your home-study instructors whenever you need it.

In the Grantham electronics program, you first earn your A.S.E.T. degree, and then your B.S.E.T. These degrees are accredited by the Accrediting Commission of the National Home Study Council.

Our free bulletin gives full details of the home-study program, the degrees awarded, and the requirements for each degree. Write for *Bulletin ET-82*.

Grantham College of Engineering
2500 So. LaCienega Blvd.
Los Angeles, California 90034

EXPERIMENTER'S CORNER

By Forrest M. Mims

How to Protect Profitable Ideas —

Part 1. Adventures of an Idea Peddler

HAVE YOU devised a circuit or created a computer program that is both original and has money-earning potential? If so, you have probably wondered how you can profit from your idea while protecting it from the unscrupulous.

I've been down this road several times over the past ten years. Along the way I've dealt with \$200-per-hour patent attorneys, negotiated with powerful corporate officers, and watched my home office be searched from top to bottom by a team of well-dressed lawyers from one of the biggest corporations in America.

While I don't have all the answers, my adventures in the corridors of the U.S. Patent Office, plush executive offices, and the land of NIH (*Not Invented Here*) may provide some helpful hints for those of you who want to cash in on a valuable idea.

In this installment I shall relate just two of my half-dozen or so unfortunate experiences in this area. In a subsequent column I'll cover ways to protect your ideas and suggest some tips for making money from them.

The Marvelous Martian Music Machine. In 1973 Exar Integrated Systems, Inc. introduced the XR-2240 programmable timer and XR-2207 voltage-controlled oscillator. An application note by Exar engineer Alan B. Grebene described a very interesting pseudo-random tone synthesizer made from these two chips. The circuit, which is shown in Fig. 1, produces a repeatable sequence of 256 tones.

I asked Exar for permission to approach a nearby consumer electronics firm with a prototype version of the synthesizer I had assembled with chips Exar supplied. I added cadmium sulfide light-sensitive photocells to my version to cause the tones to appear even more random as the cells responded to light variations.

The president of the electronics firm offered me a 5-percent royalty on sales of the synthesizer in return for my assistance

in preparing it for market. The company eventually produced a few hundred synthesizers. Dubbed the "Marvelous Martian Music Machine," the units sold for about \$60 each. In spite of repeated requests, I never received a written confirmation of the royalty agreement. Nor did I receive any royalties.

Prior to the firm's subsequent bankruptcy, the president told me how a consumer electronics firm much larger than his had copied and begun to produce a color organ he once sold them. Though outraged by what had happened to him, he displayed no sympathy toward me.

The moral seems clear. Always secure a written agreement from a firm *before* helping them place your idea into production. But even that important step would not have guaranteed royalty payments in my case in view of the company's eventual fate. A second lesson, then, is: attempt to deal only with reliable, well-established companies.

Mims vs. Bell Laboratories. Dealing with a reliable firm was very much on my mind on May 29, 1973 when I mailed the patent department of Bell Telephone Laboratories a letter describing several applications for light emitting diodes which both emit *and* detect light. The genesis of these ideas occurred in 1962 when I discovered that a cadmium sulfide photocell, normally a detector of light, will *emit* greenish yellow light when connected to several kilovolts.

In 1966 I received, with a silicon solar cell, audio tones carried by the weak infrared emission from an identical current-pulsed solar cell. Figure 2 shows the circuit used in these experiments. This work led to experiments in the transmission of tones and voice back and forth between various kinds of LEDs.

There are several useful applications for components which double as sources and detectors of light. The most important is a fiber-optic voice or data link with a single dual-function emitter/detector at either end of the link. This permits two-

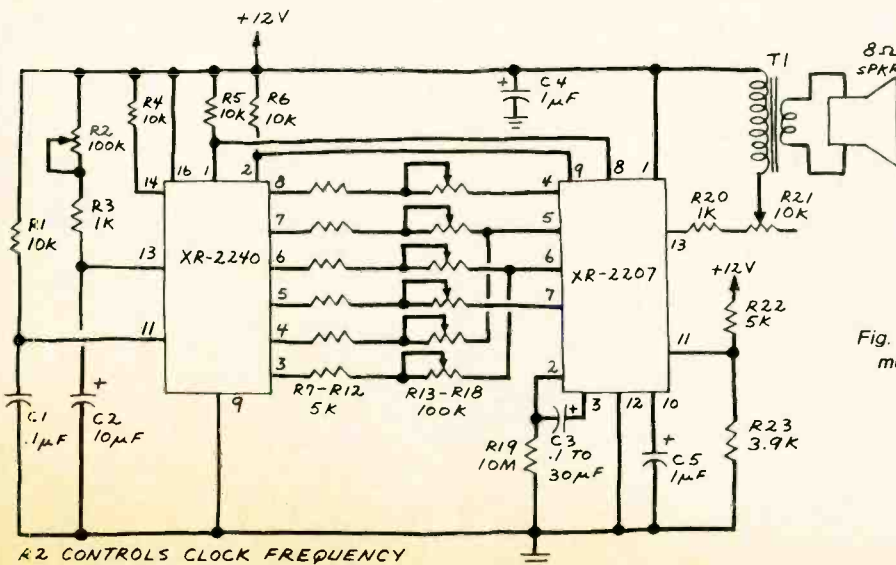


Fig. 1. Schematic diagram of the Exar musical tone sequence generator.

R2 CONTROLS CLOCK FREQUENCY
R21 CONTROLS SPEAKER AMPLITUDE
R13, R14, R15, R16, R17, R18 CONTROL INDIVIDUAL TONE FREQUENCIES
T1—1K TO 8Ω OUTPUT TRANSFORMER

way transmission over a single fiber as shown in Fig. 3.

Unable to afford a patent search, I conducted an extensive literature search at several libraries. The search revealed no similar developments. I then submitted the ideas to Bell Labs. What could be safer? Bell Labs is the most prestigious laboratory in the United States and maybe the world. Seven of its scientists have won Nobel Prizes. From there sprang the junction transistor, silicon solar cell, and the helium-neon laser. And Bell Labs is part of the Bell System, a massive utility whose assets of \$125.5 billion exceed the combined assets of Exxon, Mobil and General Motors!

William L. Keefauver, then Bell Labs' General Patent Attorney and now Vice President and General Counsel, agreed to have my suggestion reviewed if I would consent to

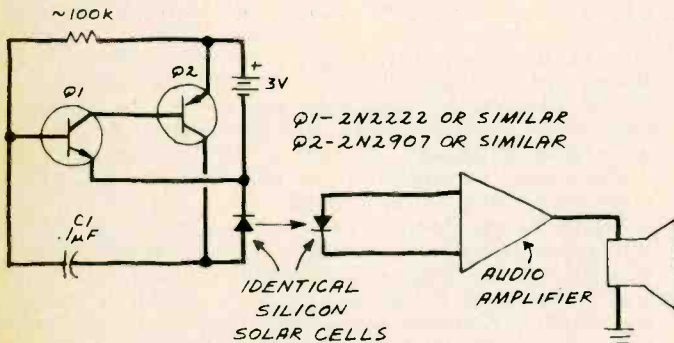


Fig. 2. Simple infrared tone transmission system.

an agreement of non-confidentiality that included the following provision:

"Should we want to make use of the suggestion, and if it is not already known to us and is not in the possession of the public and is original with the party submitting the suggestion . . . we would expect to discuss the matter with such party in an effort to arrive at an agreement that is mutually satisfactory."

I agreed and my suggestion letter was then reviewed by a member of the laboratory's technical staff and his supervisor. The scientist who reviewed my suggestions related in detail the different operating requirements of semiconductor detectors and emitters and concluded: "A single LED/detector device usually cannot be designed to meet these conflicting requirements." His supervisor then observed: ". . . I think it extremely unlikely that systems considerations would permit a single device to operate as both source and detector. Certainly all of our present thinking has been along the lines of separate fibers for transmitting and receiving."

The Bell Labs patent attorney assigned to my review then concluded in a letter to Mr. Keefauver: ". . . it appears that this outside proposal has negligible value to the Bell System, both at the present time and in the foreseeable future. Accordingly, we feel that acquisition of any rights in this proposal is *not* warranted."

At the time I was unaware of the in-house review process given outside ideas by Bell Labs. I was simply informed by Mr. Keefauver that the letter disclosing my ideas did ". . . not contain any novel features of sufficient interest to us at the present time to warrant our acquiring rights thereunder."

I clearly recall the sinking feeling which accompanied the receipt of this rejection. I remained convinced that the idea had merit. Since I had disclosed the idea in a book published in March 1973 ("Light Emitting Diodes," Howard W. Sams & Co., Inc.), the law provided a one year grace period in which to file a patent application. But my limited income as a relatively new freelance writer was insufficient to finance a patent search, much less a complete patent application.

After the rejection from Bell Labs, I described in an article for POPULAR ELECTRONICS ("Communicate Over Light Beams with the First Single-LED Transceiver," March 1974) construction details for a two-way infrared communicator that used a single GaAs:Si LED as a dual-function emitter-detector. The system could be used through the air or with an

optical fiber. The article concluded: "The fiber-optic mode of operation is a precursor of what telephone systems of the future are likely to resemble."

I continued to write about dual-function emitter-detectors in this and other publications after 1973, all the while fully convinced the idea had practical merit. You can imagine my surprise upon learning in November 1978 that Bell Labs had developed a dual-function emitter-detector! According to the press release, the "new device" doubled as a detector and light source, thus ". . . greatly simplifying the problem of coupling separate detector and transmitter devices to the same end of a hair-thin fiber."

Bell Labs used this diode in a telephone powered by light sent along a glass fiber. The diode converted the light into electrical power for operating the phone and both received and transmitted voice signals. The phone and its diode received widespread press coverage in 1979.

Electronics magazine reported ". . . the new phone could establish AT&T as the No. 1 provider of wideband services to home and industry such as color television, data and computer services, and electronic mail" (October 25, 1979). Business Week described the new phone as ". . . so radically different it may eventually transform American Telephone and Telegraph Co. and the entire telephone industry, with profound effects on data communications, cable television, and every phone user . . . and dramatically alter the basic nature of the phone network" (December 4, 1978).

Naturally, upon learning about Bell Lab's new enthusiasm for diodes which both emit and detect light, I immediately called Mr. Keefauver to remind him about my suggestion and our agreement nearly five years earlier. There followed dozens of letters and phone calls and two trips from my home in Texas to the corporate offices of Bell Labs in Murray Hill, New Jersey to negotiate my claims with Mr. Keefauver and Dr. N. Bruce Hannay, Vice President of Research at Bell Labs. I even managed to discuss the matter in a telephone conversation with Dr. Ian Ross, President of Bell Labs.

I had in mind two goals. First, I sought compensation for the use of my idea. Second, I asked that Bell Labs scientists, when writing papers about the new telephone, footnote either the book or the POPULAR ELECTRONICS article which disclosed the idea.

Bell Labs eventually offered \$15,000, \$20,000 and, finally, \$25,000 if I would undertake various writing and consulting projects for them and agree in writing not to publicize my claims. They also agreed to ask their scientists to consider referencing my work in describing their new telephone.

I wished to avoid litigation if at all possible, but the statute of limitations would soon run out. Following a final effort to obtain a settlement which didn't involve working for Bell Labs, I asked a patent law firm that I had previously contacted to file suit against Bell Labs in Federal District Court.

What happened next would teach me more than I ever

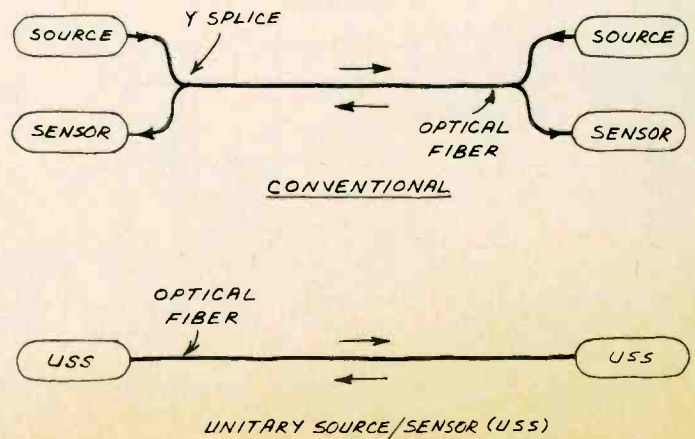


Fig. 3. Conventional and simplified optical-fiber systems.

cared to know about lawyers, courts, judges and Bell Labs. To relate all the details would require all the pages in this magazine! So I'll simply touch upon a few of the more memorable incidents.

First, I made three trips to New York City to be present during the giving of depositions by various Bell Labs scientists and officials. Settlement was alluded to at the first meeting,

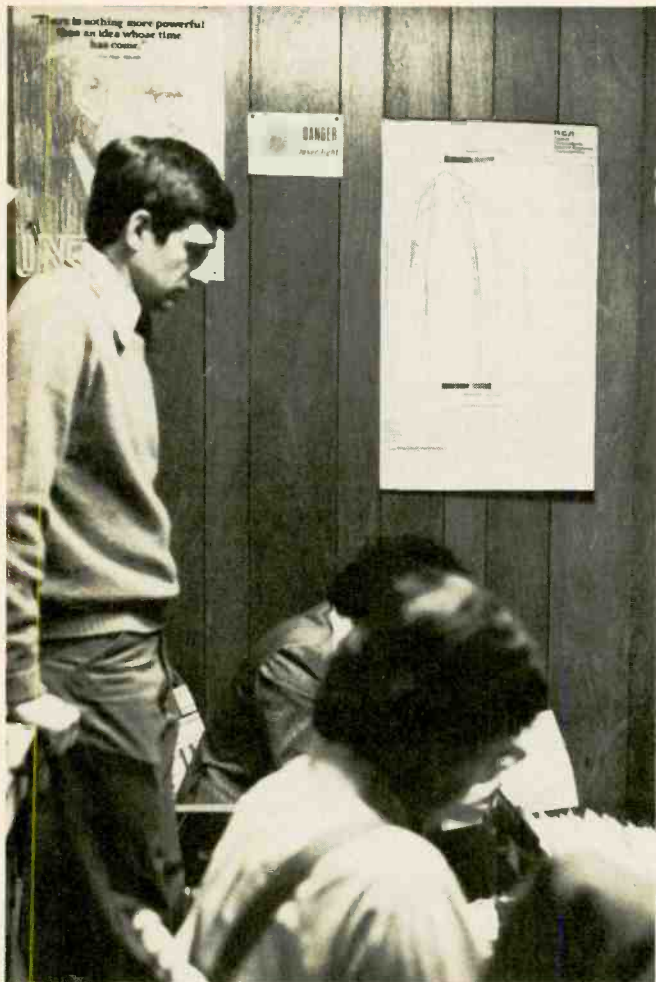


Fig. 4. With the author looking on, attorneys from Bell Laboratories and Western Electric performed a thorough search of his office and electronics shop.

so the depositions were postponed. Bell Labs cancelled the second deposition without notifying my attorneys. I found out about this shortly after arriving in New York!

Fireworks flew when the opposing attorneys finally got down to the business of deposition taking on the third trip. Bell Labs was represented by a team of attorneys from Western Electric and Bell Labs. Though most of these lawyers seemed friendly enough, their chief attorney for the case was remarkably uncooperative and did not get along well with my attorney.

As part of the pre-trial discovery procedure, Bell Labs had provided us with some, but not all, of the many documents we had requested. I was required to produce documents for Bell Labs as well. My attorneys decided to demonstrate our openness by allowing Bell Labs' attorneys to search my office and home for the documents they had requested. For some eight hours, three lawyers searched through every paper and folder in my file cabinets, desk and attic. They even read every page in my lab notebooks. Eventually they pulled more than 2000 pages for copying!

Later, I was required to give my deposition. Bell Labs had

retained a prominent Texas trial attorney, and for four straight days he quizzed me on everything from the physics of light-emitting semiconductors to the possibility of my telephone being tapped.

Finally, at the end of the fourth day and after the Bell Labs attorneys had left for the airport, their high-powered lawyer propped his feet on the table and said our dispute should be settled out of court. Bell Labs would admit no guilt. Within minutes, he and Ted Lee, my principal attorney, had worked up an agreement. A week later my lawyers and I posed for pictures along with a check from Bell Labs.

A court-issued protective order prevents me from disclosing in this column much of what I learned about Bell Labs in the course of my suit. I can say, however, that Bell Labs abandoned a patent application for an "optical telecommunication system" that incorporated a diode which doubled as both an emitter and detector!

Was the experience worthwhile? In some ways, yes. I learned much about lawyers and litigation. And the results of a massive literature search by Bell Labs will enable me to write a definitive article, and perhaps a book, about diodes which both emit and detect light.

On the other hand, several of my editors and friends were subpoenaed by Bell Labs to give their depositions. I spent hundreds of hours researching the case and writing briefs and memos to my attorneys. And to this day, Bell Labs has steadfastly refused to reference any of my writings about emitter-detector diodes in any of its papers about its new optical fiber telephone.

I hope my experiences—one with a very small company and one with the largest corporation in America—have shown you some of the pitfalls that await the neophyte idea merchant. In the next installment, I'll cover some ways to protect your ideas. ♦

<h2>OLYMPIC SALES COMPANY</h2> <p>SINCE 1947</p>		216 S. Oxford Ave. Los Angeles, CA 90004 (213) 739-1130 PHONE ORDERS: TOLL FREE out of Cal 800-421-8045 in Calif. 800-252-2153 Telex: 67 34 77 Cable: "OLYRAV" LSA	 WE HONOR 																																																																																													
<h3>HEWLETT PACKARD</h3>		<h3>Apple computer</h3> <p>APPLE COMPUTERS - II & III We are an authorized Apple servicing dealer 16K-32K-48K-64K-128K Graphics tablet Drive with controller DDS 3.3 and others 80 column cards VisiCalc and more and more We have the best prices on Apple computers in America - "CALL US!"</p>																																																																																														
<table border="1"> <thead> <tr> <th></th> <th>Retail</th> <th>Your Cost</th> </tr> </thead> <tbody> <tr><td>HP-85 Microcomputer</td><td>3250.00</td><td>2595.00</td></tr> <tr><td>HP-83 Microcomputer</td><td>2250.00</td><td>1795.00</td></tr> <tr><td>16K Exp. mem. module</td><td>295.00</td><td>259.95</td></tr> <tr><td>Graphics plotter 7225</td><td>2450.00</td><td>2089.95</td></tr> <tr><td>Personality mod. for 7225</td><td>750.00</td><td>679.95</td></tr> <tr><td>2631B Impact printer, hvy duty</td><td>3950.00</td><td>3295.00</td></tr> <tr><td>Opt. 020 for 2631B</td><td>150.00</td><td>129.95</td></tr> <tr><td>8 disk drives to choose from</td><td></td><td></td></tr> <tr><td>82902S</td><td>1300.00</td><td>1149.95</td></tr> <tr><td>9895A 8" dual drive</td><td>6850.00</td><td>5595.00</td></tr> <tr><td>Graphics tablet 9111A</td><td>2050.00</td><td>1699.95</td></tr> <tr><td>HP-41CV 2.2K bytes of memory</td><td>325.00</td><td>259.95</td></tr> <tr><td>HP-41C Calculator</td><td>250.00</td><td>188.95</td></tr> <tr><td>Card reader for 41CV/41C</td><td>215.00</td><td>168.95</td></tr> <tr><td>Printer for 41CV/41C</td><td>385.00</td><td>284.95</td></tr> <tr><td>Optical wand for 41CV/41C</td><td>125.00</td><td>97.95</td></tr> <tr><td>Quad Ram - 4 mem. mods.</td><td>95.00</td><td>84.95</td></tr> <tr><td>Memory mod. for 41C</td><td></td><td>26.95</td></tr> <tr><td>HP-97 Programmable printer</td><td>750.00</td><td>579.95</td></tr> <tr><td>HP-67 Programmable calculator</td><td>375.00</td><td>297.95</td></tr> <tr><td>HP-34C Programmable scientific</td><td>150.00</td><td>117.95</td></tr> <tr><td>HP-38C Programmable business R/E</td><td>150.00</td><td>119.95</td></tr> <tr><td>HP-32E Advanced scientific</td><td>55.00</td><td>48.95</td></tr> <tr><td>HP-37E Business management</td><td>75.00</td><td>58.95</td></tr> </tbody> </table>			Retail	Your Cost	HP-85 Microcomputer	3250.00	2595.00	HP-83 Microcomputer	2250.00	1795.00	16K Exp. mem. module	295.00	259.95	Graphics plotter 7225	2450.00	2089.95	Personality mod. for 7225	750.00	679.95	2631B Impact printer, hvy duty	3950.00	3295.00	Opt. 020 for 2631B	150.00	129.95	8 disk drives to choose from			82902S	1300.00	1149.95	9895A 8" dual drive	6850.00	5595.00	Graphics tablet 9111A	2050.00	1699.95	HP-41CV 2.2K bytes of memory	325.00	259.95	HP-41C Calculator	250.00	188.95	Card reader for 41CV/41C	215.00	168.95	Printer for 41CV/41C	385.00	284.95	Optical wand for 41CV/41C	125.00	97.95	Quad Ram - 4 mem. mods.	95.00	84.95	Memory mod. for 41C		26.95	HP-97 Programmable printer	750.00	579.95	HP-67 Programmable calculator	375.00	297.95	HP-34C Programmable scientific	150.00	117.95	HP-38C Programmable business R/E	150.00	119.95	HP-32E Advanced scientific	55.00	48.95	HP-37E Business management	75.00	58.95	<h3>SEIKO (USA) WATCHES</h3> <p>-(Limited Offer!)</p> <p>These models guaranteed by Seiko anywhere Your nearest Seiko dealer.</p> <table border="1"> <thead> <tr> <th></th> <th>Retail</th> <th>Your Cost</th> </tr> </thead> <tbody> <tr><td>FJ113 Divers watch, 300 ft. S/S</td><td>195.00</td><td>79.95</td></tr> <tr><td>YH006 Ladies quartz LCD, gldtone</td><td>295.00</td><td>79.95</td></tr> <tr><td>YH002 Ladies quartz LCD, gldtone</td><td>250.00</td><td>74.95</td></tr> <tr><td>YH016 Ladies quartz LCD, gldtone</td><td>225.00</td><td>69.95</td></tr> <tr><td>YH003 Ladies quartz LCD, svrtone</td><td>215.00</td><td>69.95</td></tr> </tbody> </table> <p>And many more—compare our prices with the nearest Seiko dealer.</p>			Retail	Your Cost	FJ113 Divers watch, 300 ft. S/S	195.00	79.95	YH006 Ladies quartz LCD, gldtone	295.00	79.95	YH002 Ladies quartz LCD, gldtone	250.00	74.95	YH016 Ladies quartz LCD, gldtone	225.00	69.95	YH003 Ladies quartz LCD, svrtone	215.00	69.95
	Retail	Your Cost																																																																																														
HP-85 Microcomputer	3250.00	2595.00																																																																																														
HP-83 Microcomputer	2250.00	1795.00																																																																																														
16K Exp. mem. module	295.00	259.95																																																																																														
Graphics plotter 7225	2450.00	2089.95																																																																																														
Personality mod. for 7225	750.00	679.95																																																																																														
2631B Impact printer, hvy duty	3950.00	3295.00																																																																																														
Opt. 020 for 2631B	150.00	129.95																																																																																														
8 disk drives to choose from																																																																																																
82902S	1300.00	1149.95																																																																																														
9895A 8" dual drive	6850.00	5595.00																																																																																														
Graphics tablet 9111A	2050.00	1699.95																																																																																														
HP-41CV 2.2K bytes of memory	325.00	259.95																																																																																														
HP-41C Calculator	250.00	188.95																																																																																														
Card reader for 41CV/41C	215.00	168.95																																																																																														
Printer for 41CV/41C	385.00	284.95																																																																																														
Optical wand for 41CV/41C	125.00	97.95																																																																																														
Quad Ram - 4 mem. mods.	95.00	84.95																																																																																														
Memory mod. for 41C		26.95																																																																																														
HP-97 Programmable printer	750.00	579.95																																																																																														
HP-67 Programmable calculator	375.00	297.95																																																																																														
HP-34C Programmable scientific	150.00	117.95																																																																																														
HP-38C Programmable business R/E	150.00	119.95																																																																																														
HP-32E Advanced scientific	55.00	48.95																																																																																														
HP-37E Business management	75.00	58.95																																																																																														
	Retail	Your Cost																																																																																														
FJ113 Divers watch, 300 ft. S/S	195.00	79.95																																																																																														
YH006 Ladies quartz LCD, gldtone	295.00	79.95																																																																																														
YH002 Ladies quartz LCD, gldtone	250.00	74.95																																																																																														
YH016 Ladies quartz LCD, gldtone	225.00	69.95																																																																																														
YH003 Ladies quartz LCD, svrtone	215.00	69.95																																																																																														
<h3>Texas Instruments</h3> <table border="1"> <thead> <tr> <th></th> <th>Retail</th> <th>Your Cost</th> </tr> </thead> <tbody> <tr><td>TI-99/A Home Computer—NEW KEYBOARD!</td><td>\$950.00</td><td>\$359.95</td></tr> </tbody> </table> <p>We carry a large inventory of software, & accessories</p> <table border="1"> <thead> <tr> <th></th> <th>Retail</th> <th>Your Cost</th> </tr> </thead> <tbody> <tr><td>TI-59 Programmable calculator</td><td>295.00</td><td>179.95</td></tr> <tr><td>TI-58C Programmable calculator</td><td>130.00</td><td>89.95</td></tr> <tr><td>PC 100C Printer/plotter for 59/58</td><td>225.00</td><td>149.95</td></tr> </tbody> </table> <p>NEW! Calculator Watch w/Alarm TI 810-11 Many features & 1 yr guarantee from TI 29.95 TI 584-11 Alarm Chron. Dual Time Zone 19.95</p>			Retail	Your Cost	TI-99/A Home Computer—NEW KEYBOARD!	\$950.00	\$359.95		Retail	Your Cost	TI-59 Programmable calculator	295.00	179.95	TI-58C Programmable calculator	130.00	89.95	PC 100C Printer/plotter for 59/58	225.00	149.95	<h3>MATTEL INTELLIVISION</h3> <p>Most animated TV game Retail: \$325.00 Y/C: \$239.95</p>																																																																												
	Retail	Your Cost																																																																																														
TI-99/A Home Computer—NEW KEYBOARD!	\$950.00	\$359.95																																																																																														
	Retail	Your Cost																																																																																														
TI-59 Programmable calculator	295.00	179.95																																																																																														
TI-58C Programmable calculator	130.00	89.95																																																																																														
PC 100C Printer/plotter for 59/58	225.00	149.95																																																																																														
<h3>ATARI Computer</h3> <table border="1"> <thead> <tr> <th></th> <th>Retail</th> <th>Your Cost</th> </tr> </thead> <tbody> <tr><td>400 SPECIAL PRICE! 16K</td><td>595.00</td><td>339.95</td></tr> <tr><td>No language inc., opt'l basic,</td><td></td><td>54.95</td></tr> <tr><td>800 16K Computer</td><td>1080.00</td><td>759.95</td></tr> </tbody> </table>			Retail	Your Cost	400 SPECIAL PRICE! 16K	595.00	339.95	No language inc., opt'l basic,		54.95	800 16K Computer	1080.00	759.95	<h3>SONY</h3> <p>MANY NEW ITEMS FROM SONY—call for information AT DISCOUNTED PRICES!</p>																																																																																		
	Retail	Your Cost																																																																																														
400 SPECIAL PRICE! 16K	595.00	339.95																																																																																														
No language inc., opt'l basic,		54.95																																																																																														
800 16K Computer	1080.00	759.95																																																																																														
<h3>ATARI VIDEOTAPES</h3> <table border="1"> <thead> <tr> <th></th> <th>Retail</th> <th>Your Cost</th> </tr> </thead> <tbody> <tr><td>TV GAME</td><td>\$225.00</td><td></td></tr> <tr><td>Minimum 3 tapes/Mixed O.K.</td><td></td><td>\$11.89</td></tr> <tr><td>SONY L500, 2 hr</td><td></td><td>14.69</td></tr> <tr><td>L750, 3 hr</td><td></td><td>14.69</td></tr> <tr><td>Handling \$4.95. All orders subject to verification and acceptance.</td><td></td><td></td></tr> <tr><td>SONY L500, 2 hr</td><td></td><td>\$13.95</td></tr> <tr><td>RCA VK250, 6 hr</td><td></td><td>13.95</td></tr> </tbody> </table>			Retail	Your Cost	TV GAME	\$225.00		Minimum 3 tapes/Mixed O.K.		\$11.89	SONY L500, 2 hr		14.69	L750, 3 hr		14.69	Handling \$4.95. All orders subject to verification and acceptance.			SONY L500, 2 hr		\$13.95	RCA VK250, 6 hr		13.95	<h3>PAPER TIGER EPSON DIABLO SANYO CORVUS OHIO SCIENTIFIC & etc., etc.</h3> <h3>AMDEK (Leedex) Quality Monitors</h3> <table border="1"> <thead> <tr> <th></th> <th>Retail</th> <th>Your Cost</th> </tr> </thead> <tbody> <tr><td>100 12" B/W, 12 MHz</td><td>179.00</td><td>139.95</td></tr> <tr><td>100-G 12" Green, 12 MHz</td><td>199.00</td><td>174.95</td></tr> <tr><td>300-G 12" Green, 18 MHz</td><td>249.00</td><td>199.95</td></tr> <tr><td>Color I 13" Color, NTSC comp. input, audio amp & speaker</td><td>449.00</td><td>339.95</td></tr> <tr><td>Color II 13" Color, RGB input, hi res graphics, speaker</td><td>999.00</td><td>699.95</td></tr> </tbody> </table>			Retail	Your Cost	100 12" B/W, 12 MHz	179.00	139.95	100-G 12" Green, 12 MHz	199.00	174.95	300-G 12" Green, 18 MHz	249.00	199.95	Color I 13" Color, NTSC comp. input, audio amp & speaker	449.00	339.95	Color II 13" Color, RGB input, hi res graphics, speaker	999.00	699.95																																																			
	Retail	Your Cost																																																																																														
TV GAME	\$225.00																																																																																															
Minimum 3 tapes/Mixed O.K.		\$11.89																																																																																														
SONY L500, 2 hr		14.69																																																																																														
L750, 3 hr		14.69																																																																																														
Handling \$4.95. All orders subject to verification and acceptance.																																																																																																
SONY L500, 2 hr		\$13.95																																																																																														
RCA VK250, 6 hr		13.95																																																																																														
	Retail	Your Cost																																																																																														
100 12" B/W, 12 MHz	179.00	139.95																																																																																														
100-G 12" Green, 12 MHz	199.00	174.95																																																																																														
300-G 12" Green, 18 MHz	249.00	199.95																																																																																														
Color I 13" Color, NTSC comp. input, audio amp & speaker	449.00	339.95																																																																																														
Color II 13" Color, RGB input, hi res graphics, speaker	999.00	699.95																																																																																														

SAVE BIG on CALCULATORS

TEXAS INSTRUMENTS

TI 59	\$175	TI MBA	50
TI 58C	80	TI BA2	39
TI PC100C	155	TI Bus Anal I	15
TI PROG	50	TI 35 SP	18
TI 55-II	37	TI 5130	60

HEWLETT
PACKARD CALCULATORS

HP-41C	\$189
HP-41C V	249
Optical Wand	95
Card Reader	165
Printer	285
Quad R.A.M. (for HP41C)	75
Mem. Module (for HP41C)	23

NEW FROM HEWLETT-PACKARD

	Mfr. Sugg. Ret.	Elek-Tek
HP - IL Loop Module	125	95
Dig. Cassette Drive	550	425
Printer/Plotter (HP-IL)	495	375

NEW!	NEW!	NEW!
	Mfr. Sugg.	Elek-Tek
HP-11C Scientific	135	100
HP-12C Financial	150	115
HP-11C/12C Sol. Books	20	17

HP-97	\$560
HP-38C	115
HP-37E	59
HP-34C	115
HP-33C	69
HP-33E	49
HP-32E	43

HP-85 COMPUTING SYSTEM



The HP-85 Personal Computing System for Professionals helps solve difficult engineering problems and simplifies financial analysis. The HP-85 is a powerful BASIC language computer with keyboard, CRT display, printer and tape drive complete in one compact unit. (HP-83 is the same as above but without the built-in printer and tape drive.)

	Mfr. Sugg. Ret.	Elek-Tek
HP-85 COMPUTER	\$2750	\$2000
HP-83 COMPUTER (as HP-85 but no Printer or Tape Drive)	2250	1600
HP-125 COMPUTER	3750	2700
2631B PRINTER	3650	2850
2671A PRINTER	1095	800
2671G PRINTER	1295	935
2673A PRINTER	1895	1375
B2905A PRINTER	945	685
7225B PLOTTER (incl. Personality Module)	3200	2300
GRAPHICS TABLET	2050	1475
GRAPHICS PRES. PAC	200	162
VisiCalc™ PLUS	200	162
IMPac	200	162
APPLICATION PACS	95	77

and all related accessories and software
at SIZEABLE DISCOUNTS
VisiCalc™ is a trademark of Personal Software, Inc.

CALL TOLL FREE 800-621-1269
EXCEPT Illinois, Alaska, Hawaii

Accessories discounted too. Corporate Accounts Invited.
Mastercharge or Visa by mail or phone. Mail Cashier's Check.
Money Order, Personal Check (2 wks to clear). Add \$4.00 1st item;
\$1.00 ea. add'l shpg. & handl. Shipments to IL address add 6% tax.
Prices subject to change. WRITE for free catalog.
**ALL ELEK-TEK MERCHANDISE IS BRAND NEW,
FIRST QUALITY AND COMPLETE.**

ELEK-TEK, Inc.
6557 N. Lincoln Ave., Chicago IL 60645
(800) 621-1269 (312) 631-7800

CIRCLE NO. 65 ON FREE INFORMATION CARD

DX LISTENING

By Glenn Hauser

Researching the Shortwave Audience

THANKS to continuing scientific research by Dr. Kim Andrew Elliott, at the University of Massachusetts, we are learning more and more about the shortwave listening audience in America. Though there are certain to be millions of us, the exact number and other demographic data have never been determined accurately; nor are they likely to be, since SWLs are so widely dispersed geographically, and of minor commercial interest compared to domestic radio listeners and viewers. Furthermore, SWLs are unlicensed in this country, and cannot be reached by mail, as hams can be.

Under these circumstances, the best approach is to conduct a survey using a scientifically selected random sample of known SWLs. Here are some of the findings of a 1981 survey by Dr. Elliott. About 10% of the subscribers to *Review of International Broadcasting* were sent a questionnaire; 72% replied. Of course, it must be kept in mind that the participants are likely to be more "active" than the truly typical SWL, for the very reason that they have gone to the trouble to subscribe to *RIB*.

Question 1: Please estimate the average number of hours per week you listen to shortwave broadcasts from anywhere. **Response:** Range, 0 to 35 hours per week. Mean (average), 12.67 hours; median, 10 hours. (The zero above reflects the fact that some people subscribe to the magazine to read about SWL without currently being active.)

Question 2: How much of your shortwave broadcast listening time is spent on DXing and how much on program listening? **Response:** Sixty-six percent of the respondents spent more than 80% of their shortwave time on program listening, as opposed to DXing.

Question 3: Please estimate the number of reception reports, for the purpose of obtaining a QSL card or verification from a SWBC station, that you sent during the previous year. **Response:** Range, 0 to 400. Mean 14.9. Fifty-six percent sent no reception reports.

Question 4: Which receiver(s) do you use for SWBC listening? **Response:** 78 different models were mentioned. The top ten, in order, were: Panasonic RF-2800 or 2900; Sony ICF-2001; Realistic DX-160; Kenwood R-1000; Panasonic RF-2900; Sony ICF-5900W; Yaesu FRG-7; Panasonic RF-2800; Panasonic RF-4800 or 4900; Panasonic RF-4900.

Question 5: Please list up to four of your favorite international broadcasting persons heard on international broadcast stations. The top ten were: Ian McFarland, *Radio Canada International*; Alistair Cooke, *BBC*; Barbara Frum, *CBC*; David Monson, *Belgian Radio*; Jonathan Marks, *Radio Netherlands*; Glenn Hauser, various; Margaret Howard, *BBC*; Joe Adamov, *Radio Moscow*; Vladimir Pozner, *Radio Moscow*; Keith Glover, *Radio Australia*.

Question 6: Your age. **Response:** Range, 15 to 71. Mean, 34.32. Median, 32.


Question 7: Sex. **Response:** 98.2% male, 1.8% female. Of course, the entire mailing list could be inspected for a more accurate proportion, but this is probably close. SWLing has long suffered from the mistaken belief that it requires great technical skills, more associated in traditional sex roles with males than females. Also, some female SWLs maintain that their numbers are proportionally greater, but they are less likely to join groups.

Question 8: Please indicate the highest level of education you have completed. **Response:** 6.4% less than high school; 9.2% high school; 22.9% some college or postsecondary; 33.9% college 4-year baccalaureate degree; 25.7% advanced degrees.

Question 9: Your full-time occupation. **Response:** There was a wide spread, with the largest single group (20.2%) being students.

Question 10: In which region do you live? The USA was split into six regions, Canada into two; and a ninth category covered all other outlying US areas beyond the continental 48 states. (Subscribers in other countries were not eligible for this survey.) The response to this becomes significant only when the percentage of SWLs in an area is compared to the percentage of the total population residing in that area. In most regions the numbers were approximately the same, but the exceptions are interesting. In the northeast USA with 44.4% of the population, there were 32.7% of the SWLs. In the southeast USA with 16.7% of the population, there were 3.7% of the SWLs. Again, a study of the entire mailing list would refine these data.

Question 11: List the magazines, journals, and other periodicals to which you subscribe or obtain at least four times per year (excluding newspapers and





Find exciting projects, troubleshooting and repair tips, and hands-on, do-it-yourself info, plus hundreds of time- and money-saving ideas in the

ELECTRONICS BOOK CLUB


Select 6 outstanding volumes for only **\$2.95** (total value up to \$116.70)

GET TWO EXCITING PROJECT BOOKS FREE!






1066
List \$14.95
paper



1370
List \$22.95



1076
List \$12.95

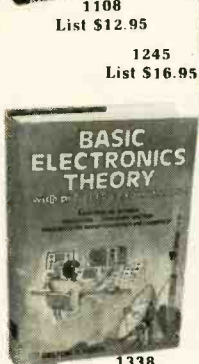

Join now . . . get two extra books absolutely free!
Modern Transistor Radios and Modern Crystal Radios

7 very good reasons to try Electronics Book Club

Blue Ridge Summit, PA 17214

- **Reduced Member Prices.** Save up to 75% on books sure to increase your know-how
- **Satisfaction Guaranteed.** All books returnable within 10 days without obligation
- **Club News Bulletins.** All about current selections—mains, alternates, extras—plus bonus offers. Comes 13 times a year with dozens of up-to-the-minute titles you can pick from
- **"Automatic Order"**. Do nothing, and the Main selection will be shipped automatically! But . . . if you want an Alternate selection—or no books at all—we'll follow the instructions you give on the reply form provided with every News Bulletin
- **Continuing Benefits.** Get a Dividend Certificate with every book purchased after fulfilling membership obligation, and qualify for discounts on many other volumes
- **Bonus Specials.** Take advantage of sales, events, and added-value promotions
- **Exceptional Quality.** All books are first-rate publisher's editions, filled with useful, up-to-the-minute info

ELECTRONICS BOOK CLUB

Blue Ridge Summit, PA 17214

Please accept my membership in Electronics Book Club and send the 6 volumes circled below, plus a free copy of *Modern Crystal Radios* and *Modern Transistor Radios*. I understand the cost of the books selected is \$2.95 (plus shipping/handling). If not satisfied, I may return the books within ten days without obligation and have my membership cancelled. I agree to purchase 4 or more books at reduced Club prices during the next 12 months, and may resign any time thereafter.

- 1066 1070 1076 1108 1128 1160 1211 1218
1225 1230 1233 1245 1249 1251 1277 1283
1291 1293 1306 1323 1333 1337 1338 1370

Name _____ Phone _____
Address _____
City _____
State _____ Zip _____
(Valid for new members only. Foreign and Canada add 20%) PE-382

Memory

4116-250nS	8/14.95
4116-200nS	8/17.95
4164-200nS	17.95 ea. 8/128.00
2114L	8/17.95
6116 2K x 8 CMOS RAM 200nS	13.95
2708 EPROM	3.49
2716 EPROM	5.49
2732 EPROM	12.99
2764 EPROM	34.95
Z6132 4K x 8 Quasi-Static RAM	24.95

Microprocessor & Interface

1771	24.50	6845	18.49	DAC-0800	3.99
1791	34.95	6850	4.49	INS8250	14.90
21102	1.49	8085A	8.95	MM58167	8.75
2112	2.39	8212	2.75	TM59900	29.95
2516	5.49	8214	3.95	TR1602B	2.49
2532	12.99	8216	2.75	SC-01	55.00
2651	12.95	8224	3.29	Z80A-CPU	7.95
4044L-2	2.49	8226	2.79	Z80ACT	7.49
6502	8.99	8228	4.49	Z80ADart	19.95
6800	6.99	8251	6.95	Z80APIO	7.49
6802	11.95	8255	6.49	Z80ASIO	17.95
6809	19.95	AY5-1013A	4.95	Z8603	74.95
6821	4.95	AY5-2376	14.95	Z8671	29.95

1 Amp TO-220 Voltage Regulators

PART #	1-24	25-99	100-499
7805 (LM340T-5)	.85	.75	.65
7812 (LM340T-12)	.85	.75	.65
7815 (LM340T-15)	.85	.75	.65
7818 (LM340T-18)	.85	.75	.65

Linear Integrated Circuits

8038	3.95	LM393	97	MC3302	90
LF351	75	LM733	99	MC1458	59
LF353	1.29	LM741-8	35	MC1514	1.39
LF357	1.39	LM741-14	35	NE555	45
LM301	45	LM747	77	NE556	98
LM307	49	LM748	49	NE565	1.25
LM311	95	LM1310	2.49	NE5534	2.35
LM318	1.75	LM1458	69	NE5538	2.25
LM324	90	LM1800	2.49	SSM2010	7.50
LM339	79	LM1818	3.49	SSM2020	7.50
LM358	90	LM1889	2.99	SSM2030	7.50
LM377	2.49	LM2900	69	SSM2040	7.50
LM380N-14	1.25	LM3900	89	SSM2044	5.75
LM381	1.89	LM3905	1.49	SSM2055	6.50
LM383	3.29	LM3914	3.79	XR2206	5.19
LM384	1.95	LM3915	3.79	XR4136	99
LM386	99	LM3916	3.79	XR4741	1.95
LM387	1.49	LM4500	3.29	XR558	1.99

5% Carbon Film Resistors

We stock all 5% standard values between 1 Ohm and 1 Meg Ohm.

¼ Watt	
Package of 5	20
Package of 100 (one value)	1.65
Package of 1000 (one value)	12.00

½ Watt	
Package of 5	25
Package of 100 (one value)	1.75
Package of 1000 (one value)	15.00

Sampler box consisting of 5 each of all 145 standard 5% values between 1 Ohm and 1 Meg Ohm.

¼ Watt Sampler Box	22.00
½ Watt Sampler Box	27.00

Minimum Order \$10.00

Shipping	
10-24.99	3.00
25-49.99	1.50
Above 50.00	FREE
C.O.D.	Add 1.65

WESTLAND ELECTRONICS

37387 Ford Rd. • Westland, Mi 48185
Order Line - 1-800-521-0664
In Michigan - 313-728-0650

CIRCLE NO. 51 ON FREE INFORMATION CARD

dx listening

RIB). *Response:* Mentioned most often were **FRENDX** (journal of SWBC DX club NASWA), *National Geographic, Time, SPEEDX* (a DX club), *Popular Electronics, Newsweek, Stereo Review,* and *BBC London Calling.*

Question 12: Please indicate the types of international broadcast programming and/or programming styles that you like to listen to and would like to hear more of. *Response:* There was a clear preference here for nonpolitical information, and music and news about the station's country or region. International news is covered so well by major stations, such as the BBC, that listeners would prefer smaller stations to concentrate on covering their own country rather than competing with the BBC. Surprisingly, the category "domestic service programming" drew the smallest number of votes, perhaps because of the language barrier and the generally inferior reception compared to external service.

Question 13: What programming don't you like and would like to hear less of? *Response:* The trend here went against popular music and political commentary, equally. There is a strong sentiment that many SWBC stations play too much of the same kind of music, which can also be heard on domestic radio; nor do listeners enjoy being regaled with outright propaganda barrages, which unfortunately is standard fare on some hostile stations.

Inventory of Program Listening.

The major part of the **RIB** survey asked respondents to indicate the specific international broadcast programs to which they listen at least once a month, and to estimate how many days a month they listen to it. Here are the top ten, ranked by the percentage of respondents who listen to at least one installment of the program.

- 1) "DX Digest" (now "SWL Digest") on *Radio Canada International*, 41.7%.
- 2) "World News" on *BBC*, 25.2%.
- 3) "DX Juke Box" (now "Media Network") on *Radio Nederland*, 24.3%.
- 4) "Letter from America," *BBC*, 16.5%.
- 5) "Radio Newsreel," *BBC*, 15.3%.
- 6) "Letterbox," *BBC*, 13.1%.
- 7) "Moscow Mailbag," *Radio Moscow*, 12.6%.
- 8) "DX Party Line," *HCJB Ecuador*, 11.8%.
- 9) "Shortwave Merry-go-round," *Swiss Radio International*, 11.0%.
- 10) "As It Happens," *CBC*, 10.9%.

The ratings were compiled again, using only the respondents with program listening rather than DXing orientations. There was no change in the order of the top six, but the next four became: 7) "As It Happens," *CBC*. 8) "Sunday Morning," *CBC*. 9) "Twenty-Four Hours," *BBC*. 10) "Moscow Mailbag," *Radio Moscow*.

The inventory of program listening shows the domination of DX/SWL/communications programs, even among the non-DXing subsample, and of news feature programming from English-speaking nations. ◇

Popular Electronics

ADVERTISERS INDEX

RS no.	ADVERTISER	PAGE no.
3	All Electronics Corp	90
4	American Antenna	8
5	AP Products	98
7	Apple Computer	Cover 2, 1
64	BSR (USA) Ltd.	59
	Classified Advertising	122-125
	Cincinnati Microwave	23
	Cleveland Institute of Electronics, Inc	26-29
1	Communications Electronics	11
6	CompuServe	42
	Computer Shopping Ctr.	97
62	Contemporary Mktg.	33
59	CASI	100
8	Computique	94
12	Cooper Group	35
55	Crown International	66
10	Digi-Key Corp.	114
14	Dynascan	48
	Edmund Scientific	96
15	Electra	77
65	Elek-tek	106
16	Epson	36
18	Firestik	111
19	Fox Mktg.	13
54	Global Specialties	87
	Grantham College of Engineering	102
	Heath Co.	17-19, 69
29	Hewlett-Packard	Cover 3
9	Hi Gain	21
22	Illinois Audio	92
23	Institute of Audio Research	3
24	Jameco Electronics	118, 119
25	JDR Microdevices	116, 117
26	J & R Music World	102
61	Koss Corp.	67
27	Lincomm Corp.	95
58	Maxell	61
57	MFJ Enterprises	100
28	McIntosh Laboratory, Inc	62
30	Micro Management Systems	44
31	Mobile Fidelity	62
33	National Guard, Army	31
40	National Guard, Air	63-65
	Natl. Technical Schools	82-85
42	NEC America	Cv. 4
	Netronics, R & D Ltd.	91, 101
	NRI Schools	72-75
	NTS	82-85
34	Olympic Sales	105
66	Okidata	41
35	PAIA	111
	Percom	111
36	Personal Computer Systems	89
38	Phoenix	95
39	Poly Paks	100
56	Protecto	96
41	Quest Electronics	113
	Radio Shack	2, 115
11, 13	R.L. Drake	94, 102
43	Scientific Systems	94
	Sharper Image	9
	Simple Simon Kits	86
	Sinclair Research	4, 5
	Sunshine Express	93
45	Tab Books	107
46	Tams	96
47	TDK	14
63	3-M Video	7
48	3-M Data Recording	71
49	U.S. Marines	45-47
60	Vidi Craft	25
50	Wabash Tape	15
51	Westland Electronics	108
53	Wildfire Publishing	43
52	Wisconsin Discount Stereo	92

ELECTRONICS LIBRARY

Early Wireless

by Anthony Constable

Here's something unusual: a book that traces the development of the radio (wireless) from the first crude detection devices at the turn of the last century, to the development of broadcasting. Drawings are used to help describe the early equipment, e.g., the Hertz resonator, coherers, Marconi detectors, the Fleming valve, etc. The highlight of the book is the section on receivers and speakers of the 1920s and '30s; there are many photographs of these artistic items. If you've never seen a book like this before, it's worth checking out.

Published by Sterling Publishing Co., Inc., New York, NY 10016. Hard cover. 160 pages. \$19.95.

Designing with Field-Effect Transistors

Arthur D. Evans, Editor in Chief

This book, written by engineers at Siliconix, Inc., describes the technical development of the FET, gives information about the early patents for the device, and illustrates the numerous characteristic curves for FETs. Practical in approach, the book deals with various FET specs, operating parameters, low- and high-frequency circuits, and the FET as an analog device. It also examines voltage-controlled resistors and FET current sources, FETs and ICs, and typical circuits using FETs. The many circuit diagrams should prove useful to anyone working with TV, radar, hi-fi equipment, or industrial controls.

Published by McGraw-Hill, New York, NY 10020. Hard cover. 293 pages. \$24.50.

Oscilloscopes

by Stan Prentiss

Stan Prentiss has done a thorough job in providing an overview of most types of oscilloscope measurement. Coverage includes professional scopes, logic analyzers, storage/sampling oscilloscopes, time-domain reflectometry, video cassettes, waveform analysis, etc. The book contains over 200 illustrations, as well as suggestions for the application of various oscilloscope techniques.

Published by Reston Publishing Company, Reston, VA 22090. Hard cover. 160 pages. \$16.95.

Packet Radio


by Robert Roulean and Ian Hodgson

The technique of packet radio breaks down information into blocks of digitally encoded signals and transmits it at

(continued on page 125)

Four-Drive Double-Density Disk Controller for H/Z-89 Includes Parallel Printer Port

\$249.95

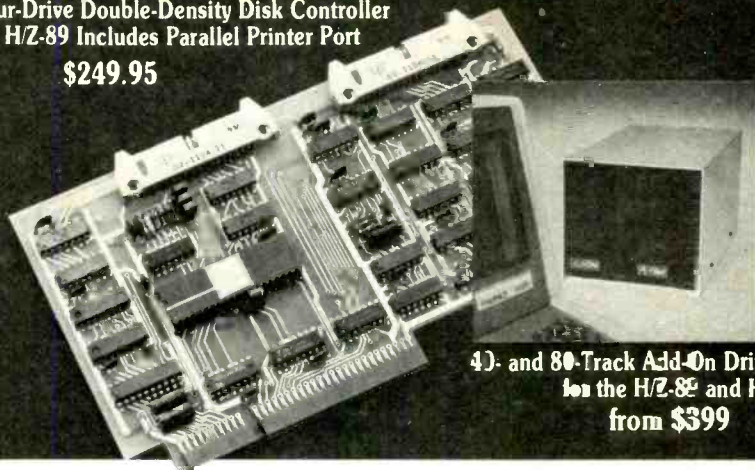

40- and 80-Track Add-On Drives for the H/Z-89 and H-8 from \$399

Now! Percom Disk Storage for Your Heath Computer.

At Percom we've been making mini-disk systems since 1977.

Our proven disk controller design, featuring digital phase-lock loop data separation, gives rock-solid performance.

Every Percom drive sold is double tested - to Percom specifications.

And every drive receives a 48-hour operating burn-in, a qc check that virtually eliminates the possibility of shipping drives with latent defects.

Get all the details about Percom's new Z line of quality mini-disk systems for Heath computers.

Fill out and mail us the coupon now.

PERCOM

PERCOM DATA COMPANY, INC.
11220 Pagemill Road - Dallas, Texas - 75243

Toll-Free Order Number: 1-800-527-1222

PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
© 1981 PERCOM DATA COMPANY, Inc.

- Yes, I'd like to know more about Percom Z drives and the Percom Z controller.
- Rush me free literature.
- Send to: PERCOM DATA COMPANY, Inc., Dept 26P01, 11220 Pagemill Road, Dallas TX 75243
- NAME _____
- STREET _____
- CITY _____ STATE _____
- ZIP _____ PHONE NUMBER _____
- [] H-Z-89 [] H-8

SEE YOUR DEALER TODAY

DEMAND THE ORIGINAL

'Firestik'
• ANTENNAS •
• ACCESSORIES •

LET THE OTHERS PLAY GAMES!

WE MANUFACTURE ONLY THE VERY BEST ANTENNAS!

AM/FM AUTO RADIO
CITIZENS BAND
CORDLESS TELEPHONE

Dealer & Distributor Inquiries Invited
SEND FOR FREE CATALOG

Firestik® Antenna Company
2614 East Adams/Phoenix, AZ 85034

Name _____
Street _____
City _____
State _____ Zip _____

Serving the CB and Communications Market Since 1962.

5-YEAR REPLACEMENT WARRANTY

CIRCLE NO. 18 ON FREE INFORMATION CARD

Remove Vocals

Remove the less vocal and substitute your own voice with most stereo recordings using our new, low cost VOCAL ZAPPER™. Great for practice, professional demos or just for fun.

WITH THE

VOCAL ZAPPER™



FRCM
PAIA Electronics, Inc.

1320 W. Wilshire - Oklahoma City, OK 73116 - (405)843-9626

- Rush my Vocal Zapper Kit, \$24.95 plus \$3 postage & handling enclosed.
- Send assembled Vocal Zapper, \$39.95 plus \$3 postage & handling enclosed.
- Send Free Catalog
- name _____
- address _____
- city _____ state _____ zip _____
- Visa MC card no. _____

PAIA Electronics, dept. 3P1020 W. Wilshire, Okla. City, OK 73116

CIRCLE NO. 35 ON FREE INFORMATION CARD

PROJECT OF THE MONTH

By Forrest M. Mims

Power Pulse Generator

THE LM150/LM250/LM350 is an adjustable voltage regulator capable of delivering from 1.2 to 33 volts at a maximum current of 3 amperes. Normally this chip is used in both fixed and adjustable power supplies, voltage regulators and voltage references.

Since I'm always looking for a new way to obtain high-current pulses for flashing lamps and driving motors, I have recently been experimenting with ways to switch the output of the LM350T on and off. Since the output voltage of this chip is fully adjustable, a circuit which switches its output on and off provides a variable-amplitude power pulse generator.

Before looking at an LM350T pow-

er pulse generator, let's first examine the operating characteristics of this versatile chip. Figure 1 shows the pin diagrams for both the TO-220 packaged LM350T and the TO-3 versions of the LM150/LM250/LM350.

The chip requires a minimum of external components. For straightforward voltage regulation, only two external resistors are required. As shown in Fig. 2, these form a voltage divider connected to the chip's voltage adjust terminal. Altering R_2 's setting varies the circuit's output voltage.

If the LM150/LM250/LM350 is located some distance from the power supply filter capacitor, the addition of a 0.1- μF bypass capacitor across the input is required. Transient response,

as during momentary high current loads, is enhanced by connecting a 1- μF capacitor across the output.

The LM150/LM250/LM350 includes on-chip thermal shutdown circuitry to protect the chip from being damaged by overloads. This circuitry remains functional even if the voltage adjust terminal is disconnected.

Power Pulse Generator. Figure 3 shows one way to switch the LM350T between its minimum output of about 1.2 V and the voltage set by R_5 . In operation, the 555 timer forms an oscillator which turns Q_1 off and on. When Q_1 is on, the output of the LM350T falls to its minimum 1.2-V level as the voltage adjust terminal is shorted to ground through Q_1 's collector-emitter path. When Q_1 is off, the LM350T functions normally.

Resistor R_1 permits the pulse repetition rate to be altered, and R_5 controls the amplitude of the output pulses. Capacitor C_1 's value can be increased or decreased to, respectively, slow down or speed up the pulse rate. When C_1 is 2.2 μF , the output pulses have a duration of 1.5 ms. The pulse duration increases to 2.5 ms when C_1 is increased to 3.3 μF .

Though this circuit has many applications, I've found it to be particularly effective as a flasher for incandescent lamps. Between flashes, the voltage across the lamp's filament falls to about 1.2 V instead of ground as in conventional lamp flashers. This minimal voltage can be considered a "keep-alive" voltage which keeps the filament glowing dimly between the flashes. When the lamp receives a current pulse, its filament reaches full brightness much faster than when a keep-alive current is not flowing.

You can operate an incandescent lamp at much more than its rated current level so long as the current is applied in brief pulses and the duty cycle is kept low. The resulting flashes are surprisingly sharp and brilliantly white. Applications include emergency strobes, close-range flash photography and novelty lighting.

Keep in mind other applications for the circuit. For example, it can deliver adjustable-rate pulses to a dc motor, thus serving as a speed control. It can also be connected to a large speaker and used as an attention-getting warning tone generator.




Fig. 1. Pin arrangement and configuration of the LM350 and LM350T voltage regulator.

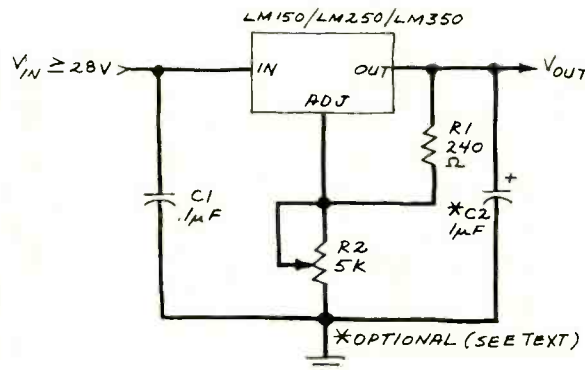


Fig. 2. LM150/LM250/LM350 1.2-to-25-volt adjustable regulator circuits.

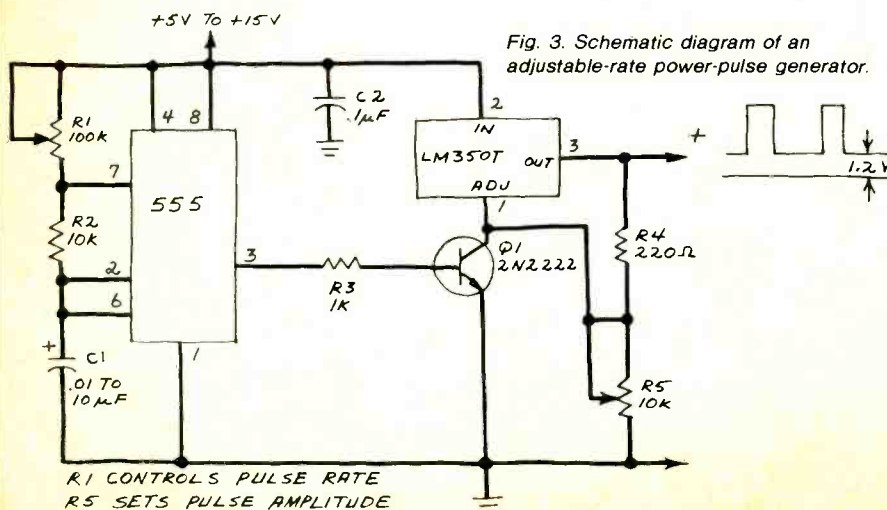


Fig. 3. Schematic diagram of an adjustable-rate power-pulse generator.

Make Radio Shack Your Parts Place

No Waiting! No Minimum Order! Low Prices!

Check These Test Equipment Values

Transistor Checker



NEW!

Tests In Or Out Of Circuit

Only

14.95

Indicates "opens," "shorts," and relative current gain in PNP and NPN small-signal and power types. Socket, plus mini hook clips for in-circuit tests. Output for meter or scope, too. Requires "AA" battery. A timesaver!
22-025 14.95

Our Best Analog VOM



- 43 Ranges!
- 4 1/4" Scale

38% Off

Reg. 39.95

24.88

Buy now and save \$15.07 on this Micronta® multimeter with voltage and current Range-Doubler switch for extra precision. Requires "AA" and 9V batteries. With leads, instructions.
22-204 Sale 24.88

Sale Begins 2/23/82. Ends 3/28/82.

Handheld Enclosure



3.95

For meters, remote controllers, T-pads, more. Has compartment for 9V battery. Polystyrene 1 1/2"x3 3/4"x5 3/4".
270-219 3.95

Solid Buss Wire

1.49



Fifty feet of pretinned 24-ga. copper on a spool. Ideal for perfboard and printed circuit projects. 278-1341 1.49

Prime CMOS ICs

Low As **79¢**



Device	Cat. No.	Each
4001	276-2401	.79
4011	276-2411	.79
4013	276-2413	.99
4017	276-2417	1.69
4027	276-2427	1.19
4042	276-2442	1.29
4049	276-2449	.99
4050	276-2450	.99
4066	276-2466	1.19
4070	276-2470	.99
4081	276-2481	.89
4511	276-2447	1.99
4528	276-2496	1.49
4553	276-2498	3.59



Crystal Mike Element

Multipurpose high-impedance element with 50-8000 Hz response and leads for easy hookup.
270-095 1.59

1.59

Electrolytic Kit



5.95

Set of 16

• 35WVDC • Radial Leads
Three 4.7, 10, 47 uF; two 22, 100 uF; one 220, 470 and 1000 uF. In reusable box with hanger. 272-605 Set 5.95

Magnet Wire

4.49

Set Of 3



Ideal for winding coils. 40 ft. of 22-ga., 75 ft. of 26-ga., 200 ft. of 30 ga.
278-1345 Set 4.49


20-Amp DPDT Switch

2.79



Momentary Type. With spring return to center position. Rated 20 amps at 12VDC. Mounts in 1/16" hole. 275-709 2.79

Let's Wrap!



- A Wire-Wrapping Tool. 4 1/2" long, metal. 276-1570 5.95
- B 30-Gauge Kynar Wire. 50-foot spools. Choice of colors Each, 2.39

Red	#278-501	White	#278-502
Blue	#278-503	Yellow	#278-504

Piezo Buzzer

2.99



For 1.5 to 20VDC

Loud 4.8 kHz signal gets attention. Ideal for battery-powered circuits—draws just 12 milliamps at 9VDC. 1 1/2"x3/4" With leads. 273-060 2.99



Touch-Tone* Pad

16.95

Ideal for remote control, ham radio autopatching, phone upgrading and more. Top quality!
277-1010 16.95

* Trademark of AT&T

DPST Reed Relay

Only **99¢**



5VDC, 180-Ohm Coil. Contacts rated 0.5 amp at 120VAC. PC mountable.
275-228 99¢

Red Mini Lamps



5-Inch Leads
Pkg. of 6 **99¢**

Cute incandescents for dial lights, model RRs, winks-blinkens and more. 6V at 60 milliamps.
272-1144 Pkg. of 6/99¢

"Analog/Digital" ICs

Low As **2.59**



TL507. A to D chip converts analog processes to the signals required for microprocessor controlling—up to 1000 operations per second! Single supply. 8-pin DIP with ap notes.
276-1789 2.59

DAC801. D to A IC gives you an analog output up to 20 volts peak-to-peak with 8-bit digital input. Interfaces with all popular logic families. Low power consumption. 16-pin DIP with data.
276-1791 4.49

9400. A highly linear frequency-to-voltage/voltage-to-frequency converter that operates up to 100 kHz. Ideal for modems. Single or split supply. 14-pin DIP with data. 276-1790 3.49


Phono Jack Board



1.19

Chassis-mount phenolic board with eight RCA-type jacks. Excellent for audio "patch bays." 274-370 1.19

Text/Tape Electronics Course

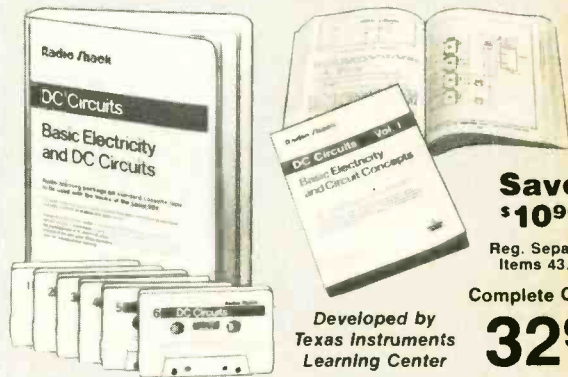

Save **\$10.90**

Reg. Separate Items 43.85

Complete Course

32.95

Developed by Texas Instruments Learning Center

DC Circuits Volume I. An easy-to-understand introduction to electricity, voltage, current, Ohm's law, parallel circuits and more. Fully illustrated. 480 pages. 62-2019 Separately, 6.95
DC Circuits Volume II. Covers voltage dividers, capacitors, inductors, formulas and more. Illustrated. 508 pages. 62-2020 Separately, 6.95
DC Circuits Audio Learning Package. Six standard cassettes that reinforce the concepts presented in Volumes I and II. Learn electronics fundamentals at your own pace! 62-2401 Separately, 29.95

An American Electronics Tradition
For Over Sixty-One Years!

Prices may vary at individual stores and dealers

Radio Shack

A DIVISION OF TANDY CORPORATION
OVER 8200 LOCATIONS IN 76 COUNTRIES

16K Memory

4116-200ns **8/15.95**

ALL MERCHANDISE 100% GUARANTEED!

CALL US FOR VOLUME QUOTES

EPROMS

			Each	8 pcs
1702	256 x 8	(1ns)	4.95	4.50
2708	1024 x 8	(450ns)	2.99	2.75
2758	1024 x 8	(5V) (450ns)	9.95	8.95
TMS2516	2048 x 8	(5V) (450ns)	6.95	5.95
2716	2048 x 8	(5V) (450ns)	5.50	4.95
2716-1	2048 x 8	(5V) (350ns)	9.00	8.50
TMS2716	2048 x 8	(450ns)	9.95	8.95
TMS2532	4096 x 8	(5V) (450ns)	12.95	11.95
2732	4096 x 8	(5V) (450ns) (200ns)	CALL	CALL
2764	8192 x 8	(5V) (450ns)	CALL	CALL

DYNAMIC RAMS

			100 pcs	
4027	4096 x 1	(250ns)	2.50	2.00
4116-120	16,384 x 1	(120ns)	8/29.95	CALL
4116-150	16,384 x 1	(150ns)	8/18.95	1.95
4116-200	16,384 x 1	(200ns)	8/15.95	1.80
4116-300	16,384 x 1	(300ns)	8/14.95	1.75
4164	64,536 x 1	(200ns)	CALL	CALL

STATIC RAMS

			100 pcs	
2101	256 x 4	(450ns)	1.95	1.85
2102-1	1024 x 1	(450ns)	.89	.85
21L02-4	1024 x 1	(LP) (450ns)	1.29	1.15
21L02-2	1024 x 1	(LP) (250ns)	1.69	1.55
2111	256 x 4	(450ns)	2.99	2.49
2112	256 x 4	(450ns)	2.99	2.79
2114	1024 x 4	(450ns)	8/16.95	1.95
2114L-2	1024 x 4	(LP) (200ns)	8/19.95	2.35
2114L-3	1024 x 4	(LP) (300ns)	8/18.95	2.25
2114L-4	1024 x 4	(LP) (450ns)	8/17.95	2.10
2147	4096 x 1	(55ns)	9.95	CALL
TMS4044-4	4096 x 1	(450ns)	3.49	3.25
TMS4044-3	4096 x 1	(300ns)	3.99	3.75
TMS40L44-2	4096 x 1	(LP) (200ns)	4.49	4.25
TMM2016	2048 x 8	(200ns) (150ns)	CALL	CALL
HM6116	2048 x 8	(200ns) (150ns) (120ns)	CALL	CALL

LP = LOW POWER

CRYSTALS

32.768 KHZ	3.95
1.0 MHZ	4.95
1.8432	4.95
2.0	3.95
2.097152	3.95
2.4576	3.95
3.2768	3.95
3.579545	3.95
4.0	3.95
5.0	3.95
5.0688	3.95
5.185	3.95
5.7143	3.95
6.5536	3.95
8.0	3.95
10.0	3.95
14.31818	3.95
18.0	3.95
18.432	3.95
20.0	3.95
22.1184	3.95
32.0	3.95

MISC.

AY5-2376	12.50
11C90	13.95
XR2206	4.95
3242	7.95
3480	9.00
MC4024	3.95
MC4044	4.50
7103	9.50
7106	9.95
7107	12.95
76477	3.95
8038	3.95
95H90	7.99
9602	1.50

DISC CONTROLLERS

1771	24.95
1791	36.95
1797	54.95
UPD765	39.95

UARTS

AY3-1014	6.95
AY5-1013	3.95
TR1602	4.95
IM6402	7.95

INTERFACE

8T26	1.69
8T28	2.49
8T95	.99
8T96	.99
8T97	.99
8T98	.99
DM8131	2.95
DS8836	1.29

CLOCK CIRCUITS

MM5369	3.95
MM5375	3.95
M5M5832	7.45
Z207	7.50
7208	15.95

CONVERTERS

MC1408 L8	4.95
DAC 0800	4.95
ADC-0804	4.95

March Specials

4116-250NS 8/13.95

Z-80A CPU 6.00

Z-80A PIO 6.00

D3242 Intel 6.95

2532 8/75.00

2732 8/70.00

LM1310	50/ 95.00	LM1488	.75
LM1800	50/125.00	LM1489	.75
MC1330	50/ 70.00	DM8131	2.75
MC1350	50/ 50.00		

16PIN Low Profile IC Sockets
100/\$12.00

Specials end March 31, 1982. Please state "March Specials" when ordering.

800-538-5000

800-662-6279

(CALIFORNIA RESIDENTS)

CALL JDR BEFORE YOU BUY!
WE WILL BEAT ANY COMPETITORS' PRICES

6502

6502	6.95
6502-A	12.95
6504	6.95
6505	8.95
6507	9.95
6520	4.35
6522	9.95
6532	14.95
6551	11.85

Z80

Z80-CPU	8.95
Z80A-CPU	6.00
Z80-PIO	6.50
Z80A-PIO	6.00
Z80-CTC	5.95
Z80A-CTC	8.65
Z80-DART	15.25
Z80A-DART	18.75
Z80-DMA	17.50
Z80A-DMA	27.50
Z80-S10/0	23.95
Z80A-S10/0	28.95
Z80-S10/1	23.95
Z80A-S10/1	28.95
Z80-S10/2	23.95
Z80A-S10/2	28.95
Z80-S10/9	17.95
Z80A-S10/9	22.95

Z80B-CPU	18.95
Z80B-CTC	17.95
Z80B-PIO	17.95

Z8671	39.95
Z6132	34.95

74LS00 SERIES

74LS00	.25	74LS85	1.15	74LS166	2.40	74LS293	1.85
74LS01	.25	74LS86	.40	74LS168	1.75	74LS295	1.05
74LS02	.25	74LS90	.65	74LS169	1.75	74LS298	1.20
74LS03	.25	74LS91	.89	74LS170	1.75	74LS324	1.75
74LS04	.25	74LS92	.70	74LS171	.95	74LS325	1.55
74LS05	.25	74LS93	.65	74LS175	.95	74LS363	1.35
74LS08	.35	74LS95	.85	74LS181	2.15	74LS364	1.95
74LS10	.25	74LS96	.95	74LS189	9.95	74LS365	.95
74LS11	.35	74LS107	.40	74LS190	1.00	74LS366	.95
74LS12	.35	74LS109	.40	74LS191	1.00	74LS367	.70
74LS13	.45	74LS112	.45	74LS192	.85	74LS368	.70
74LS14	1.00	74LS113	.45	74LS193	.95	74LS373	.99
74LS15	.35	74LS114	.50	74LS194	1.00	74LS374	1.75
74LS20	.25	74LS122	.45	74LS195	.95	74LS377	1.45
74LS21	.35	74LS123	.95	74LS196	.85	74LS378	1.18
74LS22	.25	74LS124	2.99	74LS197	.85	74LS379	1.35
74LS26	.35	74LS125	.95	74LS221	1.20	74LS385	1.90
74LS27	.35	74LS126	.85	74LS240	.99	74LS386	.65
74LS28	.35	74LS132	.75	74LS241	.99	74LS390	1.90
74LS30	.25	74LS136	.55	74LS242	1.85	74LS393	1.90
74LS32	.35	74LS137	.99	74LS243	1.85	74LS395	1.65
74LS33	.55	74LS138	.75	74LS244	.99	74LS399	1.70
74LS37	.55	74LS139	.75	74LS245	1.90	74LS424	2.95
74LS38	.35	74LS145	1.20	74LS247	.76	74LS447	.37
74LS40	.35	74LS147	2.49	74LS248	1.25	74LS490	1.95
74LS42	.55	74LS148	1.35	74LS249	.99	74LS668	1.69
74LS47	.75	74LS151	.75	74LS251	1.30	74LS669	1.89
74LS48	.75	74LS153	.75	74LS253	.85	74LS670	2.20
74LS49	.75	74LS154	2.35	74LS257	.85	74LS674	9.65
74LS51	.25	74LS155	1.15	74LS258	.85	74LS682	3.20
74LS54	.35	74LS156	.95	74LS259	2.85	74LS683	2.30
74LS55	.35	74LS157	.75	74LS260	.65	74LS684	2.40
74LS63	1.25	74LS158	.75	74LS266	.55	74LS685	2.40
74LS73	.40	74LS160	.90	74LS273	1.65	74LS688	2.40
74LS74	.45	74LS161	.95	74LS275	3.35	74LS689	2.40
74LS75	.50	74LS162	.95	74LS279	.55	81LS95	1.69
74LS76	.40	74LS163	.95	74LS280	1.98	81LS96	1.69
74LS78	.50	74LS164	.95	74LS283	1.00	81LS97	1.69
74LS83	.75	74LS165	.95	74LS290	1.25	81LS98	1.69

CMOS

74C00	.35	74C374	2.75	4019	.45	4098	2.49
74C02	.35	74C901	.80	4020	.95	4099	1.95
74C04	.35	74C902	.85	4021	.95	14409	12.95
74C08	.35	74C903	.85	4022	1.15	14410	12.95
74C10	.35	74C905	10.95	4023	.35	14411	11.95
74C14	1.50	74C906	.95	4024	.75	14412	12.95
74C20	.35	74C907	1.00	4025	.35	14419	4.95
74C30	.35	74C908	2.00	4026	1.65	4502	.95
74C32	.50	74C909	2.75	4027	.65	4503	.65
74C42	1.75	74C910	9.95	4028	.80	4508	1.95
74C48	2.10	74C911	10.00	4029	.95	4510	.95
74C73	.65	74C912	10.00	4030	.45	4511	.95
74C74	.85	74C914	1.95	4034	2.95	4512	.95
74C76	.80	74C915	2.00	4035	.85	4514	1.25
74C83	1.95	74C918	2.75	4040	.95	4515	2.25
74C85	1.95	74C920	17.95	4041	1.25	4516	1.55
74C86	.95	74C921	15.95	4042	.75	4518	1.25
74C89	4.50	74C922	5.95	4043	.85	4519	1.25
74C90	1.75	74C923	5.95	4044	.85	4520	1

2716 EPROMS 450NS (5V)

8/4.95 ea.

ALL MERCHANDISE 100% GUARANTEED!

CALL US FOR VOLUME QUOTES

8000

8005	16.95
8009	19.95
800DA	3.95
800E	12.95
800EA-2	16.95
800E	99.95
800E	39.95
8155	11.95
8156	11.95
8155	29.95
8155-2	39.95
87E1	39.95
87E8	29.95
87E5	44.95

8200

8202	45.00
8205	3.50
8212	1.85
8214	3.85
8216	1.80
8224	2.50
8226	1.80
8228	4.90
8237	19.95
8238	4.65
8239	4.95
8243	4.45
8250	14.95
8251	4.75
8253	9.25
8253-5	9.85
8255	4.75
8255-5	5.25
8257	8.75
8259	6.90
8272	39.95
8275	29.95
8279	9.50
8279-5	10.50
8282	3.65
8283	3.65
8284	5.70
8286	6.65
8287	6.50
8288	25.00
8289	49.95

TV CIRCUITS

MC1330	1.89
MC1350	1.29
MC1358	1.79
LM380	1.29
LM386	1.50
LM565	.99
LM741	.29
LM1310	2.90
LM1800	2.99
LM1889	2.49



APPLE FAN \$69.00

- EXTRA PLUG-IN CARDS CAN CAUSE YOUR APPLE TO OVERHEAT
- ULTRA-QUIET APPLE FAN DRAWS COOL AIR THROUGH YOUR COMPUTER
- ELIMINATES DOWN TIME
- SAVES REPAIR CHARGES
- INCREASES RELIABILITY
- CLIPS ON - NO HOLES OR SCREWS
- COLOR MATCHES APPLE
- LONG LIFE, LOW NOISE MOTOR



* APPLE IS A TRADEMARK OF APPLE COMPUTER INC.

IC SOCKETS

1-99	100
8 pin ST	.13 .11
14 pin ST	.15 .12
16 pin ST	.17 .13
18 pin ST	.20 .18
20 pin ST	.29 .27
22 pin ST	.30 .27
24 pin ST	.30 .27
28 pin ST	.40 .32
40 pin ST	.49 .39
ST = SOLDERTAIL	
8 pin WW	.59 .49
14 pin WW	.69 .52
16 pin WW	.69 .58
18 pin WW	.99 .90
20 pin WW	1.09 .98
22 pin WW	1.39 1.28
24 pin WW	1.49 1.35
28 pin WW	1.69 1.49
40 pin WW	1.99 1.80
WW = WIREWRAP	

CONNECTORS

RS232 MALE	3.25
RS232 FEMALE	3.75
RS232 HOOD	1.25
S-100 ST	3.95
S-100 WW	4.95

DIP SWITCHES

4 POSITION	.85
5 POSITION	.90
6 POSITION	.90
7 POSITION	.95
8 POSITION	.95

6800

6800	5.70
6802	10.95
6808	9.95
6809	24.95
6809E	29.95
6810	4.60
6820	4.95
6821	4.95
6828	14.95
6834	16.95
6840	14.95
6843	42.95
6844	44.95
6845	16.95
6847	15.95
6850	4.75
6852	5.75
6850	10.95
6852	11.95
6E75	6.95
6E80	2.95
6EB00	10.95
6EB21	12.95
6EB50	12.95

LEDS

Jumbo Red	10/1.00
Jumbo Green	6/1.00
Jumbo Yellow	6/1.00
5082-7760 .43"CC	.79
MAN74 .3"CC	.99
MAN72 .3"CA	.99

EPROM ERASERS

PE-14	78.50
PE-14T (with timer)	108.50
PE-24T (with timer)	154.50

ALL ARE HIGH QUALITY UNITS ENCLOSED IN A BLACK ANODIZED ALL MINUM ENCLOSURE.

800-538-5000

800-662-6279

(CALIFORNIA RESIDENTS)

CALL JDR BEFORE YOU BUY!
WE WILL BEAT ANY COMPETITORS' PRICES

VOLTAGE REG'S

7805T	.79	7905T	.89
7808T	.99	7912T	.89
7812T	.79	7915T	1.19
7815T	.99	7924T	1.19
7824T	.99		
7805K	1.39	7905K	1.49
7812K	1.39	7912K	1.49
7815K	1.39	7915K	.79
78L05	.69	79L12	.79
78L12	.69	79L15	.79
78L15	.69		
LM309K	1.49	LM323K	4.95
LM317T	1.95	LM337K	3.95

T = TO-220 K = TO-3 L = TO-92

LINEAR

LM301V	.34
LM308V	.98
LM309K	1.49
LM311	.64
LM317T	1.95
LM317K	3.95
LM318	1.49
LM323K	4.95
LM324	.59
LM337K	3.95
LM339	.99
LM377	2.29
LM380	1.29
LM386V	1.50
LM555V	.39
LM556	.69
LM565	.99
LM566V	1.49
LM567V	1.29
LM723	.49
LM733	.98
LM741V	.29
LM747	.79
LM748V	.59
LM1310	2.90
MC1330V	1.89
MC1350V	1.29
MC1358	1.79
LM1414	1.59
LM1458V	.69
LM1488	.99
LM1489	.99
LM1800	2.99
LM1889	2.49
LM3900	.59
LM3909V	.98
LM3914	3.95
LM3915	3.95
LM3916	3.95
75451V	.39
75452V	.39
75453V	.39

7400 SERIES

7400	.19	7451	.23	74136	.50	74186	18.50
7401	.19	7453	.23	74141	.65	74190	1.15
7402	.19	7454	.23	74142	2.95	74191	1.15
7403	.19	7460	.23	74143	2.95	74192	.79
7404	.19	7470	.35	74144	2.95	74193	.79
7405	.22	7472	.29	74145	.60	74194	.85
7406	.22	7473	.34	74147	1.75	74195	.85
7407	.22	7474	.35	74148	1.20	74196	.79
7408	.24	7475	.49	74150	1.35	74197	.75
7409	.19	7476	.35	74151	.65	74198	1.35
7410	.19	7480	.59	74152	.65	74199	1.35
7411	.25	7481	1.10	74153	.55	74221	1.35
7412	.30	7482	.95	74154	1.40	74246	1.35
7413	.35	7483	.50	74155	.75	74247	1.25
7414	.55	7485	.65	74156	.65	74248	1.85
7416	.25	7486	.35	74157	.55	74249	1.95
7417	.25	7489	4.95	74159	1.65	74251	.75
7420	.19	7490	.35	74160	.85	74259	2.25
7421	.35	7491	.40	74161	.70	74265	1.35
7422	.29	7492	.50	74162	.85	74273	1.95
7423	.29	7493	49	74163	.85	74276	1.25
7425	.29	7494	.65	74164	.85	74279	.75
7426	.29	7495	.55	74165	.85	74283	2.00
7427	.29	7496	.70	74166	1.00	74284	3.75
7428	.45	7497	2.75	74167	2.95	74285	3.75
7430	.19	74100	1.00	74170	1.65	74290	.95
7432	.29	74107	.30	74172	5.95	74293	.75
7433	.45	74109	.45	74173	.75	74298	.85
7437	.29	74110	.45	74174	.89	74351	2.25
7438	.29	74111	.55	74175	.89	74365	.65
7440	.19	74116	1.55	74176	.89	74366	.65
7442	.49	74120	1.20	74177	.75	74367	.65
7443	.65	74121	.29	74178	1.15	74368	.85
7444	.69	74122	.45	74179	1.75	74376	2.20
7445	.69	74123	.55	74180	.75	74390	1.75
7446	.59	74125	.45	74181	2.25	74393	1.35
7447	.69	74126	.45	74182	.75	74425	3.15
7448	.69	74128	.55	74184	2.00	74426	.85
7450	.19	74132	.45	74185	2.00	74490	2.55

74S00 SERIES

74S00	.44	74S74	.69	74S163	3.75	74S257	1.39
74S02	.48	74S85	2.39	74S168	4.65	74S258	1.43
74S03	.48	74S86	1.44	74S169	5.44	74S260	1.83
74S04	.79	74S112	1.59	74S174	1.09	74S274	19.95
74S05	.79	74S113	1.98	74S175	1.09	74S275	19.95
74S08	.48	74S114	1.50	74S181	4.47	74S280	2.90
74S09	.98	74S124	2.77	74S182	2.95	74S287	4.75
74S10	.69	74S132	1.24	74S188	3.95	74S288	4.45
74S11	.88	74S133	.98	74S189	14.95	74S289	6.95
74S15	.70	74S134	.69	74S194	2.95	74S301	6.25
74S20	.68	74S135	1.48	74S195	1.89	74S373	3.45
74S22	.98	74S138	1.08	74S196	4.90	74S374	3.45
74S30	.48	74S139	1.25	74S197	4.25	74S381	7.25
74S32	.98	74S140	1.45	74S201	14.95	74S387	5.75
74S37	1.87	74S151	1.19	74S225	8.95	74S412	2.99
74S38	1.68	74S153	1.19	74S240	3.98	74S471	9.95
74S40	.44	74S157	1.19	74S241	3.75	74S472	16.85
74S51	.78	74S158	1.45	74S244	3.98	74S474	17.85
74S64	.79	74S161	2.85	74S251	1.90	74S482	15.60
74S65	1.25	74S162	3.70	74S253	7.45	74S570	7.80
				74S255	7.45	74S571	7.80

HOURS: Mon. - Fri., 9 to 5; Sat. 11 to 3

VISIT OUR RETAIL STORE!



JDR MICRODEVICES, INC.

1224 S. Bascom Ave.

San Jose, CA 95128

800-538-5000 • 800-662-6279 (CA)

(408) 995-5430 • Telex 171-110

TERMS: For shipping include \$2.00 for UPS Ground, \$3.00 for UPS Blue Label Air, \$10.00 minimum order. Bay Area residents add 6 1/2 % sales tax. California residents add 6% sales tax. We reserve the right to limit quantities and substitute manufacturer. Prices subject to change without notice. Send SASE for complete list.

SN7400N	.20	SN7472N	.29	SN74156N	.79
SN7401N	.20	SN7473N	.35	SN74157N	.69
SN7402N	.25	SN7474N	.35	SN74160N	.89
SN7403N	.25	SN7475N	.35	SN74161N	.89
SN7404N	.25	SN7476N	.35	SN74162N	.89
SN7405N	.29	SN7479N	5.00	SN74163N	.89
SN7406N	.35	SN7480N	.50	SN74164N	.89
SN7407N	.35	SN7482N	.59	SN74165N	.89
SN7408N	.29	SN7483N	.69	SN74166N	1.25
SN7409N	.29	SN7485N	.89	SN74167N	2.75
SN7410N	.25	SN7486N	.35	SN74170N	1.95
SN7411N	.29	SN7489N	1.75	SN74172N	4.35
SN7412N	.35	SN7490N	.49	SN74173N	1.95
SN7413N	.40	SN7491N	.59	SN74174N	.95
SN7414N	.69	SN7492N	.45	SN74175N	.89
SN7415N	.29	SN7493N	.45	SN74176N	.79
SN7416N	.29	SN7494N	.69	SN74177N	.79
SN7417N	.29	SN7496N	.69	SN74179N	.79
SN7420N	.25	SN7495N	.19	SN74180N	.75
SN7421N	.45	SN7497N	3.00	SN74181N	2.25
SN7422N	.45	SN74100N	1.49	SN74182N	2.75
SN7423N	.29	SN74104N	.89	SN74184N	2.49
SN7425N	.29	SN74105A	.89	SN74185N	2.49
SN7427N	.25	SN74107N	.35	SN74190N	1.25
SN7428N	.49	SN74109N	.35	SN74191N	1.25
SN7430N	.25	SN74116N	.99	SN74192N	.89
SN7432N	.29	SN74121N	.39	SN74193N	.89
SN7433N	.25	SN74122A	.35	SN74194N	.89
SN7434N	.40	SN74123N	.59	SN74195N	.69
SN7439N	.25	SN74125N	.49	SN74196N	.89
SN7440N	.25	SN74126N	.49	SN74197N	.89
SN7441N	.89	SN74132N	.79	SN74198N	1.49
SN7442N	.89	SN74133N	.75	SN74199N	1.49
SN7443N	1.10	SN74141N	.99	SN74201N	1.25
SN7444N	1.10	SN74142N	3.25	SN74251N	.99
SN7445N	.89	SN74143N	.39	SN74276N	1.95
SN7446N	.29	SN74145N	3.95	SN74279N	.79
SN7447N	.69	SN74147N	1.95	SN74283N	1.49
SN7448N	.29	SN74149N	3.95	SN74284N	3.95
SN7450N	.20	SN74148N	1.29	SN74285N	3.95
SN7451N	.20	SN74150N	1.25	SN74286N	.69
SN7452N	.20	SN7459N	.69	SN74287N	.69
SN7454N	.20	SN74152N	.69	SN74367N	.69
SN7459A	.25	SN74153N	.79	SN74368N	.69
SN7460N	.20	SN74154N	1.25	SN74390N	1.49
SN7470N	.29	SN74155N	.79	SN74393N	1.49

Bulova Quartz Ladies Watches

ONE YEAR FACTORY WARRANTY






YOUR CHOICE — 50%-OFF SUGG. RETAIL PRICE
 CALL OR SEND ORDER IN REFERENCING TO THIS AD FOR SPECIAL PRICE
 Because of Limited Supply, please provide a second and third choice
 EXAMPLE: 82395-5Y, SUGG. RETAIL \$140.00, 50% OFF — YOUR COST \$70.00

LITRONIX Stick Display Sale

MULTI-DIGIT REFLECTOR ARRAYS FOR CLOCKS

SALE!

PART NUMBER	DESCRIPTION	UNIT PRICE	QUANTITY	SALE PRICE
DL-100 (100)	100 1/2" Digit Array	1.89	21,300	21.30
DL-100 (50)	50 1/2" Digit Array	1.79	21,300	21.30
DL-100 (25)	25 1/2" Digit Array	2.29	21,300	21.30

NATIONAL Stick Display Sale

LED NUMERIC ARRAYS

SALE!

PART NO.	DESCRIPTION	UNIT PRICE	QUANTITY	SALE PRICE
NSA116	100 1/2" Digit Array	1.56	21,300	21.30
NSA117	50 1/2" Digit Array	1.56	21,300	21.30
NSA118	25 1/2" Digit Array	1.56	21,300	21.30

COMPUTER GRADE CAPACITORS

MFD	VWDC	PRICE	MFD	VWDC	PRICE	MFD	VWDC	PRICE
1.500	150	1.95	10,000	15	2.95	24,000	10	2.95
1.500	250	2.49	10,000	25	3.49	27,000	10	3.49
1.500	500	3.95	10,000	50	4.95	30,000	25	4.95

OVER 200 OTHER VALUES AVAILABLE — CALL OR WRITE FOR YOUR REQUIREMENT

LOW PROFILE (TIN) SOCKETS

1-24	25-49	50-100	
8 pin LP	.17	.16	.15
14 pin LP	.22	.21	.20
18 pin LP	.29	.28	.27

SOLDAIRTAIL STANDARD (TIN)

1-24	25-49	50-100	
8 pin ST	.27	.25	.24
14 pin ST	.30	.27	.25
18 pin ST	.35	.32	.30

1/4 WATT RESISTOR ASSORTMENTS — 5%

50 VOLT CERAMIC OIS CAPACITORS

ASST. 1	5 ea.	27 Ohm	33 Ohm	39 Ohm	47 Ohm	56 Ohm	50 pcs.	\$1.95
ASST. 2 <td>5 ea.</td> <td>180 Ohm</td> <td>220 Ohm</td> <td>270 Ohm</td> <td>330 Ohm</td> <td>390 Ohm</td> <td>50 pcs. <td>\$1.95</td> </td>	5 ea.	180 Ohm	220 Ohm	270 Ohm	330 Ohm	390 Ohm	50 pcs. <td>\$1.95</td>	\$1.95

NEW 1982 JAMECO ELECTRONICS CATALOG

3155 SHOREWAY ROAD, BELMONT, CA 94002
 PHONE ORDERS WELCOME — (415) 592-8097

INTERSIL

Part No.	Function	Price
70451P1	CMOS Precision Timer	14.95
70456P/Kit*	Stopwatch Chip, XTL	24.95
7106CP/L	3 1/2 Digit A/D (LED Drive)	18.95
7106V/Kit*	IC, Circuit Board, Display	34.95
7107CP/L	3 1/2 Digit A/D (LED Drive)	15.95
7107V/Kit*	IC, Circuit Board, Display	29.95
7183CP/L	3 1/2 Digit A/D, LCD, H.L.D.	18.95
7110CP/L	3 1/2 Digit A/D, LCD, H.L.D.	18.95
7201DR	Low Battery Volt Indicator	2.25
7201PG	CMOS LED Stopwatch/Timer	12.95
7205V/Kit*	Stopwatch Chip, XTL	19.95
7205VCP	Tone Generator	12.95
7205V/Kit*	Tone Generator Chip, XTL	12.95
7207AICP	Oscillator Controller	6.50
7207AIEP/Kit*	Freq. Counter Chip, XTL	13.95
72081P	Seven Decoder Chip	17.95
72091P	Clock Generator	3.95
72151PG	4 Func. CMOS Stopwatch CKT	13.95
72151V/Kit*	4 Func. Stopwatch Chip, XTL	19.95
7216A1J1	8-Digit Univ. Counter C.A.	32.00
7216C1J1	8-Digit Univ. Counter C.A.	26.95
7216D1J1	8-Digit Univ. Counter C.A.	21.95
72171J1	4-Digit LED Up/Down Counter	12.95
7218C1J1	8-Digit Univ. LED Drive	10.95
72241J1	LCD 4 1/2 Digit Up Counter DRI	11.25
72261J1	8-Digit Univ. Counter	31.95
72261V/Kit*	8-Func. Counter Chip, XTL	34.95
72401J1	CMOS Bin Prod. Timer/Counter	4.95
72421J1	CMOS Divide-by-256 R Timer	2.05
72501J1	CMOS BCD Prod. Timer/Counter	6.00
72501V/Kit*	CMOS BCD Prod. Timer/Counter	6.00
75551PA	CMOS 555 Timer (8 pin)	1.45
75561P	CMOS 556 Timer (14 pin)	2.20
7611BCPA	CMOS Op Amp Comparator 5MV	2.25
7612BCPA	CMOS Op Amp Ext. Cmvr.	5MV 2.95
7613BCPA	CMOS Dual Op Amp Comp.	5MV 3.95
7631CCPE	CMOS Tri Op Amp Comp.	10MV 5.35
7641CCPD	CMOS Quad Op Amp Comp.	10MV 7.50
7642CCPD	CMOS Quad Op Amp Comp.	10MV 7.50
7643CCPD	Voltage Comparator	3.95
8038CCPD	Waveform Generator	4.95
8048CCPD	Monolithic Logarithmic Amp	21.60
8101CP	50ppm Band-GAP Volt Ref. Diode	9.95
8211CPA	Volt Ref/Indicator	2.95
8212CPA	Volt Ref/Indicator	2.95

74C

74C00	.39	74C95	1.59	74C221	1.95
74C02	.39	74C95	1.59	74C244	2.25
74C04	.39	74C107	1.89	74C273	2.49
74C06	.39	74C151	1.69	74C303	1.95
74C10	.39	74C154	3.35	74C374	2.59
74C14	.75	74C157	2.25	74C301	.69
74C16	.39	74C160	1.60	74C369	1.95
74C20	.39	74C161	1.60	74C311	10.95
74C42	1.39	74C162	1.49	74C312	10.95
74C43	1.39	74C163	1.49	74C315	10.95
74C73	.79	74C164	1.59	74C317	10.95
74C74	.79	74C173	1.19	74C322	5.49
74C86	.99	74C174	1.19	74C323	5.49
74C89	6.95	74C175	1.19	74C325	7.50
74C90	1.29	74C192	1.69	74C326	7.50
74C93	1.29	74C193	1.69	80C37	.95
74C95	1.29	74C195	1.59	80C37	.95

LINEAR

LM702H	.79	LM702H	.79
LM702H	.79	LM702H	.79
LM703CN	4.50	LM703CN	4.50
LM709N	.29	LM709N	.29
LM710N	.79	LM710N	.79
LM711N	.79	LM711N	.79
LM723A	6.69	LM723A	6.69
LM733N	1.00	LM733N	1.00
LM739N	1.19	LM739N	1.19
LM741CN	.35	LM741CN	.35
MC1745CG	3.00	MC1745CG	3.00
LM309N	1.25	LM309N	1.25
LM301N	1.25	LM301N	1.25
LM302N	1.25	LM302N	1.25
LM303N	1.25	LM303N	1.25
LM304N	1.25	LM304N	1.25
LM305N	1.25	LM305N	1.25
LM306N	1.25	LM306N	1.25
LM307N	1.25	LM307N	1.25
LM308N	1.25	LM308N	1.25
LM309N	1.25	LM309N	1.25
LM310N	1.25	LM310N	1.25
LM311N	1.25	LM311N	1.25
LM312N	1.25	LM312N	1.25
LM313N	1.25	LM313N	1.25
LM314N	1.25	LM314N	1.25
LM315N	1.25	LM315N	1.25
LM316N	1.25	LM316N	1.25
LM317N	1.25	LM317N	1.25
LM318N	1.25	LM318N	1.25
LM319N	1.25	LM319N	1.25
LM320N	1.25	LM320N	1.25
LM321N	1.25	LM321N	1.25
LM322N	1.25	LM322N	1.25
LM323N	1.25	LM323N	1.25
LM324N	1.25	LM324N	1.25
LM325N	1.25	LM325N	1.25
LM326N	1.25	LM326N	1.25
LM327N	1.25	LM327N	1.25
LM328N	1.25	LM328N	1.25
LM329N	1.25	LM329N	1.25
LM330N	1.25	LM330N	1.25
LM331N	1.25	LM331N	1.25
LM332N	1.25	LM332N	1.25
LM333N	1.25	LM333N	1.25
LM334N	1.25	LM334N	1.25
LM335N	1.25	LM335N	1.25
LM336N	1.25	LM336N	1.25
LM337N	1.25	LM337N	1.25
LM338N	1.25	LM338N	1.25
LM339N	1.25	LM339N	1.25
LM340N	1.25	LM340N	1.25
LM341N	1.25	LM341N	1.25
LM342N	1.25	LM342N	1.25
LM343N	1.25	LM343N	1.25
LM344N	1.25	LM344N	1.25
LM345N	1.25	LM345N	1.25
LM346N	1.25	LM346N	1.25
LM347N	1.25	LM347N	1.25
LM348N	1.25	LM348N	1.25
LM349N	1.25	LM349N	1.25
LM350N	1.25	LM350N	1.25

100 VOLT MYLAR FILM CAPACITORS

Value	10	10-100	100+	Value	10	10-100	100+
10 pf	.08	.06	.05	.001uF	.08	.06	.05
22 pf	.08	.06	.05	.01uF	.08	.06	.05
47 pf	.08	.06	.05	.022uF	.08	.06	.05
100 pf	.08	.06	.05	.047uF	.08	.06	.05
220 pf	.08	.06	.05	.1uF	.08	.06	.05

OVER 2,000 DIFFERENT SOFTWARE PROGRAMS IN STOCK

for ATARI • APPLE • PET
TRS-80 • HEWLETT PACKARD
and others

for brochure write or call
COMPUTER CENTER
DigiByte Systems Corp.
31 East 31st Street (between Madison & Park Ave.) New York, N.Y.
480 Lexington Avenue (American Brands Bldg., between 46th & 47th St.) New York, N.Y.
in N.Y. Call (212) 889-8130
Outside N.Y. Call Toll Free (800) 221-3144

CIRCLE NO. 125 ON FREE INFORMATION CARD

Computer Case Company

comp case

• AP103

- AP101 Apple II with Single Disk Drive \$109
- AP102 Apple II with Double Disk Drives 119
- AP103 Apple II, 9 Inch Monitor & Double Drives 129
- AP104 Apple ///, two additional Drives & Silentype 139
- AP105 12 inch monitor plus accessories 99
- RS201 TRS-80 Model I, Expansion Unit & Drives 109
- RS202 TRS-80 Monitor or TV set 84
- RS203 TRS-80 Model III 129
- RS205 Radio Shack Color Computer 89
- AT301 Atari Computer & Accessories 109
- P401 Paper Tiger 440 445 460 99
- P402 Centronics 730 737 Line Printer II IV 89
- P403 Epson MX70 or MX80 89
- P404 Epson MX100 99
- CC90 Matching Attache Case 75

computer case company
5650 INDIAN MOUND, CT COLUMBUS, OHIO 43213 1614/868-9464

CIRCLE NO. 126 ON FREE INFORMATION CARD

You can pay more — But you can't get more!

Model III 16K
\$839

Model III 48K
2 disc & RS232C
\$2100

Color Computer 4K
\$310
w/16K Ext. Basic
\$459

BUY DIRECT. These are just a few of our great offers which include Printers, Modems, Computers, Peripherals, Disc Drives, Software and more. call TOLL FREE **1-800-343-8124**

We have the lowest possible fully warranted prices and a full complement of Radio Shack Software.

computer plus
Write for your free catalog
245A Great Road
Littleton, MA 01460
617 • 486 • 3193

CIRCLE NO. 127 ON FREE INFORMATION CARD

COMPUTERWARE
products for
COLOR COMPUTER

SOFTWARE
Color Invaders • Color Pac Attack • Monitor • Adventure Games • Text Editors • Assemblers • PASCAL • Magikube • Finance Programs • Color Data Organizer • Graphic Games • Disassembler

HARDWARE
32 K RAM Expansion Board • 16 K RAM Set • Cables • Interfaces • Power Pack ROM Cartridge • Printers

ACCESSORIES
Books • Cassettes • Supplies • Service Manuals

Shipping from stock

Call or Write:
COMPUTERWARE
Dept. C • Box 668
Encinitas, CA 92024 • (714) 436-3512
Computerware is a trademark of Computerware

CIRCLE NO. 128 ON FREE INFORMATION CARD

Save On Hewlett-Packard & TRS-80™ Computers



For the best deals on Hewlett Packard HP-85, HP-125 and Radio Shack® TRS-80 Computers, CALL OR WRITE US:

Pan American Electronics
Dept. 64 • 1117 Conway • Mission, TX 78572
Telex Number 767339
Toll Free Order Number 800/531-7466
Texas & Principal Number 512/581-2766
TM — Trademark of Tandy Corporation

CIRCLE NO. 129 ON FREE INFORMATION CARD

MICROSETTE CASSETTES

Length	Qty 10	Qty 50
C-10	\$ 7.50	\$32.50
C-20	9.00	39.00
C-60	13.50	57.00
C-90	17.50	77.50

5-screw shell, boxes, labels, product warranty, UPS shipping included. Please no P.O. box. CA Customers add taxes.

MICROSETTE CO.
475 Ellis St., Mt. View,
CA 94043 (415) 968-1604

CIRCLE NO. 130 ON FREE INFORMATION CARD

MICROPROCESSOR IC's RAM's • ROM's • EPROM's MICROPROCESSOR SUPPORT IC's COMPLETE LINE OF ELECTRONIC PARTS, SUPPLIES & TECHNICAL BOOKS

WRITE FOR FREE CATALOG

P.O. BOX 1957P
HAWTHORNE,
CA 90250

SUNTRONICS CO., INC.
12621 CRENSHAW BOULEVARD
HAWTHORNE CALIFORNIA 90250
IN CALIFORNIA OUTSIDE CALIFORNIA TOLL FREE
(213) 644-1149 1-800-421-5775

or indicate on info card

CIRCLE NO. 131 ON FREE INFORMATION CARD

BUY DIRECT SAVE

TRS-80 DISCOUNT DIRECT PRICES

Learn To "Do It Yourself" And Save Money

WRITE FOR FREE CATALOG

1-800-841-0860 TOLL FREE

YOUR TRS-80 COMPUTER HEADQUARTERS

MICRO MANAGEMENT SYSTEMS INC.
DEPT. NO. 12
Downtown Plaza Shopping Center
115C Second Ave. S.W. • Coiro, Georgia 31728
912-377-7120 Go. Phone No.

CIRCLE NO. 132 ON FREE INFORMATION CARD

TRS-80 COMPUTERS

- Model II 64k \$3288
- Model III 16k \$825
- Model III 48k 2 Drives RS232 \$2069
- Color Computer 4k Level I \$308
- Color Computer 16k Extended Basic \$459

EPSON Printers \$CALL

All printers and accessories in stock.

Discount Prices
on full line of Radio Shack & TCS Custom Computers and Accessories. Call for catalog

Texas Computer Systems
P.O. Box 1327 Arlington, Texas 76004-1327
TOLL FREE 800-433-5184
Texas Residents 817-274-5625

PAYMENT: Money order, cashier's check or certified check. Prices reflect 3% cash discount. Call for VISA and Mastercard prices.

CIRCLE NO. 133 ON FREE INFORMATION CARD

WE ACCEPT TAX REFUNDS



SPEND YOUR TAX DOLLARS WITH US. WE SPECIALIZE IN QUALITY APPLE SOFTWARE FOR THE:

- | | |
|------------------------|--------------------------------------|
| A Doctor | G Attorney |
| B Dentist | H Stock Broker |
| C Student & Teacher | I Accountant |
| D School Administrator | J For novice programmers |
| E Secretary | K Try our teaching programs in BASIC |
| F Construction Worker | |

We also accept checks, Visa and Mastercard. Call TOLL FREE for Complimentary Brochure: (800) 854-0561 In CA (800) 432-7257 Ext. 802

For further information call (714) 365-6668

Monument
COMPUTER SERVICE

Village Data Center P.O. Box 603 Joshua Tree, CA 92252

CIRCLE NO. 134 ON FREE INFORMATION CARD

ON-LINE DATABASE

The ON-LINE DATABASE is designed for high speed retrieval of large numbers of records. Using a machine language binary search and retrieve routine, it will locate any record within a maximum of 3 seconds, with 1000 records on file.

Using an assumed field option, redundant data for each record only has to be entered once.

A flexible report writer allows you to customize your printout. In addition, two built-in mailing label formats are provided.

Other features include:

- user defined sort & retrieval keys
- full screen cursor control during entry & editing of data
- print or display option at all times
- fully menu driven

The ON-LINE DATABASE is standard DDS 3.3, may be copied for backup purposes and is flitable. No programming knowledge is required, and a tutorial with sample data is included.

Price: \$100.00

Utilities available include:

- file merging
- arithmetic operations
- flexible mail label formats

BLUE LAKES COMPUTING

3240 University Avenue
Madison, WI 53705
(608) 233-6502

CIRCLE NO. 137 ON FREE INFORMATION CARD

NEC

PC-8000 Series Microcomputer System.

Japan's Most Popular Personal Computer

Write for Special Discount Prices

JB-1201 Green Phosphor Monitor \$169

JC-1202 RGB Color Monitor \$899

PC-8023 Dot Matrix Printer \$625


Payment by check or money order
Prices subject to change

SYNAPSE VIDEO

P.O. BOX 962 New York N.Y. 10009
(212) 860-5776

CIRCLE NO. 140 ON FREE INFORMATION CARD

NEC:



COMMODORE VIC. \$CALL

APPLE, ALTOS, HP & XEROX
RCA VP-3501 Videotex
Data Terminal \$345.00

Terminals
Adds, Hazeltine, Televideo
Calculators
H.P. & Sharp
Video Recorders
Mitsubishi (MGA), RCA & Sony
Scotch
Data Diskettes & VCR Tapes

Mail Order: FUTRA COMPANY
P.O. Box 4380-P, Torrance, CA 90510
(213) 328-8951 (800) 421-5006

Retail: OMC
20695 S. Western Ave #124,
Torrance, CA 90501

TWX 910 349-6211 AGENFTRA TRNC

CIRCLE NO. 135 ON FREE INFORMATION CARD

RAM

For ATARI

48K RAM BOARD FOR THE 400

- Increases memory capacity
- Reduces power consumption
- Reduces heat

48K Board (400) \$299

32K Board (800) \$150

INTEC
PERIPHERALS
CORP

3389 Del. Rosa Avenue
San Bernardino, CA 92404
(714) 864-5269

ATARI, 400, 800 are Trademarks of ATARI, Inc.

CIRCLE NO. 138 ON FREE INFORMATION CARD

SHOP OWNERS! SELL POPULAR ELECTRONICS

in your shop and make big profits on every copy. We pay all shipping and give you a FREE display rack. Minimum order 8 copies/issue.

FOR DETAILS,
CALL COLLECT:
(212) 725-4299

CROSS ASSEMBLERS WRITTEN IN FORTRAN IV

NOW AVAILABLE: two different cross-assemblers for each of the following microprocessors:
6800 6801 6805 6809 68000 8080 85 6502 1802

- Two-pass assembly, w/forward references
- Manufacturer's complete instruction set
- Long error messages, free-format input
- Written in 1966 ANSI standard FORTRAN IV
- "Industrial" Macroassemblers also feature macros, conditional assembly, relocatable object code

(Target Machine(s))	"HOBBYIST" ASSEMBLERS	"INDUSTRIAL" MACRO-ASSEMBLERS
6809 or 6502	\$400.00	\$200.00
Other 8-bit	350.00	150.00
16-bit	500.00	250.00

Prices include source code on tape and in printed form, User's Manual, shipping (USA), and program support. All programs shipped from stock.

*** SPECIAL ON PREPAID ORDERS: Same-day EXPRESS MAIL shipping, for no extra charge. Call today — your program will arrive tomorrow!

IDM INTELLIGENT DEVICES OF MINNESOTA
P.O. Box 492
Anoka, MN 55303
(612) 427-0787 8:00 - 12 Noon

CIRCLE NO. 136 ON FREE INFORMATION CARD



NEW! for the '89 from

MAGNOLIA
MICROSYSTEMS

DOUBLE DENSITY DISK CONTROLLER

for both 5 1/4" & 8" drives

only \$595 complete

including CP/M™ 2.2

MAGNOLIA MICROSYSTEMS, INC.
2264 - 15th Ave W., Seattle 98119
(206) 285-7266 (800) 426-2841

CP/M is a trademark of Digital Research.

CIRCLE NO. 139 ON FREE INFORMATION CARD

NEW COMPUTER MART FORMAT 3" x 2"

PICTURE YOUR AD HERE!

NEXT CLOSING DATE:
MARCH 1

Electronics Classified

CLASSIFIED RATES: Per Word, 15 Word Minimum. **COMMERCIAL:** \$3.50. **EXPAND-AD:** \$5.25. **DISPLAY:** 1" x 2 1/4", \$425.00. 2" x 2 1/4", \$850.00. 3" x 2 1/4", \$1,275.00. **GENERAL INFORMATION:** Frequency rates and prepayment discounts available. Payment must accompany order except credit card—Am. Ex., Diners, MC, VISA (include exp. date)—or accredited ad agency insertions. Copy subject to publisher's approval; must be typewritten or printed. First word set in caps. Advertisers using P.O. Boxes MUST supply permanent address and telephone number. Orders not acknowledged. They will appear in next available issue after receipt. Closing date: 1st of the 2nd month preceding cover date (e.g., Mar. issue closes Jan. 1). Send order & remittance to: Classified Advertising, Popular Electronics Magazine, 1 Park Avenue, New York, NY 10016. Direct inquiries to Rose Lynch, (212) 725-7686.

FOR SALE

FREE DISCOUNT ELECTRONICS CATALOG. Over 4 1/2 million satisfied customers. Low, low prices on I.C.'s LED read-outs, computer peripherals, audio components, solar products and much, much more. Poly Paks, Box 942 PEC, Lynnfield, Mass. 01940.

GOVERNMENT and industrial surplus receivers, transmitters, sniperscopes, electronic parts, Picture Catalog 25 cents. Meshna, Nahant, Mass. 01908.

ELECTRONIC PARTS, semiconductors, kits. **FREE FLYER.** Large catalog \$1.00 deposit. **BIGELOW ELECTRONICS,** Bluffton, Ohio 45817.

RADIO—T.V. Tubes— 49 cents each. Send for free catalog. Cornell, 4213 University, San Diego, Calif. 92105.

SAVE UP TO 50% on name brand test equipment. Free catalog and price list. Salen Electronics, Box 82, Skokie, IL 60077.

TELETYPE EQUIPMENT: Copy Military, Press, Weather, Amateur, Commercial Transmissions. Catalog \$1.00. **WEATHER-MAP RECORDERS:** Copy Satellite Photographs, National-Local Weather Maps. Learn How! \$1.00. Atlantic Sales, 3730 Nautilus Ave., Brooklyn, NY 11224. Phone: (212) 372-0349.

BUILD AND SAVE. TV EARTH STATION. DETECTIVE ELECTRONICS. Video Recorders, Color Cameras, advanced Telephone Projects. **BROADCAST Electronics.** 50 page color catalog of unusual electronic projects **AIR MAILED \$3.00;** with 3 hour audio cassette dramatization of our catalog \$5.00. Don Britton Enterprises, PO Drawer G, Waikiki, Hawaii 96815.

POLICE/FIRE SCANNERS, crystals, antennas, CBs, Radar Detectors. HPR, Box 19224, Denver, CO 80219.

PRINTED CIRCUIT supplies, chemicals, tools, artwork, plating solutions. Major credit cards. Catalog \$2.00, refundable. **CIRCOLEX,** Box 198, Marcy, NY 13403.

RECONDITIONED TEST EQUIPMENT \$1.00 for catalog. **WALTER'S TEST EQUIPMENT,** 2697 Nickel, San Pablo, CA 94806, (415) 758-1050.

NEW ELECTRONIC PARTS. Continuously stocked. Stamp brings catalog. Daytapro Electronics, 3029 N. Wilshire Ln., Arlington Hts., IL 60004.

ELECTRONIC CATALOG. Over 4,500 items. Parts, & components. Everything needed by the hobbyist or technician. \$2.00 postage & handling (United States Only), refundable with first \$15.00 order. **T & M Electronics,** 472 East Main St., Patchogue, NY 11772. (516) 289-2520.

SPEAKERS SAVE 50%. Build your own speaker system. Write: McGee Radio Electronics, 1901 McGee Street, Kansas City, Missouri 64108.

PRINTED CIRCUIT BOARDS, your artwork. Quick delivery. Reasonable. Atlas Circuits, Box 892, Lincoln, NC 28092. (704) 735-3943.

CHEMICALS, Apparatus, Project Books, Wide Selection. Catalog send \$1.00 to Pioneer Corp., 14a Hughey Street, Nashua, NH 03060.

TEST EQUIPMENT, new and used. Catalog \$1.00. PTI, Box 8756, White Bear Lake, MN 55110.

POLICE SCANNERS WHOLESALE PRICES. VISA/MC Phone orders accepted. (415) 573-1624. Free catalog. Scanners Unlimited, 1199A Laurel Street, San Carlos, CA 94070.

Satellite TV

FOR THE HOME

Sick of Network TV?

Our receiver lets you get over 75 channels of television directly from earth-orbiting cable TV satellites! HBO, Showtime, super stations, sports and movies worldwide.

We don't just sell information! We Manufacture Hardware!



From offshore oil rigs, data links to hotels and backyard installations, we wrote the book. Constantly updated, our 94 Page technical information book and catalog gives you all the facts. Inexpensive dishes, feeds, telemetry software, kits and more. Recommended reading by NASA, The Office of Consumer Affairs and quality companies like Rockwell/Collins. Send \$7.95 today!

CALL
24-hrs. C.O.D. Hotline
(305) 339-7600

© **SPACECOAST**[™]
RESEARCH CORPORATION
P.O. Box 442-A, Altamonte Spgs. FL 32701

ROBOT KITS, PARTS, MATERIALS BOOKS. Send \$3 for subscription to catalog and newsletter. **ROBOT MART,** 19 West 34th St., New York, NY 10001.

SATELLITE TELEVISION . . . HOWARD/COLEMAN boards to build your own receiver. For more information write . . . **ROBERT COLEMAN,** Rt. 3, Box 58-APE, Travelers Rest, S.C. 29690.

GATED PULSE SUPPRESSED KIT \$39.00. SINEWAVE SUPPRESSED KIT, \$37.00. Both include parts, manual, and etched board. Manual only \$4.60. **MICROWAVE TV DOWNCONVERTER KIT \$169.00.** Catalog \$2.00. **J&W Electronics,** P.O. Box 61, Cumberland, RI 02864.

RF POWER TRANSISTOR - TUBE CATALOG FREE. MRF453/MRF455A/SK1451 - \$14.00; MRF454/SRF2072/MRF2769 - \$17.00; MRF245/MRF247 - \$27.00. 2N4048 - \$6.20: Exclusive Repair Center for PALOMAR PRIDE, etc. Westcom, 1320 Grand, San Marcos, CA 92069. (714) 744-0728.

MICROWAVE DOWNCONVERTERS BUILT — In preamp - highest gain. Downconverter board, plans - \$15.00. Power Supply Board, Plans - \$5.00. Antenna Cookbook - \$5.00. All three for \$20.00. **MICRO ENGINEERING,** P.O. Box 17231, Minneapolis, MN 55417.

Latest microstrip model of the original

MICROWAVE TV SYSTEM KIT

- LT-13 Down Converter with Preamp
- 16 dB Slotted Antenna
- Deluxe Power Supply Kit
- All Coaxial Cables Included
- 2000 - 2600 MHz Tuning Range

LAB-TRONICS, INC.
P.O. Box 171
Rogers, MN 55374
612-428-4226

AMATEUR MICROWAVE T.V. ANTENNAS. Receive uninterrupted movies, fully guaranteed. Also in kit form. For information and plans send \$8.00 to: **MDS Specialist,** P.O. Box 67, Southaven, MS 38671.

Buy Gov't Surplus

SAVE To 85%

SURPLUS CENTER Box 82209-PE Lincoln, Nebraska Zip Code 68501

Send 60¢ For Big Bargain Catalog

1000's Of Bargains! Surplus, Excess Inventory, Brand Name New Equipment

COMPRESSORS • WINCHES • GEAR MOTORS
TELEPHONES • WELDERS • POWER PLANTS
SURVEYING INSTRUMENTS • ELECTRONICS
FIRE/BURGLAR ALARMS • PAINT GUNS
TARPS • BINOCULARS • TOOL BOXES
HYDRAULICS • AIR TOOLS • PUMPS

SURPLUS CENTER

SATELLITE TELEVISION INFORMATION — Build or buy your own Earth Station. US. \$4.00. **Satellite Television,** RD 3, Oxford, NY 13830.

FREE CATALOG 99 cent kits. Parts. Bargains Galore! **ALL-KIT,** 434 West 4th St., West Islip, New York 11795.

FREE KIT CATALOG contains test equipment. Phone 415-447-3433. **DAGE SCIENTIFIC INSTRUMENTS,** Box 1054P, Livermore, CA 94550.

PICTURE TUBE REBUILDING equipment new and used. **ATOLL TELEVISION,** 6425 Irving Park, Chicago, Illinois 60634.

LOOKING FOR THE BEST BUYS in transistors, IC's, diodes. Call 800-458-6053, in PA (814) 837-6820. **MC-VISA** honored. Saving, service, quality, as only B&D can do. B & D Enterprises, P.O. Box 305, Kane, PA 16735.

SATELLITE T.V. Books, parts, low noise microwave transistors. Specs and catalog \$2.00. **Elite Electronics,** RR1 St. George, Ontario, Canada N0E1N0.

SOUND SYNTHESIZER KITS — Surf \$19.95, Wind \$19.95, Wind Chimes \$24.95, Musical Accessories, many more. Catalog free. **PAIA Electronics,** Box J14359, Oklahoma City, OK 73114.

RESISTORS. 1/4W, 1/2W5% C.F. 3cea., 1% Metal films. **NO MINIMUMS.** Quantity Discounts. Details from: **JR INDUSTRIES,** 5834-E, Swancreek, Toledo, OH 43614.

Amateur MICROWAVE TV 2300 MHz Downconverter Kit	Superior Microwave Products, Inc.
\$35.00	SNP P.O. Box 1241 Vienna, VA 22180
Orders: Inquiries: and Virginia Call	1-800-368-3028 1-703-255-2918
VISA MC	

SCANNER ACCESSORIES, both kits and factory assembled. Free catalog. **Capri Electronics,** Route 1P, Canon, GA 30520.

COMPACT LSI MICROWAVE TV Downconverter fully assembled and tested, no parts change for zone modification, US \$180.00 Airpost with 200P manual. Money order to: **Reiant Engineering Company,** P.O. Box 33610, Sheungwan, Hong Kong.

HENLEY'S 20th CENTURY BOOK of 10,000 Recipes. Formulas & Process for almost everything used in the home, farm, workshop or industry. Satisfaction Guaranteed. Send \$15.00 to: **Nile Corp,** 14a Hughey St., Nashua, NH 03060.

SUBSCRIPTION TELEVISION SYSTEMS. SINEWAVE SYSTEMS: 2300 MHZ MICROWAVE DOWNCONVERTER. Best systems available; no internal connections to TV! Plans \$10.00 each; both \$15.00. **PARTS, KITS AVAILABLE; MC/VISA** accepted on parts purchases. Send SASE for parts pricing and more information on these and other unique plans. **COLLINS ELECTRONICS,** Box 6424, San Bernardino, CA 92412.

MICROWAVE 2Ghz. BEST IN THE WEST! Downconverter kits \$39.00. Complete with antenna and control box \$99.00. Factory assembled - 90 day warranty. \$159.00. **GALAXY ELECTRONICS,** 6007N, 61st Ave., Glendale, AZ 85301. (602)247-1151.

Telephone Listening Device

Record telephone conversations in your office or home. Connects between any cassette or tape recorder and your telephone or telephone LINE. Starts automatically when phone is answered. Records both sides of phone conversation. Stops recorder when phone is hung up. This device is not an answering service.

Each \$19.95
Qty. Disc Avail

Super Powerful Wireless Mic

10 times more powerful than other mics. Transmits up to 1/4 mile to any FM radio. Easy to assemble kit. 15V battery (not incl.)

Call (305) 725-1000 or send \$19.95 + \$1.00 shipping per item to **USI Corp., P.O. Box PE-2052, Melbourne, FL 32901.** COD's accept. For catalog of transmitters, voice scramblers and other specialty items, enclose \$2.00 to USI Corp.

INTERCOM!—Your pushbutton telephones can double as an intercom for under \$20.00 in parts! Plans and instructions. \$5.00. iB Enterprises, Box 453, Westwood, NJ 07675.

SHORTWAVE LISTENERS! Free catalog. High quality SWL equipment! Radio West, 2015 S. Escondido Blvd, Escondido, CA 92025. (714) 741-2891. The Only all SWL store in the Known World.

BOOTLEGGERS BIBLE FOR CB MODIFICATIONS, \$12.95. CB Radio Repair Manual, \$8.95, Linear Plan Book, \$11.95. Also Kits, complete units, and more. Catalog \$1.00 at: A.P. Systems, POB 263PE, Newport, RI 02840.

HOW TO PROGRAM YOUR PET, VIC or OSI C1P/C4P. Easy Fun; Guaranteed. FREE details. Write: TIS, Dept. PE1, Box 921, Los Alamos, NM 87544.

FREE SATCOM
IN THE WORLD
NOW AND AVAILABLE

SATELLITE TV
FANTASTIC 80 TV CHANNELS

New antenna construction plans plus big 8"x11" book loaded with arming info, kits, LNAs and receivers at wholesale prices. Far better than cable TV! Enjoy crystal clear reception. Send \$9.95 today. Add \$2.00 for 1st class (air mail) or call our 24 hr. COD order line (305)862-5068 Now.

Global TV Electronics, P.O. Box 219-E, Maitland, FL 32751

PROTOTYPE/INSTRUMENT PC BOARDS. 7.8"x4.5" glasepoxyFR4 snglsided. Four interleaved power supply busses. Onboard voltage regulation area. Configured for 13 sngldual Opamps, comparators, 10 16pinDIPs, etc. 1-5 \$17.75, 6-10 \$15.50, 10-inf. \$13.25. CHROMATICS CORPORATION, P.O. Box 3009, Cambridge, MA 01239. (617)876-3113.

VARIETY ELECTRONIC SURPLUS parts and pieces. Monthly picture flyer. Send \$2.00 for 6 issues. Star-Tronics, P.O. Box 683, McMinnville, OR 97128.

MICROWAVE TV ANTENNA \$169.95
18" Dish Type Antenna. Probe Mounted Down Converter. 6 Month Warranty

MICROWAVE TV MANUAL \$16.25
Plans and Concepts

SUBSCRIPTION TV MANUAL \$14.95
Theory Schematics Etc.

KITS AVAILABLE

INFORMATION PACKAGE \$2.00
Send Check or MO Add 5% Shipping CA Residents Add Tax

ABEX, P.O. Box 26601-PE, San Francisco, CA 94126

SATELLITE TV ANTENNA - We make the best 10 foot fiberglass dish in the Midwest!!! Receive 75 TV channels direct from the satellite. We have openings for dealers. For complete specs and satellite TV information send \$2.25 for postage & handling to: SPACE ANTENNAS, 127 W. 10th, KCMO, 64105.

Fresh on your Ears.



Speakerlab speakers feature recent technology like polypropylene woofers, Samarium cobalt leaf tweeters, edgeless box construction, passive radiators and ports. They're styled in slim oak veneer or rosewood Clearseal® enclosures. Send for our FREE catalog and see our completely new line plus our huge offering of raw parts which now include musical instrument speakers and high end car stereo speakers.

speakerlab

Dept. CPE23, 735 N. Northlake Way
Seattle, Washington 98103

PRINTED CIRCUIT BOARDS manufacture and design. Also provide special services, i.e., prototypes, photo of artwork, photo-coated copper. Fast turnaround, exceptional quality. Call or write today. Digitronics, Box 2494, Toledo, Ohio 43606. (419) 473-0985.

DECODE Morse, RTTY, and ASCII signals from airwaves with new CODE★STAR. LED readout or connect your computer/printer. Keyboard, other items also available. Kits or assembled. MICROCRAFT, Box 513R, Thiensville, WI 53092. (414) 241-8144.

UNSCRAMBLE CODED MESSAGES from police, fire and medical channels. Also telephone recording adaptor. Same day service. Satisfaction guaranteed. Don Nobles Electronics, Inc. Rt. 7, Box 610-A, Hot Springs, AR 71901. (501) 623-6027.

ELECTRONIC ORGAN KITS
3-4 Manuals

THEATER and CLASSICAL
Refundable Parts
Wurlitzer reproductions Brochure \$2.00 Catalog \$1.50

DEVTRONIX ORGANS, INC., Dept 20
6101 WAREHOUSE WAY, SACRAMENTO, CA 95826

REVERBERATION FOR ORGANS AND KEYBOARDS—Simply connected to any electronic organ, even those with multiple output channels. Room size and reverberation time adjustable. Nothing comparable in this price range is offered on the market. Send for free brochure. DEVTRONIX ORGANS INC., Dept. 20, 6101 Warehouse Way, Sacramento, CA 95826.

RF MODULATORS for SATELLITE TELEVISION, MICROCROCOMPUTERS CCTV. Also monitors, cameras, kits. FREE CATALOG. Phone (402) 987-3771. Dealers Welcomed. ATV RESEARCH, 13-P Broadway, Dakota City, NE 68731.



AMAZING MINI DRILL
The little Expo Mini Drill is only 3"x1 1/4" Dia. and runs on 12v DC at 10,000 RPM, designed especially for Electronics etc. and comes complete with Pin Chuck and 3 collets, 0", 1/16", 3/32". Amazing Torque 280 GCM and is ideal for drilling, deburring and cleaning P.C. Boards, ample power for all other jobs. Send \$16 for a complete drill, incl. P & P, and we will give you free 4 Precision 3/32" Shank Drills, .60mm, 1mm, 1.3mm, 1.6mm, or send \$3 for our Cat. and Price List. Visa MC, AE accepted. Expo Drills Ltd., Unit 5A, Sutanum Works, Tichfield, Hants, England, U.K.

Be an **ELECTRICIAN**

- MAINTENANCE
- CONTRACTOR
- CONSTRUCTION

Make more money! Check out Electrician's wages against the kind of money you make now!

TRAIN AT HOME IN SPARE TIME

Make extra money in spare time while you train for a full-time job. Do odd jobs for friends and neighbors. Save money doing your own electrical work. Learn everything from repairs and maintenance to complete electrical installations. No previous experience needed. Everything explained in easy-to-understand language with plenty of drawings, diagrams and photos. Tools, materials, test equipment included with course. Approved for Veterans and G.I.'s. Be ready to take almost any electrical licensing examination offered by state, city or county.

No cost, no obligation, no salesman will call!

MAIL COUPON TODAY!

ICS (SINCE 1901)
Electrician School, Dept. PD022
ICS Center, Scranton, PA 18515

Rush free facts that tell how I can train at home in spare time to be an electrician

ELECTRICIAN GREAT MONEY-MAKING CAREER

NAME _____
ADDRESS _____
CITY/STATE/ZIP _____

TV SATELLITES - Send \$4.00 for catalog to: T & J SATELLITES, 350 San Miguel Ct. #1, Milpitas, CA 95035.

WRITE MESSAGES AND CREATIVE dot matrix designs in the air with lights! Free info SASE. Kit \$36.80. WORDWAND, P.O. Box 595, Ozona, FL 33560.

VIDEO Generator. Eight Different Patterns. \$99.00 Free program kit. ADTRONICS, 663 Branch Drive, Port Orange, FL 32019.

SATELLITE BUFFS: Used 6, 10, and 16 ft. Parabolic Antennas for sale, much misc. Call days (216) 871-5552. Evenings (216) 779-8539.

WHOLESALE RADAR DETECTORS, POLICE/FIRE SCANNERS, CB accessories—Whistler Q1000 \$199.99; Q1000R Remote \$219.99; Fox Vixen \$209.99; SuperFox Remote \$224.99; Bearcat 100 \$295.99; Bearcat 300 \$336.99; plus \$3.00 shipping—VISA MC/COD—Free catalogue—Scanner World, 10-PE New Scotland, Albany, NY 12208 (518) 436-9606.

BAR GRAPH generates Graphic display of input voltage. Adjustable calibration, smoked-glass front panel, easy hookup. Exciting music level display, many other applications. Send \$14.95: Farthest Fringe S.A., 101 Highway Blvd., N. Pekin, IL 61554.

ANTI-GRAVITY. Solid-state electronic levitation. No moving parts, magnets, gases, exotic fuels. Data, schematics, diagrams. 105 pages, 8X10 mimeo. \$20.00 ppd. GUARANTEED! SAUCER TECHNOLOGY, Box 132-M, Eureka Springs, Arkansas 72632.

VCR OWNERS — SAVE MONEY!!! Build your own switch box. Combine functions of TV, VCR, Converter box, Pay TV, Video Game, Disc Player and additional TV's without changing cable connections. Diagram/Plans with easy to follow instructions. No soldering required, and parts available everywhere. Send \$10.00 with Self-addressed stamped envelope to: WEKPE, 8690 Aero Drive #M-155, San Diego, CA 92123.

MICROWAVE RECEIVER SYSTEM — Write: "Dealers Wanted". Dept. PE, POB 440668, Aurora, Colo. 80044. (303) 620-9736.

MICROWAVE TV SYSTEM — The finest made complete ready to install-State of the art-High Gain premium TV receiver. FULL 6 month WARRANTY. \$209.00 postage paid. SASE for brochure. DEALER INQUIRIES WELCOME. 777 VIDEO SPECIALISTS, INC., P.O. Box 777, Westminster, CO 80030, Visa/MC welcome. Phone 303-428-3333.

ANTIQUe components, beautifully mounted. Brochure \$1, refundable with order. MBM, 1347 Jonathan Lane, Wantagh, NY 11793.

COMPUTER EQUIPMENT

SURPLUS COMPUTER PERIPHERALS: "Selectric" I/O typewriter bargains. World's largest selection. Send 25c for bargain-packed flyer. CFR, Box 144, Newton, NH 03858.

SAVE 90% Build Your own Minicomputer. Free Details. Digatek, 2723 West Butler Dr., Suite 20C, Phoenix, AZ 85021.

USED COMPUTER TERMINALS. Printers, Modem, Surplus Electronic parts. Catalog \$1.00. RONDURE COMPANY, THE COMPUTER ROOM, 2522 Butler St., Dallas, TX 75235. (214) 630-4621.

Z-80A 4MHz MICROPROCESSORS. \$6.85. 2716 EPROM, \$6.99. Other hardware, software bargains. Brochure. COMPUTER HEROES, 1961 Dunn Road, E. Liverpool, OH 43920.

PERSONAL COMPUTER ABC'S. Simplified, must have reference manual for beginners. \$2.00, FENCO-PE3, Box 309, Bellevue, WA 98009.

FINALLY! A Digital Gym for computer users. A must. \$4.95. Alicutco, 2550 Seaford Cr., Lutz, FL 33549.

AMATEUR RADIO

RADIO AMATEUR CALLBOOKS: 1982 Directories of Radio Amateurs around the world. U.S. Callbook \$22.00; Foreign Callbook \$21.00, shipping included. See your dealer or write for FREE catalog. Radio Amateur Callbook, Dept. PE, 925 Sherwood Dr., Lake Bluff, IL 60044.

PLAY YOUR TAPES, records, T.V. on any F.M. radio in your house - wireless - simple hook-up. Satisfaction guaranteed. \$24.95. Port-o-Sound Co., Box 279A, Howard Beach, NY 11414.

CALL US FIRST. For low Ham prices. All major brands. Call TOLL FREE 6-10PM. Mon/Wed/Fri - 1-800-231-3057. Madison Electronics, 1508 McKinney, Houston, TX 77010. (713) 658-0268 Daytime.

C.B. EQUIPMENT

GET MORE CB CHANNELS AND RANGE! Frequency Expanding, boosters, speech processors, how-to-books, plans, modifications. Catalog \$2. CB CITY, Box 31500PE, Phoenix, AZ 85046.

BOOTLEGGERS BIBLE FOR CB MODIFICATIONS, \$12.95. CB Radio Repair Manual, \$8.95. Linear Plan Book, \$11.95. Also Kits, complete units and more. Catalog \$1.00 at: A.P. Systems, POB 263PE, Newport, RI 02840.

PLANS AND KITS

PRINTED CIRCUIT Boards from sketch or artwork. Kit projects. Free details. DANOCINTHS Inc., Dept. PE, Box 261, Westland, MI 48185.

LASERS HANDBOOK with burning, cutting, Ruby Reds, CO's complete plans, books, and parts. Send \$4.00 to: Famco, Dept. PE, Box 1902, Rochester, NH 03867.

GIANT SCREEN TV projection system converts any television into 7-foot picture. Lens & instructions \$14.95. (Dealers welcome). Bell Video, 4616 Belair Rd., Baltimore, MD 21206.

TEST AND TUNE MICROWAVE Downconverters with inexpensive equipment. Procedure, \$5.00. LGS, 6871 Eighth Street Lane, Oakdale, MN 55119.

FM STEREO TRANSMITTER KIT. Range up to 1/2 mile, broadcast quality, 30 db separation. 300 mv audio input sensitivity. Tunes 88-108 Mhz, highly stable, 50 ohm out. Requires + -15V. Complete kit \$9.95. Commercial quality AM TRANSMITTERS also available. Free info. STELLATRON, 4942 Whitsett-205, N. Hollywood, CA 91607. 213/506-0415

PROFESSIONAL LIMITER-COMPRESSOR-EXPANDER KITS. Pro specs and features. balanced input. adjustable threshold, slope (1:1 to 100:1), attack and release. Models from \$79 and up. Rack mounting available. Free info. STELLATRON, 4942. Whitsett-205, N. Hollywood, CA 91607.

KERLIAN PHOTOGRAPHY as a hobby. Complete plans for Do-it-yourself machine. Includes easy instructions and ways to improve quality of prints. \$5.00. C.E.I.C. Electronics, P.O. Box 805. Missoula City, Texas 77459.

PROJECTION TV... Convert your TV to project 7 Foot picture... Results equal to \$2,500 projector... Total cost less than \$200. PLANS & LENS \$16.00. Illustrated information FREE. Macrocomgg, Washington Crossing, Pennsylvania 18977. Creditcard orders 24 hours. 215-736-3979.



MINI FM MIC
Compact size Only 2 x 1 x 3/4. Transmit to FM radio 88-108 MHz. Exceptional audio quality. Transmits stable signal up to 900 ft. Complete kit incl case battery & instructions. Only \$13.95 Assembled \$18.95 Add \$1.55 S&H ea. Send 18c stamp for brochure.
S.E. Corp. Box 16969-P
Temple Terrace, FL 33687

PEAK EXPANDER AND CX DECODER KIT MODEL SX-80 \$76.00 plus \$2.00 Shipping. Complete plans \$1.00. See Radio Electronics Dec. 81. Sound Concepts, Box 135P, Brookline, MA 02146.

CABLE TV



39⁹⁵
ADD \$2.50 FOR POSTAGE
30 CHANNEL CABLE TV CONVERTER
FREE!
UNUSUAL 96 PAGE ELECTRONIC PARTS & IDEAS CATALOG!
ORDER No. 198AE047
ETCO ROUTE 9N,
PLATTSBURGH, N.Y. 12901
Tel.: (518) 561-8700.

ALARMS



Burglar-Fire Protection
Protect Your Life, Home, Business, Auto, etc.
• Our catalog shows how. Install your own alarm systems and devices and save \$\$\$\$ We offer FREE write-in engineering service.
FREE CATALOG Lowest Prices on Reliable, High Quality Alarm Systems and Devices.
Burdex Security Co. Box 82802-PE Lincoln, Ne. 68501

BURGLAR, FIRE, CAR! Finest equipment! Save! Free Catalog. AAS, 186A Oxmoor Road, B'ham, AL 35209.

SAVE HUNDREDS! New wireless security system for home. Install in minutes. Free catalog. Davis, Box 3363, Simi, CA 93063.

UNIQUE AUTO ALARM. Operates with Interior OR Exterior Switch, Disables Ignition, has Entrance Reminder, Three Types of Resets, uses Horn or Siren. VERY EFFECTIVE! Plans, Parts, Circuit Board \$29.00. Plans \$4.00. ALARMS, P.O. Box 43, West Bridgewater, MA 02379.

INFRARED outdoor security system. Build it inexpensively yourself. Information 10c SASE. Plans \$5.00. HR Engineering, Box 272, Dayton, Ohio 45409.

HIGH FIDELITY

TOP QUALITY SPEAKERS AND KITS. Send \$2.00. Speaker Warehouse, 809 North Route 441, Hollywood, FL 33021.

DIAMOND NEEDLES and STEREO CARTRIDGES at DISCOUNT PRICES for SHURE, PICKERING, STANTON, EMPIRE, GRADO, AUDIO TECHNICA, ORTOFON, ACUTEX and ADC. Write for free catalog. LYLE CARTRIDGES, Dept. S., Box 69, Brooklyn, NY 11218. For fast COD service Toll Free 800-221-0906. 9AM - 8PM except Sunday.

WANTED

GOLD, Silver, Platinum, Mercury, Tantalum wanted. Highest prices paid by refinery. Ores assayed. Free circular. Mercury Terminal, Box 191, Norwood, MA 02062.

WANTED: Manufacturer of ROD type Microwave Antenna.
WANTED: Dealers for new H.M.R. Microwave Antenna. 212-356-4443. P.O. Box 223, S.I., NY 10312.

WANTED: Stand alone PCB or Schematic to display seven graphics at nine places on color monitor manually controlled. Write for full details: Box 122, La Plata, Maryland 20646.

TUBES

RADIO & T.V. Tubes — 49 cents each. Send for free Catalog. Cornell, 4213 University, San Diego, Calif. 92105.

TUBES: "Oldies". Latest. Supplies, components, schematics. Catalog Free (stamp appreciated). Steinmetz, 7519-PE Maplewood, Hammond, Ind. 46324.

TUBES-RECEIVING. Industrial and Semiconductors Factory Boxed. Free price sheet including TV, Radio and audio parts list. Transietronic, Inc., 1365 39th St., Brooklyn, New York 11218. Telephone: (212) 633-2800. Toll free: 800-221-5802.

HUGE INVENTORY! Thousands of types. Wholesale prices. FREE CATALOG! ETCO Electronics. DEPT. 290, Plattsburgh, NY 12901.

GOVERNMENT SURPLUS

GOVERNMENT SURPLUS! Millions of items (including Jeeps)... low as 1c on dollar! Most complete Directory available. \$2.00. DISPOSAL, Box 19107-HC, Washington, DC 20036.

JEEPS, CARS FROM \$35.00 - 700,000 ITEMS! - Government Surplus - MOST COMPREHENSIVE DIRECTORY AVAILABLE tells how, where to buy - your area - \$3 - MONEY BACK GUARANTEE - "SURPLUS INFORMATION SERVICES." Box 3070GE43, Santa Barbara, California 93105.

GOVERNMENT SURPLUS. ELECTRONICS! JEEPS \$17.00! Buy Direct from Government, Your Area. 900,000 Items! Largest OFFICIAL Directory. Including Government Oil Lottery Report. \$2.00 (Guaranteed). Government Reprints, Department A19, 4620 Wisconsin Northwest, Washington, DC 20016.

NICKEL CADMIUM BATTERIES-Government Surplus Cells, from \$2.50 (4 AMPHR) to \$8.95 (34 AMPHR). All cells guaranteed. Quantity discount. Free flyer. The NICAD Shop, P.O. Box 11142, Dept. P, St. Louis, MO 63135.

SURPLUS JEEPS, CARS and TRUCKS available. Many sell for under \$200. Call 312-742-1143, Ext. 4649. for information on how to purchase.

PERSONALS

MAKE FRIENDS WORLDWIDE through international correspondence, illustrated brochure free. Hermes-Verlag, Box 110660/Z, D-1000 Berlin 11, W. Germany.

CORRESPONDENCE FOR FRIENDSHIP IN PHILIPPINES, MALAYSIA. Free information. AACC-(PE), Box 1542, Canoga Park, Calif. 91304.

PENFRIENDS — ENGLAND — USA, through correspondence. Send age, interests. Free reply. Harmony, Box 89PE, Brooklyn, New York, 11235.

CORRESPONDENCE for friendship! Mexico, Philippines, Europe, USA. Free information. International, Box 1716-EL, Chula Vista, CA 92012.

UNATTACHED - Meet friendly interesting single people nationwide. Free details. THE ARTS WORLD, Box 833, Amityville, NY 11701.

SHY? Single? Discover new approach to meeting others. \$2.00 Advanced Concepts, Box 5491-A, Fort Wayne, IN 46895.

INSTRUCTION

UNIVERSITY DEGREES BY MAIL! Bachelors, Masters, Ph.D.'s. Free revealing details. Counseling, Box 317-PE03, Tustin, California 92680.

LEARN WHILE ASLEEP! HYPNOTIZE! Astonishing details, strange catalog free! Autosuggestion, Box 24-ZD, Olympia, Washington 98507.

LEARN ELECTRONIC ORGAN SERVICING at home. Completely revised course covers latest models including digital, LSI's, synthesizers, etc. NILES BRYANT SCHOOL, PO Box 20153, Sacramento, CA 95820.

MEDICAL ELECTRONICS TECHNOLOGY, home study. Troubleshoot medical instruments. WTI, P.O. Box 124, Pine-dale, CA 93650.

COLLEGE DEGREES BY SPECIAL EVALUATION of EXISTING Credentials & Job Experience. Fast, Inexpensive, (614) 863-1791. Guidance, Box 13151-A3, Columbus, Ohio 43213.



Be an FCC LICENSED Electronic Technician
Earn up to \$600 a Week & More!
No costly school — The Original FCC Tests-Answers exam manual that prepares you at home for FCC General Radiotelephone License. Newly revised multiple-choice exams cover all areas tested on the actual FCC Govt exam! No previous experience required. \$12.95 post-paid. Moneyback Guarantee.
Dept. P P.O. Box 26348, San Francisco, CA 94126
COMMAND PRODUCTIONS

PREPARE A RESUME that gets results. Send \$5 to: TO-MECO, P.O. Box 92, Puyallup, WA 98371.

YOUR OWN RADIO STATION! AM, FM, cable, licensed, unlicensed, low cost transmitters! Free information. Broadcasting, Box 130-A3, Paradise, CA 95969.

FOR INVENTORS

PATENT AND DEVELOP your invention. Registered Patent Agent and Licensed Professional Engineer. Send for FREE PATENT INFORMATION every inventor should have. Richard L. Miller, P.E., 3612-E Woolworth Building, New York, NY 10007. (212) 267-5252.

INVENTIONS WANTED

FREE CONSULTATION • NO IDEA TOO SMALL

Disclosure registration. Potential cash or royalties from manufacturers seeking new ideas. For free information on how to register your ideas. Call or write

AMERICAN INVENTORS CORP.

59 Interstate Dr. Dept PE
West Springfield, MA 01089 (413) 737-5376
A Fee Based Service Company

BUSINESS OPPORTUNITIES

FREE CATALOGS. Repair air conditioning, refrigeration. Tools, supplies, full instructions. Doolin, 2016 Canton, Dallas, Texas 75201.

MECHANICALLY INCLINED individuals desiring ownership of Small Electronics Manufacturing Business — without investment. Write: BUSINESSES, 92-K3 Brighton 11th, Brooklyn, New York 11235.

ERASE DEBTS with little-known law — create wealth! Details FREE — Blueprints. No. EE3, LaGrangeville, NY 12540.

FREE BOOK "2042 Unique Proven Enterprises." Fabulous "unknowns," second inflation income. Haylings-M. Carlsbad, CA 92008.

MAILORDER OPPORTUNITY! Start profitable home business without experience or capital. Write for free book, case histories, plus complete details. No obligation. Mail Order Associates, Dept 428, Montvale, NJ 07645.

T.V. MEN - Hi-PROFITS - ONE MAN FACTORY. Rebuild CRTs for \$3.00. Purchase Patented equipment. Original manufacturers. New used. Free training. C.R.T., 4071 Elston, Chicago 60618. (312) 583-6565.

BORROW \$30,000 without interest! All eligible. Repay anytime. Free details. Infohouse, Box 1004-PE3, New York, NY 10003.

LCD watch US \$2.50 Penwatch US \$3.60 for catalogue US \$1.00. Reliant (Engineering) Company, Box 33610, Sheungwan Post Office, Hong Kong.

BORROW BY MAIL! \$500.00 - \$50,000.00. No collateral, bad credit no problem!!! Write: Gelco Financial Services, Box 34293-PE, Indpls., IN 46234.

BORROW \$25,000 "OVERNIGHT." Any purpose. Keep indefinitely! Free Report! Success Research, Box 29070-GC, Indianapolis, IN 46229.

DEALERS WANTED Guaranteed lowest dealer's quantity pricing. Microwave Antenna Sales, P.O. Box 8052, Phoenix, AZ 85066. Phone (602) 276-2186.

PROJECTION TV... Make \$200.00+ per evening assembling Projectors... Easy... Results equal to \$2,500 projectors... Your total cost less than \$15.00 — PLANS, LENS & Dealers Information \$14.00... Illustrated information FREE... Macrocomogxg, Washington Crossing, Pennsylvania 18977. Creditcard orders 24 hours 215-736-2880.

EMPLOYMENT OPPORTUNITIES

JOBS OVERSEAS - Big money fast. \$20,000 to \$50,000 plus per year. Call 716-842-6000, ext. 1740.

ELECTRONICS AVIONICS EMPLOYMENT OPPORTUNITIES. Report on jobs now open. Details FREE. Aviation Employment Information Service, Box 240E, Northport, New York 11768.

REAL ESTATE

FREE, SPRING CATALOG! Top real estate values coast to coast! Please specify types, property and location desired. UNITED FARM AGENCY, 612-EP West 47th, Kansas City, MO 64112.

BOOKS & MAGAZINES

TELEPHONE AND SUPPLY CATALOG — \$2 Refundable. Telcom, 815 East Third, Dept. E2, Beardstown, IL 62618.

THE MASTERMIND - The art of trouble shooting in engineering. 120 page manual. \$15.00. Free info. BOTTAL, 4020 Brangongate #10, Malton, Ontario L4T-3W8.

SUBSCRIPTION TELEVISION EDUCATION MANUAL. Complete theory in circuits \$9.95. D & S Enterprises, P.O. Box 110901PE, Nashville, Tennessee 37211.

HOBBIES

200 PAGE 1982 catalog, listing thousands of chemicals, science equipment and labware. Send \$2.00 to: Merrell Scientific, Dept. E, 1665 Buffalo Road, Rochester, NY 14624.

RUBBER STAMPS

RUBBER STAMPS, BUSINESS CARDS. Many new products. Catalog. Jackson's, E-100, Brownsville Rd., Mt. Vernon, Ill. 62864.

RECORDS & TAPES

RECORDS — TAPES! Discounts to 73%. All labels; no purchase obligations; newsletter; discount dividend certificates. 100% guarantees. Free details. Discount Music Club, 650 Main St., P.O. Box 2000, Dept. 5-0382, New Rochelle, NY 10801.

MUSICAL INSTRUMENTS

MUSICAL INSTRUMENTS' HOT LINE! Incredible prices: Amps, PA gear. All instruments. Huge selection. Sam Ash, established 1924. 800-645-3518. NYS: (212) 347-7757.

WERSI ORGANS, must sell, Galaxy fully equipped plus extras, \$25,000.00. Helios W2T only \$7500.00, AZ. 602-325-5421.

MOTION PICTURE/VIDEO

VIDEOTAPES - 8MM/16MM MOVIES. TWO 72 page catalogs \$1.00. Both \$1.50. Reelimages, Box 137-PE, Monroe, Connecticut 06468.

DO-IT-YOURSELF

CUT INCOME TAXES. C-90 Instructional cassette tape, intensive guidebook \$16.25, deductible. Stan James CPA, Box 837, Columbia, MD 21044.

MISCELLANEOUS

MPG INCREASED! Bypass Pollution Devices easily. REVERSIBLY!! Free details — Posco GEE3, LaGrangeville, NY 12540.

VACUUM CLEANERS "Discount Prices" New Rainbow \$349.95. Kirby, Filter Queen, Compact. Details: ABC Vacuum Warehouse, 7021 Burnet-PE, Austin, Texas 78757.

MIND EXPANSION

PSYCHOLOGY TODAY CASSETTES

MIND EXPANSION WITHOUT DRUGS

— Jeon Houston teaches how to tap unused mental potential to increase creativity, heighten self-awareness, and benefit by achieving altered states of consciousness without drugs. #20101 — \$10.95 postpaid (\$11.95 outside U.S.)

Order by title and number. Send payment, or charge to your Am. Ex., Visa, MasterCard or Diners Club. Residents of CA, CO, DC, FL, IL, MA, MI, MO, NY, STATE, OH, SC, TN and VT add applicable sales tax. Call TOLL FREE 800-431-2731 (In NY, 800-942-1940) or write to: PSYCHOLOGY TODAY CASSETTES, Dept. 20101, P.O. Box 278, Pratt Station, Brooklyn, N.Y. 11205

library

(cont'd from p. 111)

various baud rates to a computer terminal. Using the familiar ASCII system as the common packet language, a UART (Universal Asynchronous Receiver/Transmitter) chip interconverts from parallel to serial and times the data as they are received or transmitted so that they arrive in discrete packets. The authors describe this process thoroughly, but simply. They also discuss the types of software that are suited to packet radio.

Published by TAB Books, Blue Ridge Summit, PA 17214. Soft cover. 304 pages. \$11.95.

Android Design

by Martin Bradley Weinstein

Author Weinstein presents a comprehensive look at the tools, materials, and techniques necessary for designing a robot (a cyborg of any shape) or android (a man-like cyborg). The book is useful as a guide and reference if you've already worked out the specs for the cyborg you want to create; Weinstein doesn't present any construction projects. He does, however, give some helpful advice for the usual elements of cyborg construction—including software for speech synthesis and stochastic programming. It's well-written, too.

Published by Hayden Book Co., Rochelle Park, NJ. Soft cover. 248 pages. \$11.95.

The Complete Guide to Car Audio

by Martin Clifford

This is a guide both for those who have some experience with car audio systems and those who know nothing about it but would like to learn. It covers 20 different setups, ranging from a two-speaker system with AM receiver to a four-speaker system with AM/FM. Also discussed are such car audio products as antennas, power amps, tape players, equalizers, etc. The author supplies practical information on installation, noise suppression, and theft protection.

Published by Howard W. Sams & Co., Indianapolis, IN 46368. Soft cover. 232 pages. \$9.95.

Microprocessors for Measurement and Control

by David M. Auslander and Paul Sagues

The authors of this text assume that the reader has had some experience with scientific programming in FORTRAN, BASIC, Pascal, or C, although they claim that prior exposure to microprocessor hardware, or to machine and assembly language programming, is not necessary in order to complete the projects they outline. Using relatively simple machinery that can be easily interfaced to a microprocessor, the projects are intended to illustrate the more common problems encountered in the control of a machine's operation, and in the real-time evaluation of its performance. Published by Osborne/McGraw-Hill, Berkeley, CA. Soft cover. 310 pages. \$16.00.

Popular Electronics

reprint series

POPULAR ELECTRONICS publishes a wide variety of important articles covering the broad field of electronics. Reprints of selected articles are now available for your reference, study or home-project needs.

Test Reports COMMUNICATIONS

- 40862 CB Specifications Made Easy (3/75)
- 40863 How To Choose CB Base Station Antennas (4/76)
- 40965 Build Morse-A-Letter (1/77)
- 50127 Radioteletype Reader, Part I (11/79)
- 50141 Radioteletype Reader, Part II (12/79)
- 50238 High Tech Gear For Hams & SWLS (8/80)
- 50246 PE Examines Cordless Telephones (12/80)
- 50247 Build A Morse-A-Keyer (1/81 & 2/81)
- 50249 A Look At Pocket Pagers (3/81)
- 50276 Direct Broadcasting Stateites (5/81)

OTHER

- 40867 How To Design Your Own Power Supplies (6/75)
 - 40868 The Care & Feeding Of NiCd Batteries (3/76)
 - 40869 Build A Gas & Fume Detector (8/76)
 - 40963 Six CMOS Circuits For Experimenters (4/77)
 - 40967 Programming Calculators For Fun & Games (6/77)
 - 41103 How To Design TTL Digital Systems (10/77)
 - 41104 Build An Autoranging Digital Capacitance Meter (2/78)
 - 41309 Use Low Cost Digital Equipment (11/78)
 - 41310 Energy Leak Detector (10/78)
 - 41311 An A/D Converter (9/78)
 - 41312 Security Focus (2 Articles) (12/78)
 - 41313 Universal Electronic Timer (1/79)
 - 41314 Mph Car "Cruisealert" (2/79)
 - 50124 NASA Motor-Control Circuit (2/79)
 - 50132 A Personal Radiation Monitor (1/80)
 - 50134 The New Digital Multimeters (2/80)
 - 50135 Car Econometer (2/80)
 - 50143 Motion-Detector Alarm (5/80)
 - 50239 Build An Auto Windshield Wiper Controller (8/80)
 - 50240 Check Heat Loss With A Degree-Day Meter (9/80)
 - 50242 Build An Infrared Road Icing Alert (10/80)
 - 50244 Inexpensive Auto Battery Tester (11/80)
 - 50245 Build A Super Music Maker Microprocessor (1/80)
 - 50248 Transient Protection For Automobile Circuits (2/81)
- LEARNING ELECTRONIC THEORY WITH CALCULATORS SERIES
- 40864 Basic Equations and Ohm's Law (7/76)
 - 40865 Reactance, Time Constants And AC Calculations (8/76)
 - 40866 RC Coupling, Basic Amplifier Calculations, And RLC Relationship (9/76)

VIDEO

- 50237 Video Cassette Recorders (6/80)
- 50270 Wireless TV Commercial Killer (2/81)

DATE INDICATES ISSUE IN WHICH ARTICLE APPEARED.

Reprints are \$2 each. Minimum order \$6.



MAIL & PHONE CHARGE ORDERS (minimum \$10). Am. Ex. Diners, MC or Visa. CALL 24 HRS. TOLL FREE 800-345-8112. In PA only 800-662-2444. BY MAIL, fill in & mail coupon plus credit card name, number & expiration date.

POPULAR ELECTRONICS REPRINTS
P.O. Box 278, Pratt Station, Brooklyn, NY 11205
Please send the reprints listed below:

Reprint #	Quan.	Reprint #	Quan.

No. of Reprints: _____ Total \$ _____ (min \$6)

U.S.A. — shipped First Class, add \$1 per order post & hand. Outside U.S.A. — shipped Air Mail only, add \$2 per order.

Print Full Name _____

Address _____

City _____

State / Zip _____


Residents of CA, CO, DC, FL, IL, MA, MI, MO, NJ, NY, State, OH, SC, TN, and VT add applicable sales tax

ELECTRONICS WORLD®

Personal Electronics News

IN-FLIGHT TELEPHONE SERVICE will probably start within a year, pending FCC approval. The service, utilizing single-sideband transmission, will operate on frequencies far removed from aircraft communications so as not to cause interference. One of the first suppliers of in-flight telephone equipment is Page America Communications, a beeper-rental company, which has tested its Sky-Tel system aboard DC10 aircraft on transcontinental routes. When a passenger wishes to call a party on the ground, he accesses the phone by inserting a credit card into a machine, which bills him automatically. Cost will be about \$ 7.50 for three minutes at first, but is expected to fall once the system becomes more widely available.

APPLE III COMPUTERS, including those with Apple's five megabyte ProFile Winchester hard disk, can now be intermixed with Apple IIs as workstations in Nestar's Cluster/One Model A distributed computing and communications system. The Apple IIs, now being used as file, print, and communications servers, will continue in that role—with the Apple IIIs performing the more sophisticated functions in both word processing and financial analysis. Connecting an Apple III to the Nestar system is said to require the addition of an internal interface card plus cabling. A maximum of 65 stations is foreseen for each Cluster/One network.

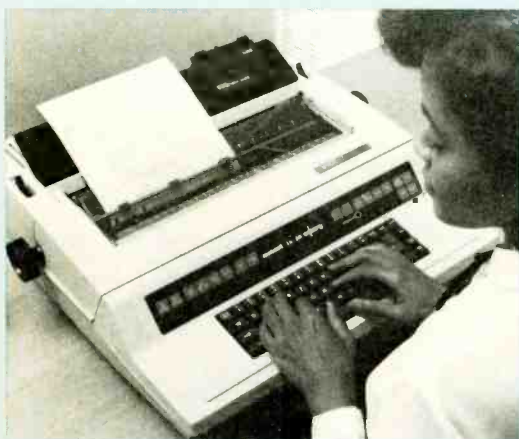

XEROX ENTERS THE ELECTRONIC TYPE-WRITER MARKET with four Memorywriter models. All have a touch-sensitive control panel just above the keyboard for setting up a particular job. They also use the same keyboard, daisywheel printer and case. The features common to the models include: intelligent print-wheels for automatic adjustment to any standard pitch, bold printing, correction memory for automatic erasing, battery back-up for the memory, a print intensity control, phrase recall, and automatic table layout. The 610 is the basic model; higher-end Memorywriters offer greater memory (to 19,300 characters) and word-processing capability, and can also be interfaced to the Xerox Ethernet network.

TELECOMMUNICATOR FOR THE DEAF has been developed by Dr. Harry Levitt, a hearing and speech professor at the City University of New York, winning First Prize of \$10,000 in the Johns Hopkins University First National Search for Applications of Personal Computing to Aid the Handicapped. The device, a programmed off-the-shelf portable pocket computer with memory and logic, can be connected to a private or public telephone for instant communication between the deaf and those with normal hearing. Messages stored in the memory can be transmitted instantly, or the user can send a message via a pocket keyboard. A compact line printer or audio cassette, can be interfaced to the unit.

SERVICING INDUSTRIAL ROBOTS PAYS WELL according to Robotics Today. In one study, students from Macomb County Community College in Warren, MI, were earning an average salary of \$23,000 to \$24,000 upon graduation from the school's three-year-old robotics program. Some more experienced technicians were earning in the \$50,000 range.

TELETEXT MARCHES ON. Time Inc. has joined AT&T, CBS, NBC, and Knight-Ridder in adopting the North American Broadcast Teletext Standard for its national, satellite-distributed, full-channel teletext service. This technical specification addresses itself to the coding and display of teletext pages. The standard also describes the transmission technique for delivery of teletext pages through video circuits employed by satellites and cable television systems, as well as by over-the-air broadcasters. Time Inc. will make use of all characteristics of the standard, including the advanced Picture Description Instructions, or PDIs, which is a compact and sophisticated method of encoding high-resolution graphics. Also to be used is a character display format of 20 rows, each with 40 characters. The service will be made available to selected homes in San Diego, CA, in the Spring of 1982.

How to turn your HP-41 into a handheld computer.



Introducing the Hewlett-Packard Interface Loop.

Starting today, your HP-41C or HP-41CV can be more than just a great little calculator. It's a great little computer, capable of controlling a quickly-expanding family of peripherals.

The new Hewlett-Packard Interface Loop (HP-IL) makes it all possible. HP-IL is an easy-to-use, low-cost interfacing system, specifically designed for battery-operable devices.

The Interface Module and Peripherals.

At the heart of the system is the Interface Module, which plugs into any one of four HP-41 ports. You can control up to 30 peripherals, using only one port in your HP-41 calculator.

One of the key HP-IL peripherals is the new Digital Cassette



Drive. This battery-operable device provides an



incredible 131,000 bytes of mass memory.

Another work-saving HP-IL peripheral is the new, battery-operable Thermal Printer/Plotter with enhanced formatting options and graphics.

This is just the beginning.

There are many more HP-IL products on the way. And they're all designed to provide the versatility and adaptability you expect from HP. You see, Hewlett-Packard is committed to a very big idea: small devices talking to each other, giving you big system capabilities – at small system prices!

For details and the address of your nearest dealer, CALL TOLL FREE: 800 547-3400, Dept. 254G, except Hawaii/Alaska. In Oregon, call 758-1010, or write Hewlett-Packard, Corvallis, OR 97330, Dept. 254G. TTY users (503) 758-5566.


61118.

When performance must be measured by results.



**HEWLETT
PACKARD**

**If you think two dimensions
of computer calculating power
have been useful, wait until
you get your hands on three.**

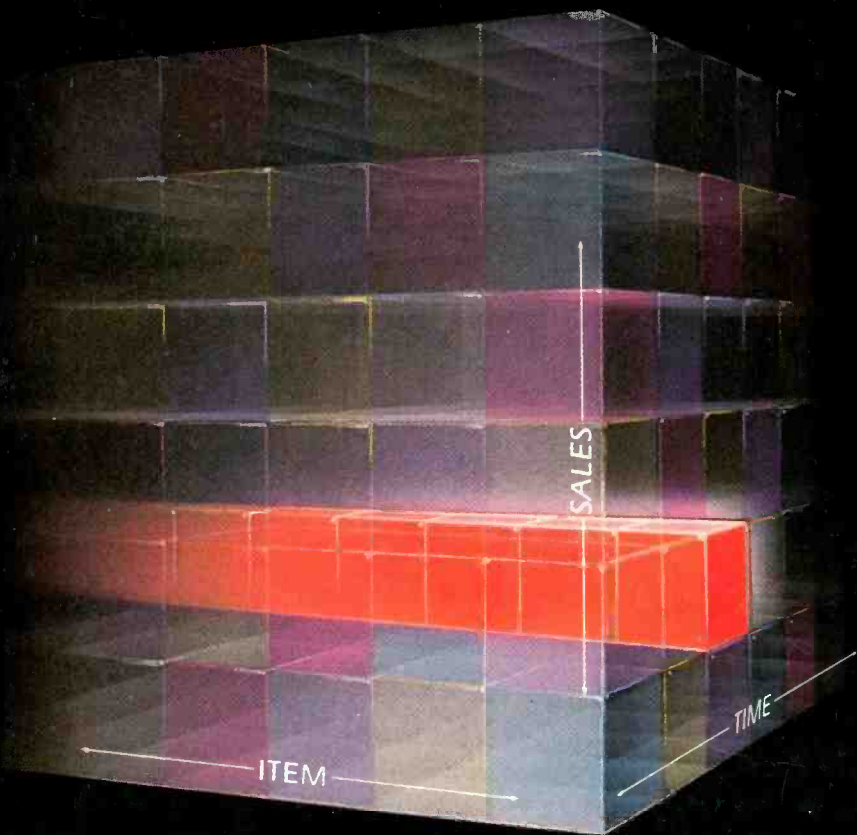

NEC introduces Report Manager,[™] giving you an astounding mastery of labels, numbers, and formulas in a unique 3-dimensional matrix, the "Data Cube."[™]



All the power and flexibility of the best electronic spread sheet ever created...now available with an axis of depth in addition to the standard horizontal and vertical.

You get an electronic book, not just an electronic page. Easy as A, B, C...and powerful as X, Y, Z!

The best way to learn about the solid wonders of Report Manager is to see it in action.

Three dimensions of calculating power, not just two. Unprecedented flexibility in any direction. Powerful editing commands to change or add to contents of a cell. Versatile report features that allow easy control over portions of data, columns on a page, pages on a row, etc. Four independent viewing regions can be created on the same screen. And there are built-in time and calendar functions, so you can manage duration as well as dimension.

It is such a remarkable program, you'll have to see it to believe it. Get the process started at your nearest NEC Home Electronics (USA) dealer.

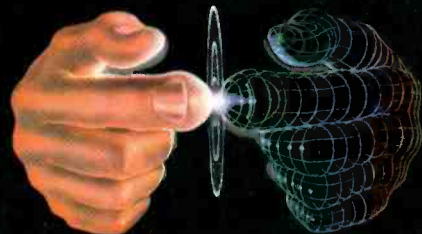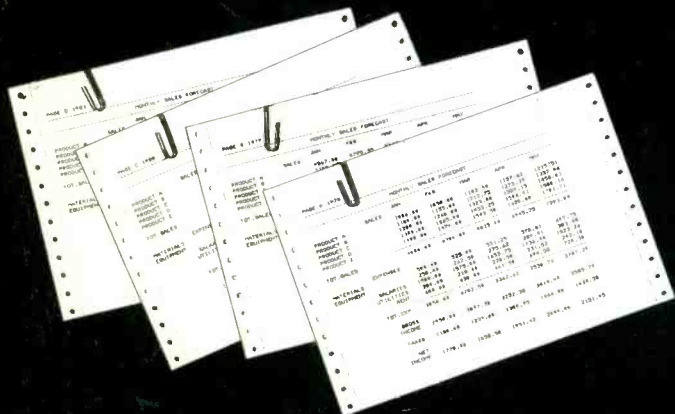

**Productivity
at your fingertips**

NEC

**NEC Home Electronics (USA)
Personal Computer Division
1401 Estes Avenue
Elk Grove Village, IL 60007**

Sample printout showing use of X, Y, and Z axes.
Report Manager and Data Cube are trademarks of The Image Producers, Inc.