


Weller. The Professionals.



The Cooper Group PO Box 728 Apex NC 27502 USA Tel (919) 362-7510 Telex 579497 BOKER CRESCENT LUFKIN NICHOLSON PLUMB WELLER WISS XCELITE

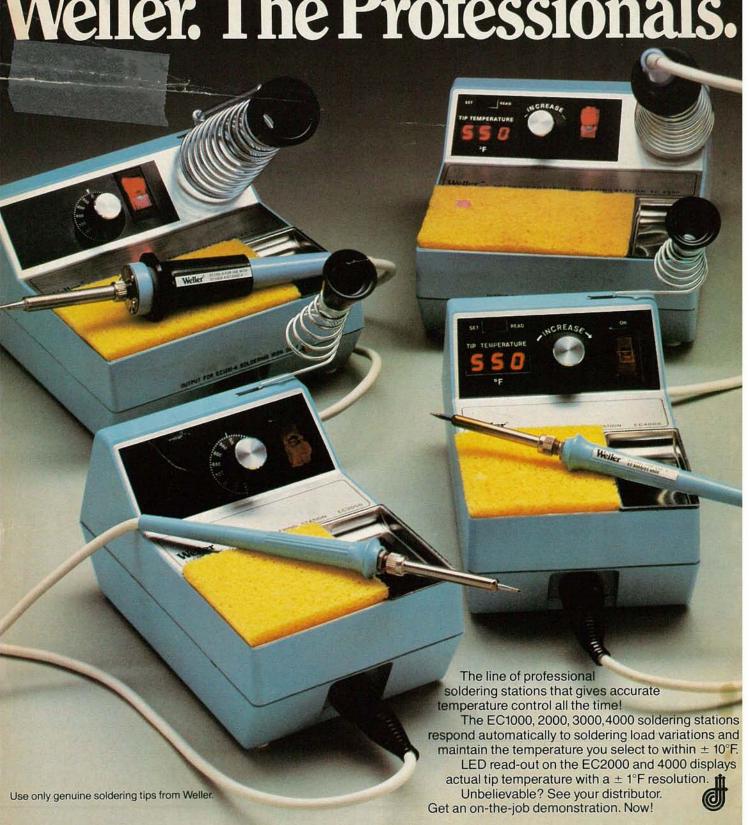

Double Your Troubleshooting and Testing Productivity . . . Or Your Money Back!

Six-digit readout: Automatically tracks every CRT test. We call it digital autotracking. It's patent pending.

Bright 60 MHz dual-trace: 60 MHz CRT (3 dB); usable to 100 MHz (12 dB)

Delta PPV, Time, Freq:
Measure any part of a
waveform for PPV,
time or frequency
using Delta measurements. Just dial in
waveform section you
want to measure and
push.

Simplify Freq ratio tests: Automatically compare input/output ratio of multiply/divide' stages from 1:1 to 1:999,999 with the push of a button.

 Autotracking DCV, PPV, Freq: Measure DCV to .5%; PPV to 2%; freq. to .001%. Just push a button for either Channel A or B.

Probe input: One probe input per channel for all measurements—digital and scope—with 5 mV to 2000 V measuring range. (2 lo-cap probes provided.)

Super sync: ECL provides rock-solid sync trigger circuits with only 4 controls; includes TV sync separators for video work.

\$3275 U.S. Patent Pending Financing Available

The first scope with push button digital readout. If you use general purpose oscilloscopes for trouble-shooting or testing, we can double your present productivity with the SC61 Waveform Analyzer, the first scope with push button digital readout.

It's ten times faster — ten times more accurate. The SC61 is the first and only instrument to integrate the speed and accuracy of a digital readout with the viewing capability of a high performance 60 MHz scope. Connect only one probe and you can view any waveform to 60 MHz. Then, just push a button to read DCV, PPV, frequency and time.

There are no graticules to count or calculations to make so every measurement is 10 to 100 times faster than before.

The digital readout is 10 to 10,000 times more accurate than conventional scopes as well, for measurements you can trust in today's high precision circuits.

Plus having everything you want to know about a test point, at the push of a button, eliminates guesswork and backtracking.

A special Delta function even lets you intensify any part of a waveform and digitally measure the PPV, time or frequency for just that waveform section.

And it's neat. No more tangled leads, piles of probes or dangling cords. The SC61 is an entire test station in one unit.

Double your productivity. When we say the SC61 will double your productivity, we're being conservative. We've seen cases of three, four, even ten time increases in

CIRCLE 16 ON FREE INFORMATION CARD
CIRCLE 89 FOR DEMONSTRATION

productivity with this first-of-its-kind, automated oscilloscope. Every situation is different, however, so try the SC61 and judge for yourself. Here's our offer.

Money back guarantee. If the SC61 does not at least double your productivity during the first thirty days, you may return it for a full refund, including freight both ways.

Call today. Get the entire SC61
Waveform Analyzer story. Call tollfree today, and ask for our eight
page color brochure. It could be the
most productive call you make this
year!

Phone Toll-Free 1-800-843-3338

Alaska, Hawaii, Canada, and South Dakota call collect (605) 339-0100

SENCORE
3200 Sencore Drive, Sioux Falls, SD 57107

wabash diskettes is \$1.39 each!

Now...Get High Quality at a Low Price

Wabash means quality products that you can depend on. For over 16 years, Wabash has been making high quality computer products. Wabash diskettes are made to provide error-free performance on your computer system. Every Wabash diskette is individually tested and is 100% certified to insure premium performance.

Why Wabash is Special

The quality of Wabash diskettes is stressed throughout the entire manufacturing process. After coating, all Wabash diskettes go through a unique burnishing process that gives each diskette a mirror-smooth appearance. Wabash then carefully applies a lubricant that is specially formulated to increase diskette life. This saves you money, since your discs may last longer. It also assists your disk drives in maintaining constant speed which can reduce read and write errors.

Special Seal... Helps Prevent Contamination

To keep out foreign particles, a unique heat seal bonds the jacket and liner together. A special thermal seal which avoids contamination from adhesives, is then used to fold and seal the jacket. This results in outstanding performance and true reliability. Wabash then packages each diskette, (except bulk pack) in a super strong and tear resistant Tyvek® evelope. The final Wabash product is then shrink-wrapped to insure cleanliness and reduce contamination during shipment.

Each Diskette is 100% Critically Tested

Since each step in the Wabash diskette manufacturing process is subject to strict quality control procedures, you can be sure Wabash diskettes will perform for you. And every Wabash diskette meets the ultra-high standards of ANSI, ECMA, IBM and ISO in addition to the many critical quality control tests performed by Wabash. Wabash does all of this testing to provide you with consistently high quality diskettes. Reliability and data integrity – that's what Wabash quality is all about.

Flexible Disc Quantity Discounts Available

Wabash diskettes are packed 10 discs to a carton and 10 cartons to a case. The economy bulk pack is packaged 100 discs to a case without envelopes or labels. Please order only in increments of 100 units for quantity 100 pricing. With the exception of bulk pack, we are also willing to accommodate your smaller orders. Quantities less than 100 units are available in increments of 10 units at a 10% surcharge. Quantity discounts are also available. Order 500 or more discs at the same time and deduct 1%; 1,000 or more saves you 2%; 2,000 or more saves you 3%; 5,000 or more saves you 4%; 10,000 or more saves you 5%; 25,000 or more saves you 6%; 50,000 or more saves you 7% and 100,000 or more discs earns you an 8% discount off our super low quantity 100 price. Almost all Wabash diskettes are immediately available from CE. Our warehouse facilities are equipped to help us get you the quality product you need, when you need it. If you need further assistance to find the flexible disc that's right for you, call the Wabash diskette compatibility hotline. Dial toll-free 800-323-9868 and ask for your compatibility representative. In Illinois or outside the United States dial 312-593-6363 between 9 AM to 4 PM Central Time.

SAVE ON WABASH DISKETTES Product Description	Part #	CE quant. 100 price per disc (\$)
8" SSSD IBM Compatible (128 B/S, 26 Sectors)	F111	1.99
8" Same as above, but bulk pack w/o envelope	F111B	1.79
8" SSSD Shugart Compatible, 32 Hard Sector	F31 A	1.99
8" SSDD IBM Compatible (128 B/S, 26 Sectors)	F131	2.49
8" DSDD Soft Sector (Unformatted)	F14A	3.19
8" DSDD Soft Sector (256 B/S, 26 Sectors)	F144	3.19
3" DSDD Soft Sector (512 B/S, 15 Sectors)	F145	3.19
8" DSDD Soft Sector (1024 B/S, 8 Sectors)	F147	3.19
51/4" SSSD Soft Sector w/Hub Ring	M11A	1.59
51/4" Same as above, but bulk pack w/o envelope	M11AB	1.39
51/4" SSSD 10 Hard Sector w/Hub Ring	M41A	1.59
51/4" SSSD 16 Hard Sector w/Hub Ring	M51A	1.59
5¼" SSDD Lanier No-problem compatible	M51F	2.99
51/4" SSDD Soft Sector w/Hub Ring	M13A	1.89
51/4" Same as above, but bulk pack w/o envelope	M13AB	1.69
51/4" SSDD Soft Sector Flippy Disk (use both sides)	M18A	2.79
5¼" SSDD 10 Hard Sector w/Hub Ring	M43A	1.89
5¼" SSDD 16 Hard Sector w/Hub Ring	M53A	1.89
5¼" DSDD Soft Sector w/Hub Ring	M14A	2.79
51/4" DSDD 10 Hard Sector w/Hub Ring	M44A	2.79
51/4" DSDD 16 Hard Sector w/Hub Ring	M54A	2.79
5¼" SSQD Soft Sector w/Hub Ring (96 TPI)	M15A	2.69
51/4" DSQD Soft Sector w/Hub Ring (96 TPI)	M16A	3.79

SSSD = Single Sided Single Density; SSDD = Single Sided Double Density; DSDD = Double Sided Double Density; SSQD = Single Sided Quad Density; DSQD = Double Sided Quad Density; TPI = Tracks per inch.

Buy with Confidence

To get the fastest delivery from CE of your Wabash computer products, send or phone your order directly to our Computer Products Division. Be sure to calculate your price using the CE prices in this ad. Michigan residents please add 4% sales tax or supply your tax I.D. number. Written purchase orders are accepted from approved government agencies and most well rated firms at a 30% surcharge for net 30 billing. All sales are subject to availability, acceptance and verification. All sales are final. Prices, terms and specifications are subject to change without notice. All prices are in U.S. dollars. Out of stock items will be placed on backorder automatically unless CE is instructed differently. Minimum prepaid order \$50.00. Minimum purchase order \$200.00. International orders are invited with a \$20.00 surcharge for special handling in addition to shipping charges. All shipments are F.O.B. Ann Arbor, Michigan. No COD's please. Non-certified and foreign checks require bank clearance.

For **shipping charges** add \$8.00 per case or partial-case of 100 8-inch discs or \$6.00 per case or partial-case of 100 5½-inch mini-discs for U.P.S. ground shipping and handling in the continental United States.

Mail orders to: Communications Electronics, Box 1002, Ann Arbor, Michigan 48106 U.S.A. If you have a Master Card or Visa card, you may call and place a credit card order. Order toll-free in the U.S. Dial 800-521-4414. If you are outside the U.S. or in Michigan, dial 313-994-4444. Order your Wabash diskettes from Communications Electronics today.

Copyright "1982 Communications Electronics"

Ad #110582









Order Toll-Free! 800-521-4414

In Michigan 313-994-4444

wabash error-free diskettes



Computer Products Division

854 Phoenix Box 1002 Ann Arbor, Michigan 48106 U.S.A. Call TOLL-FREE (800) 521-4414 or outside U.S.A. (313) 994-4444

Radio-Electronics

THE MAGAZINE FOR NEW IDEAS IN ELECTRONICS

Electronics publishers since 1908

APRIL 1983 Vol. 54 No. 4

SPECIAL SECTION

- 57 YOUR OWN COMPUTER
- 59 COMPUTER BASICS Marc Stern
- 63 ENTRY-LEVEL COMPUTERS Herb Friedman
- 67 ALL-IN-ONE COMPUTERS Marc Stern
- 73 DISK DRIVES Marc Stern
- 79 PRINTERS Marc Stern
- 85 MODEMS Herb Friedman
- 90 ACCESSORY BOARDS Marc Stern
- 96 COMPUTER GLOSSARY
- 107 GADGETS AND GIZMOS Herb Friedman
- 111 DATA TERMINALS Marc Stern
- 115 YOUR OWN SOFTWARE
- 117 BUDGET SOFTWARE Herb Friedman
- 127 "WHAT IF" SOFTWARE Herb Friedman

BUILD THIS

43 ADD A VIDEO INPUT TO YOUR TV

Modify your television set to accept a baseband video signal for better picture quality when using a computer or VCR.

John Soluk

49 BUILD YOUR OWN CUSTOM CASES Give your projects a professional look with custom-built cases. Robert Grossblatt

132 VLF-HF ACTIVE ANTENNAS

Part 3. These short-length antennas are easy to build and offer surprisingly good performance. R.W. Burhans

136 SPOT-A-MATIC

An illuminating project. Robert Grossblatt

TECHNOLOGY

4 VIDEO ELECTRONICS

Tomorrow's news and technology in this quickly changing industry. **David Lachenbruch**

12 SATELLITE/TELETEXT NEWS

The latest happenings in communications technology. Gary H. Arlen

14 VIDEOGAMES

Supercharge your Atari 2600. Danny Goodman

153 STATE OF SOLID STATE

An expander for your Hi-Fi. Robert F. Scott

CIRCUITS AND COMPONENTS

142 THE DRAWING BOARD

More on the keyboard encoder. Robert Grossblatt

146 NEW IDEAS

An easy-to-build crystal tester.

150 HOBBY CORNER

Turning a clock into a timer. Earl "Doc" Savage, K4SDS

VIDEO

155 SERVICE CLINIC

There's nothing really new about fixing those new TV sets Jack Darr

156 SERVICE QUESTIONS

R-E's Service Editor solves technicians' problems.

REPORTS

- 24 Monarchy Engineering A501/A502 Power Amp and Preamp
- RTS 28 Non-Linear Systems Kaypro II Portable Computer

DEPARTMENTS

- 10 Advertising and Sales Offices
- 188 Advertising Index
- 10 Editorial
- 189 Free Information Card
- 22 Letters
- 161 Market Center
- 39 New Products
 - 6 What's News

ON THE COVER

The fascinating world of microcomputers-whether it be a simple entry-level machine for education or entertainment, or a complex, fullfeatured computer for your business-there's something there for everyone. And there's something for everyone in our Special Section. 'Your Own Computer." This month we take an in-depth look at the hardware and the things you should know before you buy. To round things out, "Your Own Software" takes a look at one of the most popular types of software—the electronic spreadsheet—and a look at some software you may never have heard of, but that's surprisingly useful and/ or inexpensive. It all starts on page



A CUSTOM CASE will give your project a professional look and get it the attention it deserves. It can be surprisingly easy and inexpensive to build if you know how. Find out more starting on page 49.

COMING NEXT MONTH On Sale April 19

- Build A Talking Clock. This clock not only tells the time, it says it.
- Car Alarm. Connect it to your car to help keep the burglars away.
- All About LSI Music Synthesizers. A look at the different IC's available to build your own music synthesizers.
- · And more.

Radio-Electronics, (ISSN 0033-7862) Published monthly by Gernsback Publications. Inc., 200 Park Avenue South, New York, NY 10003, Second-Class Postage Paid at New York, NY, and additional mailing offices. One-year subscription rate: U.S.A. and U.S. possessions. \$14.97, Canada, \$17.97. Other countries, \$22.47 (cash orders only, payable in U.S.A. currency.) Single copies \$1.50. © 1983 by Gernsback Publications, Inc. All rights reserved. Printed in U.S.A.

Subscription Service: Mail all subscription orders, changes, correspondence and Postmaster Notices of undelivered copies (Form 3579) to Radio-Electronics Subscription Service, Box 2520, Boulder, CO 80322.

A stamped self-addressed envelope must accompany all submitted manuscripts and or artwork or photographs if their return is desired should they be rejected. We disclaim any responsibility for the loss or damage of manuscripts and/or artwork or photographs while in our possession or otherwise.

As a service to readers, Radio-Electronics publishes available plans or information relating to newsworthy products, techniques and scientific and technological developments. Because of possible variances in the quality and condition of materials and workmanship used by readers, Radio-Electronics disclaims any responsibility for the safe and proper functioning of reader-built projects based upon or from plans or information published in this magazine.

RADIO-ELECTRONICS

VIDEO ELECTRONICS

DAVE LACHENBRUCH CONTRIBUTING EDITOR



POCKET TV

The first completely tubeless TV destined for the American market is Casio's ingenious LCD model (shown above), due here in July, priced at about \$250. The complete set is about the size of a one-inch stack of 3-×-5-inch index cards. The screen measures $2\frac{3}{4}$ inches diagonally, using a twisted nematic type of liquid crystal display. To solve the problem of viewing in the dark, Casio uses an electroluminescent material as a backlight. It can be operated for three hours from three AA batteries, or can be powered by a 12-volt car battery or an AC adaptor.

The screen resolution is 20,480 picture elements (pixels)—160 horizontal, 128 vertical. The chassis contains 7 LSI IC's, including 5 VSLI IC's all developed by Casio. Weight is 12.35 ounces, and the unit contains a loudspeaker as well. Initial production in Japan will be about 20,000 monthly, and Casio expects to use the same design for computer displays. It promises a color version next year.

END OF VCR BARGAINS?

If you want a low-end VCR at \$299 or a full-featured programmable one for under \$500 or so, better snap it up now while the snapping is good. At presstime, it appeared that the oversupply crisis that pushed prices to almost unbelievable lows might be coming to an end. During 1982, inventories of excess recorders were sharply reduced by a combination of sharply cut prices and restraint in imports. In addition, the firming of the Japanese yen against the dollar appears to militate against continued low prices. And for the first time, there were no major model changes around New Year's to cause instant obsolescence of older versions and the resulting bargain closeouts.

RCA'S INTERACTIVE VIDEODISCS


RCA says it will introduce an interactive version of its CED videodisc player later this year. Controlled by a remote keypad, the player can be random-accessed to find any individual track (each one of which contains four TV frames). Both the Laservision optical-disc system and the Japanese VHD-capacitance system (being introduced in Japan this spring, but with no US starting date) are designed to allow for interactive use. RCA says its interactive player will accommodate the same types of interactive programs as the other systems. It exemplifies RCA's approach of introducing a basic system, then adding features, such as remote control, stereo, and now interactivity, as opposed to the Laservision approach of fielding a system that initially contains all such features. RCA points out that it interactive discs will play for an hour per side; interactive laser-discs are capable only of a half-hour of playing time per side.

VIDEO VIGNETTES

Miniaturized portable Beta recorders will make their appearance in 1983 as an answer to JVC's VHS-C (for "compact") format, which uses a smaller cassette to record up to 20 minutes. The new Beta machines use the standard Beta cassette that can record for up to five hours. The new machines weigh about 6 pounds without battery, 7½ pounds with.

General Electric, which buys portable VCR's from Matsushita, home units from Hitachi, will depend on Matsushita for all its VGR needs.

Look for "live-action" video games in the arcades in the near future. Those coinoperated thrillers will combine computer-game excitement with the realism of the videodisc. Pioneer will supply the built-in optical players.

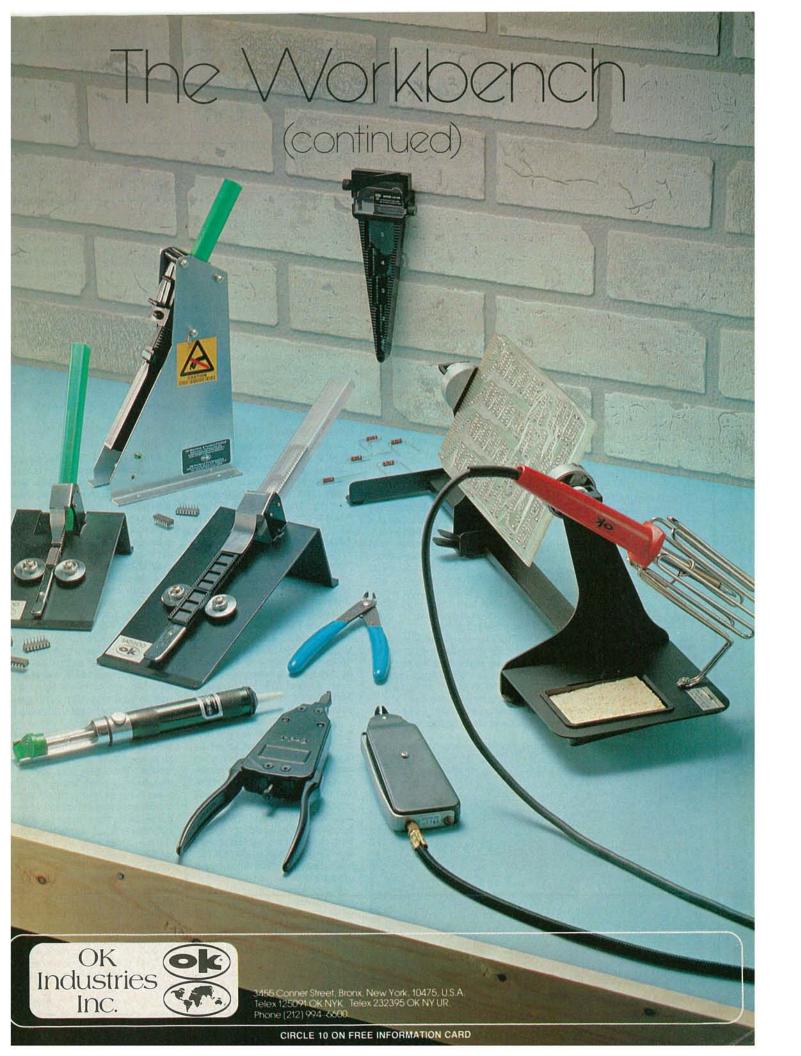

RADIO-ELECTRONICS

WHAT'S NEWS

Cellular radio license applications inadequate

Seven out of ten applications in the new cellular radio field may be inadequate, simply for failure to show "reasonable assurance" of antenna-site availability. That is the opinion of the Memphis-based real estate consulting firm, McAllister Associates, after a survey of the field.

In the rush to secure licenses, some 3000 documents have been filed. "The smartest companies," says McAllister Associates, "have made sure that antenna-site availability is well documented in their applications. They expect that the FCC will screen applications on that basis, because it is the easiest place to find indisputable errors."

Sites secured only by unenforceable letters of intent constitute the commonest inadequacy found, amounting to 60 percent of the sites surveyed. Another 28 percent showed even more obvious problems, including instances in which the property to which the rights had been signed over was not the property listed in the application.

Random access memory has 3-ns access time

Motorola claims the world's fastest random-access memory in its MC10H145, a new 64-bit bipolar ECL RAM. The access time is typically 3 nanoseconds and is 6 ns maximum. The MC10H145 is organized as a 16 \times 4 memory array and is a member of the MECL 10KH family.

The high speeds were attained by a combination of new circuit design and advanced processing techniques. The gate structure was changed to include both constant-current-source gates and a voltage regulator. Those changes and new logic configurations reduce gate delays.

The device is processed in Motorola's new oxide isolated MOSAIC (Motorola Oxide Self-Aligned Implanted Circuit) process, which reduces size and parasitic capacitances and improves bandwidth.

Art generator for Apple computers

Visual Horizons has introduced Computer Slide Express; that is a service that turns any Apple computer into an art generator, With the new service, any Apple computer user can convert computerized charts, designs, graphs, and graphics, into 35-mm color slides, standard-size black-and-white prints or enlargements, or overhead transparencies.

The information can be transmitted over telephone lines or mailed to Visual Horizons in the form of a floppy disk, which holds material for up to 35 slides. All material is returned through the mail.

The system is especially adapted to an author who might

need black-and-white charts for a book, or to lecturers who need slides quickly for a presentation.

Visual Horizons will offer a complete range of software to let Apple users access a variety of type sizes, styles, and background designs. Computer Slide Express programs are also being developed for use with other computer brands.

Information may be obtained from Visual Horizons, 180 Metro Park, Rochester, NY 14623.

RCA develops a new high-power laser

A new high-power semiconductor laser just developed in the RCA Laboratories in Princeton, NJ, is expected to find important uses in optical data recording, high-speed printing, and fiber-optics communications. The new device, a CDH-LOC (Constricted Double Heterojunction Large Optical Cavity) injection diode laser, is smaller than a grain of salt. It has just been patented and is being offered for sale by the company's Solid State Division.

Invented by Dr. Dan Botez of the RCA Labs Optoelectronics Group, the new laster is fabricated by a single-step deposition of layers of gallium arsenide and aluminum gallium arsenide over grooved gallium aresenide substrates. Thousands of lasers can be obtained from a single wafer.

The CDH-LOC structure provides a stable light source with highly linear power output versus drive current for operating currents above the laser threshold. Emission in both the single lateral mode and the single transverse mode is obtained up to 40 mW in continuous operation and 100 mW in 50-percent duty-cycle conditions. Both represent the highest powers in a single spatial mode that has ever been achieved under such drive conditions.

A unique lasing cavity design allows the device to operate in a large spot size (6 micrometers × 1.4 micrometers) and consequently a narrow beam (6° × 25°). Thus the device is well suited for applications with stringent optical-quality needs. Furthermore the device beam has almost no astigmatism; hence it can be fo-

cused to a diffraction limited spot.

It is expected that the new laser will soon replace older gas types as light sources in optical recording equipment used for mass data storage. Another area—high-speed printing—holds great promise. A high-power diode laser permits rapid scanning of the printing drum and thus fast printing. In fiber-optics communications, it could permit light transmission without repeaters over longer distances. It will also be useful for non-fiber communications and guide-wave signal processing.

Computers makes farmers out of urban dwellers


A new type of computer-based agriculture is reported from Israel, where urban residents who lack the most basic horticultural skills are growing magnificent fruits, flowers, and shrubs semi-automatically. The plants are grown in concrete sectional containers. The soil is volcanic tuffgray absorbent pebbles that provide excellent aeration. The technique can also be applied with excellent results to backyard gardens in ordinary soil.

The brain of the system is a small pocket-size computer that plans and delivers the correct amounts of water and fertilizer. It takes into account air temperature, humidity, and other variables, as well as type of soil (in earth gardens) and other data supplied by the gardener-owner.

The roof or backyard plots are seeded and the computer begins to supply liquid at calculated intervals. The water and fertilizer mixture is applied through small plastic tubes punctuated with drippers directed at the roots of the plants. In container-type gardens, the leftover liquid is recycled. The "farmer" has only to replenish fertilizers weekly or sometimes at longer intervals.


The new agricultural approach was invented by an industrial engineer, Noam Blum, who patented and is now marketing it. Installation on roofs, including all containers and equipment, costs up to about \$4,000 for 100 square meters (1,075 sq. ft.) of space. Gardens on ordinary soil cost about half that

continued on page 8

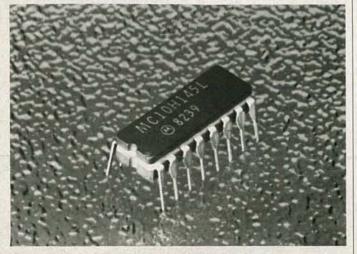

MOTOROLA'S MC10H145, a high-speed RAM.

Now! A 60 MHz Tektronix scope built for your bench.

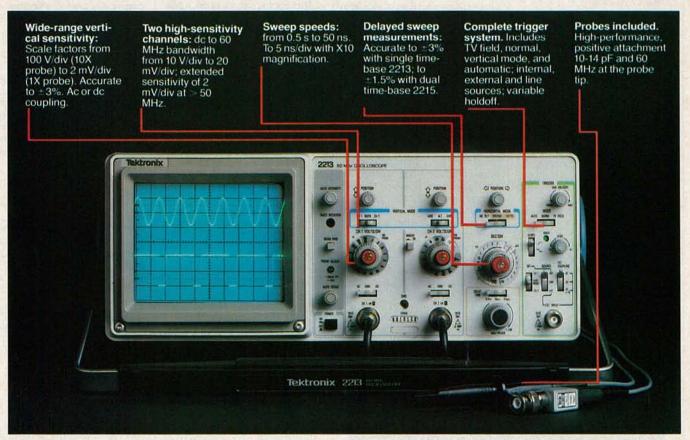

In 30 years of Tektronix oscilloscope leadership, no other scopes have recorded the immediate popular appeal of the Tek 2200 Series. The Tek 2213 and 2215 are unapproachable for the performance and reliability they offer at a surprisingly affordable price.

There's no compromise with Tektronix quality: The low cost is the result of a new design concept that cut mechanical parts by 65%. Cut cabling by 90%. Virtually eliminated board electrical connectors. And eliminated the need for a cooling fan.

Yet performance is written all over the front panels. There's the bandwidth for digital and analog circuits. The sensitivity for low signal measurements. The sweep speeds for fast logic families. And delayed sweep for fast, accurate timing measurements.

The cost: \$1200* for the 2213. \$1450* for the dual time base 2215.

You can order, or obtain more information, through the Tektronix National Marketing Center, where technical personnel can answer your questions and expedite delivery. Your direct order includes

probes, operating manuals, 15-day return policy and full Tektronix warranty.

For quantity purchases, please contact your local Tektronix sales representative.

Order toll free: 1-800-426-2200 Extension 50

In Oregon call collect: (503) 627-9000 Ext. 50

*Price F.O.B. Beaverton, OR. Price subject to change.

WHAT'S NEWS

continued from page 6

Microsync offers Timex/Sinclair maintenance plan

Owners of Sinclair ZX81 and Timex/Sinclair 1000 computers can now obtain yearly maintenance agreements from Microsync, in Keene, NH. Microsync-the only Sinclairauthorized service center in the country-repaired over 10,000 Sinclair ZX81's last year.

The maintenance agreement offers full service, including all parts. Agreements run for one year after warranty expiration, and are renewable

Cost for one-year maintenance agreements are \$14.95 for any ZX81 or Timex/Sinclair 1000 less than 90 days old and \$34.95 for units more than 90 days old. For 16K RAM's less than 90 days old. an agreement costs \$12.95; more than 90 days old, \$24.95.

Service agreements are also available on the new Sinclair ZX printer that is not marketed in the United States but is available from Canadian distributors

Further information may be obtained from Customer Service Department, Microsync Services, Keene, NH 03431.

Computer now offers complete home control

A new and improved model of Tomorrowhouse, the complete computerized turnkey homemonitoring and control system that was introduced last summer by Compu-Homes Systems of Denver, is planned for this spring.

Said by its makers to be the first such system within the reach of the average consumer, Tomorrowhouse is based on the Apple II personal computer. It consists of a specially constructed plug-in circuit card, sensors, a junction box and related hardware, the programs necessary to set up and control a house, and installation and user manuals.

The graphic display of the Apple computer shows the exact status of all security and energy-control features at all times. The Security system is extended to include temperature monitoring of critical areas or equipment, and can turn on lights to scare off burglars or light escape routes in case of fire. Heating and air conditioning can be scheduled up to nine weeks in advance. Heating/cooling and lights/appliances schedules can be stored for execution at will, a feat impossible with simple timers. Other convenience features include a wake-up alarm and an appointment calendar.

Since humans are visual and vocal animals, information is presented visually (on the display) and verbally (via a voice synthesizer). Warnings and periodic announcements are made by

The new Tomorrowhouse (model 2.2) will include remote monitoring via any Touch-Tone phone. The user can call home, inquire whether there were any intrusions or power failures, and issue commands or change schedules. Tomorrowhouse can also call the office, vacation number, or neighbor in case of emergency and give an appropriate voice message.

For people who already have Apples, prices start at about \$800.

Broadcasters' guide heralds teletext push

As part of a stepped-up marketing push of the British World System Teletext, British Video and Teletext (BVT-the marketing and promoting arm of the British videotext and teletext industry) has mailed a new Broadcasters' Guide to Teletext-the World System, to executives and engineers of broadcast groups and 1,000 television stations across the U.S.

The guide describes teletext, explains how to make money with teletext, how to get a teletext magazine started, and presents details on British World System teletext receivers, standards, and maintenance.

BVT will continue to make available the Prestel World Service, a videotex system that provides information such as international

commodity prices, shipping, and travel data. (Teletext is one-way transmission of information via broadcasting or cable, while videotex is one- or two-way communication of information via phone lines or cable.) But due to the numbers of hardware and software vendors in the United States currently using the Prestel standard, BTV will confine its active promotion to convincing broadcasters that "Today is the day to get into teletext.'

AM stereo transmission for "Grand Ole Opry"

WSM, Nashville, Tennessee, which has been transmitting "Grand Ole Opry" since 1925, switched over to AM stereo last December using the Harris system. The station covers 38 states with its 50-kilowatt signal.

'We hope," said Tom Cassetty, WSM's general manager, "that AM stereo radios for homes and cars will be on the market soon."

CBS, Sony join to make audio discs in U.S.A.

A plan to make Compact Disc audio software in the United States has been announced jointly by CBS, Inc. and Sony Corp. of Japan. The discs will be made by CBS-Sony Inc., a corporation owned equally by CBS and Sony.

The Compact Disc is the first commercially produced digitalaudio playback disc. The technology uses a small, reflective 43/4inch disc that is read by a beam from a solid-state optical laser. The dynamic range, signal-to-noise ratio, and channel separation are all over 90 dB. Wow and flutter are unmeasurable, and frequency response is flat over the whole audio range.

Since the playback system is optical, with no surface contact, the Compact Disc will retain its original quality for an indefinite period of time, and is less liable to suffer physical damage.

Under present plans, CBS Records will market Compact Discs imported from CBS-Sony of Japan in 1983, and CBS-Sony will start to manufacture them in the United States some time in 1984.



MICROSYNC OFFERS MAINTENANCE AGREEMENTS for Sinclair and Timex/Sinclair computers



REDUCE SHOCK HAZARD. NEW, VARIABLE ISOLATION TRANSFORMER, ONLY \$157.75

Here's extra safety for personnelprotection for equipment. Absolutely necessary for servicing or testing any transformerless equipment-industry, lab, school or field

New WP-29 ISO-V-AC lets you set isolated output voltage to precise

value you need. Monitor either isolated output or direct input voltage on panel meter. It's the most versatile isolation transformer you can buy!

Two isolated outputs: polarized standard two-wire socket and banana jacks (so isolated AC may be applied directly to circuit points). Completely portable. Thermal overload protection of transformer and output protected by 2-amp, circuit breaker. Output leads supplied.

VIZ Isotap[®] isolation transformers



WP-26A Isotap 400 VA isolated.

500 VA direct. Outputs at 105, 120 and 135 V. \$85.00



WP-27A Isotap II 400 VA isolated only. Outputs 25 to 150V AC

in 5V steps. \$89.95



WP-28 Porta-Isotap

150 VA isolated, 500 VA direct. Output 105-130V TV adapaters supplied. Carrying strap

\$65.00

VIZ RELIABILITY.

VIZ is a 50 year-old company. Our instruments are fully warranted, parts and labor, for a year. All units tested to NBS standards. We offer service and parts availability for a minimum of ten years. Over 15 repair depots in U.S.A.



WT-540B

For safety. Detects AC leakage in appliances and equipment. Calibrated at 0.5 and 0.75 mA.

\$39.75

Want full technical details and a demonstration? Call toll-free, 1-800-523-3696, for the VIZ distributor near you.



Look to VIZ for value, quality and availability. Over 70 instruments in the line.

VIZ Mfg. Co., 335 E. Price St., Philadelphia, PA 19144

RADIO-ELECTRONICS

EDITORIAL

WCES '83

The 4-day Winter Consumer-Electronics Show held in Las Vegas in early January attracted a record attendance of over 78,000 to evaluate the new products being introduced by the major consumer-electronics manufacturers. These products will be showing up on the

store shelves during the coming months.

The products that attracted the most attention were computers, telephones and videogames. On the computer front, new personal computers were introduced by such well known names as Hewlett-Packard, Mattel (called the *Aquarius* and it will, of course, play video games), Texas Instruments, (the *Tl99/2*, a basic computer that will compete in the under \$100 category). Computers were also introduced by manufacturers new to the field, such as Spectra Video (the model *SV-318* contains 32K ROM, 32K RAM, Microsoft BASIC in ROM, 52-graphic symbols, 16-color display, and more for \$299.95) and Data-Assette (the Jupiter Ace that will compete with the Timex/ Sinclair ZX81).

A horde of new videogame cartridges were introduced at the show. New videogame consoles were also introduced. N.A.P. Consumer Electronics unveiled their *Odyssey Command Center* that is compatible with *Odyssey*² videogame cartridges and features a typewriter-like keyboard and enhanced graphics. Mattel showed their new *Intellivision II*, actually a compact version of the currently available *Intellivision* console. At the same time, Mattel was privately showing their next-generation videogame, called the *Intellivision III*. Watch for our June 83 issue that will feature a special section on videogames.

Of particular interest was the General Electric display of hightechnology products that included a Home Control System with a CRT display. The device controls appliances by sending control signals over the existing house wiring and includes heating and air conditioning control, a security and fire alarm system, and more.

There was also action on the VCR front. Manufacturers of Betaformat VCR's announced a new Beta format with hi-fi sound.

Robots also made an appearance at the show. Nolan Bushnell (founder of Atari, Inc.) introduced his long-awaited home robot. Two models of the *Androbot* were shown. The advanced model, called *B.O.B.*, will sell for approximately \$2500 and feature three Intel 8088 16-bit microprocessors, 3 megabytes of memory, and infra-red and ultrasonic sensors. The basic model, called *Topo*, will sell for approximately \$1000 and acquires its intelligence from an outboard personal computer via an RF link. Neither the infra-red nor ultrasonic sensors are supplied with the basic model.

With new product introductions of this kind, it appears that the consumer-electronics industry is alive, well, and headed for a banner year. **Radio-Electronics** will be there covering these and other developments as they happen, presenting you with the latest in-depth

information.



ART KLEIMAN Editor

Radio-Electronics

Hugo Gernsback (1884-1967) founder M. Harvey Gernsback, editor-in-chief Larry Steckler, CET, publisher Arthur Kleiman, editor Josef Bernard, K2HUF, technical editor Carl Laron, WB2SLR, associate editor Brian C. Fenton, assistant editor Jack Darr, CET, service editor Robert F. Scott, semiconductor editor Herb Friedman, communications editor Gary H. Arlen, contributing editor David Lachenbruch, contributing editor Earl "Doc" Savage, K4SDS, hobby editor Danny Goodman, contributing editor Dan Rosenbloom, production manager Robert A. W. Lowndes, production associate

Stefanie A. Mas, production assistant Joan Roman, circulation director Arline R. Fishman, advertising coordinator

Cover photo by Robert Lewis

Radio-Electronics is indexed in Applied Science & Technology Index and Readers Guide to Periodical Literature.

Gernsback Publications, Inc. 200 Park Ave. S., New York, NY 10003 President: M. Harvey Gernsback Vice President; Larry Steckler

ADVERTISING SALES 212-777-6400

Larry Steckler Publisher

EAST

Stanley Levitan Radio-Electronics 200 Park Ave. South New York, NY 10003 212-777-6400

MIDWEST/Texas/Arkansas/Okla.

Ralph Bergen Co., Inc. 540 Frontage Road—Suite 325 Northfield, Illinois 60093 312-446-1444

PACIFIC COAST Mountain States

Marvin Green Radio-Electronics 413 So. La Brea Ave. Los Angeles, Ca 90036 213-938-0166


SOUTHEAST

Paul McGinnis Paul McGinnis Company 60 East 42nd Street New York, N.Y. 10017 212-490-1021









SELECTABLE 100 kHz INPUT FILTER FOR LOW FREQUENCY MEASUREMENTS




EIGHT DIGIT DISPLRY

LARGE HIGH-BRIGHTNESS DISPLAY

DISPLAY HOLD FREEZES YOUR





SELECTABLE XIO

New! An 80 MHz multi-function counter that does it all... frequency, totalize, period.



MODEL 1805

PRECISION DYNASCAN CORPORATION

6460 West Cortland Street - Chicago, Illinois 60635 - 312/889-9087

Intl. Sis., 6460 W. Cortland St., Chicago, IL 60635

Canadian Sales, Atlas Electronics, Ontario

South and Central American Sales, Empire Exporters, Plainview, NY 11803

For the complete story on new counters from B&K-PRECISION see your local distributor or call toll-free

1-800-621-4627 [in Illinois 1-312-889-9087]

CIRCLE 24 ON FREE INFORMATION CARD

RADIO-ELECTRONICS

SATELLITE/TELETEXT NEWS

CBS ACCELERATES TELETEXT

CBS has speeded up its timetable for introducing its "ExtraVision" teletext service, with an eye toward national launch this year. The service, using the North American Broadcast Teletext Standard format, is being transmitted on a test basis aboard lines 15-18 of the vertical blanking-interval of the network feed. The national teletext magazine will include about 100 pages of news, information, advertising, and other data, although CBS is stil pondering how much room to leave for local stations to insert their own teletext material. CBS also plans to put closed captioning into the national teletext feed, offering subtitles so that deaf viewers can follow the dialog in news and entertainment programs.

MORE DBS PROJECTS APPROVED

The Federal Communications has approved the preliminary plans for Direct Broadcast Satellites developed by seven more companies; those tentative OK's follow quickly on the heels of the go-ahead given recently to Satellite Television Corp. Among the companies now authorized to proceed with their DBS plans are CBS, Western Union, DBS Corp., RCA Americom, Graphic Scanning Corp., U.S. Satellite Broadcasting Co., and Video Satellite Systems. The companies have different approaches: For example, CBS is concentrating on the high-definition-TV feature of its system; several others plan only to be carriers for the DBS programming services of other companies.

The current round of FCC approvals is merely the go-ahead to begin developing systems. Launch authorizations, orbital slots, and other technical approvals probably won't come until late 1983 or beyond, after an international meeting hammers out a western-hemisphere agreement for DBS technology.

Among the interesting features of the latest batch of DBS projects are the RCA Americom systems, which will include four satellites, and the four-bird CBS system. In addition, U.S. Satellite Broadcasting, owned by the Minnesota-based Hubbard Broadcasting, proposes a four-bird ad-supported programming service. Graphic Scanning seeks a two-satellite system which will offer two pay-TV channels.

In a separate action involving DBS, the Commission is encouraging public comments about the susceptibility of DBS home receivers to extraneous interference. The research comes in anticipation of this summer's international DBS meeting. In particular, the U.S. committee going to that meeting wants to find out more details about possible problems, such as out-of-band emissions from terrestrial systems in the next higher band which could fall into the 12-GHz frequency range used by DBS. In addition, the committee will examine harmonics of emissions radiated by equipment in lower bands, such as microwave ovens, which could fall into the 12 GHz spectrum.

AROUND THE SATELLITE CIRCUIT

Bell Labs has developed a system that can put two high-quality video signals on a single satellite transponder with no loss in image. In a recent demonstration, Bell scientists showed a time-frequency multiplexing system which squeezes a single TV channel into half the usual transmission time. Using elaborate signal-processing techniques, the system stores material from the first field of each video frame scan then adds only the differential information in the second field. Both the first field and the differential data of the second field are then transmitted simultaneously. The differential data sent in an upper band by means of double-sideband suppressed-carrier modulation. That squeezing technique leaves room within the transmission for a second signal. Bell engineers think that they could even tuck a third video transmission into the same transponder, although there would be some signal-quality loss for all three channels if that happened. Nonetheless, the video-compression technique, which is the latest in a long series of efforts to piggyback channels on a single circuit, is seen as an important step in the search for ways to increase transmission capacity in the crowded skies.

Intelsat has adopted an earth station "Standard Z" intended to make it easier for international satellite operators to design and build reception equipment. Until now, most earth-station antennas used for domestic service have not followed any universal pattern. The new "Standard Z" provides specific guidelines on performance characteristics and differs from previous standards in that such items as the effective radiated power per carrier, modulation methods, transmit gain, and channel quality are not included. **R-E**

We gave solderless breadboarding a new name.

Proto-Board® breadboards, by Global Specialties. The leading name in solderless breadboarding.

You find them wherever electronics is important. From labs to production lines to classrooms to home workshop benches. Their name, synonymous with solderless breadboarding. And for good reason.

Proto-Board breadboards introduced engineers, technicians and hobbyists to a new way of designing and building electronic circuits: as fast as they can think. Testing, modifying and expanding as quickly as new thoughts occur. Saving precious time and money by freeing creativity from manual labor.

Global Proto-Board products are arrays of solderless sockets and bus strips that emulate PC while permitting instant insertion and removal of components from the largest DIP to the smallest discretes. With a rugged construction built to provide positive connections and withstand day-in, day-out professional use—even as test fixtures. And mounted on sturdy metal backplanes, for extended high-frequency use and extra durability.

ips that Their value and versatility are why inlate PC so many professionals and hobbyists board layouts are "Proto-Board"-ing. And why you should be, too.

OCETO USA Available with precision, fixed and variable regulated power supplies, or in unpowered versions. Proto-Board breadboards come in a variety of sizes and config-urations, to meet virtually any circuit design challenge

70 Fulton Terr. New Haven. CT 06509 (203) 624-3103, TWX 710-465-1227
OTHER OFFICES: San Francisco (415) 648-0611, TWX 910-372-7992
Europe: Phone Salfron-Walden 0799-21682, TLX 817477
Canada: Len Finkler Ltd., Downsview, Ontario

GLOBAL SPECIALTIES CORPORATION

Call toll-free for details 1-800-243-6077 During business hours

Copyright 1981 Global Specialties Corporation

"See us at Electro, Booths 3139, 3141, 3143, 3145."

VIDEOGAMES

New life for your Atari 2600

DANNY GOODMAN, CONTRIBUTING EDITOR

DEDICATED ATARI 2600 ENTHUSIASTS become defensive whenever friends carry on about one of the many systems now on the market that offer arcade-like graphics. By comparison, the 2600 seems a generation or two behind. Even after some wonderfully detailed graphic executions like Parker Bros.' Frogger, Atari's Defender, and Imagic's Demon Attack, the 2600 still lacks the 'flash' of the Intellivison from Mattel, and the newer systems by Atari and Coleco. That is, however, only until you plug Starpath's Supercharger into the cartridge slot (see Fig. 1). It's like discovering a completely new game system, and the cost is only about \$70.



FIG. 1

One of Starpath's (formerly known as Arcadia) founders, Bob Brown, is an ex-Atari engineer who had a lot to do with the design of the 2600. As such, it's not surprising that he's very knowledgeable when it comes to working miracles with that console.

Simply put, the Supercharger expands the part of the console's memory that creates a graphic image and sends it to the video screen. The 2600 by itself has only enough "screen memory" to handle new video information every other horizontal scanning-line (a TV picture is made up of a few hundred such scanning lines). Thus, the smallest video element is two scanning lines thick. The Supercharger, however, supplements the screen memory to accommodate new video information on each line, greatly improving the graphics resolution.

But the hardware—the Supercharger

unit itself-is only a small part of the story. First, let's clear up a misconception among many game players—and even retailers-about standard gamecartridges for any home videogame. For one reason or another, perhaps because they resemble the old 8-track tape cartridges, the videogame cartridges are often referred to as "tapes." They are nothing of the sort! I don't recommend it, but if you were to open up a game cartridge, you would see a small circuit board, one or two integrated circuits and perhaps a few other components, but no tape. The IC's are, of course, ROM's, and they store the game program. When the cartridge is plugged into the unit and the game is switched on, the contents of the ROM's are downloaded into the console's main memory and the game begins. And so it has been, until Starpath.

With the advent of the Supercharger comes a program-loading technique new to home games, but well known to home-computer hobbyists: downloading from a cassette tape. All you need is a cassette player into which you plug the cable coming out of the Supercharger. Turn on the 2600 and TV (the Supercharger gets all its power from the 2600) and you are prompted on the screen to rewind the tape and press PLAY. In about 30 seconds, the screen fills up with color and you're instructed to stop the tape. Presto, you're in the game.

Game play, though, is what makes or breaks a system. And, on that score, Starpath comes through with flying colors. The tape packed with the Supercharger is called Phaser Patrol. Similar to Star Raiders (Atari) and Star Master (Activision), Phaser Patrol puts you at the helm of a space fighter whose goal is to clear 36 galactic sectors of enemy squadrons. Your on-screen control panel makes full use of the super graphics with sharp, clear status indicators, digital readouts, and a graphically unique relative-time keeper. Flip the COLOR/B + w switch on the 2600console, and an ultrafine sheet of dots slowly fills your viewing area, indicating that your "shields" are on.

The game play is fast, and is sure to keep your attention. If you "survive," you are rated according to your expended time and energy. I prefer this space simulation over any other for the 2600, and I place it just a notch under the version for

the Atari 400/800 computers.

More recently, Starpath has taken full advantage of its cassette-loading technique with games that require multiple loading as you master each level. It is really like getting two or three complete games on one tape.

Dragonstomper may become a cult classic among home-videogame addicts. It's a graphic adventure-type game in which the player fights several different kinds of enemies, and explores various buildings in search of gold and a scroll to gain access to the next level. When those have been found, you do another load and begin trading and buying provisions for the third and most dangerous part of the journey. The final phase (this is a threeload game) is a completely different screen layout with almost insurmountable hazards on your way to face the dragon. In the tradition of adventure-type games, instructions are minimal, so be prepared to spend many hours finding your way around using trial and error.

As cassette tapes are less expensive to produce than ROM cartridges, games range in price from \$14.95 to \$18.95. And when you consider that, for the most part, the games offer better displays and more involved play than the \$35 high-end cartridges, suddenly the initial \$70 investment for the *Supercharger* and *Phaser Patrol* doesn't look so bad.

Astrocade's The Incredible Wizard for Astrocade

LIFE FOR THE ASTROCADE (FORMERLY Bally Arcade) console and its owners has not been too easy of late. For one thing, there have always been pretty slim pickings when it came to cartridges. For another, the manufacturer's (Astrocade, Inc.'s) precarious financial situation, which has become common knowledge in these past few months, has put the future of the machine in doubt. However, to paraphrase Mark Twain, reports of its death may have been greatly exaggerated. The company, at press time, was undergoing reorganization and is hopeful that it can continue producing the console and even introduce some new cartridges in the near future.

In any event, most of the cartridges that continued on page 20


1355 SHOREWAY ROAD **BELMONT, CA 94002**

One-Stop Component Center 🕾

Quality Components
 Over 650 Items Available From Our 700

 Competitive Prices **Authorized JIM-PAK Distributors**

Send Self-Addressed Stamped Envelope for 1983 Catalog and Distributor List



BUG TRAYTM — Stores in Bug Cage • Molded plastic • Three styles: Open (1 compartment); Vertical (5 compartments); and Horizontal (8 compartments) tols, hardware, components, etc. • Color: Black • Size: 3.55" x 5.05" x .6".

PART NO.
Horizontal Bug Tray (2) BTH-002
Vertical Bug Tray (2) BTV-002
Open Tray (2) BTO-002

DATA BOOKS

Part No.	Description	Pages
30001	National CMOS	(628 pg.)
30003	National Linear	(1952 pg.)
30005	National TTL Logic	(624 pg.)
30008	National Memory	(464 pg.)
30009	Intersil Data	(1356 pg.)
30013	Zilog Micro	
10400	Intel Data	(1405 pg.)



CONNECTORS



Description	Part No.
9 Pin Plug	DE9P
9 Pin Socket	
15 Pin Plug	
15 Pin Socket	DA15S
25 Pin Plug (Meets RS232)	DB25P
25 Pin Socket (Meets RS232)	
37 Pin Plug	
37 Pin Socket	
50 Pin Plug	
50 Pin Socket	DD50S
Accessories	
Hood for DE-9 Series Connectors	DE-9H
Hood for DA-15 Series Connectors	DE-15H
Hood for DB25 Series Connectors	DB25H
Hood for DC37 Series Connectors	DB37H
Hood for DD50 Series Connectors	DD50H

BUG CAGE

New!



BUG CAGETM — 6 locations store Bug Boxes, Big Bug Boxes or Bug Trays • Modular & interlock-ing • Cage size: 5-1/8"x5"x3-7/8" • Color: Blue

PART NO	BGC-001B
PARINO.	BGC-UUTB

LSI BIG BUG BOXTM — Designed to store large IC's, Resistors, Capacitors and Diodes • Three vertical and three horizontal dividers included • Color: Blue • Size: 4.9" x 3.3" x .6".

PART NO. BLX-002B (2 Boxes)

PART NO. BLX-002BAS (2 Boxes)

JE224 Adjustable Switching Power Supply Kit 4-24VDC REGULATED, UP TO 5AMP



The JE224 is a high-efficiency power supply utilizing a LH1605 5 amp switching regulator. The LH1605 provides high current output while maintaining a small physical configuration. Open frame type to allow mounting into restricted areas.

FEATURES: Adjustable 4-24VDC: 5VDC @ 5A, 6VDC @ 4.8A, 9VDC @ 4.1A, 12VDC @ 3.3A, 18VDC @ 1.9A, 24VDC @ .5A. Overvoltage protection. Input: 115VAC 50/60Hz. Output variations within 20mV. Size: 8.24 "L x 4.25 "W x 2.25 "H. Weight: 3.25 lbs.

PART NO. JE224 KIT im pak

BUG BOX

New!



BUG BOXTM — 30 individual compartments
• Stores 60 8-pin or 30 14- or 16-pin DIPs • Heavy duty injection molded plastic • Clear plastic cover slides & locks • Cover marked w/numbers 1-30 • Compartment size: 1" x 3.75" x .5" deep • Box size: 4.9" x 3.3" x .6"
• Weight: 1.75 oz. • Color: Blue BUG BOXTM _

PART NO. BGX-002B (2 Boxes)

- ANTI-STATIC

PART NO. BGX-002BAS (2 Boxes)

JOYSTICKS





JS-5K .											4		!	5K	Linear Taper Pots	
JS-100K												į.	10	OK	Linear Taper Pots	
JS-150K													150	OK	Linear Taper Pots	
JVC-40						4	C	k	((2	2)	٧	id	eo	Controller in case	

Muffin-Style Fan



- 105cfm free air delivery
 4.68" sq. x 1.50" depth
 10 years continuous duty at 20°C
- · Impedance protected,
- ambients to 70°C 115V 50/60Hz 14W
- Weight: 17 oz.

PART NO. . . . MU2A1

Sprite-Style Fan

36cfm free air delivery

- 3.125" sq. x 1.665" depth
- 10 years continuous duty at 20°C

PART NO. .. PWS2107

Door Security System

• Coded door alarm. • Instant or 7-second delay system. • Alarm activated as door is opened.

• Can be de-activated by pressing personal code.

• Power: One 9V battery (not incl.). • System includes one personal coded keyboard and one magnetic sensor.

PART NO. ES-07 Door Alarm

Stereo Cassette Player with FM Stereo Tuner Pack

Anti-Theft Auto Alarm System

• Audible horn is activated when door or trunk is opened • Alarm sounds for 3 min. — unless turned

opened • Alarm sounds for 3 min. — unless furned off by secret 3-digit code. • Wire cutting will not deactivate alarm. • Code set by owner. • Uses only 0.01mA power. • System complete w/one blackbox control unit; one personal coded keyboard; 2 sets of sensors; one audible horn; & wiring (incl.

PART NO. CA-06 Auto Alarm

- Lightweight Headphones
- Cr02/Metal/Normal **Tape Selector**
- Anti-Rolling Mechanism

FEATURES: • Blue carrying case, shoulder strap, belt strap, lightweight headphones, FM stereo tuner pack & instruction manual • Talkline • Tone selector • Cr02/Metal/Normal tape selector • LED operation indicator • Built-in microphone • Stop/eject, play, rewind/review, fast forward/cue, tape/radio selector functions • Vol. control • Ext. power input jack • Headphone jack • Auto-stop mechanism (shuts off player when tape ends) • Anti-rolling mechanism (prevents sound from quivering when walking, jogging, etc.) • Weight: 13 oz. • Requires 4 AA batteries (not included) • Size: 6"L x 4"W x 1-1/8"H

PART NO..... MODEL TWF-802



WIRE **SPEAKERS** TOOLS CORDS SOLDER IC'S BOOKS CAPACITORS and more . . .



Home Alarm System

HOME AIAIM SYSTEM

Self-Installation • Presettable w/Individual
3-digit code — no key nec. • Instant or 10-sec.
delayed warning system • Alarm system incl. window & door contacts • One 9V battery required (not
incl.) Low power consumption (0.01mA) • Loud
audible alarm (900b) • Delayed exit feature
• System complete w/one control station with
built-in siren and test button; 4 magnetic contact
sets & connecting wires for entire system

PART NO ST-05 tems Alarm Section

PART NO. . ST-05 Home Alarm System



Mini Stereo UTIC AM/FM Receiver

WITH HEADPHONES For Joggers, Cyclists, Skaters & Sports Events

FEATURES: Lightweight headphones. Left/right balance control. Full fidelity stereo sound. Additional black soft carrying case & shoulder strap. Belt-clip (hands-free). Uses 3 AA cell batteries (not included). Compact size: 3-1/8"H x 4-7/8"L x 1"D, Wt. 6 oz.

Everybody's making money selling microcomputers. Somebody's going to make money servicing them.

Now NRI Trains You At Home To Make Money Servicing, Repairing, and Programming Personal and Small Business Computers





Training now includes either the TRS-80 Model III Microcomputer with *Disk Drive* or the TRS-80 Color Computer with Computer Access Card; professional LCD multimeter; the NRI Discovery Lab; and hundreds of demonstrations and experiments.

Seems like every time you turn around, somebody comes along with a new computer for home or business use. And what's made it all possible is the amazing microprocessor, the tiny little chip that's a computer in itself.

Using this new technology, the industry is offering compact, affordable computers that handle things like payrolls, billing, inventory, and other jobs for business of every size . . . perform household functions including budgeting, environmental systems control, indexing recipes. And thousands of hobbyists are already owners, experimenting and developing their own programs.

Growing Demand for Computer Technicians

This is only one of the growth factors influencing the increasing opportunities for qualified computer technicians. The U.S. Department of Labor projects over a 100% increase in job openings for the decade through 1985. Most of them *new* jobs created by the expanding world of the computer.

(TRS-80 is a trademark of the Radio Shack division of Tandy Corp.)

Learn At Home to Service Any Computer

NRI can train you for this exciting, rewarding field. Train you at home to service not only microcomputers, but word processors and data terminals, too. Train you at your convenience, with clearly written "bite-size" lessons that you do evenings or weekends, without going to classes or quitting your present job.

Your training is built around the latest model of the world's most popular computer. It's the amazing TRS-80™ Model III now with disk drive and the capabilities and features to perform a host of personal and business functions. No other small computer has so much software available for it, no other is used and relied on by so many people. And it's yours to keep for personal and business use.


You get plenty of practical experience. Under NRI's carefully planned technique for getting inside is enhanced by using the new NRI-developed Computer Access Card. Only NRI offers you a choice to fit your specific training needs.

Become the Complete Computer Person

In addition to training in BASIC and advanced machine language, you gain hands-on experience in the operation and application of the latest computers for both business and personal jobs. You're trained to become the fully rounded, new breed of technician who can interface with the operational, programming, and service facets of all of today's computers. You're ready to take your place in the new electronic age.

Other Opportunities

NRI has been giving ambitious people new electronic skills since 1914. To-day's offerings also include TV/Audio/Video Systems servicing with training on our exclusive Heath/Zenith computer-programmable 25" diagonal color TV...
Industrial Electronics, Design Technology

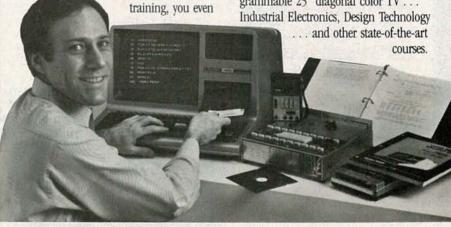

install a *disk drive* verifying its operation at each step. Using the NRI Discovery Lab® that also comes as part of your course, you build and study circuits ranging from the simplest to the most advanced. You analyze and troubleshoot using the professional 4-function LCD digital multimeter you keep to use later in your work. Then you use the lab and meter to actually access the interior of your computer . . . build special circuits and write programs to control them. You "see" your computer at work and demonstrate its power.

Same Training Available With Color Computer

NRI offers you the opportunity to train with the TRS-80 Color Computer as an alternative to the Model III. The same

Free Catalog . . . Mail Card Today

Send the postage-paid card for our 104-page catalog showing all courses with equipment and complete lesson plans. There's no obligation other than to yourself. See how NRI can help you take advantage of the exciting job and earnings opportunities in the exploding field of microcomputers. If card has been removed, please write to us.




NRI SCHOOLS

McGraw-Hill Continuing Education Center 3939 Wisconsin Ave. Washington, DC 20016

We'll give you tomorrow.

VIDEOGAMES

continued from page 14

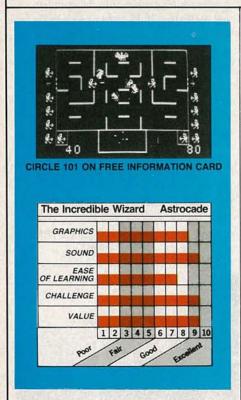

do exist are of high quality, owing largely to the vast graphics and sound resources of the *Astrocade* console electronics. One such cartridge is *The Incredible Wizard*, Astrocade's home version of the mildly successful Midway arcade game, *The Wizard of Wor*.

The game can be played by either one or two persons.


In the game, your warrior descends through many different mazes, battling three different kinds of creatures. The farther you get in the game, the faster and more numerous the creatures become. Some of the creatures are invisible unless you're in their line of sight (when it may be too late), so a radar screen without maze walls indicates the approximate locations of the unseen menaces. When all the creatures have been blasted by your 'concentrated unified-field-disturbance rifle" the flying Worluk appears. You've got to shoot him before he either runs you down or escapes through one of the side escape doors. If you get him, the next maze scores double point-values. At random maze levels, the hooded Wizard will appear, racing about like crazy, hurling lightning bolts. If you are good enough to shoot him, you'll exprience a fantastic light and sound show as the dungeon trembles, and your next maze will be worth quadruple points. At higher levels, mazes show up that have no visible walls. As in the arcade game, those are called Pits.

Graphic detail is fine enough to see that your warrior is suited up in a helmeted space suit with a back pack. When he shoots, the kick from the rifle blast sets him back on his heels for a half second.


A diverse sound package adds to the appeal of the cartridge. The chirp-like sound of some of the creatures, the rifle blasts hitting a target, the disorienting sound of the trembling dungeon, and musical interludes all help to keep things interesting.

In many respects, including Astrocade's rather nice hand controller, The Incredible Wizard is much more enjoyable than its arcade ancestor.

Atari's Pac Man for Atari 5200



CIRCLE 102 ON FREE INFORMATION CARD



ATARI'S NEW 5200 GAME SYSTEM has the advantage of having some of the

best home versions of arcade classics in its cartridge library, and Pac-Man is no exception. Arcade addicts who were disappointed with Atari's version for the 2600 will have little to complain about in this rendition. The game designers took great care in copying arcade features such as board-level indicator (standard fruit symbols until you get near the top range-where an Atari logo is the symbol-and keys at highest range); bonus point symbols appear under the monster pen twice during each board; monster "blue time" varies as difficulty levels increase (including some where there is no blue time); 1UP, 2UP, and HIGH scores are shown; maze walls flash between levels; etc. Even intermissions appear between some levels (something even the Atari home computer Pac-Man cartridge doesn't do).


The basic difference between the home and arcade versions is that some of the arcade sounds are missing, like the "wocka-wocka-wocka" of Pac-Man eating dots and the sound of a deflating Pac-Man that's been captured by a monster. Another minor difference is that the monitors used in the arcade version were oriented vertically, while your home color-TV display is horizontal (because your TV is wider than it is tall). But, while the maze is slightly different, it's just as challenging as the original.

A tendency you'll have to overcome is working the joystick too hard. It's not easy when all four monsters are after you and you're a long way from an energy pill, but the controllers on the 5200 need only a very light touch to get Pac-Man moving in the right direction. But for about \$40 on the \$250 console, you've got the closest thing to the \$2500 arcade game you can get.



"About that new natural English syntax translator package, Mossman...!"

CALCULATOR MATH?

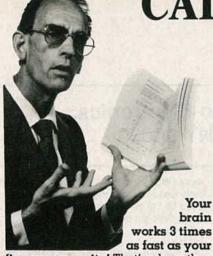

fingers can write! That's where the Calculator comes in — you can go three times as fast with your machine doing the dirty work.

It's easier and more interesting. And you'll understand it better when it's fun. (If you haven't yet tried out a modern scientific-statistical calculator, you're in for a pleasant surprise — see below!)

WHY MATH? To get a promotion or a new job. Just to hang on to that job you've got. To quicken your mind. To understand this world you live in. To impress people. Just for some fun you'll feel good about. (Read those letters below to see how it has worked for others.)

Do it at home... You can start right away and go as fast as you like! Put it aside while you're busy with something else — in short, set your own pace!

Lots of us like to avoid being compared with the other members of a class—we like to set our own standards. Too, we like to save the time and expense of going to a school or seminar. (Best of all, it's a lot cheaper to study at home where the rent is already paid—read on!)

Let's be honest. You wouldn't expect to learn to play baseball or chess by watching an expert do it. Math is the same — you'll need to do some work. BUT — with my calculator method, you'll see it's a whole new ball game!

THIS METHOD IS FRIENDLY! You can use it on your own. You follow interesting examples step-by-step with calculator keystrokes — instead of algebra.

Let me introduce myself — I'm Dr. George McCarty and I teach at the University of California. Tens of thousands of people like yourself have already used my guidebook to teach themselves calculus. Recently I have teamed up with another professor. We put those same tested and proven techniques to work for you in a new Statistics Guidebook.

Even if you've had trouble with math, this method will work for you. Choose the one you want to learn, calculus or statistics (or both) and start today!

As pennywise Ben Franklin said, "An investment in knowledge pays the best dividends."

CHOOSE STATISTICS

It's used everywhere — to set insurance rates and to assess a drug's effectiveness, to detect a crooked roulette wheel and to measure lightbulb lifetimes, to audit the books and to find your position at sea.

People have always known that their experience was not a perfect guide to the

STATISTICS

future. Statistics shows us that uncertainty is not only inevitable but it itself is measurable.

You'll find out about this in my guidebook.
You'll read informal explanations with detailed calculations for topics like "confidence intervals" and "contingency tables."

YOU'LL BE DOING Inference and Hypothesis Testing, the Chi-Square Distribution, ANOVA, Regression and Correlation, Non-Parametric Methods — they're all here. SUPPOSE YOU HAVE ALREADY STUDIED

SUPPOSE YOU HAVE ALREADY STUDIED STATISTICS. You'll use Quick-Reference Guides to go straight to a topic you want to refresh yourself, on — then get right-now answers in your own field, business, biology, science, psychology, education.

The Guidebook is guaranteed to work with any calculator or computer. If you would like to start out with a fancy new machine, order my Statistics Kit which includes the guidebook and a TI-35 calculator which finds means and standard deviations at the touch of a button. It has an LCD display, 1000 hour batteries — the works.

PHONE MC or VISA ORDERS TO (714) 831-2637

Ask for our Catalog of books and calculators.

LOOK AT WHAT THEY SAY-

- "...excellent diagrams and clear explanations."
 —POPULAR SCIENCE
- Professor John Ball of Harvard College writes:
 "I wish I had had as good a calculus course."
- •S.C. McCluney, Jr. of Philadelphia writes: "With your book and a calculator the whole idea becomes clear in a moment, and is a MOST REFRESHING EXPERIENCE."

CHOOSE CALCULUS

The math of science and engineering—satellite orbits and compound interest, bacterial growth and radioactive decay, marginal profits and reaction rates.

You'll find out about these concepts when you use the Calculus Kit. This Kit

contains my guidebook and a TI-35 calculator which finds log and trig values at the touch of a button. (It's modern, too, with LCD display and 1000 hour batteries.)

In the guidebook you'll learn both differential calculus and integral calculus — even differential equations!

NEED TO EVALUATE functions, areas, volumes — solve equations — use curves, trig, polar coordinates — find limits for sequences and series? It's all here!

If you're in the biological, social or physical sciences, you'll be doing Bessel functions, carbon dating, Gompertz' growth curves, half-life, future value, marginal costs, motion, cooling, probability, pressure — and plenty more.

Important numerical algorithms are here, too: rational and Padé approximation, bracketing, continued fractions, Euler's method, Heun's method, iteration functions, Newton's method, predictor-corrector, successive substitutions, Simpson's method and synthetic division.

If you already have a scientific calculator, you can get just the Calculus Guidebook.

George Willand

P.S. — **YOU CAN DO IT!** I'm certain I can show you this easy way to success with math, so *I guarantee it to you unconditionally* — if you are not satisfied just send it back for a prompt refund!

- Professor H.I. Freedman of the U. of Alberta, states, "There can be no question as to the usefulness of this book...lots of exercises...very clearly written...easy reading."
- "...straight-to-the-point explanations..."

 —HP Key Notes
- Tektronix Engineer Bill Templeton says,
 "The best, most clearly written book I have seen for improving your math skills."

TAX DED	UCTIBLE	FOR PROP	FESSIONALS

YES, I want to learn math fast and easy with your new method. If I am not more than satisfied I can return it for a quick refund. RUSH me the guidebook or complete kit I select below (kit contains the guidebook and a modern TI-35 calculator).

Send FREE Catal	og of books	& calculators
STATISTICS GU	IIDEBOOK	KIT
Howmany?	\$14.95	\$39.95
Handling/Shipping	1.00	2.00
Tax (within Calif.)	.90	2.40
TOTAL	-	
CALCULUS GU	JIDEBOOK	KIT
Howmany?	\$19.95	\$44.95
Handling/Shipping	1.00	2.00
Tax (within Calif.)	1.20	2.70

For AIR SHIPMENT add \$3.00 per item
Phone (714)831-2637 (MC or VISA only)

TOTAL.

ui	debook and a modern TI-35 calculator).	
3	Enclosed is \square Check, \square M.O.; or charge my MC/VISA exp.	_
	Card #	
	Name	_
	Address	
	City	
	State, Zip	
7	OUTSIDE USA, surface shipping is \$2.00 per book or \$5.00 per kit. Air shipment is \$5.00 per book or \$10.00 per kit. U.S. FUNDS PLEASE.	I
	EduCALC Publications, Dept. D3	1
	27953 Cabot Road	382

South Laguna, CA 92677

LETTERS

Address your comments to: Letters, Radio-Electronics. 200 Park Avenue South, New York, NY 10003

NO SELLOUT

Thank you for not selling out and becoming another computer magazine.

Even if computers are now everywhere, not everyone has an interest in those things. For those who are computer buffs, there are many publications devoted entirely to that field. I would suggest that they read them and leave the electronics magazines to those of us who appreciate the fact that the world of electronics doesn't revolve around just one specific technology.

RANDALL FRASER Worcestor, MA

THE FCC

I was very disappointed at the ignorance about the facts, and the shallow thinking that was exhibited in Radio-Electronics' January 1983 editorial: "Committing Suicide-FCC Style.'

In dealing with the FCC for over 20 years, I have found their current overall policy attitude to be the most progressive, commonsense, and up-to-date so far.

Even taken out of context, the quotes of Chairman Fowler that you used do not support the conclusions that you derived from them. Mr. Fowler did not say (or imply) that either technical or basic licensee qualifications would be reduced. Instead, he recognizes that a great portion of the licensees' time and money are spent on paperwork and compliance to superfluous and outdated rules-as is the commission's time also. If you have ever filed an application, or maintained a license for a station other than a CB station, you should know how needlessly time-consuming it is.

The only way that the public will interpret Mr. Fowler's words as an approval of homebrew broadcast stations, or 1 kW CB stations, is when they read it in publications such as yours, and assume that you are knowledgeable on the subject.

I have read Radio-Electronics (and its

earlier titles) for close to 30 years and will continue to do so as long as the articles are as good as the ones in this issue-despite the poorly-thought-out content of the January

How about some positive thought and constructive comments in the editorials? (Anyone can sit on his or her butt and complain!) What's your answer toward properly using and balancing the radio spectrum? How are we going to accommodate future technologies and spectrum requirements? Do you even care?

JACK K. DANIEL New York, NY

Of course we care! And I wish I had a solution for every problem currently facing the FCC-but I don't. I also applaud any attempts to reduce much of the needless and wasteful bureaucratic red tape that currently exists at the FCC. However, across-theboard general deregulation is not the answer.

NOW...DMM'S AND SCOPES FROM WORLD RENOWNED

R CORPORAT



SUPERIOR ENGINEERING • EXCELLENT QUALITY • UNEQUALED PRICES

31/2 LCD AUTORANGING DMM'S




ME-532 ME-533

MF-531

- Measure AC/DC Volts AC/DC Amps High/Low Power OHMS All Auto Range **Decimal With Annunciators**
- All features of 533 Plus Continuity Beeper
- All features of 532 & 533 Plus 10 Amp AC/DÇ And Diode Test

COMPLETE WITH PROBES, BATTERIES, FUSE


35MHz DUAL TRACE AND LOADED



MODEL MS-6035

- · 1mV Sensitivity
- 20 Sweep Speeds To 0.1m Sec
- . Trigger Delay
- · Trigger Hold-Off
- Alternate Trigger
 6" PDA CRT
- Easy Trace Rotate . HF & LF Filters, TV Sync.

20MHz DUAL TRACE



- 5mV Sensitivity
- 19 Sweep Speeds To 0.5m Sec CHZ Invert, TV Sync
- Modes, CHI, CHZ, Dual, Add, Chop 51/2" Rect. CRT Internal Graticle & Trace
- Rotator 5 Trigger Modes

MODEL MS-6020 \$599.00

COMES COMPLETE WITH 2, 10:1 HOOK-ON PROBES

COMES COMPLETE WITH 2, 10:1 HOOK-ON PROBES SUPER PERFORMANCE DMM



- **MODEL 8050** \$89.95
- 30 Ranges, 8 Functions With Full Overload Protection, 10 M Ω Input
- 10 Ampere AC/DC Ranges
 Diode Test, Transister hFE Measure
- Super Fast Continuity Beeper 0.4 Sec
 Large Bold ½" LCD Display With Auto Zero,
 Decimal And Low Battery Indicator
- . Complete With Battery, Probes, And Spare Fuse

OPTIONAL CARRYING CASE \$9.90

WM. B. ALLEN SUPPLY 1601 Basin Street, New Orleans, LA 70116



Over 70,000 electronic items in stock for immediate delivery.



CALL TOLL FREE LOUISIANA TOLL FREE 800 462-9520 Chairman Fowler's statements, coupled with recent FCC decisions (or, shall I say nondecisions), such as teletext and AM stereo, indicate that across-the-board deregulation is the ultimate intent.-Editor

This is in response to the editorial, "Committing Suicide-FCC Style," in the January 1983 issue. I think that you have misinterpreted Chairman Mark Fowler's comments. My understanding is that those comments refer to getting the FCC out of regulating the non-technical aspects of broadcasting. To that end, I applaud Chairman Fowler. The FCC should be solely a technical regulatory agency-not an agency that deals with social policy.

Unfortunately, Chairman Fowler's deregulatory juggernaut does not want to stop at getting the FCC out of social engineeringthe momentum is carrying through to bonafide regulatory areas such as standards, operator licensing, type approval, operating, and maintenance logs.

If Chairman Fowler's unregulation/ deregulation/reregulation approach turns out to work, I for one will gracefully acknowledge the validity of his premise that the "forces of the market place" are preferable to artificial regulation by a government agency. However, if he is wrong, and the wisdom of the Communications Act of 1934 is vindicated, we will certainly have an incredible mess to clean up.

DANE E. ERIKSEN Alameda, CA

FASTER THAN LIGHT?

In regard to the article, "Faster Than Light,"

by Harold W. Milnes, Ph.D., in the January 1983 Radio-Electronics, I believe that he made a misinterpretation of what was observed.

Refer to Fig. 2 on page 56 of the January 83 issue of Radio-Electronics. When a positive pulse was applied to point A by the generator, current flowed into the delay circuit. Since the ground of the generator was connected through resistor R to point B, current flowed through R, producing the same positive pattern at B as was observed at A, and through the other end of the delay circuit. Superimposed on the scope picture was a mixture between a standing wave and a traveling wave produced by these signals entering both A and B. That accounted for what Dr. Milnes attributed to line distortion.

In other words, he did not observe anything traveling faster than light. HARVEY GLUCKMAN Montauk, NY

Radio-Electronics' recent article, "Faster Than Light?" (January 1983) does the readers and staff writers of your magazine a disservice. I am especially concerned about your younger readers, who may consider as gospel that seriously flawed sojourn into pseudo-science. As any scientist, engineer, or for that matter any well-trained technician conversant in electromagnetics knows, the wire "delay line" referred to in the article is neither a delay line nor a transmission line. It is a crude antenna, which serves to radiatively couple the two oscilloscope channels. The author's conclusion that signals travel faster than light is based on an incorrect and naive analysis of data obtained from a flawed and simple-minded experiment. The wire may be made as long as the author wishes, and the same apparent result would still be forthcom-

Literally hundreds of crank articles dealing with the speed of light and relativity are written every year. It is unusual, however, to see such an article in a technical publicationespecially in a magazine of the stature of Radio-Electronics. By publishing such nonsense, the accuracy and usefulness of all articles in the magazine are thrown into ques-

DR. THOMAS D. ROBERTS. University of Alaska, Fairbanks, AK

COMPATIBILITY

While your computer buyers' guide in the October 1982 Radio-Electronics is full of useful information not easily obtained eslewhere, I feel that you could say more about compatibility. For example, in the Commodore line, the MAX and the 64 are compatible, so that programs on cassette and cartridge written for the MAX will also run on the 64. However, neither machine is compatible with the VIC-20. In fact, the cartridge port on the VIC-20 is of a different configuration. Such information could be a highly important factor in deciding which machine to buy, especially at the low end where CP/M is not available and where each machine typically has its own version of BASIC. And I wonder: Why don't companies such as Commodore point out those important differences in their advertising?

HAROLD MILLER Clayton, GA

R-E

TRITON MARKETING Corp. **679 REMSEN AVENUE**

We Accept Mastercard and Visa

TOLL FREE HOT LINE

1-800-221-6535 1-212-345-8000

MICROWAVE TV

BROOKLYN, N.Y. 11236



- DCV 200

- All Cable & Hardware

129.95

MDC - 23D

- Built in A/B Switch
- All Cable & Hardware

\$149.95=



MDC - 23P

- \$199.95 =

WE CARRY A COMPLETE LINE OF CABLE TV CONVERTERS & DECODERS

SATELLITE TELEVISION SYSTEMS



TRITON:

A NEW APPROACH TO SATELLITE TV

DON'T BUY LESS SYSTEM THAN YOU WANT, OR MORE THAN YOU NEED. ONE PHONE CALL WILL INSURE THAT YOUR SATELLITE DOLLARS ARE WELL SPENT.

ALL TRITON SYSTEMS ARE EXPANDABLE, START WITH THE "ADVENTUER" AND YOU CAN ADD COMPONENTS AS YOUR NEEDS CHANGE.

NO SYSTEM IS COMPLETE UNTIL YOU DECIDE IT IS

ADVENTURER: 10' fiberglass with pole polar mount, Avantek 120'K LNA, Gillaspie 7600A receiver, electronic scaler feed, 100' wire and instructions.

STARGAZER: The "ADVENTURER" plus East/West motor drive. 2625.00 3025.00

STATESMAN: The "ADVENTURER" plus a programable motor drive. PERFORMER: The "STATESMAN" with a stereo processor for all stereo formats.

EXECUTIVE: The ultimate system with wireless remote control. Featuring a 10' fiberglass reflector, pole polar mount, IR remote, auto polarization

A true roof mountable system weighing only 160 pounds. With an


of Avantek 100 K LNA, all stereo formats, programable motor drive.

Avantek 120 K LNA, Gillaspie 7600A receiver, scaler feed and rotator, East/West motor drive, 100' wire and instructions.

\$ 2275.00

URBANA:

EQUIPMENT REPORTS

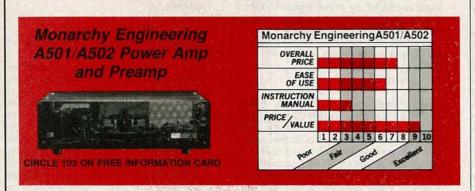

FOR MOST AUDIO ENTHUSIASTS, SETTING up an audiophile's sound system means laying out a very large amount of cash. For those interested in electronics, however, there is an option—build one of the high-quality units currently available. If you do that, you'll not only cut the cost

of your system, but gain the added pride and satisfaction of listening to components you built yourself.

Among the better units we've seen lately is a pair of matching components from Monarchy Engineering (380 Swift Ave, Unit 21, South San Francisco, CA

94080). Those are the model A501 power amplifier and the model A502 preamp/control-center. The sound quality of those units compares favorably with high-quality assembled units on the market. There are some problems with the construction, however, particularly with the instruction manuals, but we'll get to that later. Let's first take a closer look at the units and their features.

Model A501 power amplifer

The power amplifier (shown) offers several unusual features. For instance, it offers switchable Class A or Class AB operation. In the stereo mode, the output power is 25 watts-per-channel Class A and a hefty 100 watts-per-channel Class AB. In the monaural mode, the two stereo channels are connected together in a bridge configuration and the power out-

GET THE SAME VIDEO TRAINING THE PEOPLE AT SONY GET.

Now you can be trained by Sony even if you aren't employed by Sony.

Because we're making our vast library of training videotapes available to you. The very tapes that teach our own engineering, service and sales personnel.

The tapes cover the products and concepts of video and its related technologies. You can learn the

basics of video recording. Color systems.
Digital video and electronics. Television
production. And more.
Plus you can learn how to service

Plus you can learn how to service cameras,VTR's, and other video products. As professionally as Sony does.

The tapes are produced entirely by Sony and contain up-to-the-minute information. They communicate clearly and simply. And some of them are even programmed for interactive learning.



Write Sony Video Products Company, Tape Production Services, 700 W. Artesia Boulevard, Compton, California 90220.
Or call (213) 537-4300.
Of course, there's no

Of course, there's no obligation. Except the obligation you have to yourself: to find out about the best training available in one of the country's fastest-growing, most lucrative fields.




Video Communications Sony is a reg. trademark of Sony Corp.

THE POMONA PROMISE

We provide the design engineer with the best "black boxes" made in this country.

Or anywhere.

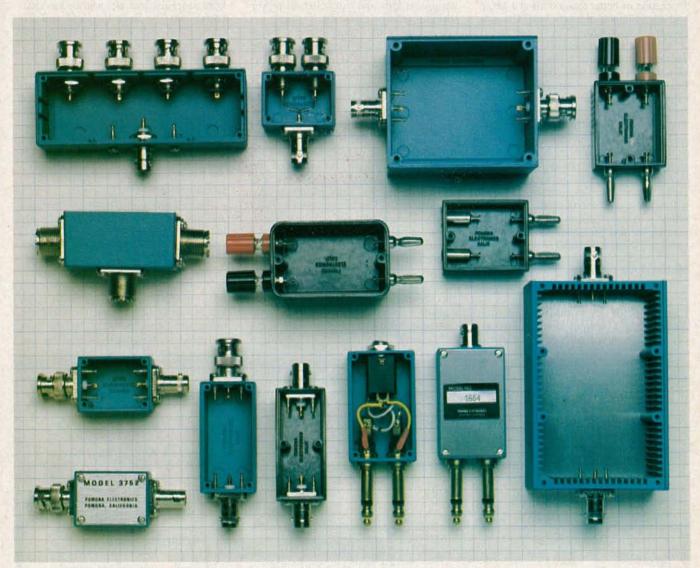

That may seem like a tough promise to deliver on. But if you talk to the professionals of the electronics industry, you'll learn quickly and with great assurance that the "black boxes" designed and produced by ITT Pomona Electronics are looked upon as the best in the business. Bar none.

The reason goes back to when we first introduced the idea of providing convenient containers for special test circuits. We promised then that ours would be the best. And that's the way it's been.

Since then our line has ex-

panded to eleven different series to accommodate just about any component packaging requirement you'll ever need.

At ITT Pomona Electronics, we know there is no such thing as standing pat. We also know that your needs change and your expectations become greater as the demands become more severe. To this end we will continue to create a better way. A better product.

That's a promise.

All of our products are described and illustrated in our General Catalog, and it's free. Just call (714) 623-3463 or 623-6751.

TWX 910-581-3822. Write to us at ITT Pomona Electronics, a Division of International Telephone and Telegraph Corporation, 1500 E. Ninth St., Pomona, CA 91766.

In Europe: ITT CANNON BELGIUM S.A./N.V. Rue Colonel Bourg Str. 105 Space A (B.3) 1140 Brussels, Belgium. Phone: 02-735-6094.

Our products are available through your favorite electronics parts distributor.

III Pomona Electronics

The manufacturer's specifications for total harmonic distortion (THD) is less than .007% Class A (.01% Class AB). Other important specifications include a frequency response of 5 Hz to 200 kHz (- 1 dB), a signal-to-noise ratio of 105-dB Class A (115-dB Class AB), channel seperation of better than 80 dB at 1 kHz, and internal noise of less 0.3 mV Class A (0.2 mV Class AB).

All of the supply voltages in the voltage-amplification stage are regulated. The unit is protected from overheating by a rather interesting highefficiency liquid convection-cooling system. It may be a bit disconcerting to find that if you listen very carefully to the unit (assuming there is no input, of course) you can hear it "bubbling away" much like a radiator. Rest assured, however, that this is normal; what's more important is that the system works, and works well, affording excellent thermal stability. Other protective features include a DCsensing speaker protection circuit and an excessive-current limiter.

Model A502 preamp

The matching model A502 preamplifier is actually called a "control center." Like the power amp, the preamp's features and specifications compare favorably with assembled units on the market.

The model A502 will work with both moving-coil and moving-magnet phono cartridges and includes separate RIAA input-amplifers for each type of cartridge. Also, all capacitors have been eliminated from the audio-signal path so that direct coupling from input to output (or from cartridge to speaker when used with the A501) is achieved. The use of independent left- and right-channel power supplies reduces crosstalk.

Looking at the manufacturer's specifications, the unit's frequency response (phono) is 20 Hz to 20 kHz (± 0.2 dB). Both total harmonic distortion and intermodulation distortion are less that .005% at 3 volts. The maximum outputlevel from the unit is 15 volts and the maximum phono-input level is 16-mV RMS for the moving coil input and 270-mV RMS for the moving magnet input.

Let's next turn to the layout of the control panel. Among the more interesting controls on that panel is the CARTRIDGE-SELECT/PHONO-STRAIGHT switch. The actual function of that switch is chosen during construction. If you use it as a CARTRIDGE-SELECT switch, you can connect either a moving-coil or moving-magnet cartridge to either of the rearpanel inputs—the switch is then used to choose between the inputs. If it is used as a PHONO STRAIGHT switch, moving-coil cartridges must be connected only to IN-PUT 1 while moving-magnet cartridges


must be connected only to INPUT 2. In the PHONO-STRAIGHT mode itself, the phono signal takes the most direct route from the input to the output of the unit, bypassing (and thus disabling) most of the controls with the exception of the VOLUME control.

Another feature is a subsonic filter that cuts off frequencies below 15 Hz. The front panel also includes a MODE REVERSE switch that flip-flops the right and left channels as well as three-position bass and treble TURNOVER-FREQUENCY switches that are used to select the frequencies at which the BASS and TREBLE controls become effective. These turnover frequencies are 150 Hz, 300 Hz, and 600 Hz for the BASS control and 1.5 kHz, 3 kHz, and 6 kHz for the TREBLE control. A TONE switch can be used to defeat the BASS, TREBLE, and TURNOVER controls and provide flat frequency-response.

Construction

Each kit is designed to be built in stages and all parts are prepackaged in easily identified clear-plastic bags. Each bag is opened only as it is needed, and each stage of construction follows logically.

That does not mean all is well, however. For those familier with the "can't fail" instructions provided with some kits, such as those from Heathkit, the difference between those and the ones provided with these kits will be im-

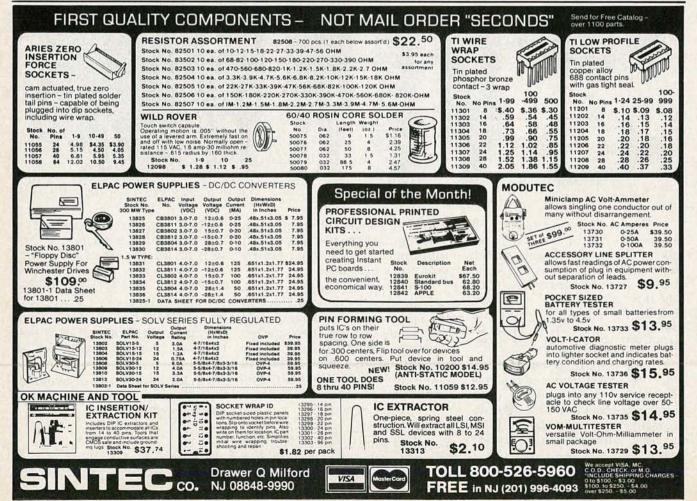

The PIED PIPER

Hickok's LX-306 is leading the way for **Digital Multimeters**



\$155 List Price **\$139** Limited Time

When it comes to digital multimeters The Pied Piper is a natural leader. You won't find a better DMM. Because The Pied Piper (Model #LX-306) combines all the best functions and features of a quality DMM with Hickok's exclusive VARI-PITCH - a full function, variable audible tone.

Don't let the low price and miniature size fool you. This DMM is designed to outperform all other hand-held digital multimeters and it will fit in your hand. With the VARI-PITCH feature and a basic accuracy of 0.25%, The Pied Piper can increase your testing and servicing capabilities by more than 25%.

10514 Dupont Avenue · Cleveland, Ohio 44108 · (218) 541-8080

mediately obvious. For another thing, the primary instruction manuals are written in *Japanese*. An English translation is provided, to be sure, but the manual and the translation must *both* be used if the kit is to be successfully built. For another thing, all of the illustrations appear only in the Japanese manual, and those illustrations are, of course, vital.

Another, and perhaps more critical fault, however, is the quality of the translation. It appears to have been translated literally from the original Japanese and as a result can be difficult to read and confusing. You'll find yourself rereading an instruction several times just to be sure you completely understand it.


Finally, a few typographical errors and a few ommisions of information were spotted (you'd be surprised at how much Japanese you can "learn" just studying the diagrams). All of those can be spotted before any damage is done, but you must pay careful attention to both the original and the translation or you might run into trouble.

All that aside, however, the finished products are well worth the time and effort put into building them. They are two truly sophisticated units, with both impressive specifications and performance. The *A501* sells for \$299.95, the *A502* for \$349.95. Both units are available directly from Monarchy.

Non-Linear Systems Kaypro II Portable Computer



CIRCLE 104 ON FREE INFORMATION CARD



Service it!



VACO

Builds tools like your job depends on it."

Vaco Products Company

1510 Skokie Blvd.

Northbrook, IL 60062 U.S.A.

ADAM OSBORNE CREATED A SENSATION IN 1981 when he brought out the first truly portable microcomputer. People said it couldn't be done, but he did it, offering with it a powerful assortment of applications software. The most unbelievable part to many observers at the time was the price—\$1795 for a full 4-MHz Z80 microcomputer that was capable of running the industry-standard operating system, CP/M.

Other companies are following the path that Osborne paved. One of them is Non-Linear Systems (533 Stevens Ave., Solana Beach, CA 92075). The company is best known for its line of test equipment and oscilloscopes, but it has also leaped onto the portable-microcomputer bandwagon with its *Kaypro II*. That portable, which also comes with a powerful set of applications software, is aimed directly at the Osborne market with a price of \$1795.00. The Osborne computer and the *Kaypro II* have a number of features in common—and a number of significant differences.

Similarities

The Kaypro II is comparable in size and weight to the Osborne—roughly 18 inches wide by 8 inches high by 14 inches deep, and weighing about 26 pounds. Neither unit has a cooling fan, although the Kaypro II seems to have more vents. (However, that doesn't mean that they run hot; instead, they keep their cool even after hours of use.) Both are similar in that their covers are actually detachable keyboard units, and each has a similar number of keys, arranged in the familiar

skes-Fordham rs Prices on BK PRECISION

Now Fordham is passing on to customers the hugest savings possible on test instruments. To help celebrate the opening of our new 40,000 square foot facility on Long Island, we've purchased an extra large inventory of B&K Precision products. We're offering the quality of name brand products and the benefits of our volume purchasing power. While supplies last we guarantee these unbelievably low prices.

31/2 Digit LCD **Autoranging DMM**

Model 2845 Reg. \$175.00 Now

PRECISION

- Fully automatic, autoranges on all functions.
- Range lock holds any range.
- 0.1% accuracy.
- Fast reading.
- 0.5" LCD display.
- · Autozeroing.
- Autopolarity on all ranges.
- Audible continuity indicator.
- Varistor and fuse overload protection.
- · RF shielded.
- Meets UL 1244 safety standards.



8-Trace, 4 Channel 100 MHz **Dual Time Base Scope**

Model 1500 Reg.\$2575.00 Now



 100 MHz response, 3.5nS rise time • 2nS/div. sweep rate with 10X magnifier • Trigger views or four separate inputs

Dual time base

1 M ohm inputs or 50 ohm inputs • 1 mV/div sensitivity to 100 mHz • CH 1 frequency counter output • Delayed sweep, 20 nS to 0.5 seconds • Alternate timebase Switching power supply
 Selectable chop frequencies • Voltage and current probe calibrators

Low Distortion **Function Generator**

Model 3010 Reg. \$220.00





 Generates sine, square and triangle waveforms . Variable amplitude and fixed TTL squarewave outputs • 0.1 Hz to 1 mHz in six ranges . Typical sine wave distortion under 0.5% from 0.1 Hz to 100 kHz • Variable DC offset for engineering applications VCO external input for sweep-frequency tests.

Dynapeak Transistor Tester

Model 520B Reg. \$239.00

Now



circuit when others won't . Identifies leads of bipolars and FETs . Random lead connection . Audible test OK 'beep' Automatic NPN/PNP and SI/Ge

CRT Restorer/Analyzer

Model 467 Reg. \$495.00

Now

each

 Restores color and b/w picture tubes like new! Uses the most powerful restoration

method known with minimal danger to the CRT • Exclusive multiplex test technique tests all three guns of color CRTs simultaneously under actual operating conditions, even CRTs with common G1 and G2, with real dynamic tests . Instant, automatic tracking

FOR ORDERING OR PRICING ON OTHER TEST EQUIPMENT

Call Toll Free (800) 645-9518

N.Y.S. (800)832-1446

260 Motor Parkway, Hauppauge, N.Y. 11788



■ Master Charge ■ VISA ■ COD Money Order M Check \$50.00 minimum order COD's extra (required 25% deposit)

VISA

typewriter-style QWERTY layout. The KayPro II has a 62-key soft-touch keyboard with a separate 14-key numeric

Both portables come with 64K (64,000 bytes) of memory and use Z80 CPU's, and both run the CP/M operating system, which allows users a wide selection of pre-packaged, off-the-shelf applications software. However, the average user may not even need further applications programs because each portable comes with a standard word-processing package, a financial-spreadsheet package, a powerful BASIC programming package, and, of course, CP/M.

More than one wag has suggested

whimsically that the user is actually paying for the software and getting the computer free. That's not exactly true, but for the relatively small amount of money he has to spend, the user gets a great deal.

Both machines take advantage of existing technology. They are not among the new wave of 16-bit or 16-bit/8-bit machines now coming to the market and they break no new ground. Instead, they build on the resources of existing hardware and software. The average user of each machine should find either more than adequate for his needs.

Differences

Similarities aside, the Kaypro II is an

interesting machine in its own right. It attempts to correct some of the things that have been criticized in other portables. In some cases it succeeds, while in others it doesn't. Take the display, for instance. Rather than rely on a tiny five-inch CRT and horizontal scrolling, as does the Osborne computer, NLS has used a nineinch screen with a full 80-column display capability. That makes the machine much easier and less disconcerting to use. NLS has apparently been able to use a largersize screen because of the placement of the computer's built-in mini-floppy disk drives. They are stacked vertically to the right of the screen, while Osborne chose to mount the drives horizontally, one on either side of the display, and thus had to save space with a much smaller CRT.

NLS also took the Kaypro II several steps farther than Osborne did his original unit. When the Osborne computer was first released, it came equipped with single-sided, single-density disk drives. That limited mass storage to about 180K, which also limited the usefulness of the system. Although Osborne later opted for a single-sided, double-density format, NLS had the foresight to equip its machine with single-sided, double-density drives from the start, thus increasing its usefulness greatly. Mass storage on the Kaypro II's two drives is 382K. Obviously, NLS learned from the Osborne experience

What it didn't learn from Osborne shows up in the usefulness of the larger nine-inch CRT screen. Osborne's screen is matte-finished so there is a minimum of glare, while NLS uses a normal glass-like outer screen that's subject to glare spots and can be hard to read. Also, the "greenon-green" display can be somewhat difficult to make out in some light. Granted, the actual surface of the Kaypro II's screen is matte finished, but the outer CRT covering is glass, and that defeats the purpose of the matte finish on the inner surface.

Furthermore, the display picks up a great deal of noise that appears as raster scan-lines that run across the face of the CRT when the disks are accessed. That can prove disconcerting if you are trying to follow a user help-menu. And, it's not limited to isolated incidents; it happens every time the read-write head of the disk is accessed. The problem is something that should be looked into, because the fact that the screen "hears" the controller circuitry indicates that it is noisy from an RF standpoint.

You would also think that because of the all-metal enclosure the system would be quiet from an RF standpoint, but it isn't. When the computer was used near a VHF-FM amateur-radio transceiver, it easily overcame the receiver's quieting circuitry and popped the squelch, especially when the read-write head was accessed. The noise continued even with the squelch control turned all the way up,



FOCUS ON VIDEO WITH SAMS

Sams library of video books clearly shows you everything you need to produce and enjoy your own video. Be your own producer with these books from Sams:

HOME VIDEO HANDBOOK (3rd Edition) covers the big home video picture and shows you how to use everything from VCRs and videodiscs to largescreen projection systems. Easyto-read info from video industry expert Charles Bensinger. No. 22052, \$13.95 VIDEO PRODUCTION GUIDE

takes you through the entire production process from script to distribution. Covers all details of in-studio and remote productions for video professionals and serious amateurs. Also makes an excellent textbook. Edited by Charles Bensinger. No. 22053, \$28.95

VIDEO GUIDE (3rd Edition), also by Charles Bensinger, is a fully-illustrated, hardwareoriented introduction to the use and operation of video equipment. A classic reference guide to professional and amateur use of cameras, editing systems, lenses, accessories and

more. No. 22051, \$18.95 SATELUTE TV HANDBOOK shows you how to build your own earth station, see blacked-out and unedited network TV shows, legally and privately cut your cable costs in half, and much more. Written by Anthony T. Easton, No. 22055, \$16.95 (tentative)

BASICS OF AUDIO AND VISUAL SYSTEMS DESIGN provides valuable NAVAsanctioned information for designers and installers of commercial, audience-oriented AV systems, and especially newcomers to this field of AV. Gives you a full background in fundamental system design concepts and procedures, updated with current technology. No. 22038, \$15.95

Get your act together with these Sams Books, and act now! To order call 800-428-3696 or 317-298-5566 and reference AD277

Offer good in USA only and expires 7/31/83. Prices subject to change without notice. In Canada, contact Lenbrook Industries, Ltd., Scarborough, Ontario

HOWARD W. SAMS & CO., INC., 4300 West 62nd Street, P.O. Box 7092, Indianapolis, IN 46206

30

of course.



MODEL V-1880

BP STABLIZER/IMAGE ENHANCER/RF CONVERTER/ VIDEO FADER/2-WAY DISTRIBUTION AMPLIFIER

OUR PRICE \$135.00 each

Most versatile video processor. Contains five units in one: stabilizer (video guard remover); image enhancer, video to RF converter, video fader, and dual output distribution amplifier.

Stabilizer Will correct entire range of copy guard distortion such as jitter, vertical roll or black bar travelling through picture.

Enhancer Lets you attain best picture for your own preference.

RF Converter Allows your TV set to receive video and audio signals from your image enhancer, guard stabilizer, video camera, computer, VCR, etc. The direct video signal from any video component can be fed into the V-1880 and converted to a usable RF signal that can go to your TV antenna terminals.

Video Fader Used to produce professional fade ins and fade outs.

BP VIDEO GUARD STABILIZER MODEL



OUR PRICE \$45.00 each Has self contained A&B and bypass switch. Many movies, concerts and special programs for sale or rental are copy guarded. This removes copy guard and allows you to make copies. Many TV sets will

not play prerecorded tapes because copy guard causes picture to roll and jitter, turn to snow or disappear. Video Guard Stabilizer removes copy guard from signal

BP VIDEO GUARD STABILIZER/ RF CONVERTER

MODEL V-1877



OUR PRICE \$69.95 each

Same as above but with a built-in RF Converter that gives the model V-1877 an RF output which can be fed directly to the antenna terminals of a TV set. This enables you to remove the copy guard from a pre-recorded tape and view it on a TV using only a VCR.

Use as an RF Converter only. Used in conjunc-tion with your TV, you can feed direct audio and video signals from any video device such as video camera, computer, portable VCR, etc.

BP VIDEO COMMAND CENTER MODEL V-4803 OUR PRICE \$59.95 each

A switcher that can accept 6 inputs and direct them to 3 outputs. Utilizes switch similar to one used on home VCR's. You avoid signal loss incurred by using splitters.



JERROLD 60 CHANNEL CORDLESS TV CONVERTER MODEL DRX-3-105

CALL FOR PRICES



 Receive up to 60 TV channels
 Remote TV Control ● Attach to any age or model TV in minutes. ● No tools required. ● On/Off button · Channel selection. · Channel Stepping. · Fine

JERROLD JRX TV REMOTE CONVERTER MODEL JRX-3C105 (SWITCH)

OUR PRICE \$79.95 each

HIR PROPERTY.

Consists of two units - a receiver and transmitter. 20 ft. connecting cord is detachable at one end to help you position the unit. May be attached to

any age or model TV in minutes. No tools required.

Receive up to 36 channels.
 Remote

TV control. **BP VIDEO CONTROL CENTER**

MODEL V-4802 OUR PRICE \$19.95 each Provides remote control access of all

Video, TV or Cable, inputs to TV or Big Screen TV from one location by flipping switch.

One output, your

TV set or Big Screen TV

■ Four inputs ■ Completely passive, i.e. no AC power required to operate ■ Auxiliary input and output provides added flexibility.

BP UHF CONVERTER FOR TV AND VTR

MODEL V-5736 OUR PRICE \$24.95 each 5 FOR \$100.00

Use your VCR to its maximum capability. Record VHF, UHF, Cable or Pay TV while watching any other

FEATURES • 36 channels

 Allows complete programming of VTR Super color quality Watch or record any combination of selectable channels. • Receives midband, superband/Pay and all VHF channels on UHF

For Beta/VHS type recorders or TV set ● Record and use TVs remote control.

BP IMAGE ENHANCER **MODEL V-1860**

Dramatically improves performance of video cameras and VCR's (off-the-air or second generation recordings),

by compensa-ting for deterioration of detail and



\$59.95 each sharpness. Includes video distribution amplifie with two video outputs, allowing you to make two copies at once without loss in signal level.

BP RF CONVERTER/MODULATOR **MODEL V-1885**

OUR PRICE \$39.95 each

to receive video and audio signals from image enhancer, guard

stabilizer, video camera, computer, VCR, etc. The outputs of many video components cannot be directly hooked up to the

VHF antenna terminals on your TV set. This problem is solved by using the Model V-1885 RF Converter. Converts video signal from any video component to adjustable RF signal at antenna terminals. Allows your VCR output to feed two TV sets at the same time, with virtually no signal loss.



ADD FOR SHIPPING AND INSURAN \$250.00\$4.50

in N.Y. State call 800-832-1446

and indicates a deficiency in the unit's RF shielding. It should be noted, though, that normal television viewing wasn't interfered with greatly, although there were some signs of stray RF entering the front end of the television receiver. That isn't a minor quibble; other computers tested and used regularly within the same area produce only limited RF-interference on the same equipment, and it is easily quieted.

Performance

Setting up the computer is very easy. Since it is an all-in-one unit, all you have to do is take it out of the carton, plug it in, and flip a switch. After that, you insert the system disk (the one that contains the CP/M operating system) and start ("boot") the machine. In addition to the 64K of RAM, the Kaypro II also has 2K of ROM (Read-Only Memory) that stores the bootstrap routine that allows the operating system and programs to be loaded into memory. The ROM also runs any start-up self-test diagnostics. That portion of memory, since it is read-only, is not user-modifiable.

Like the Osborne portable, the Kaypro II comes with a powerful set of applications software. A set of four programs from Perfect Software includes Perfect Writer, Perfect Speller, Perfect Calc and Perfect Filer. The first two are a word processor and its associated spelling

checker. *Perfect Calc* is a spreadsheet program, and *Perfect Filer* is a relational data-base program.

Also included is Chang Labs' *Profit Plan*, a simplified business spreadsheet, an *S-BASIC* compiler for user-written programs, and, of course, CP/M.

The Perfect Speller word-processing program comes with a "teaching disk" that leads the first-time user by the hand through the steps he needs to make the best use of the program. The lessons are thorough and while, in my opinion, the presentation could have been better, they do do the job.

The soft-touch keyboard used on the *Kaypro II* lacks a positive feel. The impression is as if the keys are somehow vaguely disconnected from the keyboard, although there is a software-driven beep to indicate a keystroke. If NLS had used stronger springs, the overall feel of the keyboard would have been better. While that may slow the touch typist, it should pose no problem to the average two-fingered typist.


Communications and printer inputoutput are handled via either a standard RS-232C serial port or a standard parallel printer port.

One of the nice features of the machine is its memory-mapped display. That means that for every spatial element on the screen there is a corresponding block reserved in the memory. That would indi-

cate that there is the possibility of making use of computerized graphics, which will make the computer valuable in a scientific or engineering setting. It further means that a user can manipulate screen elements in any manner he desires.

For those potential computer-users who are familiar with well-bound and presented documentation, what comes with the Kaypro II may be a great disappointment. The manual is limited and only glosses over the capabilities of the system. It is necessary to wade through the other documentation before the system becomes very understandable. Further, the documentation isn't bound. Instead, it is merely stapled together and arrives in three separate envelopes. That contrasts greatly with the Osborne's bound, notebook-type documentation that promotes much easier use. It should be noted, though, that what I received may have been preliminary versions of the final product.

Overall, the *Kaypro II* is a fairly good attempt at emulating and improving upon the *Osbrone I*. However, while it sets an ambitious course for itself, it seems to fall down on some counts—such as RF noise, documentation, screen usability, and keyboard feel. When NLS corrects those problems, it will have a very, very powerful and useful system that is just right for the person on the go who needs true computing power.

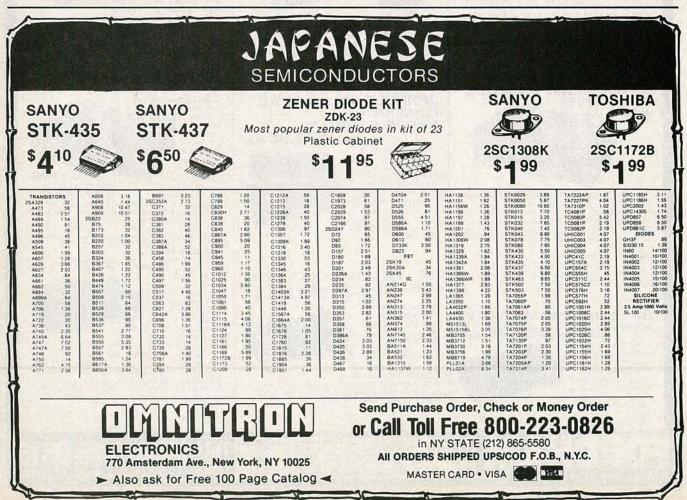

OPPORTUNITY WITHOUT RISK.

The biggest improvement in Savings Bonds in 40 years.

New Variable Interest Rate.

Looking for an ideal investment? One with a variable interest rate? But one where rates can't drop below a certain level?

Well, there is one available to everyone, even if you have only \$25 to invest.

you have only \$25 to invest.

It's U.S. Savings
Bonds. Now changed from a fixed to a variable interest rate, with no limit on how much you can earn.

A Guaranteed Minimum.

Although interest rates will fluctuate, you're protected by a guaranteed minimum. And if you hold your Bond to maturity, you'll double your money. You may do even better.

Take another look at Savings Bonds. We did, and made them better.





At CIE, you get electronics career training from specialists.

If you're interested in learning how to fix air conditioning, service cars or install heating systems – talk to some other school. But if you're serious about electronics... even earning an Associate Degree... come to CIE – The Electronics Specialists.

Special Projects Director

Cleveland Institute of Electronics



y father always told me that there were certain advantages to putting all your eggs in one basket. "John," he said, "learn to do one important thing better than anyone else, and you'll always be in demand.'

I believe he was right. Today is the age of specialization. And I think that's a very good thing.

Consider doctors. You wouldn't expect your family doctor to perform open heart surgery or your dentist to set a broken bone, either. Would you?

For these things, you'd want a specialist. And you'd trust him. Because you'd know if he weren't any good, he'd be out of business.

Why trust your education and career future to anything less than a specialist?

You shouldn't. And you certainly don't have to

FACT: CIE is the largest independent home study school in the world that specializes exclusively in electronics.

We have to be good at it because we put all our eggs in one basket: electronics. If we hadn't done a good job, we'd have closed our doors long ago.

Specialists aren't for everyone.

I'll tell it to you straight. If you think electronics would make a nice hobby, check with other schools.

But if you think you have the cool - and want the training it takes to make sure that a sound blackout during a prime time TV show will be corrected in seconds - then answer this ad. You'll probably find CIE has a course that's just right for you!

At CIE, we combine theory and practice. You learn the best of both.

Learning electronics is a lot more than memorizing a laundry list of facts about circuits and transistors. Electronics is interesting because it's based on some fairly recent scientific discoveries. It's built on ideas. So, look for a program that starts with ideas - and builds on them.

That's what happens with CIE's Auto-Programmed® Lessons. Each lesson uses world-famous "programmed learning" methods to teach you important principles. You explore them, master them completely ... before you start to apply them!

But beyond theory, some of our courses come fully equipped with the electronics gear to actually let you perform hundreds of checking, testing and analyzing projects.

In fact, depending on the course you take, you'll do most of the basic things professionals do every dayeven use a Digital Learning Laboratory to apply the digital theory essential today to keep pace with electronics in the eighties.

Plus there's a professional quality oscilloscope you build and use to "see" and "read" the characteristic waveform patterns of electronic equipment

You work with experienced specialists.

When you send us a completed lesson, you can be sure it will be reviewed and graded by a trained electronics instructor, backed by a team of technical specialists. If you need specialized help, you get it fast ... in writing from the faculty specialists best qualified to handle your question.

People who have known us a long time, think of us as the "FCC License School."

We don't mind. We have a fine record of preparing people to take . . . and pass...the governmentadministered FCC License exams. In fact, in continuing surveys nearly 4 out of 5 of our graduates who take

the exams get their Licenses. You may already know that an FCC License is needed for some careers in electronics - and it can be a valuable credential anytime.

Associate Degree

Now, CIE offers an Associate in Applied Science Degree in Electronics Engineering Technology. In fact, all or most of every CIE Career Course is directly creditable towards the Associate Degree.


Find out more! Mail this card for your FREE CATALOG today!

If the card is gone, cut out and mail the coupon.

I'll send you a copy of CIE's FREE school catalog, along with a complete package of independent home study information.

For your convenience, I'll try to arrange for a CIE representative to contact you to answer any questions you may have.

Remember, if you are serious about learning electronics . . . or building upon your present skills, your best bet is to go with the electronics specialists - CIE. Mail the card or coupon today or write CIE this magazine), 1776 East 17th

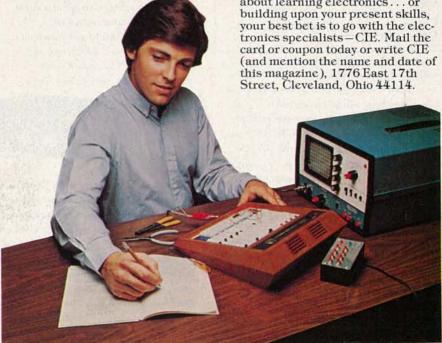

Pattern shown on oscilloscope screen is simulated

CIE	Cleveland Institute of Electronics, Inc. 1776 East 17th Street, Cleveland, Ohio 44114
	1776 East 17th Street, Cleveland, Ohio 44114
	Accredited Member National Home Study Council

Send me my FREE CIE so	nt to learn from the specialists in electronics – CIE. thool catalog – including details about the Associate v FREE package of home study information.
Print Name	
Address	Apt.
City	AND THE PARTY OF T
State	Zip
Age	Phone (area code)

Gillaspie Continues Industry Leadership . . .

WITH A 6-FOOT ANTENNA SYSTEM THAT WORKS! - AND MAKES SATELLITE TV AFFORDABLE NOW!

Hovering overhead at this very moment is an arc of 11 satellites, like giant mirrors reflecting over a hundred channels of video onto your yard and roof. The signals are there now . . . live sports, Hollywood movies, entertainment specials ... continuous news, sports and weather channels ...

7600A

- · Receiver frequency range: 3700 to 4200 MHz
- · Full frequency tunable audio for all subcarriers: 5 to 8 MHz
- · Simplified channel tuning
- · Built-in video modulator
- · Improved video performance circuitry
- Automatic frequency control Signal strength carrier level
- · Attractive all wood cabinet
- Definitive Gillaspie quality control

6 Foot Antenna

- · High gain
- Direct broadcast application
- · Ease of installation
- · Complete orbital coverage
- Precision spun aluminum reflector
- Hot dipped galvanized steel mount
- · Hot dipped galvanized or stainless steel hardware

... channels specializing in programming for various ethnic and religious groups . . . channels specializing in adult films plus major independent t.v. stations from Atlanta, Chicago and New York, and channels carrying the programming of the major broadcast networks, ABC, CBS, NBC and PBS . . . Canadian Channels . . . over 100 in all. This kaleidoscope of everything you've always wanted from your t.v. is at your home now and all you need to bring it in is a Gillaspie Satellite T V Earth Station.

Don't be Fooled by the Low Price.

The Gillaspie is not a toy or kit you have to assemble. It is a complete system which includes the same 6-foot "dish" antenna which was the sensation of the recent Satellite TV Trade Show in Atlanta. Of some 150 antennas demonstrated, from 8foot to 20-foot diameter, Gillaspie's was the only 6-foot. Sophisticated t.v. engineers

me in full fic reo and your ch

approached this easily installed antenna, suitable for nearly any home, in utter disbelief, but their skepticism vanished when they viewed the studiomonitor quality pictures it delivered when coupled to the Gillaspie 7600A receiver that is the heart of your Gillaspie Satellite TV Earth Station. Here are just some of the advantages you'll enjoy

- with Gillaspie's new 6-foot antenna: An aesthetically pleasing appearance in your yard or on your roof.
- Easy mounting where larger dishes can not go, such as rooftops, apartments, condos and even R.V.'s!
- Complies with more local zoning ordinances.
- Greater safety, even in bad weather.
- Easily moved when you do.
- Commercial-grade spun aluminum . . . just like the professional antennas used by cable systems and t.v. stations.
- Will not rust, warp or lose accuracy.



Perhaps Only a Receiver as Good as the Gillaspie can deliver good video from a 6-foot antenna, but deliver it does, and we guarantee it with our money-back-if-not-satisfied warranty*. The Gillaspie 7600A receiver has been proven the standard of the industry with over 8,000 units in use by t.v. stations, cable systems, industrial users, and individuals throughout the world.

The Model 7600A Satellite Receiver is the new look from Gillaspie, state of the art technology, distinctively styled, successful integration of the most sought after high performance characteristics and ease of operation capabilities. Attractively packaged, affordably priced, experience the difference performance makes!

The Model 7600A introduces more high perform-

ance characteristics to its price range than ever before, like uni-board construction for maximum reliability and easier service, full frequency tunable audio for cleaner crisper sound with less distortion, a new temperature compensated oscillator to eliminate drift, advanced circuit design for improved video sensitivity, and more.



On the 7600A, All Channel Selections are controlled from the comfort of your easy-chair by the convenient optional remote control unit. Ask your dealer about handy satellite program guides, published weekly and monthly. Provisions have been made for sharing of an antenna among neighbors for even further savings!

Sounds Too Good to Be True: Is It Legal?

Perfectly, as long as you don't charge admission and open a theatre in your home. The Federal Communications Commission has specifically de-regulated satellite t.v. reception by private individuals for personal enjoyment.

The Gillaspie Model 5800 Portable is a completely self contained high performance satellite receiver, t.v. set, signal meter, signal scanner, with rechargeable battery pack and charger all in one small portable unit! It is light weight, fits under an airplane seat and is perfect for site surveys, R.V.'s, antenna alignment and system trouble shooting.

Gillaspie & Associates

365 San Aleso Avenue, Sunnyvale, CA 94086 Distributed by:

Multi-Vision Oakridge, TN (800) 351-3000 Nevada Satellite Las Vegas, NV (702) 452-5509

North American Satellite Fresno, CA (209) 431-4936

Satellite Communications Corp. Silverlake, KS (913) 582-5819

low Do I Get One	ł	ow	Do	I	Get	On	e?
------------------	---	----	----	---	-----	----	----

Gillaspie satellite t.v. systems are sold by franchised dealers throughout the U.S. and Canada. Most accept major credit cards and many can help you arrange long range financing. For the name of your nearest dealer and free descriptive brochures, just phone or mail in this handy coupon. (408) 730-2500

Yes! I would like to receive more information.

Name

Address

(Gillaspie #7600A System, including receiver, low-noise amplifier and 6-foot diameter dish antenna sold as a unit. May be installed by customer or by dealer at slight additional cost. *Gillaspic systems are warranteed by the manufacturer to be free from defects for 90 days. See dealer for details of warranty and optional dealer installation.) Note: Satellite TV reception may vary in certain locales. Check with your nearest Gillaspie dealer.

38

NEW PRODUCTS

For more details use the free information card inside the back cover

PRINTER SWITCH for the Apple computer permits hard copy to be routed easily to either a letter-quality daisywheel or high-speed, dot-matrix printer.



CIRCLE 121 ON FREE INFORMATION CARD

To install, the user plugs the interface cable from a single parallel board within the Apple computer to a connector on the rear panel of the *Printer Switch*. Each of the two built-in 6-foot cables from the switch are then attached to the selected printers.

The Printer Switch is enclosed in a plastic case colored to match existing Apple hardware. It is priced at \$150.00.—Centronics, Intra Computer, 101 West 31st Street, New York, NY 10001.

ANTENNA PREAMPLIFIER, Model PRE-1, is designed to provide high-gain, low-noise amplification for received VHF and UHF signals; it boasts a midband gain of at least 15 dB, with a noise figure of only 1.8 dB. The Model PRE-1 consists of a lightweight



CIRCLE 122 ON FREE INFORMATION CARD

antenna-mounted preamplifier module and an indoor control unit. Switch-selectable high and low gain allows the user to customize his or her signal-enhancing needs. The *Model PRE-1* comes with all necessary hardware, connectors, and instructions, and is priced at \$69.00 (plus \$2.00 UPS shipping).—**Grove Enterprises, Inc.**, 140 Dog Branch Road, Brasstown, NC 28902.

STEREO RECEIVER, The Realistic Model STA-204, fine-tunes FM stations and locks them on-frequency. An FM-mute circuit eliminates noise when tuning between stations.



CIRCLE 123 ON FREE INFORMATION CARD

Special circuitry automatically activates a unique rumble filter when the bass control is moved from its center position. A high-filter reduces hiss, and a loudness pushbutton boosts high and low frequencies for improved sound even at low-volume levels.

The Realistic Model STA-204 features a 10-segment LED AM/FM signal-strength meter, separate 11-step bass and treble adjustment controls, center-detent balance control, FM stereo LED indicator, lighted dial, and pushbutton controls for mono/stereo, tape monitor, and A/B speaker selection. It is priced at \$199.95.—Tandy Corporation/Radio Shack, 1800 One Tandy Center, Fort Worth, TX 76102.

MICROCOMPUTERS, model TS800 and model TS803 (shown) are CP/M-based, eight-bit microcomputers that allow smalland medium-sized businesses to grow from their first single-user computer station to a full network, without making the entry computer obsolete. Both models have 14-inch screens and detachable keyboards engineered to reduce user error and produce maximum speed. Standard interface features on both models include one RS-232 serial port for modem or serial printer, one parallel Centronics-compatible printer port, and an RS-422 port capable of 800 kilobits-persecond communications to either of the Tele-Video multiuser service processors.

The model *TS800* can serve up to 15 additional users as a satellite station once the user is employing MmmOST (*Multiuser*, *multitasking*, *multiprocessing Operating System Technology*). Because the model *TS800*




CIRCLE 124 ON FREE INFORMATION CARD

needs no additional storage, it provides high performance at a low incremental price. It is priced at \$1495.00.

The model *TS803* is a complete standalone system with two 500 kilobyte floppy disks and graphics with high resolution (640 × 240 pixels); it serves not as a stand-alone, but can connect into a series processor to use TeleVideo's proprietory network manager, MmmOST. It is priced at \$2495.00—Televideo Systems, Inc., 1170 Morse Avenue, Sunnyvale, CA 94086.

EPROM PROGRAMMER, Model 2300, permits programming of EPROM's and EE-PROM's from memory, disks, or directly from the keyboard when used with an Apple II computer. Most currently available EPROM's can be copied or programmed using the Model 2300. Any program, ROM, or EPROM in the computer's memory can be copied without removal. When programming an EPROM, the Model 2300 verifies each byte by a "read after write" operation, and automatic reprogramming is initiated if an error is encountered. An erase verify mode is also provided so that a partially erased EPROM is not accidentally programmed.

The Model 2300 requires no external power, yet it meets the Apple computer's power requirements for a peripheral card. The Mod-



CIRCLE 125 ON FREE INFORMATION CARD

el 2300 is supplied complete with Programmer, Apple II + interface card, operating software on disk (DOS 3.3), and an operating manual. Free software upgrading is provided as new EPROM's become available.

The *Model 2300* is priced at \$429.00 FOB factory.—**Software Specialties, Inc.,** Box 329, Springboro, OH 45066.

MOBILE SOUND SYSTEM is in three parts: the model *TD-1200* tuner/cassette deck, the model *PA-300* power amplifier, and the model *SP-400* speaker system.

The model TD-1200 tuner/cassette deck combines an AM/FM-stereo tuner with 10-station memory, a preamp/control section designed to correct acoustic flaws that are typical of automotive environments, and an auto-

reversing cassette deck. The frequency response is from 20 Hz to 22,000 Hz \pm 3dB in both directions; wow and flutter is less than 0.045%, and signal-to-noise ratio is better than 70dB with Dolby-C. The model *TD-1200* is priced at \$1260.00.




CIRCLE 126 ON FREE INFORMATION CARD

The model *PA-300* power amplifier delivers 70 watts-per-channel with a distortion figure of 0.005%. It is priced at \$340.

The model *SP-400* 3-way speaker system spans the range from 50 Hz to 22 kHz. It is priced at \$390 per pair.—**Nakamichi U.S.A. Corp.**, 1101 Colorado Avenue, Santa Monica, CA 90401.

MODEM, the SSM 110/300 baud ModemCard for the Apple II features half and full duplex, auto answer/auto dial Touch Tone and pulse dialing, and audio monitoring to provide increased flexibility for use with many systems, including PBX. The ModemCard



CIRCLE 127 ON FREE INFORMATION CARD

plugs directly into any Apple slot (except 0) and requires no additional external devices. The SSM Apple *ModemCard* is priced at \$299.00.—**SSM Microcomputer Products, Inc.**, 2190 Paragon Drive, San Jose, CA 95131.

COMPUTER SYSTEM, model QDP-200, has a standard 64K of RAM and its CP/M operating system is an enhanced version fully compatible with all other CP/M systems. It also offers on-line HELP for CP/M and MP/M systems, which makes the unit user-friendly, plus an easy-to-use menu program.

Two 8-inch, double-sided/double-density floppy disk drives are standard, but the model is also available as a single-drive, dedicated system. All connections needed to add a 10-



CIRCLE 128 ON FREE INFORMATION CARD

or 15-megabyte 51/4-inch hard disk are built in. A programmable floppy disk shut-off extends drive and media lives. An additional feature is a filtered cooling system.

Using a Z80A microprocessor, the model QDP-200 features two serial and two parallel ports, plus a real-time clock. The single-user system also has exclusive "cache memory" disk buffering available.

The model QDP-200 has a suggested retail price of \$3495.00 with the dual drive; the system with a single drive is priced at \$2995.00.—Quasar Data Products Computer Systems, 10330 Brecksville Road, Cleveland, OH 44141.

OSCILLATOR, model *SG 505 Option 2*, provides a high-level, fully balanced output from a selection of three source impedances: 600 ohms, 150 ohms, and 50 ohms.

The addition of those features to the standard model *SG 505* is in direct response to user demand. Most professional audiocommunication systems—broadcast, telephone, professional recording studies—use 600 ohms as their standard line impedance. Proper testing of microphone inputs requires 150-ohm source impedance. And 50 ohms is a common source impedance in many generalized signal applications which do not require impedance matching: audio-amplifier design, two-way radio, etc.

The model SG 505 Option 2 provides a fully balanced, fully floating output with a maximum calibrated amplitude of +22 dBm from 600 ohms into 600 ohms and +28 dBm from 50 ohms into 600 ohms. Into 150 ohms, more than +30 dBm can be achieved. While +18 dBm is a fairly common test level in broadcast systems, proper testing should verify sufficient headroom for program peaks by driv-



CIRCLE 129 ON FREE INFORMATION CARD


ing the system at significantly higher levels. More than 100-dB attenuation of the output level can be achieved with the built-in step and variable attenuators.

The key performance features of the standard model SG 505 have been retained in the Option 2—0.0008% maximum THD (typically 0.003%) from 20 Hz to 20 kHz and \pm 0.1 dB flatness from 10 Hz to 20 kHz.

The model *SG 505 Option 2* is priced at \$1360.00.—**Tektronix**, **Inc.**, PO Box 500, Beaverton, OR 97077.

TOOL KIT, model 030-2, contains a straight prober, sharp tip; a bent prober, sharp tip; and a triangular scraper with sharp cutting edges

and sharp tip. The tools are made from hardened tool steel, nickel plated, and are .032 inch in diameter, with integrated hexagonal anodized aluminum handles.



CIRCLE 130 ON FREE INFORMATION CARD

Applications for these tools include miniature instruments and meter work, straingauge work, integrated-circuit artwork/repair, camera repair, model work, and any manner of miniature hobby project.

The model 030-2 is packaged 3 tools per kit in a plastic shipping and storing container, and is priced at \$9.95. Single tools can be ordered from the kit in quantity.—**Minitool Inc.**, 1334/F Dell Avenue, Campbell, CA 95008.

PROTECTOR, the Master AC Control Console, (MACC) provides surge protection plus master control for the delicate circuitry of electronics components, amplifiers, stereos, and personal computers—all of which are extremely vulnerable to high-voltage surges. (Such surges can be caused not only by nearby lightning, but also by distant storm fronts, as well as by transient currents produced by electric motors, fluorescent lights, wind-driven snow, transformers, and power outages.)



CIRCLE 131 ON FREE INFORMATION CARD

The MACC's 3-stage automatic restorable circuitry clips off power surges and spikes to provide clean AC power. Its resettable circuit breaker adds further protection for word processors, small computers, and other sophisticated communications and electronics equipment.

Eight plug-in "U" ground outlets are provided on the back of the MACC, including one "hot" one for a continuously powered application such as a clock. Seven "on-off" rocks witches let the user control individual components from one station. The entire system can be turned on or off with a single master switch, and all switches light up when "on" to confirm condition.

The Master AC Control Console is rated at 15 amps at 125 volts AC, 60 Hz, 1875 watts continuous duty. It is priced at \$79.95.—
Alpha Delta Communications, PO Box 571, Centerville, OH 45459.

R-E

Our innovation.



Their imitation.



If you need any one of nine microwave oven rectifiers now, only Philips ECG is ready to deliver today.

You can tell where your new markets are by checking

out what's new from Philips ECG. When microwave ovens became popular, Philips ECG was ready first with Sylvania microwave oven components. When the computer boom hit, we were first again. In fact, on average, we introduce roughly 300 new replacement semiconductors every year—far more than anyone else in the business.

Maybe that's why even our competition looks to us first for new ideas. But although they copy us, they never quite equal either our superior performance specs or our cross-reference accuracy. So for the best insurance against premature failures and call backs, demand parts from Philips ECG. We're the only source you'll ever need for replacement semiconductors that fit and work.

But just because the imitators can't keep up with us doesn't mean it's hard for you to keep up-to-date. To stay posted on all our latest advances in profit-generating replacement parts, stop by your Philips ECG distributor's and pick up your copy of our new, expanded Master Guide (ECG212L) and our *ECG Counterpoints* new product update. For the name and number of your nearest distributor, call 1-800-225-8326 toll free (in MA, dial 1-617-890-6107). Or just send \$3.25 for your Master Guide to Philips ECG, Inc., Dept. RE, 70 Empire Drive, West Seneca, NY 14224.



PhilipsECG

If it's ECG, it fits. And it works.

ADVANCE ELECTRONICS IS PROUD TO INTRODUCE THE A.W. SPERRY INSTRUMENTS LINE OF TEST EQUIPMENT.

15 MHz DUAL TRACE PORTABLE W/INTERNAL BATTERY PAK

20 MHz DUAL TRACE W/BUILT-IN COMPONENT CHECKER



CALL FOR OUR SPECIAL INTRODUCTORY **PRICES**

315P

FEATURES

THE SMALL PORTABLE WITH BIG FEATURES

 AC/DC powered • 2mV/Vertical sensitivity • TV (Video) sync filter • 31/4" internal graticule, high brightness CRT • X-Y display mode • Add/Sub mode with ch.2 invert . Automatic and triggered time base . Trace rotation adjustable from front panel • Internal rechargeable pak included • Lightweight 12.1 lbs with battery . Small size (4.4" x 8.8" x 11.7")

SPECIFICATIONS

Vertical System CH. A and CH. B- Deflection Factor, 2mv/div 10v/div, 12 steps • Frequency Response, DC - 15 MHz (-3 dB) • Risetime, 24 ns • Maximum Input Voltage, 300 V (DC + AC peak) • Input Impedance, 1MΩ ±5%, 20pF ±3pF • Display Modes, CH-A, CH-B, DUAL, ADD, CHOP • Internal Horizontal System (Sweep Operation) • Deflection Factor, 0.5μs/div. - 0.5s/div (±5%), 19 steps • Magnification, 5x all ranges • Trigger System - Sources, INT, CH-A, CH-B, EXT • Modes, AUTO, NORMAL • Sensitivity, INT: 1 Div or more, EXT: 1V p-p • Coupling, DC, TV SYNC. Vertical System CH. A and CH. B-Deflection Factor, 2mv/div -



FEATURES


 Component checker for locating defective components in or out of de-energized circuits. • 6" high brightness, internal graticule CRT • TV (Video) sync filter • Z axis (intensity modulation) High sensitivity X-Y mode
 Front panel trace rotator . Low power consumption . 3PCB modular construction . Comes with 2 year warranty

SPECIFICATIONS

Vertical System CH. A and CH. B-Deflection Factor, 5mV/div-20v/div, (±3%) 12 steps • Frequency Response, DC-20MHz (-3dB) • Risetime, 17ns or less • Maximum Input Voltage, 300 V (DC + AC peak) • Input Impedance, 1MΩ ± 5%, 20pF ±3pF • Invert, CH-B only • Operating Modes, CH.-A, CH.-B, DUAL, ADD, X - Y • Internal Horizontal System (Sweep Operation)-Time Rese, 0.2 us/div.0.5s/div.(+3%) 20 steps • Magnification)-Time Base, $0.2\mu\text{s}/\text{div} - 0.5\text{s}/\text{div} \ (\pm 3\%) \ 20 \ \text{steps} \bullet \ \text{Magnification}, 5x \bullet \textit{Trigger System} - \ \text{Sources}, \ \text{INT}, \ \text{CH-B LINE}, \ \text{EXT} \bullet \ \text{Modes},$ Norm, Auto • Coupling, AC, HF rej, TV • Slope + or Sensitivity, INT: 1 div or better, EXT: 1V p-p or better.

A.W. SPERRY INSTRUMENTS INC.

FEATURES A FULL 2 YEAR PARTS AND LABOR WARRANTY ON OSCILLOSCOPES

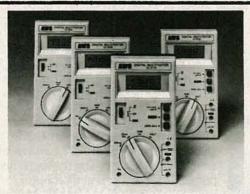

AWS DIGITAL MULTIMETERS

Models EZ-6100, 6110, 6200 & 6220

- Autoranging on volts and ohms
- Self-contained 10 Amp AC/DC ranges (EZ-6110) & 6220)
- Low power ohm ranges—applied voltage ≤ 0.3V.
- Continuity buzzer (EZ6100 & 6110), 5 settings
- Range hold (EZ6100 & 6110)
- Large 3½ digit LCD display
- 300 hours continuous operation

FIVE-YEAR WARRANTY



TOLL FREE HOT LINE

THE TEST EQUIPMENT SPECIALISTS



26 WEST 46th STREET, NEW YORK, N.Y. 10036 • 212-730-7030

Modify your TV to include a direct video input for your computer or VCR-and still have it function as a receiver.

JOHN SOLUK



ARE YOU ONE OF THE MANY THOUSANDS of owners of personal computers, VCR's, videodisc players, etc. whose eyes have been bothered because of color shift, signal beat, ghosts, and RF interference showing up on your TV screen? The source of your problem is probably the fact that you are RF-modulating the video signal from your device to get it into your TV set. Fortunately, there's a low-cost solution for you. With this easy-to-build direct-video modification for your TV set, you can rid yourself forever of the "RF syndrome."

Until recently, the most common and economical method of obtaining a display from a video source (computer, VCR, etc.) has been through an RF modulator, by means of which the video-source signal is fed through the antenna terminals of a standard TV set. By using a TV set in that manner-thereby eliminating the need to purchase an expensive display monitor-one could save hundreds or even thousands of dollars. However, as many users have come to realize, the RFmodulator method has several significant drawbacks. Most of the problems are related to RF radiation and the interference it causes, which degrade picture quality.

Theory of operation

In this direct-video modification, the tuner and IF sections of your set are bypassed. The video-source signal is injected directly into-or as close as possible to-the first-video-amplifier stage in your set. To provide electrical isolation between the input and output sections (both for safety and to protect your video source), two special-purpose optoisolators (optical couplers) are used; there is no electrical connection between the two sections. One optoisolator is a widebandwidth coupler for the video channel; the other is a narrow-bandwidth device for the audio channel.

Figure 1 shows a block diagram of the system. The output section is powered directly from the set's own DC power supply. The input section has an on-board rectifier and is powered by inductivelycoupled AC that you get by placing a few turns of insulated wire around the exposed ferrite core of the flyback transformer (we'll talk more about how to do that

A schematic of the direct-video modification board is shown in Fig. 2. The video signal is applied across R1 and is coupled via C1 to the Q1-Q2 powerdriver stage. That transistor pair steps up the input-signal level enough to modulate the input LED (in IC1) and also provides a low impedance for best frequency response. Resistor R5 determines the amount of modulation drive-signal, and R6 and C2 provide additional boost at frequencies above 2 MHz for improved video response. The signal is coupled through C3 to the LED in optoisolator IC1. Resistor R7 provides the DC-bias point about which the input signal will be modulated.

Inside IC1 are an LED and a phototransistor that are optically coupled by a light pipe. There is no internal electrical connection between the two devices. The modulated light strikes the detector surface and the resultant current flow appears at pin 5 of IC1 with a signal being developed across R20. That signal is typically 200 to 300 mV peak-to-peak and requires amplification to bring it up to a

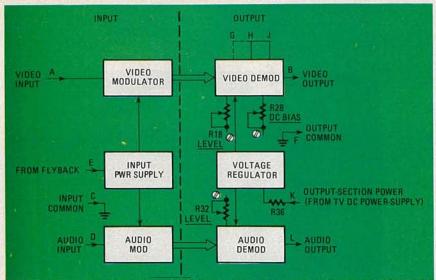


FIG. 1—THE INPUT AND OUTPUT SECTIONS of the direct-video modification must be electrically isolated.

usable level. Transistor Q5 performs that function. Resistor R18 sets the video-output level. The signal at that point is inverted with respect to the input and is coupled to Q6 through C9. The signals at the collector and emitter of Q6 are equal in amplitude but are inverted with respect to one another. Thus, an in-phase signal is available at pad "J" while the signal at

"G" is out of phase. The signal with the desired phase is coupled through C12 and C13 to the output, where it is mixed with a DC component whose level is set by R28.

The audio portion of the circuit functions similarly. But, because of audio's narrower bandwidth-requirements, a simpler circuit is used. An audio signal is applied to C4. Transistor Q3 amplifies that signal and sets the DC-bias point for optoisolator IC2's LED simultaneously. Resistor R11 sets the drive-current range. The modulated light falling on the detector of IC2 produces an output current at pin 5. The output level is set by R32.

As mentioned earlier, to isolate the input and output sections, separate power supplies are used. The output section can usually take low-voltage DC directly from within the set, while the input section gets its power from inductive coupling to the TV's flyback transformer. A few turns of wire are wound around the flyback's ferrite core and the resulting signal is rectified and filtered by D3, R12, and C6. The voltage at that point will be approximately 12 volts, if two turns of wire are used.

Transistor Q4 and its bias network, along with LED1, form a low cost go/nogo indicator that is especially helpful for those who do not have an oscilloscope or VOM at their disposal. When the voltage is approximately 12 volts, LED1 will begin to glow dimly. If it glows too brightly, there are too many turns on the flyback and thus too high a voltage.

The output power is controlled by D4, a Zener diode that limits the voltage to the output stage to a maximum of 12 volts. Resistors R38 and R36 provide the voltage drop necessary to ensure safe operation of D4. The value of R36 depends

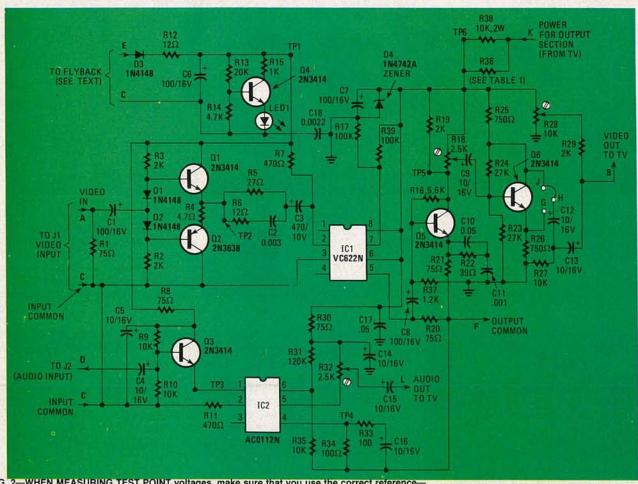


FIG. 2—WHEN MEASURING TEST POINT voltages, make sure that you use the correct reference-TP1-TP6 are measured with respect to "C" and all others are measured with respect to "F."

upon the value of the input voltage. See Table 1 for help in selecting a resistor of the correct value.

Construction

A foil pattern for a single-sided PC board is shown in Fig. 3, and a partsplacement diagram in Fig. 4. Install all components on the component (non-foil) side of the PC board. Start by inserting all of the resistors except R36 (that will be installed once we have determined the output-section power source). Next, install all of the capacitors as indicated,

PARTS LIST

All resistors 1/4-watt, 5% unless otherwise specified

R1, R8, R20, R21, R30-75 ohms R2, R3, R19, R29-2000 ohms

R4-4.7 ohms

R5-27 ohms

R6, R12-12 ohms

R7, R11-470 ohms

R9, R10, R27, R35-10,000 ohms

R13-20,000 ohms

R14-4700 ohms

R15-1000 ohms

R16-5600 ohms

R17, R39-100,000 ohms

R18, R32- 2500 ohms, trimmer potenti-

ometer, PC-mount

R22-39 ohms

R23, R24-27,000 ohms

R25, R26-750 ohms

R28-10,000 ohms, potentiometer, PC-

R31-120,000 ohms

R33, R34-100 ohms

R36-see text and Table 1

R37-1200 ohms

R38-10,000 ohms, 2 watts

Capacitors

C1, C6, C7, C8-100 µF, 16 volts, electrolytic

C2—.003 μ F, 50 volts, ceramic disc C3—470 μ F, 10 volts, electrolytic

C4, C5, C9, C12, C13, C14, C15, C16-10 μF, 16 volts, electrolytic

C10, C17,— 0.05 µF, 50 volts, ceramic disc C11-0.001 µF, 50 volts, ceramic disc

C18-0.0022 µF, 400 volts, ceramic disc

Semiconductors

IC1-VC622N wideband opto-isolator

IC2-AC0112N opto-isolator

Q1, Q3-Q6-2N3414

Q2-2N3638A

D1-D3-1N4148

D4-1N4742A 12-volt Zener

LED1-jumbo red LED

S1—DPDT miniature toggle switch (on-on). 125 volts, 3 amperes

J1, J2—phono, BNC, UHF, or phone jack Miscellaneous: PC board, 75-ohm coax

(RG-59/U), hookup wire, single- and twoconductor sheilded audio cable, hardware

The following are available from V.A.M.P. Incorporated, P.O.Box 411, Los Angeles, CA 90028: Complete kit with PC board and all components (DVM-1), \$64.95; PC board and optoisolators (VC622N and AC0112N), \$29.00; optoisolators only \$19.95. Please add \$2.00 for shipping and handling within U.S.A. Foreign orders please add \$4.00. California residents please add 6% sales tax.

TABLE 1

Receive-section input voltage

R36

10 to 11.9 VDC 12 to 17 VDC 18 to 24 VDC 105 to 165 VDC

Jumper 27 ohms, 1/2W 100 ohms, 1/2W 10K ohms, 2W

except for C16 (and R33), which can be installed later if your set requires a boost in audio output. Install the remaining components as shown in the partsplacement diagram. When mounting the transistors and diodes be sure to orient them correctly. Once you have completed the board assembly you can proceed to the next phase-converting the set.

Set modification

As an example, we'll show the conversion process for a 13-inch Samsung color receiver. However, the process will work for any other set. Before you start tearing apart your TV, it would probably be a good idea (actually, it's just about essential) to get the appropriate Sams Photofact folder, which will provide you with a schematic for your model and show you where all the components are located.

With that in hand, several points will have to be located and marked off for future reference. Remove the back panel of your set so that you can find and verify those points. For your own safety, unplug the set and to discharge the high-voltage power supply prior to performing any work on it.

The first point to locate is the power source for the output section. Begin by finding the power supply on your circuit diagram. Most transistorized TV sets will either have a low- or high-voltage output (or both) present at the power supply, but a vacuum-tube set may have only a high voltage output. Do not use the 6.3-volts AC heater windings on tube sets for a power supply; the direct-video PC board requires DC, preferably 12 volts. By using Table 1 and choosing the appropriate resistance value for R36, you can use other DC source-voltages to power the converter board.

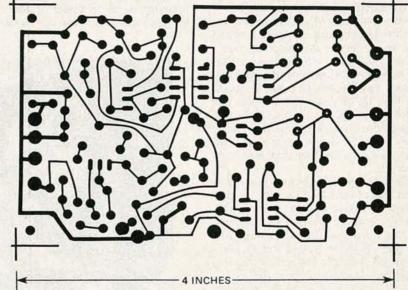


FIG. 3—SINGLE-SIDED PC BOARD is small enough to fit comfortably inside most TV sets.

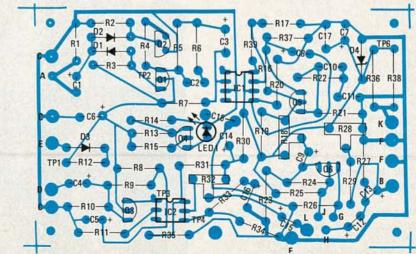


FIG. 4—ONLY THE BYPASS switch and input jacks are not contained on the circuit board.

For our Samsung set, we selected an input voltage of 12 volts. The appropriate value for R36-determined from Table 1-in our case was 27 ohms. Mark on your circuit drawing the point from which you will tap your power and then find that point in your set. Be sure that your value for R36 is correct, and install the resistor on the PC board. Then strip one end of a three-foot length of red wire and connect it to pad "K" on the PC board. Connect a similar length of black wire to pad "F." (Longer lengths may be required if you are working with a large console.) Do not connect the free ends of the red and black wires to your set at this time.

Next, you have to determine the point for external-video injection. Due to design differences, that point will vary from one set to another. The objective, in any case, is to get as close to the first videoamplifier as possible. At that point the signal-level within the set closely matches that of the signal that will be injected. The circuit impedence must be greater than 1000 ohms—otherwise the ability of the direct-video PC board to provide the appropriate video level and DC bias may be hampered. A high impedence is usually found at the base of a transistor or at the input of an integrated circuit. In general, when you choose the injection point, select it so that it will eliminate all (or most) of the set's bias networks when the BYPASS switch is thrown to its EXTERNAL position. Doing that will leave only the video signal and the DC bias from the direct-video board at the injection point. Mark your injection point on your own circuit diagram, and locate and mark it in your set.

Once the video-injection point has been determined, you'll have to determine whether positive or negative video is required. (Positive video means that the video-information signal is positive with respect to ground, and the sync signal negative; the opposite is true for negative video.) If you are unable to determine which type of signal your set needs at the injection point, assume for the moment that it's positive video. To select a positive-video output, connect pads "H" and "J" on the PC board with a jumper. For negative video, connect pads "G" and "H."

The final injection-point to be located is the one for external audio. The simplest place to inject the audio is usually at the high side of the volume control. However, some sets—as was the case with our Samsung—use an IC to control the volume level. In such sets the audio should be injected at a point after the detector de-emphasis network, and the level controlled through R32 on the PC board.

Some sets may require that you feed the driver stage directly. In that type of installation, the DC bias to the audio powerstage must be maintained. That can be done easily with a resistor network like




FIG. 5—RESISTOR NETWORK to maintain the DC bias to your set's audio power-stage.

the one shown in Fig. 5.

Having selected the injection point for your set, mark it on your circuit diagram and make sure you know where it is in the set.

Installation

Find a convenient place inside your set to mount the PC board, and drill the appropriate mounting holes. Figure 6 shows how the board was mounted in our Samsung. Place as much distance as is practical between the PC board and the flyback transformer to avoid any possibility of interference. Do not mount the PC board at this time, though.

Next, mount the audio and video inputjacks. Install them in a convenient location either on the back panel or side of the set. The jacks should be as close as posssible to the PC board. Make sure that the video-input jack is mounted on an insulated surface (preferably plastic) if you are converting a hot-chassis type set. In our installation, we used a standard ¼-inch phono jack requiring a ¾-inch hole, but BNC- or UHF-type connectors can also be used, as long as they are mounted on an insulated surface.

The miniature DPDT BYPASS switch, S1, should be mounted as close to the input jacks as possible. That switch will allow you to select either the RECEIVE OF EXTERNAL mode. Once again, if you are converting a hot-chassis set, make sure that you mount the switch on an insulated surface.

You can now proceed with the wiring phase of the installation. Earlier, you determined the power source for the output section of the PC board and inserted an R36 of the appropriate value. Now, you must consider the power source for the input section of the PC board. If you are converting a set which is already transformer-isolated from the power line (as opposed to a hot-chassis set), the input portion of the direct-video board can use the same power source as the output section. In that case, take a piece of insulated

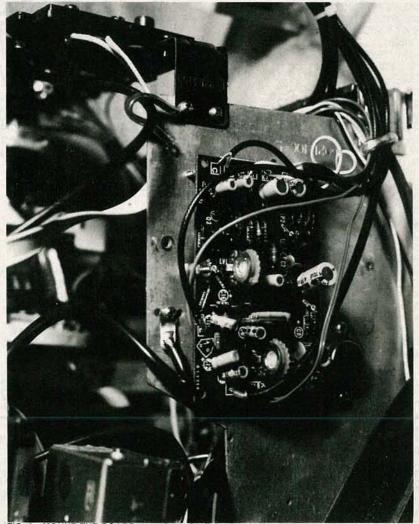


FIG. 6—MOUNT THE BOARD away from the flyback transformer to avoid interference.

wire and connect pads "C" and "F" which are the input common and outout common respectively. Use a second piece of insulated wire to connect pad "E" with the pad at TP6. Remember, those connections should be made only if the set you are converting is transformer isolated.

If the set you are converting is not transformer isolated, but is a hot-chassis type, then the power for the input section can be obtained from the flyback transformer. That will involve work in the highvoltage section of the set. Any time you are working in that area, be sure to unplug the set for safety. (It would be a good idea to have the set unplugged anytime you're working inside it-Editor.) As a further precaution, discharge the power supply. That is done by connecting one end of a wire to the chassis of the set and then carefully slipping the other end under the rubber high-voltage cap on the picture tube itself. Don't forget to remove the wire afterward.

Take a 6-foot length of (white) insulated single-conductor wire and fold it in half. Slip one end of the wire through the ferrite core of the flyback transformer so that there are two equal lengths on both sides of the core. Then take one of the ends of the wire and loop it twice around the ferrite core so that you end up with approximately 21/2 turns around the core. (For console sets with screens larger than 19 inches you may require only 11/2-2 turns.) Twist the wires together for their entire length and connect them to the direct-video board at pads "E" and "C. Figure 7 shows the windings around the core of the flyback in the Samsung set that we converted.

The next step is to determine whether there is a sufficient number of turns around the core of the flyback, and whether the wires to the board are phased properly. During the following test make sure that the PC board is clear of the set, to prevent any accidental shorts. Apply power to the set and turn it on. Indicator LED1 should light. If it does not, unplug the set and interchange the wires at pads "E" and "C." If the LED still doesn't light, unplug the set and add an additional 1/2-1 turn around the core of the flyback. If the LED still doesn't light, unplug the set again and interchange the wires on pads "E" and "C" so they're back in their original positions. (If you have an oscilloscope at your disposal, connect the leads from the windings so that the flyback pulse is positive with respect to ground.) If the LED still doesn't light, measure the voltage at TP-1. It should be positive with respect to ground. Increase or decrease the number of turns until the voltage at TP-1 reaches a value between 12 and 15 volts DC. The LED should light when the voltage exceeds 11-volts DC.

In the event that you can't get at the ferrite core of the flyback transformer, you will have to add a step-down transfor-

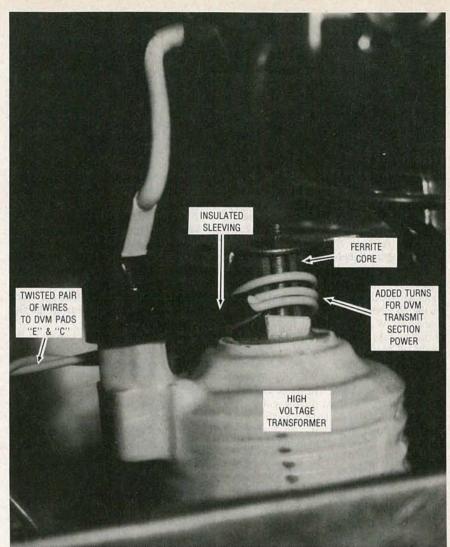


FIG. 7—POWER FOR THE INPUT SECTION can be obtained by inductive coupling to the flyback transformer.

mer (120 volts:12 volts) or use a commercially available portable 12-volt DC power-adapter so that the input section can be powered directly from the AC line.

Using Fig. 8 as a wiring guide, you can now start the final phase of the installation. First, cut two equal lengths of video cable (RG-59/U) long enough to reach from the video injection-point to S1. We'll refer to that as the DEMOD/RETURN cable pair. Label and set those cables aside momentarily. Next, cut a length of video cable that will reach from the S1 to the video output of the PC board at pads "B" and "F." We shall refer to it as the "B" cable. Label it accordingly. Cut an-

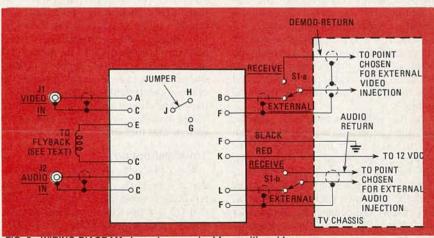


FIG. 8-WIRING DIAGRAM shows jumper wired for positive video.

other length of cable that will reach from the VIDEO-IN connector J1 to pad "A" on the PC board and label it as the "A" cable.

Strip one end of the "A" and "B" cables, making sure that you have a sufficient length of outer conductor (shield) unraveled. Then connect those ends to the PC board as shown in Fig. 8. Make sure that the center conductors of the cables are connected to the correct pads ("A" to "A" and "B" to "B"). Do not connect the other ends of the cables yet.

Prepare the audio cables next. Cut a length of two-conductor shielded cable long enough to reach from the BYPASS switch (S1) to the audio-injection point. We shall refer to this as the AUDIO-RETURN cable. Label it and set it aside momentarily. Now cut a length of singleconductor shielded audio cable long enough to reach from pads "D" and "C" on the PC board to the AUDIO-IN (J1) connector. We will refer to that as the AUDIO-IN cable. Cut another length of single-conductor shielded cable to reach from pads "L" and "F" on the PC board to the BYPASS switch; we will refer to that as the AUDIO-OUT cable. Strip one end of the AUDIO-OUT and AUDIO-IN cables, making sure that you have a sufficient length of outer conductor unraveled. Then connect those ends to the PC board as shown in Fig. 8. Make sure that the center conductors of the audio-in and audio-out cables are connected to pads "D" and "L," respectively. Do not connect the other ends of the cables yet.

You can now mount the PC board permanently using 4-40 machine screws and nuts. Use 1/4-inch fiber spacers to insulate the board from the TV chassis, and make sure that the PC-board foil doesn't touch any metal surface. Once you have secured the PC board, strip one end of each of the DEMOD/RETURN cables you set aside earlier. At the external-video injection point remove a small portion of the copper trace that connects the two points between which you wish to insert the BYPASS switch. (Instead of breaking a trace you may have to cut a wire; it depends on your TV set.) Connect the center conductor of the demodulator cable to the side that comes from the set's own IF/demodulator circuits. Connect the center conductor of the return cable to the side that goes to the video amplifiers and the circuits that eventually drive the picture tube. Twist the shields of that cable pair together, and then solder them to a convenient ground point.

At the audio-injection point, cut the trace that connects the two points between which you'll insert the BYPASS switch. (Again, a wire instead of a copper trace may have to be cut.) Connect the dark center conductor to the side that comes from the set's own sound IF demodulation circuits and connect the light center conductor to the circuits that eventually terminate at the set's speaker. Route the

AUDIO-RETURN cable and the DEMOD-RETURN cables through the set and connect them to S1 as shown in Fig. 8. Now strip the free end of the "B" cable and connect it to the switch. Next, strip the free end of cable "A" and connect it to the video-input connector. Then, strip the free end of the audio-out cable and connect it to the BYPASS switch; also strip the free end of the audio-in cable and connect it to the audio-input connector. Finally, connect the red wire from the PC board to the voltage-source point you selected earlier, and connect the black wire to chassis ground.

If your installlation used the inductive pickup from the flyback transformer, be sure to route the wires to the board so they avoid, as much as is practical, the RF and low-level video demodulator circuits; that will minimize interference. Also, make sure that the pair of wires is twisted its full length—all the way from the flyback to the PC board.

Connect the appropriate cables to the video- and audio-input connectors. Make sure that you connect the center conductor of each cable to the center pin of the connector.

That completes installation of the conversion board. Check all your connections, and also make sure that the PC-board foil pattern is not touching any metal surface. Finally, make sure that the input connectors and BYPASS switch are insulated from the TV chassis, especially if you are converting a hot-chassis set.

Operation

Having checked your installation thoroughly, apply power to the set. Place the BYPASS switch in position for normal TV operation. If the set does not work properly, you have wired something incorrectly (most likely the switch). Retrace your steps through the installation instructions.

Once the set operates normally as a receiver, use a voltmeter to measure the DC-bias voltage at the center terminal of the BYPASS switch with respect to chassis. Then apply a standard video signal to the VIDEO IN jack. Set the BYPASS switch to the EXTERNAL position. Adjust R28 so that the DC voltage measured at the center terminal of the switch matches the value you obtained when operating the set as a receiver. Then adjust R18 for the desired picture contrast. Finally, apply a tone to the AUDIO IN jack J1 and adjust R32 to obtain a comfortable listening (or operating) range. If you cannot get satisfactory video or audio, see the troubleshooting section that follows.

Troubleshooting

If the LED will not light, check to see that it is properly inserted into the board and is not reverse biased. Also make sure that D3 is properly inserted and that the voltage at the cathode (TP1) of the diode is positive with respect to ground.

If you have no video, or if the picture quality is poor, the problem may be due to an incorrect DC bias (that can result in complete picture loss or heavy picture tearing). To correct the problem, adjust R28 for the appropriate bias level.

If you have no video in either mode (RECEIVE OF EXTERNAL), the problem is probably a mis-wired BYPASS switch. Check the wiring, referring to Fig. 8.

A streaky, clipped, or washed-out picture may be caused by too high a video level. Adjust R18. Sometimes a misadjusted bias level (R28) can cause similar problems.

Interference may be due to ripple from the low-voltage source used to power the receiver section of the direct-video board. Changing the board to operate from a DC source in the 105–165-volt range usually clears up the problem. Also check the shields of the cables for proper connections. Another source for possible interference is the route selected for the twisted pair of wires that runs from the PC board to the inductive loop on the core of

	TABLE 2 Test Point Volta	ges
	VDC	VDC
	Min.	Max
TP1	11.0	15.0) है
TP2	5.0	8.0
TP3	5.0	7.5
TP4	0.2	0.35
TP5	5.0	7.0
TP6	10.0	12.5
В	Adju	stable
G .	2.2	4.0
J	7.0	9.0

the flyback. It is important that the pair be twisted over its entire length, and that the bundle be kept away from the demodulator, IF, and RF circuits.

Low audio output can be caused by your set requiring a higher signal level at the audio-injection point than is currently being supplied. Install C16 to boost the board's audio output.

Should your set not display external video and you have wired everything correctly, check the direct-video board for failure. Refer to Table 2 and measure the voltages at the appropriate test points. Note that the voltages at test points TP1, TP2, and TP3 are measured with respect to pad "C." The voltages at all other test points are measured with respect to chassis common or pad "F." Check to make sure you have not installed the transistors or optoisolators incorrectly.

After you've made any adjustments necessary, replace the rear cover of the set. Your newly converted set is now ready for use. Rest easy and let your eyes relax.

BUILD YOUR OWN CUSTOM CASES ROB

ROBERT GROSSBLATT

If you want your project to be appreciated by others, it must be packaged properly. Here's how to make custom cases that are sure to get your project the attention it deserves.

IF YOU'VE EVER BUILT AN ELECTRONIC PROJECT YOU KNOW THE feeling. After hours spent at your workbench, the magic moment arrives—you're finished. You go running to the rest of the house and round up the family. You gather them at the table and excitedly demonstrate your new mousetrap. Again and again you send small mechanical mice in and your new invention does all that you promised but no one seems impressed. When you start looking around for real mice the kids go back to watching TV, and your wife shrugs her shoulders, sighs, and leaves the room.


Sound familiar? What went wrong is something that even the most junior executive on Madison Avenue would recognize—poor packaging. It's sad but true. What something looks like is just as important as what it does. If you've spent every evening for a month buried in the back room building a gadget, you've also built something else—expectation.

The mistake you made with your mousetrap was simple. The project wasn't finished when you thought it was. It wasn't packaged properly. If you had spent as much time on the case as you had on the circuit, you would have gotten the desired "oohs" and "ahs" from your family. Unless your project is something for your bench—a special front end for your scope or meter, for example—something that will never see the light of day, the case is as important as the circuit.

You could just stuff everything into a standard chassis box or plastic case but the result will always be the same. A standard box gives a standard appearance. Besides, there is no such animal as a commercially available custom case. Think about that for a while.

Building a case for your project involves as much planning as any other part of the job. Once the circuit has been breadboarded and you've gotten rid of all of the glitches, it's time to consider the case. The first decision you have to make is the shape of its case. Often that will determine the shape of the circuit board and the material you're going to use for the case. Let's go back to our mousetrap. Housing it in a square box would be really boring. The nature of the project is such that it calls for something much more whimsical. We need some sort of box to hold the mice but supposing the actual entrance to the trap were shaped like a cat with its mouth open. Not only would that be eye-catching but chances are that the finished project would be on a table in the living room rather than behind the refrigerator.

Once the shape is decided, we have to choose the material. Metal is an obvious choice but it has its problems. It's hard to shape and harder to work. Unless you have access to a machine shop, precision pieces are going to be very difficult to make. And if you don't weld the different pieces together you're going to have lots of screws and tabs showing. Metal cases also have a

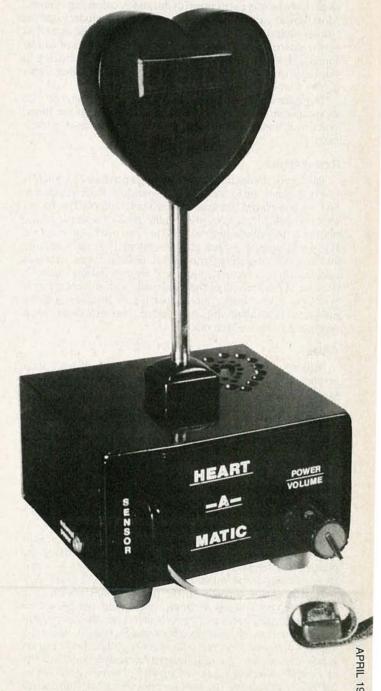

nasty habit of shorting parts of the circuit and blowing up those components it took you three and a half weeks to get by mail.

Wood is a possibility. The grain and color are attractive and it's easy to work with standard tools. The problem here is joining pieces together. Screws still have to be used and glue takes a while to dry thoroughly. That means that the pieces will have to be made and fitted together over a period of days. And any curved pieces are going to be a real problem.

Our last alternative is ideal for case making—acrylic plastic. It can be easily cut and shaped using ordinary tools, and solvent cement will immediately bond pieces together. As a matter of fact, the cemented joint is often stronger than the piece itself. The plastic can be bent and shaped by heating it and is extremely forgiving of mistakes. Repeated heating and bending won't even weaken the material. Scratches and abrasions are inevitable when working the plastic but they are easy to sand away. The plastic can be buffed and polished to any degree of luster you want.

Acrylic is available from a wide variety of sources and comes in an overwhelming assortment of thickness, colors, and shapes. Most lumber yards and stores that specialize in products for the "do-it-yourselfer" will carry a good range of acrylic as well as all the material you'll need to work it. The plastic itself can be found in flat sheets, tubes, pipes, and other shapes ranging in thickness from ½16 to over two inches. Cubes and other solids can be found in every size and color imaginable.

There are a variety of techniques you should be familiar with to successfully work with acrylic. Before trying to use them, practice on some scrap material to get a bit of hands-on experience.

Raw material

The acrylic comes in sheets measuring up to four by eight feet and in thickness up to greater than two inches. Both transparent and opaque plastic are available in many colors. The brown paper covering both sides protects the glossy finish put on the plastic by the manufacturer and also lets you mark your cuts (see Fig. 1). In general, ½-inch plastic is the most widely available and is more than strong enough for making cases, although occasionally a structural piece will require thicker material; because of the strength of the bond made with solvent cement, you can, if you wish, glue thinner pieces together in those instances. If a thinner piece is needed, you can always sand down one of the ½-inch pieces.

Glues

Although all of the glues shown in Fig. 2 will work with acrylic, without doubt the best glue to use is the solvent cement; you can get that cement at the same place you bought the plastic. It isn't really a glue in the strict sense of the word. What solvent cement does is soften and partially dissolve the plastic. When the two pieces being joined are put together the bond formed between them is as strong, if not stronger, than the plastic itself. The joint hardens in a minute or so and can be sanded or shaped immediately. The solvent action of the cement can cause problems, however. If you press your finger against any part of the plastic that has been softened by the cement, you'll leave your fingerprints in the surface. They can be sanded out but it's better to avoid doing it in the first place.

Remember though, solvent cement *only* works with pieces of acrylic. Anytime you want to glue some other material to the plastic, a different glue will have to be used. Both two-part epoxy and any of the instant-bonding cyanoacrylate glues work well. The choice depends on the particular application. The two-part epoxy will fill in empty spaces and can be sanded smooth, but the instant glues are contact types; that means that they will only work when the two surfaces being joined mate together perfectly. One interesting feature of the epoxy cements is that they can be colored. Powdered fabric dyes work well but be careful—a little dye goes a long way. The best method I've found is to mix the two parts of the epoxy together with a small amount of the dye and stir them until the color has become

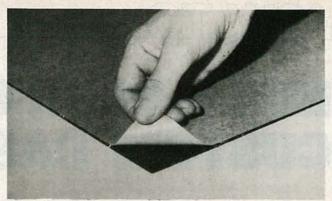


FIG. 1—WHEN YOU BUY IT, acrylic plastic is usually covered with brown paper to protect its surface. That paper is easily removed.



FIG. 2—ALL OF THESE GLUES will work with acrylic plastic, but the solvent cement is best for joining two pieces of plastic.



FIG. 3—ACRYLIC PLASTIC CAN BE EASILY BENT into any shape, if it is heated.

uniform. Slowly add more dye, mixing it in continuously until you get the color you want.

Tools

Any tool used for woodworking can be used with acrylic plastics, including power and hand tools. The only thing to watch out for is heat. If you are using power tools there are two basic precautions to be aware of. Make sure to use only the bits and blades that have been specially rated for use with acrylic. That usually means that the blades have fine teeth and are not hollow ground. The bits should be sharp enough to bite into the plastic without having to apply an undue amount of pressure. Rough cutting blades and bits will crack and shatter the plastic

and dull ones will generate so much heat that the plastic will melt at the cut and the waste, rather than falling away, will melt together and harden behind the blade.

Sanding and polishing

Acrylic is easily sanded. The key to success here is to avoid the build-up of heat. For general work, I've found that a medium grit paper is the best to start with. Coarser papers score the plastic and leave sanding marks that are almost impossible to remove. If you use a sanding disc on an electric drill, you'll get the best results by use the drill's highest speeds—the higher the speed, the less pressure you have to apply. Do the sanding in short bursts to keep the heat down; if you have to sand off a ¼ inch of plastic, do ¼ inch at a time. If you try to do it all at once, you will generate so much heat that the plastic will melt at the surface and leave deep marks. That is to say nothing of the blocking up that will happen to the paper. There will be so much build-up of hardened plastic on the sandpaper that you'll have to replace it. If you've ever sanded paint you know what I'm talking about.

Polishing the plastic is similiar to polishing metal. Use successively finer grits and then use fine steel wool. Always sand in the same direction. The last bit of polishing you need to do is with a kitchen steel wool pad. Use a new one that's loaded with soap. That will leave a very high luster on the plastic and the sanding marks will be just about invisible. If you want to go farther, use 0000 steel wool and oil and do the final polish with a soft cloth and pumice. Keep in mind though, that the plastic is really susceptible to scratches and there's nothing like a mirror-smooth finish to show off imperfections.

Bending and shaping

Now we get to one of the best reasons for using acrylic plastic. Anyone who has ever tried to get uniform curves in flat pieces of metal, or shape a smooth curve in wood, will appreciate the ease with which it can be done in plastic. There are two basic ways to shape the plastic—sanding and heating. If you want to round a corner or taper something, sanding is your best bet. Use a medium-grit paper on a sanding disc and carefully shape the plastic. Examine your work frequently because it goes very quickly and it's easy to go too far. Remember that a little bit of impatience on your part when sanding something to shape will ruin both the last three hours work and the rest of your day.

Creating a curve, or some other complex shape, from a flat piece of plastic is done by heating. Acrylic becomes bendable when it gets to a temperature of about 350 degrees Fahrenheit. That isn't particularly high and there are several commercially available tools made especially for heating plastic to that temperature. Basically, they are all heating elements that have some sort of guard on them to keep the plastic about ¼-inch away. You hold the plastic against the guard and bend it when it softens. Those are fine for creating a simple corner or lip but are useless when you're trying to bend the plastic to conform to some complex jig.

There are several ways to heat the plastic so it can be wrapped around a bending jig. You can use a hair dryer but that takes a long time, because the hair dryer has to be kept away from the plastic so the air flow isn't restricted. If you hold it too close, the motor will load down and the dryer will blow its thermal fuse. You can heat the plastic over a high-wattage lamp but it's hard to work with spots in front of your eyes, and there's always the danger of the plastic touching the lamp and either sticking to it or breaking the glass.

The simplest way to heat the plastic is over an open flame from either a candle or the top of the stove, as shown in Fig. 3. The only problem with that is that the plastic can start to burn; but that can be avoided by moving the plastic rapidly in and out of the flame and only using the cooler part of the flame (at its base). If the plastic *does* start to burn, it's a simple matter to blow it out or douse it in water. The advantages of doing it that way are that the plastic heats quickly and the flame provides only localized heat, which means that a long complex bend can be

made a little at a time. The acrylic is a good insulator and only the area in the flame will get hot enough to bend. As a result, as you work your way along a complex bend, previously curved areas will stay that way. As you finish each part of the bend, set it by immersing it in cold water. That will immediately cool the plastic and make it rigid again. Don't force the plastic to bend because it will break. There's absolutely no way you can be mistaken about when the plastic is hot enough to bend—it will flap around like a piece of wet cardboard and stay that way more than long enough to let you make your shape. Wear protective gloves because not only can you burn yourself, but it's impossible to have any control over the plastic unless you can hold it firmly while you're bending it. And remember that you have to hold it until it cools off enough to become rigid again.

Cutting

The best way to cut acrylic is with a saw, as shown in Fig. 4. That sounds a bit trivial but it isn't. Plastic suppliers sell a scribing tool that's used to score the plastic so it can be broken much the same as glass—I've never gotten that tool to work. When I went back to the supplier to ask if I was using it correctly I noticed that they always used a saw—case closed. As long as



FIG. 4—THE BEST WAY to cut acrylic plastic is with an ordinary power saw, as shown here.

you make sure that the blade is designed for acrylic, and you don't force the cut you'll find it easier to cut plastic than to cut wood

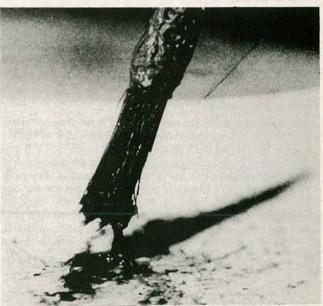


FIG. 5—ONE THING YOU'LL APPRECIATE about working with plastic is that you can correct mistakes with an easy-to-make paste.

"Welding" and embossing

That technique is extremely useful and can only be used with plastic. Because we're all human, we make mistakes and cuts aren't always made as smoothly as we'd like. If a gap turns up along a joint there's an easy way to correct it. Save the plastic "sawdust" and soak it with solvent cement. Work it around with a brush and you'll wind up with a pasty gunk like that shown in Fig. 5. That can then be used to hide any minor mistakes, such as mis-cuts, imperfections, and even small holes. As shown in Fig. 6, work the gunk into the gap with brush that is kept soaked in cement-if the brush gets too dry it will start pulling the gunk out of the gap. A bit of brushing back and forth, and the gap will be entirely filled with plastic gunk. The color will be the same as the surrounding area and, after sanding, will be flush with the surface. Make sure to allow time for the repair to dry before sanding it-since you've really soaked it with cement you'll find it takes longer to dry than a regular joint. That "welding" technique will go a long way toward correcting errors in measurement and slips of the saw. After a bit of practice you'll find that corrections made by welding are virtually invis-

Embossing is a technique that also takes advantage of the solvent action of the cement. If you brush cement repeatedly over an area of plastic it will get soft enough for you to press in a design, as shown in Fig. 7. The only precaution here is to make sure that whatever you press into the plastic is unaffected by the cement. You want to remove if after you've pressed in the



FIG. 6—TO FIX ANY CRACKS OR HOLES, fill them with plastic shavings soaked in solvent cement. After it dries and is sanded smooth, the repair will be almost invisible.

design. Coat the embossing piece with some thin oil before pressing it in the plastic. That ensures that the plastic won't stick to it and ruin the transfer of the design. After the acrylic has hardened, brush it lightly with fine steel wool to remove any burrs.

Screws and hinges

Although regular hinges can be used, it's much neater to use pins or brads. If your case requires a door, design it so that the door fits snugly and flush between two other pieces. Drill thin holes through the side pieces and the edges of the door. Push in small wire brads as shown in Fig. 8. If you're careful about your sizes, the brads will fit tightly and you won't have to use any glue. Don't force the brads in, because you'll only crack the plastic. If they're not tight enough, use a drop of cyanoacrylate glue on the side piece to hold the brad in place. Make sure not to cement the brad in both the side piece and the door. When the glue dries, grind the end of the brad flush with the side piece. Make sure that the door opens easily and stays in position when it's closed.

The same precaution against forcing things applies to screws. Acrylic is rigid and won't compress, so the hole sizes for screws are more critical than they are with wood. Make the screw hole

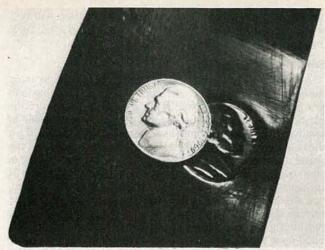


FIG. 7—IF YOU SOFTEN THE PLASTIC with solvent cement, you can emboss any designs you wish into the surface.

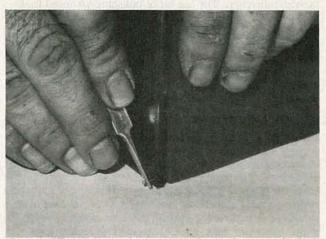


FIG. 8—IF YOUR PROJECT requires hinges, make them by inserting small brads into pre-drilled holes.

at least as wide as the inner shaft of the screw. It goes without saying that you shouldn't use tapered screws. If there's any doubt about the size of the hole, make it larger and stuff in part of a toothpick. The screw will compress the wood and that will keep the whole thing tight.

Lettering

Transfer-type lettering is available in a wide variety of fonts, sizes, and colors. You can even get sheets with graphic designs, borders, lines, and so on. The secret to making lettering look good is simple—keep it straight. Put a piece of masking tape on the case about a 1/4-inch below the line for the lettering and use it as a guide. A fairly wide burnisher will lessen the chances of having hairline cracks develop in the letters. Once lettering is applied, it has to be protected because it is fairly easy to scrape it off-that is great for correcting mistakes but when you finally get it straight on the tenth try you want a bit more permanency. Any art-supply store will sell you a protective spray, or you can get a can of spray lacquer. Use it sparingly and avoid runs. Spray the entire case to make the finish uniform, and don't handle it until it's dry. An easy test to see if the case is dry is to smell it-if it is wet, you'll know it. When the lacquer is dry it will no longer have an odor.

With a little bit of practice you will be able to make cases that do justice to your electronics handiwork. And I'm sure that you'll even find that your projects work better. You can be sure that housing your project in an imaginative case will make all the difference—everyone in your family will want to be first in line to try it, instead of first in line to leave the room.

New!...the 25" Heathkit **Television Computer System**

Introducing the new GR-3000...the first information center. telephone, terminal, video bulletin board. modem and microcomputer interface... all part of the most future-thinking color television available for tomorrow, today.



The GR-3000 Television Computer System is the only receiver designed to bring you all the unlimited information plus entertainment in this spectacular new era of multisource televiewing.

An exclusive new microprocessorbased "teleplex" receiver.

The GR-3000 is an expandable kit with

plug-in capacity for eight microprocessor controlled modules. The basic modules are here now. In coming months, you can add new internal components to be ready for more advanced data retrieval, telephonic networking, and other growing life-service technologies. But even now, with standard chassis.

GR-3000 is television as you've never seen it before. Why?

A multi-level screen display delivers your choice of 4 test patterns, super-steady Monitor

Mode, and the Message Center with 16 combinational text and backdrop colors. The broadcast screen offers direct audio and video i/o, an ultra-clear picture with channel, time and date overlay. Six screens of 'help' hints make

> Infrared telemetry Remote Control. This 56-key pad can access almost every programmable feature under microcommand, including all adjustments for picture correction. And the imagination-stretching Learn Mode function, for infinitely versatile sequenced operation. Type in personal messages on your GR-3000 and the real-time calendar clock displays them whenever you want.

the system user-friendly.

Battery back-up preserves important data. And an **Exclusion Password will** protect preset picture fidelity parameters.

More to come.

New modules are arriving soon, to bring you further into the teleconsumer age:

Directory Dialer and Modem Interface. GR-3000 will become a two-way speaker phone with memory, auto-dial and modem capabilities.

Serial Interface will instantly access outside

computer services and information, plus provide RS-232/C interface with any compatible computer in the world and work as a superb color graphics terminal The Programmer will add greater

memory for programming TV functions and control protocol for remote computing.

View a GR-3000 today at your nearby Heathkit Electronic Center, or act now and call toll-free 800-253-0570 for Visa or Master-Card orders.




..not just a tv

Heathkit

Company

CIRCLE 6 ON FREE INFORMATION CARD

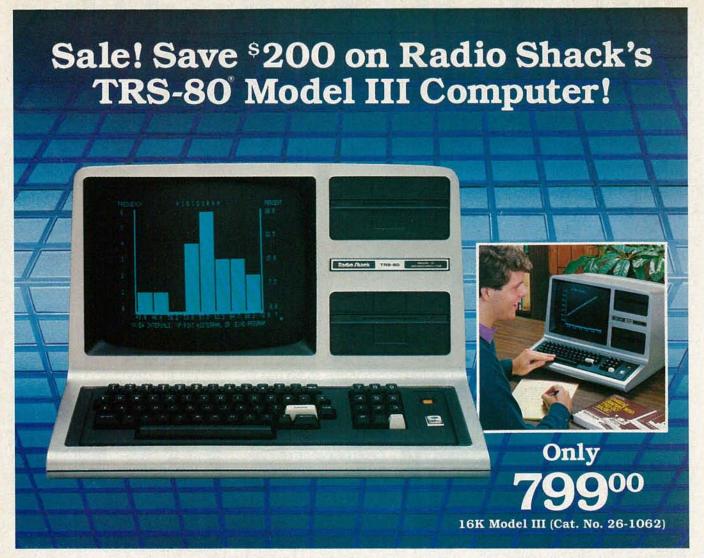

Get started in computing the easy—and affordable—way with the versatile and powerful TRS-80 Model III. It's the "user-friendly" computer that grows with you as your needs and skills increase. And now, it's sale-priced at only \$799 (regularly \$999)!

No Experience Necessary. You don't have to be a computer expert to use a Model III—just add a recorder and our ready-to-run cassette software. It's easy to manage your personal budget, keep track of investments, prepare statistical analyses, write letters and reports, computerize your household records, even play exciting action games.

Learn to Write Your Own Programs. Our entertaining, step-by-step manual introduces you to BASIC programming—and makes the Model III the ideal way to become part of the "computer revolution".

The Extras Are "Built-In". The attractive one-piece cabinet contains a 12" high-resolution monitor, which displays 16 lines of 64 upper and lower case characters per line, a 65-key typewriter keyboard with datapad, 16,000 characters (16K) of internal memory and a parallel printer interface.

Expand Your Horizons. It's easy to configure your Model III into a more powerful system. Expand to 48K internal memory, and add one or two internal double-density disk drives with 184K each, or even a 5-megabyte hard disk drive. Add high-resolution (640×240) graphics, a printer, a plotter or an RS-232C serial board and modem for communications.

Hurry—Sale Ends April 25, 1983. You can get your Model III at a nearby Radio Shack Computer Center, store or participating dealer. Do it today!



Radio-Electronics. YOUR DWN GOINGS OF THE STATE OF THE

Computer Basics * Gadgets and Gizmos All About Modems * Accessory Boards Printers * Data Terminals * Disk Drives



TIMEX MAKES THE COMPUTER, BUT WE MAKE IT TICK.

If you own a TS-1000 or ZX-81 computer and want to bring out the power within it, you'll want Memotech. From easier input to high quality output and greater memory, Memotech makes the add-ons you demand. Every Memotech peripheral comes in a black anodized aluminum case and is designed to fit together in "piggy back" fashion enabling you

to continue to add on and still keep an integrated system look.



MEMOPAK RAM All Memopak RAMs are directly addressable, user transparent and are neither switched nor paged. No additional power supply is required. 16K RAM BASELINE The 16K Baseline is our most economical way to add memory to your TS-1000. It is fully compatible with Memopak 16K and 32K RAMS to provide you with up to 32K or 48K of RAM respectively. 16K RAM The Memopak 16K RAM offers expansion capabilities through its "piggy back" connection and is fully compatible with Timex or Memotech 16Ks to give a massive 32K of RAM. 32K RAM The 32K Memopak enables you to execute sophisticated programs and store large data bases and like the 16K RAM is fully compatible with Timex's or Memotech's 16K RAMs to give you a full 48K of RAM. 64K RAM The 64K Memopak is powerful enough to turn your TS-1000 into a computer with capabilities suitable for business and educational use. It accepts such BASIC commands as 10 DIM A (9000). MEMOCALC Memocalc, our spreadsheet analysis

software, enables TS-1000 users to perform complex number crunching routines with ease. With the 64K RAM a table of up to 7000 numbers with up to 250 rows or 99 columns can be specified. Quick revisions can be achieved by entering new data to your formula.

MEMOTECH KEYBOARD For ease of operation, the Memotech keyboard is a high quality standard typewriter keyboard, with TS-1000 legends. The keyboard is cable connected to a buffered interface which is housed in a standard Memopak case and plugs directly into the back of the





TS-1000 or other Memopaks. MEMOPAK HRG The Memopak High Resolution Graphics, with up to 192 by 248 pixel resolution, enables display of high resolution "arcade game" style graphics through its resident 2K EPROM, programmed with a full range of graphics subroutines.


CENTRONICS PARALLEL AND RS232 INTERFACES

Memotech's Interfaces enable your TS-1000 to use a wide range of compatible printers. The resident software in the units gives the

complete ASCII set of characters. Both Memopak Interfaces provide lower case character capabilities and up to 80 column printing. The RS232 Interface is also compatible with modems and terminals. SEIKOSHA GP 100A PRINTER The Seikosha GP 100A uses a 5x7 dot matrix printing format with

ASCII standard upper and lower case character set. Printing speed is 30 characters/second with

maximum width of 80 characters. The printer uses standard fanfold paper up to 9-1/2 inches wide. The GP 100A is offered as a package including cable and



interface. Other printer packages are also available through Memotech.

ORDER AT NO RISK. All Memotech products carry our 10 day money back guarantee. If you're not completely satisfied, return it within ten days and we will give you a full refund. And every Memotech product comes with a six month warranty. Should anything be

defective with your Memotech product, return it to us and we will repair or replace it free of charge. Dealer inquiries welcome. To order any Memotech product use the order coupon or call our toll-free number 800/662-0949.

TS-1000 is a registered trademark of Timex Corp.



ode:	Price	Qty.	Total
16K RAM Baseline	\$ 49.95	W N	
16K RAM	59.95		
32K RAM	99.95		
64K RAM	149.95		
Memocalc	49.95		
Keyboard with Interface	99.95	14030_	-
High Resolution Graphics	99.95		- 7
Centronics Parallel Interface	74.95		
RS232 Interface	99.95	115	
Printer Cable	19.95		
CP 100A Printer Package**	399.00		
Shipping and Handling	4.95		\$4.95
Tax (Colorado residents only)			
TOTAL			
*All prices quoted in U.S. dollars. Prices : **Please add an additional \$5.00 for print Check	and specifications subjecter shipping charges. Exp.		without notic
		1	
Name		Phone	number
Address		1 11 11	

RADIO-ELECTRONICS





Radio Electronics YOUR DWN PAPAIL 1983

Are you considering buying a microcomputer? Then, you should first learn how a microcomputer operates. Once you have even a basic understanding, it is easier to ask the right questions when it comes time to buy the system.

MARC STERN

IN WHAT HAS SEEMED LIKE AN EXPLOSION, THE COMPUTER revolution has arrived. In only the last eight years, the personal computer has moved from the province of hobbyists and "hackers" to take a place in business offices and—what has really made it a revolution—the computer has moved into thousands of homes

Whether that has been due to the videogame explosion, or the marketing efforts of major manufacturers, or the public's recognition of the power and capability of the microcomputer, we will not go into. But, suffice it to say that hundreds of thousands of people, who, a few years ago, didn't know BASIC or the meaning of ROM or RAM (and maybe they still don't!), are now using personal computers.

And it seems that each week thousands more are jumping onto the microcomputer bandwagon. They are buying not only lowend, home systems, but also high-end systems such as the IBM Personal Computer. Further, it seems that for every person who does buy a computer, two or three more are considering a purchase. However, they are hesitating because they lack information—they have many questions that need to be answered. In the following pages we will attempt to answer some of those questions and familiarize you with some commonly-used terminology.

Overview of a computer system

For the first-time buyer, perhaps the best way to visualize a system is to break it into its major parts. In general, a computer consists of the CPU (Central Processor Unit)—and the mother-board or system board that connects the CPU to other devices for input and output (I/O) and storage. Figure 1 shows a block diagram of a basic microcomputer system.

The CPU, which is sometimes called the MPU or microprocessor unit, is the "heart" of the system. But that by itself would not make a computer. It is also necessary to have, among other things, memory. There are two basic types of memories: RAM and ROM. RAM (Random Access Memory) is memory in which data can be either written or read. It is like a large holding area of information. It either holds active information for immediate

use, or it stores data for later use by the CPU. A ROM (Read-Only Memory) on the other hand is a memory that can only be read. Once the information is put in the ROM it cannot be changed. The mass storage device is another type of memory. An example of a mass storage device is the floppy disk drive, which allows you to store great quantities of information and programs on a magnetic disk.

A CPU with memory still does not make up a computer. There must be some way to input information to the computer and for the computer to output information. One way that is accomplished is by parallel and serial interfaces. Those interfaces connect the microcomputer to other devices such as printers, keyboards, etc.

That, then, is the basic outline of a personal computer. Of course, there is much more that we could have included, but for starters, that outline will suffice.

With those basic concepts established, let's look more closely at the personal computer, beginning with the CPU and progressing to the other areas of the system.

The CPU and bus structure

The CPU includes the microprocessor and any necessary support circuitry. The "standard" CPU is an 8-bit device (a bit is a binary digit). That CPU handles information eight bits (or one byte) of data at a time. (Thus the data bus shown in Fig. 1 actually consists of eight data lines.) A byte is often referred to as the "word size" of the microprocessor.

The address bus, on the other hand, consists of 16 lines. That lets the microprocessor address 2¹⁶ memory locations. Although 2¹⁶ is referred to as 64K (64 kilobytes), the actual number is a little over 65,000, because 2¹⁰ or 1,024 bytes of information is commonly referred to as 1 kilobyte or 1K of information.

The third standard microprocessor bus is the control bus. It consists of from 10 to 12 lines, depending on the particular CPU. It is mainly used to carry synchronization signals between the microprocessor and other system components. Typical signals are: read, write, interrupt, and reset.

With all of this said, a question probably has arisen in your

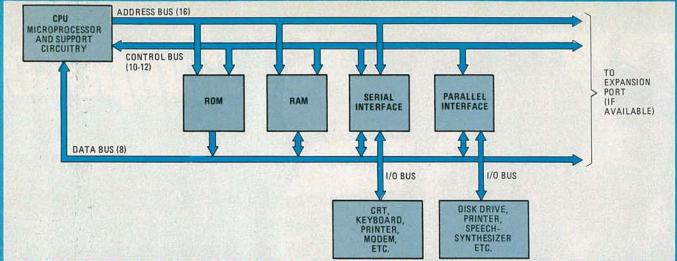


FIG. 1—BLOCK DIAGRAM of a basic micromputer system. Note the arrows on the bus lines. They indicate the direction of information flow.

mind as to which type of CPU is best. The answer is that for most personal computing uses, it makes little difference what type of CPU is used. In a given situation, a 6502 will work just as well as a Z80 or an 8080.

There is a "but" in this situation, though, and that is for the computer user who wants access to, say, the broad range of CP/M programs. CP/M (Control Program for Microcomputers) is the standard operating system of the 8-bit-system world and many business programs are written under it. It was written for the 8080 series of microprocessors and is also compatible with the Z80 series. Thus, if you want access to those programs you must use one of those microprocessors. There are emulators that allow you to use CP/M with other CPU's, but the programs will work slower when that is done.

We will not discuss operating systems in great detail. What we will say is that the operating system effectively isolates the computer user from the computer hardware. It also makes the particular computer "invisible" to the software. What that means is that if two different computers—even with different microprocessors—use the same operating system (say, CP/M) they will both be able to run the same software, as long as the software is written for that operating system.

The CPU world is changing. Although it is still dominated by 8-bit microprocessors, 16-bit systems are starting to appear in increasing numbers. Chief among the 16-bit units is the 8086/8088 family, which is capable of running under the MS-DOS operating system. That is the operating system that has been adopted by IBM. Because so many systems are being designed to run under it, it is likely that MS-DOS will become the "standard" of the 16-bit microcomputer world. However, a 16-bit version of CP/M—CP/M-86—may give MS-DOS a run for the money.

Memory

Although we previoulsy mentioned ROM and RAM, we did not say what each one was used for. First, we'll give an example where you would want to use read-only memory (ROM).

There are some programs that you would never want to change. An example is the bootstrap loader routine (that program gets the system up and working when the computer is first turned on). That routine is stored in ROM. ROM, as its name implies, is not user-modifiable (you cannot write to it). It is important to note that ROM also is non-volatile. In other words, ROM will not lose its memory contents even if the power is turned off. Another example of where ROM is used is in videogames. The program that runs the game computer is stored in the videogame cartridge in ROM.

The contents of RAM, on the other hand, are constantly changing. It is in RAM that you would store, say, a BASIC

program. RAM can be thought of as the microprocessor's work space. It is essential to a micromputer because the system needs a way to store and frequently update information as it is used. RAM is volatile; when power is turned off, the contents of the memory will be lost—unless you record it on disk or other storage medium.

One of the most often asked question by the first-time microcomputer buyer is how much RAM is sufficient? The answer is as much as you can comfortably afford—but there is no such thing as enough memory. A bare minimum, good for games and some applications programs, is 16K. However, 48K or 64K is a much better place to start. No matter how much memory you have, though, sooner or later you're going to run up against a program that needs more memory. Or, you may use a program, which, while it runs with the memory you have, it would perform better with more memory.

Inputs and outputs

There has to be a way to communicate with the computer, and for the computer to communicate with you. The communication is called input and output (I/O). Let's now look at some possible inputs.

First, we'll look at the keyboard. When you input data via the keyboard, the information is first sent to the *keyboard processor*, where the electrical impulses that are generated by the keys are turned into codes that can be read by the microprocessor. Once the keystrokes have been encoded, they are then directed not only to the display, but also to RAM where they are stored until they are processed by the CPU.

Another possible source for an input is a mass storage device, such as a disk drive. The data stored on the floppy disk is first read by the read/write head and is then sent on its way to the system bus. The data may either be used immediately by the CPU or it might be stored in RAM until it's called by the CPU.

Other inputs can also be entered via the input/output interfaces (I/O ports). There are two basic types of interfaces: parallel and serial. A parallel port transfers the data eight-bits (one byte) at a time. A serial port transfers the data one-bit at a time.

In a microcomputer system, input is generally handled via a serial port, while output-only is usually handled by a parallel port—although either port can be used for both input and output.

One example where you would use a serial port for information input is for connection to a modem (MOdulator/ DEModulator). With a modem, it is possible to communicate with other computers using a telephone line. (See article on modems, elsewhere in this section.)

That pretty much completes the general picture of the input side of the microcomputer, but that is only half of the picture. We must take a look at how data is output.

Again the two ports, parallel and serial, are used for output. When a user decides to output something to a printer for hardcopy purposes, he requests that action from the CPU. That keyboard request is then processed and the CPU searches RAM for the information to be output through the printer. When that information is found, the CPU not only flashes a message on the CRT, but it also sends the information to the port that is to be used. If the data arrives too quickly for the printer to handle, the overflow is shunted into a buffer where it is stored until the printer or plotter can handle it. Either a parallel or serial port can be used for output to the printer. However, a parallel port handles data much more speedily than a serial port because the data is transferred eight bits (one byte or word) at a time. However, there are disadvantages to using the parallel port. First, it is prone to picking up stray noise that can cause datatransmission errors. That is especially true if you are trying to communicate over long distances.

A second disadvantage is that there is no set standard for parallel ports—each microcomputer manufacturer has his own idea of the type of interconnection to use with a printer or other parallel device. Of course, there is the Centronics-compatible standard for printers, but once you have wired up a connector for such a device, you will find that about the only thing agreed upon with this standard is the type of connector. It seems that each microcomputer handles things just differently enough to cause problems. Another standard parallel interface is the IEEE-488 bus. That bus is most commonly used for scientific per-

ipherals.

The more reliable, although slower, interface is the serial interface. That type of interface uses fewer wires and is much less sensitive to stray noise pickup. Further, since fewer wires are used, cabling costs can be reduced. The key disadvantage when compared to parallel transmission is its speed. It is slower because information is sent serially—one bit after another.

There is a standard to cover serial communications interfaces and make them all compatible (the RS-232C standard). However, while the RS-232C protocol is standard, some manufacturers do not use all of the lines, and others may tie some lines high or low. Keep that in mind when interfacing peripherals.

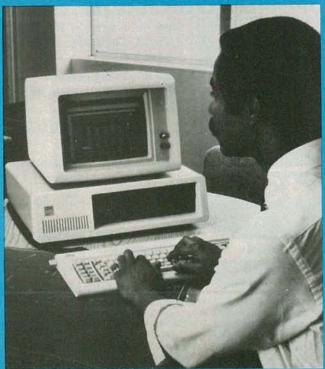


FIG. 2—With a monochrome display, the IBM Personal Computer can be used for word processing or other applications that require high-resolution graphics. (See Fig. 3.)

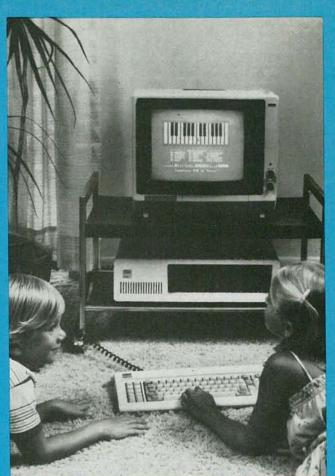


FIG. 3—Often, the display can limit a computer's capabilities. For example, when used with a TV, the IBM *Personal Computer* cannot be used for word processing. (See Fig 2.)

Other considerations

There are other questions that you should ask yourself before buying a personal computer. Of course we cannot cover all situations here, but we will give some examples of things you might want to consider.

Many computers are meant to be used with a TV. That, while reducing the cost of the system, is not all that desirable. The limited bandwidth of the TV does not allow it to reproduce high-resolution graphics. (See Figs. 2 and 3.)

What, then, is the best display? That very much depends on

what you plan to do with with the computer.

Let's first presume that you want to use your computer mainly for word processing and record keeping, and thus do not need a color display. Then, the question you should be asking is what type of monochrome (single color) display you should use. Experts have long noted that a black-and-white display is the hardest on the eyes. Although it is highly visible, that type of display is the most fatiguing to use. A green-on-black monochrome display is better on the eyes. It is easier to read and use under conditions of glare, and it is much less fatiguing. There is a current controversy, however, about whether an amber-on-black display is easier on the eyes than the green-on-black. In fact, just about all of Europe has mandated the amber-on-black type of screen format. In reality, though, the jury is still out on the question and it is probable that both displays will come out about even in the final analysis. Definitely, though, either is better than a black-and-white display.

Whichever type of display you choose, it should be capable of reproducing 80 columns by 24 lines of text for word processing. The reason is that that is the industry standard and it is also about the number of columns you can reasonably expect on an average piece of paper.

There are systems which only display 40, 52 or 60 characters and those require special add-on boards to make them capable of 80-column display. Further, many of those units generate capitals-only, which makes them almost useless for true word processing, unless the correct hardware fix is made.

Perhaps you plan to use the computer to generate color charts and graphs, or for other color computer graphics. Therefore, you need a color monitor (of course your computer must be capable of generating color graphics to use that). Although some color computers can use a color TV for a display, a monitor with R-G-B (Red-Green-Blue) inputs should be used because it permits higher-resolution graphics. A color TV, because of its narrow bandwidth, is not capable of high-resolution graphics unless it is modified.

Of course, a monitor cannot reproduce high-resolution graphics if the computer cannot generate them. Conversly, it is important to remember that the monitor should be capable of reproducing the graphics that the computer can generate.

Don't forget the keyboard; it should be typewriter-like in its features. That's because that type of keyboard is one with which most of us are familiar. Try to avoid those keyboards which have nonstandard placement of important function keys. A useful convenience on a keyboard is the separate numeric keypad. If you do a great deal of number entry, that feature is a necessity more than simply a convenience.

Another feature that you might find convenient is a detatchable keyboard. That would allow you to use the keyboard in your lap or to move it to a convenient place on a desktop. However, on some systems, that's not possible.

Do not forget some type of mass storage device when shopping for a computer. Two popular mass storage devices are the disk drive and the common cassette recorder. Although you might be able to get along for a while using a cassette recorder, you will really need a disk drive if you want to use your

computer for serious applications. To handle as much information as possible, double-sided, double-density drives are preferred for mass storage. However, if those are beyond your means, make sure the single-sided drives you buy are at least capable of double-density data encoding. It gives you far greater data storage.


The microprocessor that the computer is based on can be important. There is no definitive "best" microprocesser. As we mentioned before, though, if you want access to the wide spectrum of CP/M-based business programs, then your obvious choice is a Z80 or 8080-based system because these are the microprocessor units for which the CP/M operating system was devised.

What about the 16-bit CPU's that are becoming more popular? You've probably heard that 8-bit systems aren't as capable as 16-bit devices. In truth, the answer is that the microcomputer industry still hasn't taken advantage of the full power of the 16-bit CPU and most of the programs those systems run are really rewritten 8-bit programs. Eight-bit microcomputers will perform for you equally as well in a single-user situations, so don't worry about it. However, the 16-bit CPU does have an advantage in that it can address more memory—it can address more than 16 megabytes, while the 8-bit CPU is limited to 64K.

What peripherals are most necessary and useful? Probably the first item you should choose is a good printer. The second should be a good modem. Those will allow you to have not only hard copy printouts, but also with the modem you will be able to have access to remote databases, friends' computers, and information services.

Microcomputer buying doesn't have to be frustrating. The key to making it easy is to learn and to take the time to ask questions. Then, you have to ask yourself what you really need. Once you know the answer to that, you'll be able to join the microcomputer revolution that is here—to stay.

BUILD YOUR COMPUTER BREADBOARDS & INTERFACES FASTER AND EASIER WITH NEW VECTOR PLUGBORDS

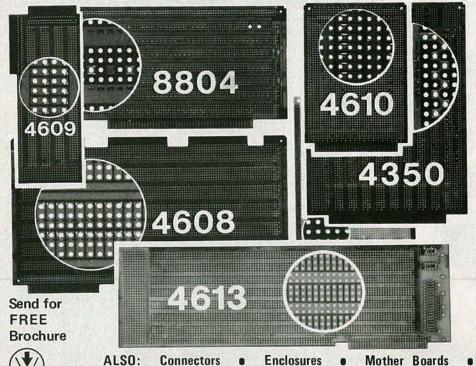

New 4613 series — for IBM Personal Computer. Three models available.

New 4614, 4615 series — for VME Bus. Six models available.

4610 series — for STD-Bus. Three models available.

4608 series — for Multibus solderable, or unpatterned.

8804 series — for S-100. Seven models available.

4607 - for DEC LSI-11/PDP8-11, Heath-11.

4609 — for Apple II, Super-Kim, Pet Commodore with Expandamem.

4350 - for TI 980

4611 series — for Motorola Exorciser

Extenders

748209

VECTOR ELECTRONIC COMPANY, Inc., 12460 Gladstone Ave., P.O. Box 4336, Sylmar, CA 91342-0336; (213) 365-9661





Entry-Level Computers

If you want to learn about computers and programming, but are not interested in paying a large price to own your own system, take a look at some of these "entry-level" computers. For learning purposes, they offer a value that is hard to beat.

HERB FRIEDMAN

with an understanding of BASIC programming, that's one of the few areas of agreement. As you'll see, each has its own ideas about what an "entry-level" computer should offer. Neither their software nor peripherals (accessory equipment such as printers, modems, etc.) are interchangeable. Also, in most instances, most popular peripherals cannot be used at all without purchasing a relatively expensive interface device. (We'll have more on that subject later.)

Start small

Of course, the best way to learn what computers are all about is to simply use one. Unfortunately, to most general-audience newspapers and magazines that usually means a "minimal system" consisting of a color computer with at least 48K of memory, two disk drives, a printer, a color monitor, and about \$3500 to pay for it all—anything less "simply isn't worth the expense." In truth, by using a rock-bottom-priced "entry level" computer—a model specifically intended for someone getting started in personal computing—you can attain "computer literacy" for as little as \$85; and by the time you're finished you'll have an excellent understanding of how computers and their programs work. You'll also be able to program in BASIC quite

NO MATTER WHERE YOU WORK, OR WHAT YOU DO, ONE THING

has now become very clear—your chances for advancement, promotion, or making a success of your own business may depend on how well you adapt to, or understand, modern com-

puterized equipment and programs. Sorry to say, you will not be

able to sit out the computer age-even just trying to prove the

bank made an error on your checking account will require some

understanding of the type of errors computers make.

Many of the best known consumer-electronics and personalcomputer companies provide models specifically intended for the newcomer to personal computing: among them are, Atari (1265 Borregas Ave, Sunnyvale, CA 94086), Commodore (487 Devon Park Rd., Wayne, PA 19087), Radio Shack (One Tandy Center, Ft. Worth, TX 76102), Texas Instruments (PO Box 225012, MS-84, Dallas, TX 75265), and Timex/Sinclair. Except for the computer from Timex (1579 Straits Turnpike, Middlebury, CT 06762)—the Timex/Sinclair 1000, perhaps bettter known as the Sinclair ZX81 (50 Staniford St., Boston, MA 02114)—all entry-level computers are "color computers" that can generate multi-color backgrounds, characters, and graphics, although the nature of the color capability varies from model to model. And, again with the exception of the Timex 1000, entry-level computers have some form of a musical-tone generator that allows the user to create sound effects for games, or even compose music.

While each manufacturer agrees that computer literacy starts

It's on TV

Though there are no standards as such, most models have several features in common. To start off, all use a standard TV-receiver for the display, and all come with the necessary switch-box so that the TV can function normally when the computer is not in use.

That display system works this way: A video modulator built into the computer, or one attached through a cord that provides the power and video from the computer, converts the computer's video output to an RF signal on TV Channel 2, 3, or 4. (Two of those three—usually 2 and 3 or 3 and 4—are provided; the user selects the channel not being used in his or her area.) The modulator is really a low-power TV transmitter that "broadcasts" the computer's output to the TV through a shielded patch-cord. As far as the TV is concerned, it is receiving an authentic TV signal so it displays the computer's output as a TV "picture." Also, sound effects and/or the output from the music synthesizers found in those computers are "transmitted" as a TV sound-carrier and are heard over the TV's speaker.

Whether the signal the computer receives is from the computer or a TV-antenna is determined by a switch-box as mentioned earlier. It's exactly the same as the ones provided with videogames: a small metal box with a slide switch that has connections for a TV antenna and the computer's output signal, and an output connection for hooking up the switch to the TV set (see Fig. 1). Whether the switchbox is intended for use with 300-ohm twinlead or 75 ohm coax, depends on the particular computer rather than the price. If you don't get the one you need with the computer, you can buy one at a nominal cost from an electronic-parts or video-tape retailer.

As to the type of TV set or monitor you need, a color unit is required only if you want to take full use of the machine's color

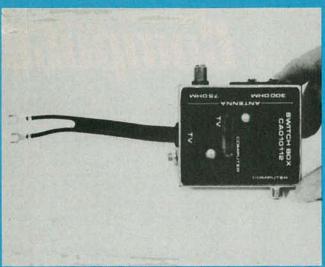


FIG. 1—ALL ENTRY-LEVEL COMPUTERS come with a TV switchbox that allows a standard TV set to serve as a computer monitor as well.

capability. Otherwise, a black-and-white unit will work perfectly well.

Another feature common to all machines of this type is a cassette I/O (Input/Output) connection. All entry-level computers provide some means for using a cassette recorder for mass data-storage. Programs and data written by the user can be saved (stored) on cassette tape, or pre-recorded programs and data can be loaded into the computer from a cassette tape. The cassette I/O connections on the Timex and Radio Shack computers are standard phono jacks, and virtually any cassette recorder—even a cheap \$20 model—will work just fine. The Timex uses the least sophisticated system of all and the user must manually start and stop the recorder. On the other hand, the motor of a cassette recorder used with Radio Shack's Color Computer is under program (computer) control: It is started and stopped by the computer, or it can be manually controlled (whichever is more convenient for the user).

The computers from Atari and Commodore use what is known as a "dedicated" recorder, a model specifically intended for use with one or more of the manufacturer's computers (see Fig. 2). The dedicated recorders range in price from approximately \$70 to \$100, and while they aren't any more reliable than a \$20 recorder, they can be more convenient because the recorder has been designed specifically for use with the computer. The dedicated recorder connects to the computer through a single cord that carries the input and output signals, the motor on/off switching, and quite possibly the power supply for the recorder. Depending on the model, most or all of the dedicated cassette-recorder's motor functions and video screen cues to the user are controlled directly by the computer; the computer even senses if the recorder is on-line and ready for whatever it's supposed to do. If it isn't, a screen cue to turn on the recorder appears.

Texas Instruments requires that you buy a special dedicatedcable if you want to use a cassette recorder for mass storage.

Another common feature is a port, slot, or connector for a plug-in ROM (Read Only Memory) module containing a complete software package (see Fig. 3). (Timex/Sinclair does not offer any of those ROM's, for the TS1000, but some independent manufacturers do.) When a program module is connected the computer "comes up" with the program rather than with BASIC. Software in ROM for entry-level computers is available for everything from arcade games, to home- and family-budget management, to elementary business programs, to high-fidelity system spectrum analyzers, to—well, you get the idea: just about anything you can think of is available. The advantage to ROM software is that it doesn't have to be loaded from tape or disk; simply turn on the power and it's running. The



FIG. 2—ANY INEXPENSIVE CASSETTE RECORDER can be used with some entry-level computers. Others require a dedicated cassette-recorder that has a special connector that mates with a special socket on the computer as shown. Surprisingly, the dedicated recorders are an excellent value; they are well made and notably easy to use.

problem, however, is that the quality of ROM software ranges from absolute "garbage" to "decent," and it's almost impossible to know what you're getting until you buy it. (Did you realize that computer software is the only product sold for which there is no performance guarantee of any kind? Think about that.)

A lot for the money

Let's now take a closer look at what the entry-level computers have to offer.

For one thing, there's the price. To say that they are inexpensive is an understatement—they are, for the most part, an out-and-out bargain. At discount, prices range from about \$80 for the Timex/Sinclair 1000 to perhaps \$250 for the Atari 400. (If you chose to pay a "suggested retail" price of \$299 for a computer that can be purchased for as little as \$179 maybe you need a computer to oversee your family's finances.)

Radio Shack's *Color Computer* is a somewhat special case, however, because it is sold only by Radio Shack and there is virtually no local competition between stores—although mail order is often discounted about 18%. To meet the competition from the other brands, Radio Shack has sharply reduced the price of their *Color Computer* models. You'll have to decide for yourself whether the higher cost for that machine is justified for your particular needs.

Keep in mind that the least expensive Atari package does not include BASIC; the computer comes with 16K of "empty" memory and BASIC is available in an optional extra-cost ROM module. The advantage to that, at least from Atari's point of view, is that a full 16K of RAM is available for arcade-game modules, and Atari has some of the very best games—such as Missle Command. Naturally, the cost of Atari's BASIC module is added to the cost of the computer itself.

Timex/Sinclair 1000

The least expensive computer is the Timex/Sinclair 1000 computer. It features a very powerful, underrated built-in BAS-IC, and a membrane keyboard. The best way to describe a membrane keyboard is a plastic sandwich with switch contacts between the "slices." The corresponding "keys" are imprinted on the top directly over the associated switch (see Fig. 4). Obviously, one cannot touch-type on a membrane keyboard.

The only difference between that computer and the Sinclair ZX81 is that the Sinclair version has 1K of built-in RAM while the Timex version has 2K. But that difference is more substantial than you might think—a skilled programmer can do a lot more with 2K of memory than he can with 1K. In any event,

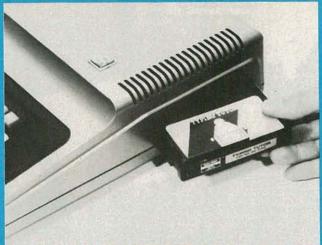


FIG. 3—TO USE A ROM program-module, just plug it into a special port, slot, or connector built into the computer. When the computer is turned on, the machine will come up running that program rather than the resident RASIC.

however, most will want to purchase the optional 16K RAM pack regardless of which machine is owned.

The use of a membrane keyboard would slow programming down to a crawl except for one thing: Every essential BASIC command (LOAD, PRINT, GOTO, IF, etc.) is entered at the touch of a single key. Each key has up to five functions and the computer automatically recognizes when the touch of a key should enter a command or a character. (I know that sounds unbelievable but it really works.) That automatic command-recognition is particularly valuable for young children learning programming. They can just key in the commands and learn to program much more rapidly than if they had to sweat out a precisely spelled key word.

The computer has an expansion port for, among other things, an optional 16K memory-module (about \$45) that provides a total of 16K memory (not 2K or 1K plus 16K). Larger RAM modules are available from several independent suppliers.

Evaluating the computer overall, it is a wonderful trainer, for which some rather good software is available at a rock-bottom price (like \$18 for a "Calc" type program). But before investing in any expansion peripherals other than the memory module, keep in mind that the lack of touch-typing is a serious limitation for advanced uses.

Commodore VIC-20

The Commodore VIC-20, which now sells at discount for about \$179, is sheer dynamite for the money. It has an excellent version of MicroSoft BASIC, outstanding color capabilities, an excellent typewriter-style keyboard, expansion ports, a serial-output port, a plug-in ROM port, and a port for two game paddles. It comes with 5K of RAM, which is more than adequate for a good amount of moderately advanced programming. It has both a video and an RF output, which means that it can be connected directly to either a video monitor or a TV receiver. Compatible peripherals include additional memory, a printer, modem, cassette recorder, and a disk system.

Unfortunately, it uses an IEEE-488 output bus. To connect a "standard" Centronics-type printer it is necessary to go through the additional expense of an IEEE-488-to-Centronics-type interface. It's an extra cost that you must consider if you plan on expanding the system. On the other side of the coin, Commodore offers a relatively inexpensive plug-in modem. Commodore also sells a direct plug-in printer, but at last look it didn't use standard $8\frac{1}{2} \times 11$ -inch paper.

The manual gives excellent operating instructions, and has a great introduction to color-control, but says almost nothing about programming in BASIC; you must also purchase the Commodore book, *Introduction to BASIC Programming*.



FIG. 4—A MEMBRANE KEYBOARD such as this one used on the Timex/ Sinclair 1000 (Sinclair ZX81) has character, graphics, and BASIC key functions imprinted directly on the membrane—there are no "real" typewriter keys.

Texas Instruments TI-99/4A

This Texas Instruments computer system, which when first introduced included a color monitor, started out with a price tag close to \$1000. TI's latest version of their personal computer, the *TI-99/4A*, is sold without a monitor but can be purchased at discount for as little as \$199. It comes with 16K of RAM and has expansion ports for ROM modules as well as for the usual assortment of peripherals. It also accommodates two game paddles.

The computer has an approximation of a standard typewriterkeyboard (see Fig. 5) that isn't as bad as it's often made out to be, but isn't all that good or easy to use, either. (Why TI, with years of experience in consumer electronics, chose to go with a non-standard typewriter-style keyboard remains one of the mysteries of merchandising.)

One thing TI has going for it is a tremendous assortment of software—over 1000 items at last count—available on cassette tape, disk, and in ROM modules. Texas Instruments has many years experience with their *Speak-and-Spell*-type devices and they know how to select quality software for children as well as adults. They also have separate classes—called "clubs"—for children and adults that teach about computers and programming for a very reasonable price; that's one of the real strong points of the company and the machine.

Texas Instruments has also just announced a new computer, the TI-99/2—the first 16-bit computer selling for less than \$100.

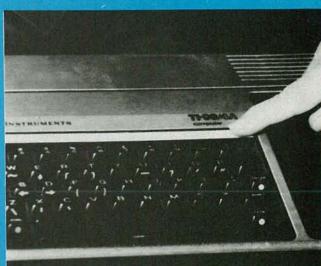


FIG. 5—EVEN IF THE CHARACTER ARRANGEMENT isn't standard, as is the case in this Texas instruments T199/4A, typewriter-style keys are the easiest type to use.

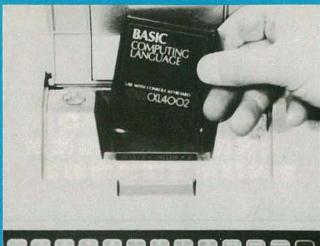




FIG. 6—EXCEPT FOR THE ATARI 400, entry-level computers have BASIC built in and "come up" in BASIC when the computer is turned on. The Atari 400 contains only memory and a small "start up" software routine. All software, including BASIC, is installed by plugging in a ROM module as shown.

That computer, designed primarily as a teaching computer, will also be well-supported with educational, personal-management, and entertainment software available both as plug-in cartridges and on cassette tapes. The TI-99/2 produces only a black-and-white display, but a 4-color X-Y printer/plotter is available.

Atari 400

The Atari 400 is a personal computer with strong roots in the area of videogames. It has superb high-resolution color capability and videogames run on that machine look as good as they do in the arcade. As mentioned earlier, BASIC is optional and is supplied in a ROM module (see Fig. 6).

The computer has a membrane-type keyboard, but the "keys" are not only imprinted but indented. It looks almost like "the real thing," but the user still cannot touch-type. That is a serious limitation when programming in BASIC, because the commands must be spelled out.

There are provisions for four game-paddles. All peripherals, which include a modem and a printer, connect to the computer through an optional, accessory interface, the Atari 850, shown in Fig. 7. The interface is an outstanding concept, even though an extra cost is involved. Among other things it provides four serial ports with programmable baud rates, and a Centronics-type parallel port.

An excellent assortment of game, educational, and general software is available, with more coming on-stream every week. Atari was a slow starter, but they now have a large, continuously expanding software selection. The only problem here is that if you're interested in the 400 you should really be looking at the Atari 800, a highly under-rated computer with notably good features and performance. It does, however, sell for considerably more.

Radio Shack Color Computer

Finally, we come to Radio Shack's Color Computer. The lowest priced model, which sells for about \$300, has 16K of memory, a good Color BASIC (Extended Color BASIC costs another \$100), inputs for two game paddles, a serial port used for both a printer and a modem, and a socket for ROM modules and/or a disk system. Though priced considerably above other entry-level computers, it has the most potential for low-cost growth, and that's the reason we've included the machine in this survey.

Unlike the other entry-level computer manufacturers, Radio

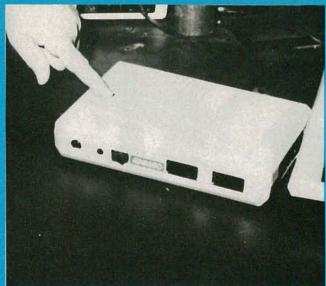


FIG. 7—ONE OF THE FINEST PERIPHERALS for computers of this class, the Atari 850 is more than worth the extra cost, as its four serial-ports and one Centronics-type printer-port allow for serious expansion.

Shack's own software selection is relatively limited and somewhat elementary. Fortunately, there is an extensive software aftermarket for which Radio Shack has recently announced full, unfettered support. Some notably excellent software is rapidly coming on-stream.


Radio Shack, like the other computer manufacturers, has always tried to restrict peripherals to their own brand. One reason why Radio Shack computers have become so popular, however, is their inability to do it; aftermarket vendors have made Radio Shack one of the great names in personal computers. Not learning from experience, Radio Shack tried again to restrict peripheral selection for the *Color Computer* to their own brand. The serial output for a printer is a ''Mickey-Mouse'' circuit that works either with a \$400 printer best suited for listing, or an \$800 line printer. For those who prefer something inexpensive but great, like an Epson or Okidata printer, there's a *PC180C* parallel-printer interface from The Micro Works (Box 1110, Del Mar, CA 92014) that converts that output to standard

While Radio Shack's own word-processing software for the machine leaves a lot to be desired (which is putting it kindly), Telewriter by Cognitec, (704 Nob Ave., Del Mar, CA 92014) turns the Color Computer into the lowest cost, high-performance word processor on the market (it works with virtually any serial or parallel printer—it restructures the machine's serial output).

The Color Computer is supplied with a notably excellent instruction manual for color BASIC (and Extended Color BASIC). Also, Radio Shack computer centers offer outstanding low-priced courses in elementary BASIC, advanced BASIC, and disk BASIC.

Summing up

All the entry-level computers will give you a solid foundation in computer fundamentals as well as in BASIC programming. If learning is your primary goal, and you have no interest in upgrading, then by all means purchase the lowest-cost computer. But if you plan to upgrade, to add peripherals such as a printer that can handle 8½ × 11-inch paper, or if you plan to experiment with complex home- and business-software, consider very carefully the cost/value ratio for the peripherals and software. As a general rule of thumb, the peripherals for entry-level computer—with the possible exception of the *Color Computer*—do not give the best performance for the lowest price. If you plan to upgrade, consider purchasing the least expensive version of a more advanced model.

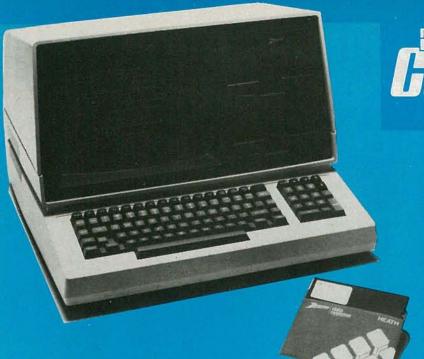

Radio POUR DWN APPRE 1983

COMPUTED PUBLICATION 1983

Is an all-in-one computer system better than a component system? While there is no definite answer, we may be able to help you decide which is better for your needs.

MARC STERN



THERE IS AN IMPORTANT QUESTION TO PONDER IF YOU ARE thinking of purchasing a microcomputer system—whether to buy a complete, turnkey (ready-to-run) system or to "build" a system from individual components. Each course has its advantages and disadvantages. We'll take a look at each type of system, the advantages and disadvantages of each, and propose some questions for you to ask yourself (and the computer salesmen) before you buy.

All-in-one systems

The greatest advantage to buying a turnkey system is convenience. In one package you get a keyboard, cathode-ray tube (CRT) display, the motherboard and its central-processor unit (CPU), plus input and output ports (if they are standard with the system) and, possibly, one or two disk drives. Usually such a

system comes equipped with the minimum amount of RAM (Random Access Memory) the manufacturer thinks you'll need.

An example of an all-in-one system is the Radio Shack TRS-80 Model III (Fig. 1). The system is available in different equipment configurations, but we'll examine the version with 48K (kilobytes) of RAM and two disk drives for mass storage. That system is priced at \$2295 and, as it comes from the box, it is a fairly powerful, ready-to-run unit.

In fact, for most home uses that system will be more than adequate. But, for the serious microcomputer user, the amount of RAM may be fairly limiting. Some sophisticated programs, such as word-processing or spreadsheet programs, really require at least a 64K machine to run properly.

The Model III includes a standard RS-232 serial port that allows the user access to network communications, and a

"I built this 16-bit computer and saved money. Learned a lot, too."

Save now by building the Heathkit H-100 yourself. Save later because your computer investment won't become obsolete for many years to come.

Save by building it yourself. You can save hundreds of dollars over assembled prices when you choose the new H-100 16-Bit/8-Bit Computer Kit money you can use to buy the peripherals and software of your choice

DIAGNOSTICS:

on power-up

CP/M-85

Multiplan

SuperCalc

WordStar

MailMerge

Data Base

8-bit CP M

Most standard

Manager

Memory self-test

Z-DOS (MS-DOS)

Microsoft BASIC

Z-BASIC Language

AVAILABLE SOFTWARE:

H-100 SERIES COMPUTER SPECIFICATIONS:

USER MEMORY: 128K-768K bytes

MICROPROCESSORS:

16-bit: 8088 8-bit: 8085

DISK STORAGE: **Built-in standard** 5.25 disk drive.

320K bytes disk KEYBOARD: Typewriter-style.

108 keys. 13 function keys. 18-key numeric pad

GRAPHICS: Always in graphics mode. Software 640h 225v resolution: up to eight colors are available

COMMUNICATIONS: Two RS-232C Serial Interface Ports and one parallel port

128K bytes standard

Optional

The H-100 is easy to build the step-by-step Heathkit manual shows you how. And every step of the way, you have our pledge "We won't let you fail." Help is as close as your phone, or the nearest Heathkit Electronic Center.

And what better way to learn state-of-the-art computing techniques than to build the world's only 16-bit 8-bit computer kit? To run today's higher-speed, higher-performance 16-bit software, you need an H-100. It makes a significant difference by processing more information at faster speeds.

Dual microprocessors for power and compatibility. The H-100 handles both high-performance 16-bit software and most current Heath Zenith 8-bit software

Want room to grow? The H-100's standard 128K byte Random Access Memory complement can be expanded to 768K bytes compared to a 64K standard for many desktop computers.

And the industry-standard S-100 card slots support memory expansion and additional peripheral devices. increasing future upgradability of the H-100

High-capacity disk storage, too. The H-100's 5.25" floppy disk drive can store 320K bytes on a single disk. The computer also supports an optional second 5.25" and external 8" floppy disk drives. And an optional multimegabyte internal Winchester disk drive

will be available in the near future.

The H-100 gives me the most for my computer dollar!





Critical circuits are pre-assembled, making the H-100 easier and faster to build!

Want beautiful high-resolution graphics? You can create extensive charts, drawings, graphs and symbols to meet your needs—using the H-100's bit-mapped graphics and its 640 x 225 pixel video display.

The H-100 gives you total communications flexibility. Three interface ports let you plug in dot-matrix and letter-quality printers, as well as other peripherals.

Compare the H-100's exceptional capabilities with other desktop computers:

COMPUTER:	Heathkit H-100	Personal Computer	Apple III
MICROPROCESSORS: 16-bit: 8-bit:	8088 8085	8088	6502
RANDOM ACCESS MEMO Minimum: Maximum:	128KB 768KB	16KB 576KB	128KB 256KB
FLOPPY DISK STORAGE: Per Diskette: Maximum Internal: 8 Floppy Support:	320KB 640KB Standard	320KB 640KB	140KB 140KB
EXPANSION SLOTS:	Five S-100 (four available)	Five (three available)	Eight
I/O PORTS: Parallel: Serial:	1 2	Optional Optional	17
VIDEO DISPLAY: Line Columns Pixels Colors	25 x 80 640 x 225 (8 colors)	25 x 80 640 x 200 (2 colors) 320 x 200 (4 colors)	24 x 80 560 x 192 (16 colors)
OPERATING SYSTEMS	CP M-85. Z-DOS (MS-DOS)	CP M-86 PC-DOS (MS-DOS) UCSD P-System	Apple SOS
Information current as	of 8 31 82 Ex	ternal disk storage ava	ilable soon.

Learn by building. When you build and operate the H-100, you learn more about this sophisticated computer system and its unique 16-bit 8-bit software capabilities.

Learn from outstanding documentation. One of the most important parts of any computer system is documentation—and Heathkit documentation is among the industry's best. Our instruction and operating manuals are fully detailed, in the world-famous Heathkit tradition.

Learn by doing. Many of our software programs come with a complete set-up and operating manual. More complete than most other software documentation, each manual not only tells you what the program will do it shows you the easiest way to accomplish each task.

We back you all the way. With Heathkit computer products, technical assistance and expertise is as close as your telephone – or the nearest Heathkit Electronic Center. Complete technical assistance and service is available at over 60 locations nationwide.

Buy from a leader. When you choose a Heathkit computer, you get the backing and reliability of the world's leader in quality electronic kits for over 50 years! You can count on us for quality, service, reliability and value at kit prices that give you more computer for your dollar!

See the H-100 in action. Visit your nearby Heathkit Elec-



Always in graphics mode, you can control each of the H-100's 144,000 screen dots! (Color graphics optional)

tronic Center, which has the world's first 16-bit 8-bit computer kit, peripherals and software programs on display. See your telephone white pages for the nearest store location. Or mail the coupon today for a FREE, full-color Heathkit computer catalog.

Heath Company, I Benton Harbor, M	D MAIL TODAY TO: Dept 320-014 49022
Please send my FR the new 16-bit/8-bit	EE Computer Catalog, with details on H-100 Computer Kit, today!
Name	
Address	
Address	State

Heathkit Electronic Centers are units of Veritechnology Electronics Corporation. Heath Company and Veritechnology Electronics Corporation are subsidiaries of Zenith Radio Corporation. Prices, product availability and specifications are subject to change without notice.

Heathkit

neum



FIG. 1—RADIO SHACK'S TRS-80 Model III is a popular all-in-one computer system.

parallel printer-port. Dual minifloppy disk drives are also included with the system; they allow 368K (184K per disk) of mass storage. They are not, however, double-sided, doubledensity drives, which would permit 320K (or more) of storage per disk.

One advantage that may especially appeal to many first-time buyers is that, because there are fewer separate components, an all-in-one system is easier to buy. And, since everything in the system is made by one manufacturer, there is the advantage of having it all warranteed by that manufacturer, rather than having several different warranties and service networks to deal with. Another advantage of a one-piece system is that it often takes up less space than a component-type system. For instance, rather than having a system box for the CPU (Central Processor Unit), and a separate CRT, keyboard, and drive(s), everything is in one cabinet.

While the all-in-one concept is appealing to many potential personal-computer buyers, it also has a few drawbacks that should be considered. Usually, when you opt for an all-in-one system, you are locked into whatever configuration you first purchased, unless you want to go inside the system and "get your hands dirty" to make the changes needed (such as adding an accessory board or resetting system switches). If you do that, you may run the risk of damaging the unit and losing its service while it is being repaired. Furthermore, if the system is still under warranty, then merely opening the unit can void that warranty. However, if going inside the computer to make additions and changes doesn't scare you, maybe you should consider building an all-in-one computer from a kit. One of the few such computers is the Heathkit H-89 (also available fully assembled from Zenith as the Z-89). That computer is shown in Fig. 2.

A further question arises as to the ultimate expandability of the system. If you opt for an all-in-one system, you may not be able to add more RAM, or output ports or disk drives, and you may not have access to the system bus. If you opt for an all-in-one system, be sure there is at least an expansion box or some other potential for expansion.

We should mention that even if the manufacturer does not offer expansion options, other companies may. Those options usually require going inside the computer to make additions and/or changes, especially in all-in-one systems.

Another important consideration is the operating system that the computer uses and the software that's available to run under that system. If you opted for the Radio Shack unit, you would get a disk operating system called TRSDOS (pronounced "trissdos"). It supports a large library of Radio Shack programs, as well as programs from outside sources. Other operating systems are available which expand on TRSDOS' capabilities, but still allow you to run most TRSDOS-compatible programs.

If you want even more flexibility in your choice of software,



FIG. 2—A COMPUTER IN KIT FORM might be the right choice for you if you don't mind a little work. Shown here is the *H-89* from Heathkit.

though, you should consider a disk operating system called CP/M. It is especially valuable if you are going to be using your computer for business purposes, for the amount of "serious" software available to run under CP/M is enormous. To run CP/M on a Radio Shack computer, though, you have to make some hardware modifications. CP/M can be run on most computers, but many of them require considerable reworking, and the conversion can become expensive.

The CRT display must also be considered. The one supplied with the system will probably be more than adequate for the first-time microcomputer user. But, after a while, if you want to use any sort of graphics, you may find the resolution of the display too limited for the task. With an all-in-one system, you could be locked into a situation where there are no options because the CRT is built into the cabinet. The same is true if you want a different type of display (or just want to move the one you have—see Fig. 3). For instance, it has been found that a black-and-white display is more fatiguing to use over a long period than a green or amber one. But, changing a black-and-white display to one of the others cannot be done reasonably unless a replacement is offered by the manufacturer. One alternative is a colored plastic shield that will change the color of the display; unfortunately, it will also cut down on its visibility.

Despite its limitations, though, the all-in-one computer is still a viable option for many.

Component computer-systems

The heart of a component system is a system box that houses the CPU, RAM, and—possibly—disk drives, and has built-in card slots for easy expandability. The keyboard and CRT are separate, although the two may be combined into one unit. The biggest advantage that component systems have over all-in-one systems is flexibility—the ability to upgrade or modify the system easily.

Although you may think of a system such as the IBM Personal Computer (see Fig. 4) as being at the mid-to-upper end of the microcomputer scale, a prudent buyer can put together a system that isn't very much more expensive than many all-inone microcomputers.

The first building block in the IBM system is the system unit. In its simplest form, that box houses the 8088 16-bit microprocessor and 16K of RAM. It contains no disk drives, but has a built-in port for connecting a cassette recorder for data storage. The unit also features space for two drives, and for up to five IBM-compatible cards (for memory expansion, various types of video displays, etc.). A separate keyboard is also included in the basic configuration, but a CRT is not. A user has the option of using his own television set (through the addition of an RF modulator) or he can opt for any of the monochrome or color monitors on the market.

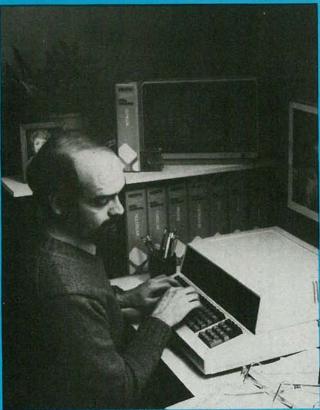


FIG. 3—NOT HAVING EVERYTHING in a single housing can sometimes be an advantage.

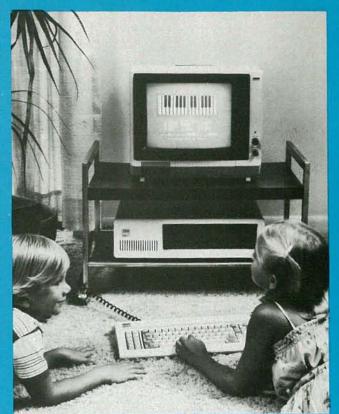


FIG. 4—THE IBM PERSONAL COMPUTER is a component-type system that can use a standard TV for display.

In its basic configuration, the IBM Personal Computer can be purchased for a little over \$1250. However, you may soon find the basic configuration limiting. Your first move will probably be to add more RAM; bringing the total system RAM up to 80K. That requires an investment of only about \$150. In that configuration, the computer becomes far more flexible, and capable of running sophisticated programs.

At the same time, you may also find cassette storage restrictive, and may want to add a disk drive or two for mass storage (see the discussion of disk drives elsewhere in this section). One drive and a controller card for it will cost about \$420, and, with careful shopping, a second drive can be added for as little as \$250. The disk operating system and BASIC bring the total cost of the system up to about \$2110, but it now consists of 80K of RAM, a disk-controller card (which can support up to four drives, as can the Radio Shack TRS-80), and two double-sided, double-density disk drives, for a total external storage-capacity of 640K.

Still lacking at this point is a communications option. The computer package has yet to include either a parallel printer-port or an asychronous (serial) communications port. Often—but not always—an all-in-one microcomputer will include those ports as part of the package. Adding them to the IBM component-system will increase its cost by about \$480 (bringing the total to \$2550), but they will also increase the functionality and flexibility of the system tremendously. And, the system box will still have two slots available for other add-on cards (the disk-controller card and both port cards are plugged directly into the main system-board).

There is still something missing from the picture—a computer-grade CRT capable of displaying high-level graphics; the user is still tied to his RF modulator and television set. Fortunately, the video interface has already been taken care of—the parallel printer-port board also contains a monochrome-display interface. That saves you from tying up an extra slot on the motherboard. Monochrome (black-and-white—or-green, or

-amber) monitors—capable of delivering high-quality displays—are available for as little as \$95. (You can also pay \$350 for the IBM-compatible unit, which sports one of the best displays in the business.)

You might want to change the configuration of the computer to include high-level color graphics capability by adding a \$499 color-graphics monitor/printer interface instead of the \$350 monochrome/printer interface. That would raise the cost of the system to the \$2800 to \$3150 range. Of course, a quality color-monitor will further increase the cost of the system. In fact, depending on the type chosen, a color monitor can add from nearly \$300 to \$1,000 to the price of the system.

Further considerations

While an all-in-one system offers convenience, it does so at the expense of flexibility.

Consider this: in the two examples we've just given, the owner of the component-type of system still has further slots left for other functions to increase his system's versatility. You can add a game-controller card for computer-game use, and still have another slot available for memory expansion. It must be admitted that game-controller access is built into many all-inone systems, but if it isn't, then you must find out whether you can add one to your system, and whether and where the add-on is available.

Each type of system has its attractions and advantages, but the component or building-block system seems to offer much more flexibility—and the differential in price over the all-in-one type isn't all that great. Component systems can be found in all price ranges, ranging from Commodore's VIC-20 to the Apple series, and on to the IBM and S-100-bus computers. In fact, just about all of the new generation 16-bit microcomputers are appearing as component-type systems.

Portable computers

There is a special type of all-in-one system that does merit a

The portable-computer trend was started by author and microcomputer-industry pioneer Adam Osborne, who launched the Osborne I portable computer nearly two years ago. That computer, shown in Fig. 5, comes with standard features that include 64K of RAM, dual disk-drives, a Z80 microprocessor, the CP/M operating system, a full ASCII keyboard, a built-in miniature black-and-white CRT, and CP/M-based software that includes word processing, a spreadsheet program, the CBASIC programming language and, of course, CP/M and its utilities. All of that could be purchased for the unheard-of price of \$1795. (The computer's capabilities have recently been increased through the addition of double-density drives and the inclusion of a data-base program in the software package, but the price has remained unchanged.)

When the computer was announced, industry skeptics said the concept would never get off the ground. But Osborne proved them wrong. His system took off, and his California manufacturing facilities were stretched to the limit. The business community knew a bargain when it saw one, and leaped at it... as did many serious home-computer users.


The system is powerful not only in its own capabilities, but also in its ability to allow the user to access remote data-bases via a built-in serial port. About the only item detracting from the appeal of this portable personal computer is its tiny, five-inch display with its limited display-width—while it can display the industry-standard 24 lines, it's limited to a width of 52 columns; you have to scroll the display sideways to access the full 80-column work area. The size problem can be overcome by using an optional external display, and Osborne is, reportedly, making an 80-column-display feature available.



FIG. 5—THE PORTABLE COMPUTER is growing popular among both business users and home-computer users. Shown here is the Osborne I.

Which is for you?


If you are considering the purchase of a microcomputer, which way should you turn? The question really revolves around what you want to do with your system. If it is to be used for casual purposes and game-playing, then any of the inexpensive color microcomputers on the market—whether component-type or all-in-one—should fill the bill. If, on the other hand, you want more power and don't want the inconvenience of piecing the system together, then an all-in-one (or, perhaps a powerful, yet still inexpensive portable computer) is the way to go. If, though, you want the ability to tailor a system precisely to your needs, then a component system is your best bet.

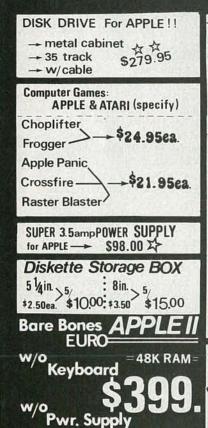



DS/DD 3240 37.40

\$699.00

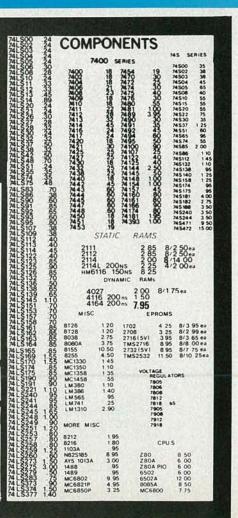



Radio Flectronics YDUR DWN APRIL 1983

Disk Drives

An invaluable peripheral for the serious computer-user is a disk-drive system for program and data storage. Here's a look at the more popular types, and a discussion of how they work.

MARC STERN

TODAY'S MICROCOMPUTERS ARE TRULY POWERFUL DEVICES. Many come with 64K (64,000 bytes) of RAM as "standard equipment." (In the old days, 4K was a lot!). RAM (Random Access Memory) is the part of the computer that holds programs and data when they are in use. In it, data can be manipulated and modified almost instantaneously.

RAM has a serious drawback, though—it needs power to retain its contents. If the computer is turned off, those contents are lost, disappearing forever into the proverbial "bit bucket." Such storage is termed *volatile*, and if you want to retain its contents, you must keep the computer on 24-hours-a-day—not an inexpensive proposition.

There are nonvolatile types of semiconductor memory such as ROM's (Read Only Memories) and EPROM's (Eraseable Programmable ROM's), but they are intended to be programmed once, and their contents left unchanged afterward. Because of that, and their relatively small capacity and high cost, such IC's are used for programs that will be used again and again without modification, like the computer's operating system or a built-in BASIC language.

What's the alternative for long-term data and program storage? Ideally, it should be fast, reusable, and fairly inexpensive. Fortunately, magnetic media—tape and disks—meet those criteria.

Tape vs. disk

Back in the early days, personal computer users relied on cassette tapes for storage. They could use readily available equipment, and the storage medium was very inexpensive and fairly reliable. Disks, at the time, were an expensive luxury.

But, those early users soon found that tape had several short-comings. First, because the data was stored serially, one bit after the other, it was necessary to read all the information on a tape until the material that was desired was located; there was no easy way to tell where on the tape that material was. If a program were stored at the end of a tape, all the programs preceding it had to be looked at by the system before the one that was wanted was accessed. If a C-60 cassette were used, that process could take almost half an hour.

Using tape for mass-storage for personal computers also had

another drawback, and that was speed. Typically, the data-transfer rate for tape is about 30 to 150 characters-per-second or about 300 to 1500 baud (bits-per-second). Thus, loading a 10K program into the computer required over five minutes.

So, it's evident that using cassette tape, even though it has a potential for about 500K of storage (on one side of a C-60 cassette) isn't very efficient.

To illustrate that another way, suppose you had a database consisting of names and addresses, and you wanted to access a particular name. If that name were stored somewhere near the end of the tape, it could take as long as 30 minutes to find it. In addition, if you wanted to add even just one more item to the database, you would have to re-record *all* the records.

Contrast that with the capabilities of a floppy disk, now an affordable and commonly used mass-storage device. It can access data at random, and its transfer rate is much faster than that of tape.


Using the address database as an example, instead of waiting half an hour to locate a particular address, the floppy can access the information in as little time as a second.

And, since the transfer rate for information is so high, instead of spending five minutes loading a program into RAM from tape, the same program can be loaded from disk in a matter of seconds.

The most popular storage medium for microcomputers today is the floppy disk. Floppy disks are available in two sizes: 8-inch and 5¼-inch minifloppies.

Disk formats

Floppy disks are available in a variety of formats. Those formats include single-sided, single-density; single-sided, double-density; and double-sided, double-density. The densities refer how tightly the data is packed on a disk. You can store data on one side of a single-sided disk and on both sides of a double-sided one. Thus, a single-sided, single-density minifloppy can store about 92K of information, while a single-sided double-density one can store about twice that amount. The number doubles again for a double-sided, double-density disk. Thus a single-sided, double-density minifloppy can store about 180K of information, while that figure increases to as much as

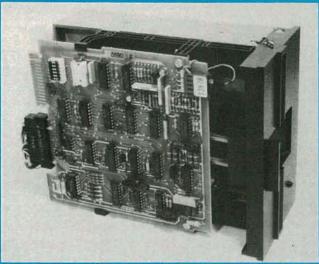

INTERIOR VIEW OF 51/4-INCH FLOPPY-DISK DRIVE shows logic board mounted over read/write head assembly.

360K for a double-sided one. Because of their size, 8-inch disks have about twice the capacity of their 51/4-inch relatives.

Perhaps the limiting factor in the density situation is the way the disk is formatted (more about that later). Formatting refers to the way the tracks on the disk are set up when the disk or minifloppy disk is configured to work with a particular system. Thus, even though a diskette manufacturer may claim that his product has up to 128K of space available for storage, in reality, that space is limited to about 92K after formatting, if it is a single-sided, single-density disk. Bear that point in mind when you shop for a disk system—make sure that the storage capacity quoted you is the capacity after formatting.

Disk structure

Let's look more closely at the disk system for a clearer understanding of the way it works.

Floppy disks were an invention of the late 1960's, when IBM sought to replace keypunch cards. Because they were flexible

and easily bent, they were termed "floppy."


A floppy disk is a .003-inch thick Mylar disk, covered with a coating of magnetic oxides. In that respect, it is much like an audio tape. The disk is sealed inside a protective jacket, which has several windows cut in it. The jacket also contains a lubricant so the disk rotates freely.

The disk revolves inside its protective jacket at a speed of 300 rpm for a minifloppy, and 360 rpm for an 8-incher.

The units in which the disks work—the drives—resemble file drawers with slots to insert the disks, and doors that close over the slots. Inside, along with other parts we'll discuss shortly, are the read/write heads that access and deposit the data on the disks. During recording or reading, those heads make light contact with the surface of the disk; and when they are not in use, the heads are usually lifted away from the disks to reduce wear and tear.

One of the windows in the disk jacket is a slot that allows the read/write head to make contact with the disk. There is also a large center hole that allows the drive spindles to grip the disk and it to spin. To the right of the center hole is a smaller *index hole* that provides timing information, and at the edge of the disk is a *write-protect notch*. The purpose of that notch is to allow the user to protect the information on the disk from being accidentally written over or erased. A small self-adhesive tab is used to cover the notch. In the case of 5½-inch disks, when the notch is covered, the disk is write-protected and when it's exposed, data can be recorded on it. On 8-inch disks, the reverse is true.

A disk is covered with magnetic tracks, arranged in concentric circles. To read or write data from or to the disk, a magnetic-sensitive head is placed over a track while the disk rotates. The head senses the changing magnetic states it finds on the disk, and

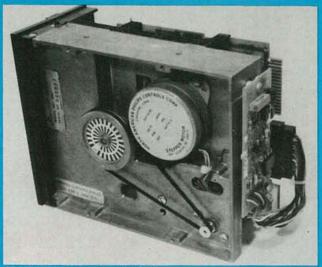

DRIVE BELT TRANSMITS POWER from motor to assembly that spins disk. Large round stepper motor controls motion of read/write head.

that information is then translated into electrical pulses representing logic-1 or logic-0 states. When it writes to the disk, the head changes the magnetic state of the disk's surface to represent the logic-level signals from the computer.

The number of tracks on a disk varies with the format the microcomputer manufacturer uses. An 8-inch disk will usually have from 77 to 80 tracks, and a 51/4-inch disk will usually have from 36 to 40 tracks.

Using concentric tracks is very convenient for speedy operation, but, if only one file per track were kept, it would be very inefficient. That's because, if one file were assigned per track, it would mean that a short file would leave a large amount of disk space unused. On the other hand, another file might fill up one track and still be large enough to require space on another; most of that second track could also be wasted.

To avoid that sort of problem, each track is divided into units called *sectors*, and data is written to or read from those sectors. On an 8-inch disk, there are 26 sectors per track, while on a 5½-inch disk, there may be as few as 10 or as many as 16 or more—it depends on the manner in which the microcomputer's manufacturer chooses to handle its disk formatting. Each sector holds 128 bytes, or 1,024 bits, of information. There are, potentially, 2002 sectors available for data storage on a standard 8-inch, single-sided, single-density disk, while there are from 400 to 600 (or more) sectors available on the average single-sided, single-density 5½-inch minifloppy.

That arrangement makes data storage and handling much easier for the microcomputer and the read/write head. A directory is automatically maintained on the disk, indicating where everything is stored, and where it is possible to place and locate data quickly and accurately.

Keeping track of the data, though, brings another element into the picture; hard- or soft-sectoring. As mentioned earlier, every disk contains an index hole. It is that hole which determines the timing for proper data access by identifying the starting spot on the disk. On a soft-sectored disk, there is one index hole, and specific sector locations are identified by information contained on the disk. As mentioned earlier, the added storage requirement for the sectoring information reduces the amount of space available for information storage.

The picture changes with a hard-sectored disk. It. too, contains a master index hole, but there are also other holes (which are also visible in the index hole cutout in the disk jacket). They are index markers, or sector holes, and may number from 10 to 16 (32 on an 8-inch disk). Their presence means that less timing information has to be stored on the disk, and that frees about 25 percent more space for storage. Since they are exactly spaced, the sector holes are able to provide the tight timing-information needed to indicate the exact start spot on the disk.



EIGHT-MEGABYTE HARD DRIVE system from Radio Shack is completely sealed and inaccessible to user.

Format compatibility

Disks made by one system will not necessarily—even if they are the same size and use the same sectoring method—work on another. There are a number of format considerations to be taken into account.

Since format compatibility is so important, let's take a closer look at it. In the 8-inch-drive world, there is at least an industry standard to which most microcomputer makers conform: the IBM 3470 standard, which calls for 77 tracks and 26 sectors, with soft sectoring. Recording density is 3408 bits-per-inch. Unfortunately, no such standard exists for 51/4-inch minifloppies.

For the moment, though, let's look at the 3470 standard. The tracks are numbered from the outer edge of the disk, beginning with 00 and ending with 76, at the innermost edge. As noted earlier, there are 2002 sectors on the disk; each of those sectors is divided into four parts. The first identifies the sector and track number, while the second contains the data. In between these two sections are two *interrecord gaps*.

The identification and data parts of the sectors are broken down even farther, and contain pulses used to synchronize the controller circuitry and to compensate for variations in the rotational speed of the disk. Also contained in them are errorchecking bits to permit the controller circuitry to recognize an error, should one occur.

The sectoring information isn't usually contained on a disk when you first take it out of the box. Instead, you have a non-magnetized blank, which must be inserted into the disk drive so the tracks and sectors can be defined. That process is called *formatting* or *initializing*, and a program run by the computer initiates the process using the index hole as a marker. During the formatting process, the disk loses a considerable amount of its storage potential. Thus, a disk which may hold 400K unformatted will only hold about 256K when it's formatted.

In its formatted state, the disk is ready for use by the system. To record data on a single-density disk, frequency modulation (FM) is used. In addition, a 250-kHz clock generator produces pulses every 4 microseconds (ms) that form the data cells on the surface of the disk. If, during the interval between two pulses, data is written to disk, a logic-1 will be recorded at that spot on the disk. The magnetic state of that minute area is changed. If, however, no data appears, the disk oxide material remains unchanged and it will appear to the system as a logic-0.

When the disk is read, if a magnetic change has taken place where there was a data bit written on the disk, not only does the 250-kHz clock pulse register, but so does the data pulse, and the system sees two pulses, which it translates to a logic-1. If the system sees only the clock pulse, then it translates it to a logic-0.

Double-density recording requires another method: MFM, or Modified FM encoding. Rather than using a constant clockpulse, many of the pulses are removed and appear only at certain intervals. That frees far more space for data, since only one pulse is used to indicate a logic-1 and none indicates a logic-0. It must be noted that the drive-controller circuitry has to become far more sophisticated to handle that type of encoding.


Double-sided, double-density recording uses the same type of arrangement, but adds another read/write head so the system can read and write to both sides of the disk.

Access time is defined as the time it takes the drive to access a piece of data chosen at random. (It is generally calculated as half the slowest, or worst-case, access time.) That figure, in turn, depends on how long it takes for the head to arrive at the proper track, and how long it has to wait for the proper sector to arrive beneath it. The time it takes for the drive to arrive at a track is termed the track-to-track seek time, and the time it takes for the proper sector to reach the head is known as the latency time.

Latency time is derived by measuring the interval between the time when the read/write head arrives at the proper track just as the proper sector has passed by, and the time when the beginning of the sector passes beneath the head. That, in general, requires a full disk rotation.

Generally, track-to-track seek time varies from 3 to 15 ms for an 8-inch drive, and from 6 to 30 ms for a 5½-inch drive. Latency time is in the 85-ms range for an 8-inch drives, and is about 100 ms for a minifloppy. Total access-time ranges is about 100 ms for an 8-inch drive, and is about 300–400 ms for a 5½-inch drive.

Also important is the data-transfer rate. That is the rate at which data is read or written from or to the disk. The higher the transfer rate, the quicker the data is fed into the system and the more efficient it is. That rate is on the order of 125–250

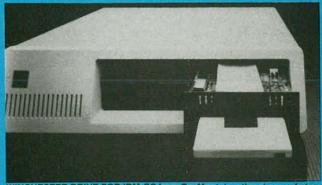

WINCHESTER DRIVE FOR IBM PC from TecMar takes the places of standard 51/4-inch minifloppy. Removable cartridge can hold five megabytes.

RADIO-ELECTRONICS

PARTIAL LIST OF DISK-DRIVE MANUFACTURERS AND SUPPLIERS

Amdek Corp. 2201 Lively Blvd. Elk Grove Village, IL 60007

Apparat Inc. 4401 South Tamarak Pkwy. Denver, CO 80237

Apple Computer Inc. 20525 Mariani Ave. Cupertino, CA 95014

Atasi Corp. 235 Charcot Ave. San Jose, CA 95131

Commodore Business Machines 487 Devon Park Rd. Wayne, PA 19087

CompuPro Division Godbout Electronics Box 2355 Oakland Airport, CA 94614

Corvus Systems 2029 O'Toole Ave. San Jose, CA 95131

Cybernetics Inc. 8041 Newman Ave. Suite 208 Huntington Beach, CA 92647

Data Peripherals 965 Stewart Dr. Sunnyvale, CA 94086

Davong Systems 1061 Terra Bella Ave. Mountain View, CA 94043

Digital Equipment Corp. Parker Street Maynard, MA 01752

Evotek 1220 Page Ave. Fremont, CA 94538

Genie Computer Corp. 31125 Via Colinas #908 Westlake Village, CA 91362

Heath Company Benton Harbor, MI 49022 Irwin International 2000 Green Rd. Ann Arbor, MI 48105

Laredo Systems 2264 Calle DeLuna Santa Clara, CA 95050

Lobo Drives International 935 Camino Del Sur Goeleta, CA 90317

Magnolia Microsystems 2812 Thorndyke Avenue West Seattle, WA 98199

Micropolis Corp. 21329 Nordhoff St. Chatsworth, CA 91311

Micro-Sci 2158 South Hathaway St. Santa Ana, CA 92705

MiniScribe Corp. 410 S. Sunset Longmont, CO 80501

Morrow Designs 600 McCormick St. San Leandro, CA 94577

PDS Universal Inc. 2630 Walnut Ave. Suite G Tustin, CA 92680

Percom Data Co., Inc. 11220 Pagemill Rd. Dallas, TX 75243

Priam Corp. 3096 Orchard Dr. San Jose, CA 95134

Quantum Corp. 448 Whitehead Rd. Box 5141 Trenton, N.J. 08619

Qume Corp. 2350 Qume Dr. San Jose, CA 95131

Radio Shack One Tandy Center Ft. Worth, TX 76102 Rana Systems 20620 Leapwood Avenue Carson, CA 90746

Rotating Memory Systems 1701 McCarthy Blvd. Milpitas, CA 95035

Seagate Technology 360 El Pueblo Rd. Scotts Valley, CA 95066

Shugart Assoc. 475 Oakmead Pkwy. Sunnyvale, CA 94086

Sony Corp. 7 Mercedes Dr. Montvale, NJ 07645 (micro-floppy disk)

Syquist Technology 44160 Warm Springs Blvd. Fremont, CA 94538

Tallgrass Technologies Corp. 9207 Cody Overland Park, KA 66214

Tandon Corp. 20320 Prairie St. Chatsworth, CA 91311

Tarbell Electronics 950 Dovlen Pl., Suite B Carson, CA. 90746

Tecmar Personal Computer Products 23600 Mercantile Rd. Cleveland, OH 44122

Vista Computer 1401 Borchard St. Santa Ana, CA 92705

Xcomp 7566 Trade St. San Diego, CA 92121

Xebec 432 Lakeside Dr. Sunnyvale, CA 94086

Xiten Systems 16815 Hawthorne Blvd. Lawndale, CA 90260

kilobytes-per-second for a minifloppy (depending on density) and about 250 kilobytes-per-second for an 8-inch disk (500 kilobytes-per-second, double density).

The rest of the system

There are, of course, more parts to the floppy-disk system than just the disk and drive itself. The most important of them are the disk controller and the disk operating-system, which is actually a piece of software.

The disk controller has responsibility for determining head position and sector identification, for disk-motor control, for head loading and unloading, for error detection and correction, and for controlling the data transfer to the interface circuits between the disk and the computer. The disk-controller is usual-

ly on a board separate from the computer's main board(s).

The DOS, or Disk Operating System which, by the way, is usually loaded from the first tracks (known as the system tracks) of a floppy disk, is actually the manager of the microsystem. It controls data and program transfer between the computer and the disks, and also handles file management, labeling, editing, error detection, and copying.

The DOS is always the first program loaded into the computer from the disk, and its loading is handled by a ROM-based routine called the *bootshap loader*. Actually, the short bootstrap-loader in ROM loads in a longer loader program from the disk, and *that* loads in the DOS. The process is akin to hoisting oneself by his own bootstraps, and is thus known as "booting the system" or "booting the disk."

Microfloppies

There are types of disks other than floppies. We'll look at two of them here; microfloppies and Winchesters.

One of the most recent developments in disk technology is the *microfloppy*. Microfloppies come in several sizes, ranging from a little over three- to a little under four-inches in diameter. They are basically the same as floppy or minifloppy disks, except for their small size and the fact that, instead of using a flexible protective covering, they are encased in a hard, plastic covering. That plastic shell contains what looks like a sliding door, and, indeed it is. It covers the disk-access notch through which the read/write head contacts the disk surface. When the disk is inserted into its drive, the door retracts so the head can contact the disk. It closes automatically when it is removed. That prevents the delicate disk-surface from contamination by skin oils or particulate matter in the air (like smoke or dust) that can cause the disk to "crash."

Operating at about the same speed as 5¼-inch minifloppies, microfloppies are capable of great data densities. Dense-packing techniques allow a microfloppy to store nearly 500K of data on its surface. The recording technique is similar to that used for double-sided, double-density media, except that the tracks are much closer together.

The potential for miniaturization offered by this medium is of great importance. With 3.5-inch drives occupying about half the space taken by a pair of minifloppies, it is possible to design microcomputers that are even smaller than they are now.

One disadvantage of microfloppies at present is that the drives are not yet available in great quantities. Another, and more serious problem is that the industry has yet to settle on a microfloppy standard.

Winchesters

There is a growing trend toward storage on *Winchester* drives. The concept, first developed by IBM in 1973, was originally aimed at the mainframe market. The early hard disks, codenamed "Winchester," were 14 inches in diameter. But, they soon began to shrink toward 8 inches, and eventually to 5½ inches. The 5½-inch Winchester has become quite important in the last year or so.

The beauty of Winchester disks is the amount of data they can hold. Even the small ones are capable of storing 10 megabytes, and there is a race on now to increase that figure. In fact, in the next couple of years it is likely that disks that size will have capacities of 20, or even 30, megabytes.

That storage capacity comes at a price: Mini-Winchesters are about four to nine times more expensive than comparably sized double-sided, double-density minifloppies. Their prices range from about \$1400 to \$2000.

A hard disk like the Winchester differs radically from a minifloppy in the way it is constructed, although not in its basic data-storage function.

The control circuitry is much like that used for the minifloppy and, in fact, Winchester drives are usually pin-for-pin compatible with 51/4-inch minifloppies.

The hard disk is made of metal, polished to mirror brightness. Like a floppy, it is coated with a layer of oxides for recording, but it may spin at speeds of up to 3500 rpm. Dense data-packing and track-packing techniques allow the high information densities of which Winchesters are capable.

Mechanically, a Winchester is as unlike a floppy or minifloppy as day is from night. The disk and read/write head are enclosed in a rigid sealed housing; they're safe from contamination or damage by human hands. Also, the read/write head never touches the surface of the disk; instead it floats on a cushion of air just microns above the surface of the disk, much like a ground-effect vehicle. That planing action is made possible by the high rotational speed of the disk. Even though it is not in contact with it, the sensitive head can still sense the changes in the magnetic state of the disk.

Because of the tight tolerances under which Winchester

drives operate, the enclosure must be dirt-free. Thus, air is drawn into it by a fan through a filter and is then circulated. That also helps keep the heat level down; heat is one of the primary enemies of the hard disk.

To give an indication of the speed of the drive—data access and display seem almost instantaneous—the access time is 30 to 50 ms. (On some older models, access time is on the order of 100 ms.) That may seem slow, but it must be considered that the disks contain 800 to 900 tracks of information.

While the storage potential of hard disk drives is awesome, so are some of their inherent drawbacks. First comes the problem of backup copies. They are especially important for hard disks, where a head crash against the disk can ruin the entire data field. The most logical method for backing up data is with a floppy disk, but even with one-megabyte 8-inch disks, it can take 20 disks to backup a 20-megabyte hard-disk drive. That's not only time-consuming, but also expensive. If you use minifloppies, even more disks are needed.

An alternative is called the *streaming tape-drive*, which can copy 20 megabytes in as little as a minute. A high-speed tape unit, it is actually a huge, continuously moving data cassette. Its primary drawback is its expense.

An exciting alternative is the removable-cartridge Winchester disk. A fairly recent development, in that type of unit, the disks are encased in plastic housings and can be removed and stored. It's a good idea, and makes the hard disk much like the minifloppy in flexibility.

Winchesters are also susceptible to shock and vibration. Although most companies ruggedize their units as much as possible, it is still possible for jarring or bumping to cause the head to smash into, and destroy, the disk surface. Excess vibration can also be a potential cause of data errors.

One recent development, which emphasizes the trend toward miniaturization, is the 3.9-inch hard disk. Packaged to be half the height of standard 5½-inch units, two of those drives can fit in the space taken by one standard drive. The units contain removable disk-cartridges.

Some considerations

Whatever decisions you may make in choosing a mass storage device, there are some caveats that should be remembered. First, try to determine your future expansion requirements. Don't buy a 92K single-density drive when you know you will need far more storage space in the near future. A good starting point is a double-sided, double-density 320K 5½-inch drive. An 8-inch drive is the choice if your data storage needs are higher. You can get nearly a megabyte of data on a double-sided, double-density 8-inch disk. If you can afford two drives, so much the better. Not only will you double your storage capacity, but you will find making backup copies much simpler and faster.

Make sure the disk-systen is compatible with your computer, and can easily be interfaced with it. It makes no sense to buy an inexpensive disk only to be faced with the monumental task of interfacing it. The result will be a "kluge," and may require a great deal of original software—written either by yourself, or by someone you have to pay to write it for you.

The manufacturer should be one who has been in business for a time, and has established a good reputation. Choose a company that supports its customers and provides a good warranty.

Once you have purchased the drives, remember to back up all your key program and data disks. When you purchase a new piece of software, make a copy of it *immediately*. Use the copy, and lock up the original in a safe place.

Although the average life of a disk is about two years, it is possible for a disk or program to fail because of mishandling. It pays not only to back up your work and programs, but also to handle your disks properly. Keep them away from dirt and cigarette smoke, and keep them at a constant temperature. A separate room for your computer is advisable.

If you take those precautions, you should get long life and good reliability from whatever drives you purchase.

Electronics Paperback Books

Quality Paperbacks at Affordable Prices BUY 12 PAY FOR 10—TAKE 2 FREE!



30 SOLDERLESS
BREADBOARD PROJECTS BOOK-1.
\$5.75. Whenever possible the same parts are
used in several projects. Even a first-time these circuits.

HOW TO GET
YOUR ELECTRONIC
PROJECTS WORKING. \$5.00. Helps you
troubleshoot and repa

built upon a mini-matrix board that has 10 strips and is 24 holes long.

MULTI-CIRCUIT BOARD PROJECTS. \$5.00. 21 fairty simple projects that can all be built on a single printed-circuit board. All are powered by a 9V battery.

IC PROJECTS
FOR BEGINNERS.
\$5.00. Inexpensive digital and linear IC's are used to assemble this selection of circuits intended for the beginner.

ELECTRONIC
CALCULATOR USERS HANDBOOK.
S. 9.5. Presents formulae data, methods of
calculation, conversion
factors & more from the
view of the calculator
user.

LINEAR IC EQUIV-ALENTS AND PIN CONNECTIONS. \$8.25. Shows equivalents & pin connections of a popular user-oriented selection of linear ICs.



GRAMMING THE 16K ZX81, \$6.25. Topics ining, PEEK & POKE

THE 6809 COM-PANION. \$5.00. Writ-ten for the average assembly language programmer. A discus-sion of 6809 features & reference work for the 6809 programmer.

PRACTICAL COM-PUTER EX-PERIMENTS: \$4.50. Fills in background to microprocessor by con-structing typical compu-ter circuits using dis-crete logic components.

ART OF PRO-GRAMMING THE 1K ZX81. \$5.00. How to use the features of the ZX81 in programs that fit the 1K machine and are still fun to use.

INTRODUCTION
TO BASIC PROGRAMMING TECHNIQUES. \$5.00. Based
on author's own experience in learning BASIC
and helping others to
learn to program.

A MICROPROCES-

FIRST BOOK OF HI-FI SPEAKER EN-CLOSURES, \$4.50.

28 TESTED TRAN-

SOLID-STATE SHORTWAVE RE-CEIVERS FOR BE-GINNERS, \$4.50.

☐ 50 PROJECTS US-ING IC CA 3130. \$4.50.

ADVANCED SHORT-WAVE RECEIVERS. \$5.00.

BEGINNERS
GUIDE TO BUILDING
ELECTRONIC PROJECTS. \$5.00.

PRACTICAL COM-PUTER EX-PERIMENTS. \$4.50.

☐ ENGINEERS & MACHINISTS REFER-ENCE TABLES. \$3.50.

SECOND BOOK
OF TRANSISTOR
EQUIVALENTS &
SUBSTITUTES. \$4.50.

☐ BEGINNERS
GUIDE TO
µPROCESSORS &
COMPUTING, \$4.50.

O VMOS PROJECTS.

HOW TO USE OP-

HOW TO GET YOUR ELECTRONIC PROJECTS WORK-ING. \$5.00.

MULTI-CIRCUIT BOARD PROJECTS. \$5.00.

ELECTRONICS SIMPLIFIED CRYSTAL SET CONSTRUCTION.

ELECTRONIC
HOUSEHOLD PROJECTS. \$4.50.



REMOTE CON-TROL PROJECTS. \$5.00. Radio-control infra-red, visible light, & ultrasonic systems are all included, along with methods of applying tham

ELECTRONIC
TEST EQUIPMENT
CONSTRUCTION.
\$4.50. Construction details of a wide range of
test equipment the experimenter can build at
home.

ELECTRONIC TIM-ER PROJECTS. \$5.00. Timing circuits for almost any application the experimenter might need. A most valuable reference.

COUNTER DRIVER & NUMERICAL-DISPLAY PROJECTS. \$4.50. Features ap-plications & projects using various types of numerical-display de-vices.



PRACTICAL ELECreference work that bridges the gap be-tween complicated technical theory & cut and tried methods.

☐ INTERNATIONAL DIODE EQUIVALENTS GUIDE. \$5.75. Helps you find substitutes for types of semiconductor diodes in use today.

INTERNATIONAL TRANSISTOR EQUIVALENTS GUIDE. \$7.50. Products of more than 100 manufacturers are listed & cross-referenced with possible replacements.

ELECTRONIC SYNTHESIZER PRO-JECTS, \$4.50.

50 CIRCUITS US-SILICON & ZENER DI-ODES. \$3.75.

50 PROJECTS US ING RELAYS, SCR'S & TRIACS. \$5.00.

EFFECT TRANSIS TOR PROJECTS. \$4.50.

50 CIRCUITS US-IC'S \$4.50.

PROJECTS USING

RADIO CONTROL FOR BEGINNERS. \$4.50.

GAMES \$4.50.

RADIO CIRCUITS USING IC'S. \$4.50.

ELECTRONIC TAPE RECORDING. \$5.00.

ELECTRONIC SECURITY DEVICES. \$5.00.

HOW TO BUILD YOUR OWN SOLID-STATE OSCILLO-SCOPE. \$5.00.

PRACTICAL CON-STRUCTION OF PRE-AMPS, TONE CON-TROLS, FILTERS AND ATTENUATORS. \$3.75.

GUIDE TO DIGITAL
TECHNIQUES, \$3.75.

ELECTRONIC HOUSEHOLD PRO-JECTS. \$4.50.

POPULAR ELECTRONIC PROJECTS. \$3.75.

PROJECTS IN OPTO-ELECTRONICS. \$5.00.




ANTENNA PRO-JECTS. \$5.00. Covers practical antenna de-signs including active, loop & ferrite types that are easy & inexpensive

RADIO STATIONS
GUIDE. \$4.75. Comprehensive listing of transmitters around the world. Presents location, frequency, power.

LONG DISTANCE
TV RECEPTION
(TVDX) FOR THE ENTHUSIAST. \$5.00.
Practical & authoratative introduction
to this unusual aspect
of electronics.

CB PROJECTS.
\$5.00. A number of useful and interesting designs for CB accessories. Speech processor, interference filter & more.



ELEMENTS OF ELECTRONICS Special

THE SIMPLE
ELECTRONIC CIRCUIT & COMPONENTS, \$5.75, All the fundamental theory needed to lead to a full understanding of the simple electronic circuit and its components.

ALTERNATING CURRENT THEORY. \$5.75. Alternating current theory without which there can be no comprehension of speech, music, radio, or Television.

MICROPROCESS-ING SYSTEM & CIR-CUITS. \$7.50. A truly comprehensive guide to all of the elements of a microprocessing

Everything you always needed to know about solid-state devices in

COMMUNICATIONS. \$7.50. Covers most modern communication systems. Line, micro-wave, submarine, satellite, digital multiplex, radio & telegraphy.

AUDIO. \$9.00. Chapter after chapter investigates every im-portant aspect of audio

SPECIAL OFFER— Complete set of all six volumes—a bargain that saves you \$6.25—SPECIAL PRICE \$35.00 FOR THE COMPLETE SET.

ELECTRONIC TECHNOLOGY TODAY INC.

P.O. Box 83, Massapegua Park, NY 11762

Number of books ordered	Name		
Total Price of Books\$	Address		
Sales Tax (NY State Residents)	Address		
Shipping (75¢ 1st two books, 30¢ ea additional)	City	State	ZIP
TOTAL ENCLOSED\$	Prices good until	April 30, 1983	

Printers

One of the first accessories for your computer that you'll find yourself looking for is a printer. Here's some help to make knowing what to look for—and making a





AT SOME POINT IN THE LIFE OF EVERY MICROCOMPUTER OWNER there comes a time whem he needs a permanent record of what he sees on his display screen. It doesn't matter whether it's a copy of a favorite program, budget or financial data, or a letter—the printout is needed. That usually comes about the time he realizes that he's severely limiting the usefulness of his system without some sort of printing device. After all, there's just so much one can do with a CRT display as the sole output device.

Faced with this situation, there's only one thing the microcomputer owner can do; he must begin the quest for some sort of computer printer. For the veteran computerist, the task is fairly easy. He knows what he wants and sets out to get it. The novice, however, faces a bewildering array of choices—and of terminology.

Almost at once he's confronted with the need to become an expert at deciphering such terms as bidirectional, impact, dot-matrix, pin feed, tractor feed, KSR, RO, serial, parallel, graphics, thermal, and the like. To him, it must seem as though the list goes on forever, but it really doesn't. In fact, with a bit of study the novice can become as knowledgable as the longtime computer veteran.

Where should that study begin? Perhaps it's best to start with a simple description of the types of printers available and a glossary of terms.

Inside a printer

In general, a printer is made up of several parts: the printhead, printing mechanism, platen, and the paper-feed mechanism. Those parts are shown in Fig. 1. The **printhead** is what actually makes the impression that forms the letter that appears on the paper. It can be a typewriter-like type bar—or its functional equivalent—or it can consist of a number of wires that are electronically programmed to reproduce the letter in the form of

a matrix of closely spaced dots.

The printing mechanism is the whole mechanical or electromechanical assembly that drives the printhead. Many print mechanisms are bidirectional. That is, they print from left to right and from right to left. The result is a greater output rate. When it reaches the end of a line, the printer "looks ahead" to see how long the next line will be. If that line is long enough, instead of performing a carriage return and starting printing from the left, the printhead will simply reverse direction and print it "backwards," from the right side of the page.

The platen is the roller—like the one in a typewriter—against which the printhead strikes, and which may also serve as part of the paper feed, the mechanism used to move the paper on which the copy is printed. The paper-feed mechanism can be either friction feed (like the platen); tractor feed, where paper with a series of holes along the sides is pulled through the printer by a sprocket arrangement; or some type of pin feed, where small peglike pins that are part of the platen grip and pull the paper forward, always assuring perfect alignment.

If you think that sounds like a glorified electric typewriter, you're right. It's much easier to think of a printer as a typewriter without a keyboard; generally, the microcomputer provides the keyboard.

Thinking of a printer in that way does a great deal to ease some of the confusion you may face as you go about your search. However, of even more importance is our glossary—the words presented here in bold type, along with their definitions. It will help you to make sense of the terms used by a computer-store salesman or in a printer advertisement.

Types of printers

It's quite likely that at some point or another in your search you will come across the terms KSR- and RO printers. Simply put, KSR means Keyboard Send/Receive, while RO means

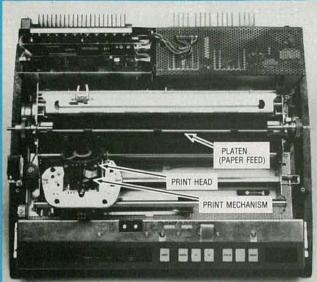


FIG. 1—THE MAIN PARTS OF A PRINTER are the print head, the print mechanism, the platen, and the paper-feed mechanism.

Receive Only. If you are familiar with mainframe computers, then you probably have seen KSR's before. They are the Teletype-like devices used to input or request data to or from the computer. They may either be linked by a dedicated line or through a telephone modem (see the section on modems elsewhere in this supplement).

That isn't to say that's the only type of KSR device. There are compact versions available from many manufacturers that usually combine not only a printer, but also a keyboard and modem. The RO printer is like the keyboardless printer you may have seen at a friend's house. It is the printer linked to his micro and to which he sends data when he wants a printout. When he wants to send data to or through his computer, he uses the computer's keyboard.

Just as there's nothing especially mysterious about those terms, there's nothing mysterious about the terms impact and non-impact printers. Quite simply, an **impact printer** has some sort of print head that makes contact with the paper through a ribbon and forms a character. A **non-impact** printer is one that does not require the paper to be struck. It can be thermal, electrosensitive, laser, or ink jet. In that type of system, the shapes of the characters are stored in a memory, much like the one in your micro, and the characters are printed using one of the non-impact methods just mentioned.

Impact printers come in two types, dot-matrix and fully formed. A **dot-matrix** print head contains a number of pins that are driven by an electronically controlled solenoid. Those pins, in turn, are what form the actual letters by referring to charactershapes stored in the printer's memory. **Fully-formed**-character printers, on the other hand, rely on special wheels, thimbles, or balls to produce their output. The computer instructs the printer to print a letter, and the printer's control circuitry tells the print head to move that letter into position. A small hammer then strikes the letter, which contacts a ribbon, and an impression of the letter is left on the paper.

In general, non-impact printers are much quieter than their impact counterparts, although some types can be much more expensive. The reason for their quietness is that they don't use a mechanical system to form the letters on the paper. Many non-impact printers can operate at higher speeds than impact models.

The chief drawbacks of non-impact printers are that their output frequently tends to be much less legible than that of impact printers; they can only produce one copy, and they often require expensive special paper. Another drawback for the user who wants full-sized reports is the fact that many inexpensive non-impact printers are only capable of handling limited line-

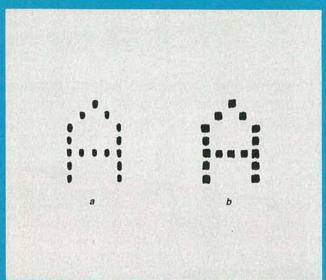


FIG. 2—DOT-MATRIX CHARACTERS (a) are formed by an array of pins that press against the ribbon to form an image; print offsetting can provide a much higher quality output (b).

lengths—16 to 40 characters. Some, however, can handle 81/2-inch-wide paper.

In general, non-impact printers can perform nicely for the microcomputer user who doesn't need high-quality print output. In fact, some home computer systems offer thermal or electrostatic printers as their standard printers. They are also priced relatively low. In fact, Radio Shack offers a low-cost thermal printer for as little as \$129.95, although there are units that can cost upwards of \$500. There are other types of non-impact printers—laser and ink-jet—but their costs are still too high for the average microcomputer user and probably will be for some time.

Dot-matrix printers

As noted, a dot-matrix printer generates patterns of dots to form a letter. The characters measure from four to seven dots horizontally by seven to nine vertically. It is that feature that defines the matrix and, in general, the greater the dot density, the better the quality of the printing. Examples of the output of a dot-matrix printer are shown in Fig. 2.

A couple of years ago, it could truthfully have been said that dot-matrix printers produced poorer-quality output than fully-formed-character ones. The situation has changed, though, with the advent of more sophisticated machines capable of print offsetting.

In normal operation, a dot-matrix machine makes one pass over a line and moves on to the next. However, with **print offsetting**, the printhead makes two or more passes at each line, printing the second time in a slightly different position, and making the matrix of dots denser, as can be seen in Fig. 2-b. That feature has made the dot-matrix printer the rival of the fully-formed-character machine because it is now capable of near-letter-quality printing.

Dot-matrix characters are formed by a number of solenoid-actuated pins in the print head. The character shapes are actually stored in a character-generator ROM (Read-Only Memory) inside the printer. As the data bits arrive in the ROM, it selects the appropriate dot-pattern to create the letter, and the proper pinsolenoids are selected. The solenoids drive the printer pins forward so they make contact with a ribbon and the character is formed.

Another type of dot-matrix printer is the ribbonless printer. Instead of relying on an inked ribbon, the printer needles actually burst microdots of ink on an impregnated roll of paper. Those pin pricks produce characters directly on the paper. However, the printer paper required is much more expensive than ordinary paper.



FIG. 3—SOME DOT-MATRIX PRINTERS can produce dot-patterns exactly matching what you see on the computer's display screen. Both line graphics and more complex images can be printed.



As microcomputers have developed greater graphics capabilities, so have printers. It's a matter of form following function, because what good is a high-resolution graphics display on a screen if it can't be sent to a printer for output? Only a couple of years ago, the top resolution available from a personal computer was about 240 pixels (picture elements) by 240 lines. Higher resolution was reserved for scientific or engineering computers where it was felt it was needed. But, the technology began to filter down to the microcomputer industry, and systems with higher-resolution graphics began to appear. Soon, resolutions approaching 400 or 500 pixels were common and now the resolution range is well over 600.

That degree of resolution means that a desktop computer can produce sophisticated graphics displays. In fact, the business community is taking advantage of those graphics capabilities, and of the software that makes use of them.

The printer industry, naturally, has followed suit and the character-generator ROM has been joined by the graphics-generator ROM. That integrated circuit contains machine-language routines that control not only the printhead, but also the printing mechanism and the platen. In that manner, the printhead is moved around a sheet of paper, forming the graphics image. Further, that ROM also contains the information needed to print special character-fonts.

Further, dot-matrix printers with graphics ROM's can produce "screen dumps." Since the graphics ROM is able to use the microcomputer screen's bit-mapped memory during a graphics printing session, it is also able to print out a representation of what is shown on the computer's display screen. Many microcomputers have areas of their RAM (Random-Access Memory) reserved to hold that display information. Thus, each area of such a computer's CRT screen will have a corresponding address in RAM. Because of that bit-mapping, the RAM is able to output its contents directly to the printer and a user is able to have a real-image dump or "photograph" of the screen. Figure 3 will give you an idea of what some printers are capable of.

Finally, some dot-matrix printers can now print in color. A ribbon with (usually) four horizontal color-bands can be moved up and down in front of the print head and, over multiple passes, a wide variety of colors—corresponding to those generated by the computer for its display—are produced.

So, the dot-matrix printer, because of its versatile printhead, is a far more flexible printer than the fully-formed-character type. But, even with all its capabilities, many people are still put off by dot-matrix printing. They believe it looks too "com-

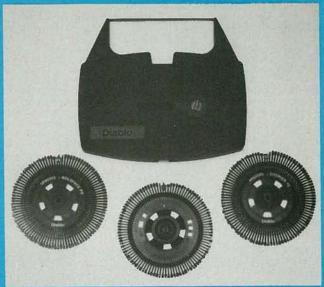


FIG. 4—A DAISY WHEEL has one character at the end of each of its "petals." Daisy wheels commonly contain 82, 88, or 96 characters.

puterish," and prefer the traditional letter-quality, fully formed characters of a typewriter.

Solid-character printers

Perhaps the earliest solid-character printer was the *Telex* or *Teletype*. It used a print cylinder that rotated on a vertical axis. That printhead was transported across the page by a movable carriage. Inside the printhead is a small hammer that is the print-actuating element. The device responds to the microcomputer's request for a particular letter by raising or lowering the cylinder, and rotating it to bring the correct letter into play. When it is located, the hammer strikes the cylinder, which in turn, strikes a ribbon, and prints a character. The carriage then moves on to the next space.

Units like those—*Teletype* models 33, 35, and 38—are available today for relatively little (\$200 to \$400), but they do have some drawbacks. They tend to be slow—about 10 charactersper-second (cps)—and they are noisy and difficult to service. Also, they can't print lower-case letters.

An alternative is the ball-type printer. The type of printhead it uses was developed by IBM for its familiar *Selectric* typewriter series and contains a set of fully-formed characters on its surface. In action, it's much like the *Teletype*. The computer requests a letter, and the printhead/carriage mechanism spins to the correct spot. The head then strikes the ribbon and a letter is printed.

There are conversion kits that can turn older *Selectrics* into computer printers. One of them consists of a device that straps to the keyboard and has a series of solenoid-actuated arms. As a letter is requested, the proper arm drops and pushes the key, causing the letter to print. However, that is only one method. There are also companies that recondition *Selectrics* and turn them into true computer printers by adding the proper electromechanical parts internally.

Although the ball-type unit produces good quality printing, it is still noisy and fairly slow—about 15 characters-per-second. On the positive side is the fact that it is available at a relatively low price.

The final type of solid-character printer we'll examine is the daisy-wheel type, and its variant the thimble printer. The daisy wheel was pioneered by Diablo Systems, Inc. in 1973 and offers much higher speeds than were previously possible with solid-character printers.

Running at speeds up to about 55 cps, daisy-wheel printers use a wheel-type printhead, of the sort shown in Fig. 4. Running radially from the wheel hub are flexible arms topped by embos-

sed characters. As the computer requests a letter, the wheel spins the correct character into place and that is hammered against the paper by a small striker to print the character. The print wheels are made of plastic or a metallized material, and are usually good for more than a million impressions.

The thimble printer is a variant of the daisy-wheel type. Unlike the daisy wheel, though, the thimble print-element is shaped like a thimble facing upward, and the letters are on flexible steel shafts extending from the thimble base. Thimbles work on the same principle as daisy wheels.

Like the ball-type printer, those printers have an advantage in their easy interchangability of typefaces (the print elements can be changed in a matter of seconds). They are also much faster. They are somewhat noisy, though.

One alternative a computer user might want to consider is the conversion of an electronic typewriter. Since those units use daisywheels in place of normal type bars, and since many of their mechanical parts have been replaced by electronics, it makes a great deal of sense. You retain the typewriter capability for yourself...while adding, fairly inexpensively, a quality printer for your computer. There are reasonably priced interface boards available or you can purchase a converted unit such as the *Bytewriter* (based on the Olivetti *Praxis* electronic typewriter) for a reasonable price. Print speed is limited to about 10 or 15 cps and they are somewhat noisy, but, for many, they'll fill the bill.

Non-impact printers

The last category is non-impact printers, which were mentioned briefly earlier. It includes thermal printers, electrostatic matrix-printers, and ink-jet printers.

Thermal printers, which are fairly popular, use a specially manufactured paper and a heating element. Common in many calculators, they form characters using heat. The characters are formed as heating elements in the printhead discolor the sensitized paper into a dot-matrix pattern. The printers are lightweight, quiet and quick; however, the paper they use is fairly expensive.

Electrostatic printers also produce a dot-matrix pattern, but they use a special aluminum-coated paper. A voltage is applied between the printhead and a metal plate that burns off the aluminum and exposes a black layer beneath. Electrostatic printers are fairly inexpensive and their print quality is good, but the special paper they require is costly and fairly delicate. Laser printers work in much the same way, using a specially treated paper and a low-energy laser to form the characters.

Ink-jet printing is another non-impact process. In that system, a small jet of ink is pumped through a tiny nozzle, and the nozzle is vibrated to create a series of droplets. The resulting spray is directed to the paper, and its path controlled so it will form characters.

There are a number of methods used to determine where the jet will strike the paper, including electrostatic deflection, controlled nozzle movement, and controlled paper movement. There is also another method that uses a printhead with a matrix of nozzles that can be fired selectively; it works somewhat like a dot-matrix printer.

Print lines

Other terms that you may encounter in reference to printers include serial, character, and line. The term "serial" can be especially confusing because it refers not only to the way in which characters can be printed, but also to the way in which data can be transmitted. We'll get to the latter shortly.

In printer terms, a serial printer is one that prints a continuous flow of characters in a straight line across a page, one after the other. It's also known as a **character** printer. **Line** printers—which are generally large and very expensive—print an entire line all at once. That makes them much faster than serial printers, and they are used in situations where a high throughput is needed—in data-processing centers, for example, where thousands of checks or documents are printed at a time.

One of the chief advantages line printers enjoy over serial

printers is speed. In fact, that's how their performance is rated. A slow line-printer will run at a speed of about 300 lines-perminute (lpm), while a medium-speed unit will print at between 300 and 600 lpm. High-speed line printers are capable of speeds in the 600 to 1200-lpm range. Line printers are generally categorized in three groups: drum, chain, and scanning-matrix.

Serial-printer speeds contrast markedly with even the slowest of line printers. Rated in terms of characters-per-second (cps), dot-matrix printers have speeds in the 40- to 400-cps range, while fully-formed-character printers may operate between 10 and 60 cps.

Interfaces

There are two ways that a printer can be connected to a computer: through a serial interface, or through a parallel interface.

When a **serial interface** is used, data is transmitted by the computer's print routine to the printer one bit after the other. The task is handled **asynchronously**, which means that the rate at which the data is sent does not have to be constant. Instead, the timing is established by the number of start and stop bits sent at the beginning and end of each byte of data; one byte represents one character. The serial-data format is shown in Fig. 5-a. When the printer has received the correct number of start, stop, and data bits, it knows that it has received a complete byte (also sometimes called a word) and it then begins to piece together another one. Appropriately enough, that type of communication is carried out through a computer's serial port.

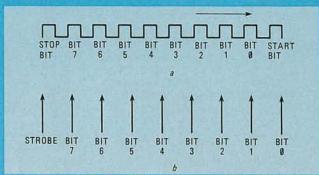


FIG. 5—SERIAL DATA IS TRANSMITTED one bit after the other. The bits indicating the character being sent are surrounded by what are known as framing bits (a). Parallel transmissions send all the data bits at once (b); a strobe pulse tells the printer when a character is to be printed.

That contrasts with a **parallel interface**, where entire bytes are sent at once, as can be seen in Fig. 5-b. That is possible because, instead of using only one input line to the printer, there are seven or eight data lines used. Thus, each of seven or eight data bits is sent down its own line. The result is a much higher transmission speed, and a corresponding increase in printer speed. A special port is needed to handle parallel communication between a printer and computer because of the number of data lines required. A **Centronics-compatible**, or **Centronics-type** interface is a particular form of parallel interface; it was originated by a printer manufacturer named *Centronics*, and was adopted by many other companies as a sort of standard. Be careful, though—not all interfaces billed as Centronics-compatible are identical; make certain before you buy that the printer will run with your computer.

Which system is better? For distances of up to ten feet, parallel transmission is better because of its greater throughput (ability to send more data in less time). However, over longer distances, the potential for errors induced by such things as vibration, electrical noise, or stray RF from the computer or printer makes parallel communication less desirable. In addition, after they travel some distance, the signals begin to weaken and must be reamplified through a repeater.

For distances of more than ten feet, the serial method is the

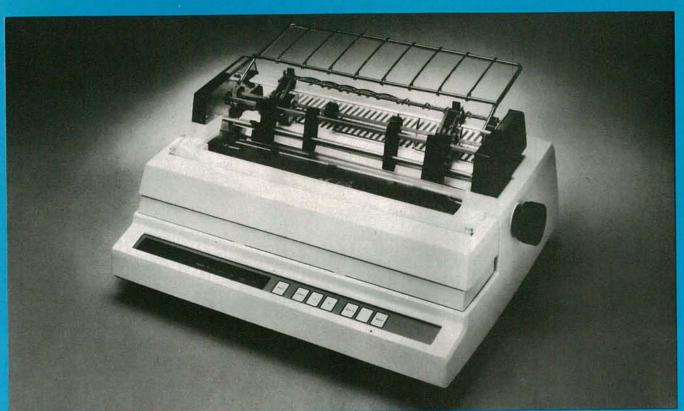


FIG. 6—A TRACTOR-FEED MECHANISM allows continuous-form paper to be pulled through the printer evenly without slipping from side to side. Thus, it allows long unattended runs.

better choice. While it is much slower than parallel datatransmission, the error rate is much lower. Furthermore, serial transmissions will carry for longer distances before needing reamplification. Transmission rates ranging from 110 to 19,200 baud (bits-per-second) are possible, but must be compatible with the capabilities of the printer, of course.

Asynchronous transmission isn't the only type of serial protocol, though; there is also **synchronous** transmission. This type of communication is far more complex than asynchronous. The system must know the exact timing of each data byte. When a synchronous protocol is used, the data flow is broken into blocks, with all the bits being sent at equal intervals.

Using oscillators as clocks, the computer initiates the timing sequence by inserting a series of synchronization signals at the start of each data block. Each block ends with an error-checking character. The clock-oscillators act to keep the timing sequence very tight. And, even if no data is transmitted, nulls (zeroes) are sent to fill each block so the timing chain never varies.

Paper-feed systems

Three different methods are used to move the paper through a printer. In the first method, known as **friction feed** the paper is pulled between the platen and a set of pressure rollers, much as in a typewriter. While it's a simple, trouble-free method most of the time, friction feed can be bothersome because of alignment problems. That is especially true when using continuous-form paper, which tends to skew (slip sidways).

With tractor feed, used on the printer shown in Fig. 6, a set of adjustable sprockets engages perforations at the edges of the paper. A gear train, driven by a motor, turns the sprockets which, in turn, pull the paper through the printer line by line. Usually the tractors (sprockets) are moveable, and tractor-feed printers can accommodate paper of any width. Most tractor-feed printers can also use plain paper, a sheet at a time.

Pin feed is similar to tractor feed; a set of pins set into the platen at either end fits into perforations in the paper to keep it aligned. While that system solves alignment problems, it does limit you to single paper-width.

Other considerations

There are several other factors that you should take into account when looking for a printer. Consider the amount of noise the printer makes. Impact printers are generally noisier than dot-matrix printers, but the sound produced by the latter type can sometimes be very irritating. If the sound a printer makes is too obtrusive, it can make working around the printer uncomfortable, and can contribute to fatigue.

Consider, too, the speed at which the printer runs. A slow printer will tie up your microcomputer for long periods, rendering it useless for other tasks unless you add a buffering print-spooler that accepts data from the computer almost instantly, and feeds it to the printer as required, thus returning control of the computer to you. Also, remember that a bidirectional printer will operate somewhat more quickly than one that has to do a carriage return after each line.

Bear in mind the length of the lines you will be printing; don't buy a printer with too narrow a platen. For documents on standard $8\frac{1}{2} \times 11$ -inch paper, an 80-column printer is a necessity; some applications may require a 132-column printer. Also consider the typefaces you will need, and the graphics capabilities of the machine. And, consider the type of paper you will be using (single sheets or continuous form) and the amount of attention the printer will need while in operation.

Finally, a word about prices. Like the prices of other microcomputer peripherals, those of printers have been dropping. A couple of years ago it wasn't unusual to find a letter-quality, solid-character printer costing in excess of \$3000, with the better-quality dot-matrix printers selling for over \$1000. Today, it's possible to buy a letter-quality printer for well under \$1000. Furthermore, dot-matrix printers with graphics capabilites were priced in the \$1500 range only two years ago; today the same features can be found in printers costing between \$300 and \$1000.

If you put to use the information that's been presented here, finding the printer you need should become a much less difficult task than you may have imagined it would be.

Use the POWER within your reach!



A new and unique magazine for the world's most popular personal computer



Now that you've got a TIMEX SINCLAIR computer make sure you get the new magazine that helps you to get the most out of it . . . TIMEX SINCLAIR USER! And take advantage of our special bonus of a free software cassette (\$15.00 retail value) with each subscription.

TIMEX SINCLAIR USER is published monthly. It keeps you totally up-to-date. It helps you make full use of the power of your computer.



TIMEX SINCLAIR 1000: the price and technology breakthrough that finally made computers affordable.

TIMEX SINCLAIR USER: the magazine that helps you use the power of this revolutionary computer.

PIMEX SINCLAIR USER covers the full spectrum of user interests. Education. Business applications. Home management. Games and family entertainment. And TIMEX SINCLAIR USER does it in a easy-to-understand style that's authoritative yet friendly.

Each issue is packed with articles and information that help owners make use of the power of their computer. News about software releases. Reviews. Hardware developments. Reader question and answer column. Eight pages of program listings in every issue. New and unique user applications. How to program. Interviews. Special money saving offers to readers.

In fact, all the latest ideas and information to ensure that new owners and expert users never tire of their computer.

FREE BONUS WITH YOUR SUBSCRIPTION



Signature_

"Packrabbit" Retail value \$15.00

A good reason to order now! Receive a software program cassette of an exciting, new arcade game! "Packrabbit" is a regular \$15.00 retail value. Free with subscriptions for a limited time only.



Remember: the TS1000 was designed precisely for you. Whatever your age and experience in computers, TIMEX SINCLAIR USER can help you use the power of your computer.


SUBSCRIBE NOW and take advantage of our special offer. Only \$29.95 for 12 monthly issues postage paid. This represents a \$6.00 saving over regular newstand prices. And remember, you receive a FREE BONUS with every subscription, a "Packrabbit" software cassette (\$15.00 retail value).

To order call TOLL FREE

800-543-3000

Ask for Operator 243. In Canada call (513) 729-4300 and ask for Operator 243. These numbers are for orders only. Have your VISA, Mastercard or American Express card ready.

Mail to TIN	MEX SINCLAIR USE	H, 49 La Salle Avenue	Buffalo, New York, 14217
Name			and the second
Address _			2502 2500
City	State	Zip	Silician
() Check	() Mone	ey order. Or charge to	
() Visa	() Mastercard () American Express	() Yes, I want to subscribe to TIME SINCLAIR USER at the special rate of \$29.9 for 12 issues delivered to my door. In addition
Number _		·	understand I will receive the FREE softwar cassette with my first issue.

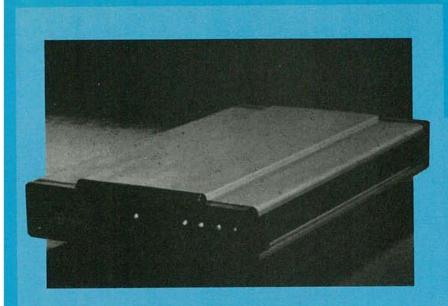

Radio Electronics YOUR DWN APRIL 1983 FOR DUCK PRINT 1983

Modems

Your computer can exchange information with any other computer in the world—all you need is a telephone and a modem.

HERB FRIEDMAN

MOST FAMILY AND SMALL-BUSINESS USERS OF PERSONAL COMputers eventually discover that there's a lot more to the world of computers and information-processing than software they can write or purchase. For those who need it, there are the commercial data-banks that will provide up-to-the-minute information on just about anything, as well as "community bulletin boards"—usually run by hobbyists—that will keep you up to date on the latest developments in personal computing.

Then there's customized software to share. You might have written a program (or data) you'd like to share right now with a friend on the other side of town. Or maybe he has some new

software he'd like to share with you.

If you're tired of killing a lot of time at the bank every payday, waiting in line to deposit your check and pay your bills, some banks will now allow you to handle all of your banking chores from the comfort of your home using your personal computer. (And if the banks have their way, in a few years you won't have the choice; all banking will be done through some form of personal computer—but that's a whole other story.)

The key to the world of personal computer communications is a modem (MOdulator/DEModulator)—a device that permits computer and terminal communications over a voice-grade telephone circuit. It does so by converting your computer's electrical signals to audio tones that can be efficiently handled by the telephone system. Conversely, the modem converts received audio tones back to electrical signals that are understood by your computer.

Modems

There are several kinds of modems in current use. The type generally used for communicating through the dial-up telephone system is called "Bell-System-103-compatible," which means that it uses the same protocols (standards) as the modem that was provided by the Bell System when that company had a monopoly on data exchange over most of the telephone lines in North America.

A Bell-103-compatible modem can transmit and receive data at rates of 0 to 300 bps (Bits Per Second), which also happens to work out to be the "baud rate," because for data transmission, the bit rate equals the baud rate: 110 bps is 110 baud, 300 bps is 300 baud, etc.

While there are modems capable of transmitting and receiving more than 300 bps, they require specially equalized telephone circuits or dedicated lines and are presently not worth the expense for personal-computer use. It often can take several years just to pay off the difference in cost between a Bell-103-compatible modem and a high-speed modem, assuming you can get convenient access to a telephone circuit that will handle more

than 300 bps efficiently. Because of that, we will concentrate mainly on Bell-103 compatible modems.

The first modems were rather simple devices as they were most often used to connect terminals—usually teletypewriters such as the *Model 33*—through the dial-up telephone system to large mainframe host-computers. The most common type used was the acoustic-coupled model (we'll get to why shortly), the type with two large rubber cups into which the user places the telephone handset after dialing up another computer or terminal. That type of modem is still popular today; let's take a closer look at it

One cup contains a small speaker; the other a microphone. When the telephone handset is seated in the device, the handset's microphone is opposite the speaker, while the receiver (earphone) is opposite the modem's microphone. The modem itself is connected to the terminal or computer through a "standard" electrical connection, called an RS-232C interface (usually shortened to simply RS-232), or a 20-mA current loop. When an RS-232 interface is used, all signals are represented as variations in voltage level. In the case of the 20-mA current loop—the original "standard" for teletypewriters—the data is represented by the make/break sequence of a reference 20-mA DC current. Many early personal computers provided a 20-mA current-loop output because almost all commonly available modems could accommodate the 20-mA connection; not all were equiped to handle an RS-232 signal.

Electrical signals from your computer or terminal are converted by the modem to audio tones that are fed to the internal speaker and passed on to the handset's transmitter (microphone). Audio tones arriving over the telephone from another computer are picked up by the modem's microphone and converted to electrical signals.

Making the connection

The usual procedure for getting your terminal or computer hooked up to the remote computer or terminal is to first use a rotary or *Touch-Tone* telephone to call the remote. When the user hears the "carrier" tone from the remote computer, he inserts the handset in the modem's cups. When the modem senses the carrier, it turns on its own carrier, thereby informing the remote computer that the communications link has been established.

To make certain that every terminal can communicate with every computer, all Bell-103-compatible modems use exactly the same protocols. In the early days, because the remote terminal usually originated the "call," its modem was called an originate modem; it transmitted data at frequencies of 1270 and 1070 Hz. Since the host computer answered the call from the

terminal, its modem was called an answer modem. The answer modem transmitted the data at frequencies of 2225 and 2025 Hz. When, as often is the case today, the communications link is computer-to-computer rather than terminal-to-computer, either one can use the answer modem unless one is specifically designated as "the host;" in that case, it is the one with the answer modem.

The reason that those early modems were of the acoustic type was that, at one time, Bell would not allow anyone to connect directly to the telephone system without paying a stiff tariff for some sort of protective device; acoustic modems have no direct connection to the telephone lines. However, for those who could afford the convenience, many early acoustic modems also had provision for direct connection. For example, Fig. 1 shows an Omnitec model 701A coupler. Many of you will recognize the Omnitec as the workhorse of the early time-share computer systems. Though the acoustic cups are plainly evident, there is also an output jack and switch for a direct connection to the telephone system, as well as a monitor output jack, a selector for half and full duplex operation, and connectors for both a 20 mA and an RS-232 input/output.

The 701A was built like a battleship, could probably serve as a boat anchor in a howling gale, and was known for reliability. While the advertisements for many modern modems belittle acoustic coupling on the basis of noise interference or microphone distortion, bear in mind that acoustic couplers such as that one were usually bolted to the side of a teletype, which was known as a "Klunker" (because it literally "Klunked" away continuously). What's more, it was usually used in a room full of teletypes hammering away; yet it provided dependable computer communications at maximum convenience. (In case you're short of funds, those old acoustic couplers are available on the surplus market for \$15 to \$50, depending on the model.)

Full and half duplex

Before we go any farther, let's take time out to cover half and full duplex for those not familiar with the terms. When you use a terminal or a personal computer to communicate with a host computer, what you see on your video screen or printer is not what you sent from your keyboard. The video is an "echo" from the host computer that serves as a check on the two-way path between you and that computer. If the echo display is not what you sent you can be reasonably certain there is trouble with the telephone circuit or the host computer, not your equipment. You check that quickly by switching the modem to half duplex (if possible). In half duplex your own signal is returned by the modem to your video display; what you see is what you sent.

Unfortunately, you usually cannot use half-duplex with a host computer that is echoing for two reasons. Firstly, everything will be repeated, the video display will show your half duplex display and then the echo; the word 'HELP' would be displayed as "HHEELLPP." Secondly, many terminals and computers seem to "go crazy" when they must handle both the half-duplex signal and the echo; it's sort of like trying to speak while listening through headphones to your voice being reproduced with time delay from a tape recorder.

Until recently, most modems available to personal computer users were originate-only because it was assumed the user would only want to communicate with host computers or database systems (which are provided by a host computer). When it became obvious that users of personal computers wanted to communicate with other personal computers, an instant market was created for a combination answer/originate modem because in any communications link someone has to use an answer modem—although it doesn't matter who it is.

Up until a few years ago modems were somewhat expensive, too. A cheap originate-modem could run upwards of \$150, while a manually-selected combination originate/answer modem usually cost in the neighborhood of \$300-\$500. Through modern technology, inexpensive integrated circuits, somewhat severe competition, and Bell losing the fight over whether they can control any and all equipment that generates signals carried on the telephone circuits (the Carterfone case), the price of modems has been sharply reduced. There is now a wide assortment of modem equipment specifically designed and priced for the personal computer user, with features ranging from the most basic to the most sophisticated.

What's available

Other than using a modular connector for modems that connect directly to the telephone system, no two manufacturers seem to have the same idea as to what features should go into a modem intended for use with personal computers. Because of that, we'll take a look at the various features found in some of the most popular or generally available models. You can then select what features you need or want most for your particular computer installation.

We'll start off with one from Omnitec—the people who manufactured the 701A. Their latest effort is the model 9123AD. It is a direct-coupled originate/auto-answer modem with automatic telephone-silencing. The modem connects to the telephone jack through a modular connector. The telephone, which formerly connected to the modular jack, now connects to a modular receptacle on the rear of the modem. The computer connects to the modem through a "standard" DB-25S, RS-232 connector.

The unit can be switch-selected to function as an originate, manual-answer, or auto-answer modem. Auto-answer means

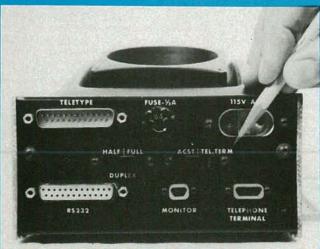


FIG. 1—ALTHOUGH OVERSIZED AND HEAVY, older acoustic modems such as this one did an excellent job even in teletype-filled rooms.



FIG. 2—THIS OMNITEC MODEM is a direct-coupled, originate/auto-answer model. The three front-panel LED's indicate operating status.

the modem literally "answers" a telephone call. When the phone rings the modem connects to the phone line and generates an answer carrier. If it receives an answer-back carrier from an originate modem, it establishes a communications link. If it does not, the modem disconnects itself from the line after approximately 20 seconds.

In the manual-answer mode, the user selects the mode after the telephone contact has been established. For example, if your friend calls you at 3 in the morning bubbling about his latest game and insists you take a download so you can try it immediately, you simply switch your modem to answer if all he has is an originate modem. On the other hand, if you are not enthusiastic about being disturbed in the middle of the night, you can leave your modem in the automatic mode. It will answer the phone, and with the proper software take the download automatically. All around, that is a very classy personal-computer operation.

The automatic telephone-silencer works this way. You are originating a link to, say, The Source. You dial their phone circuit, and when The Source connects with its answer carrier you hear it in the phone. When the modem senses the answer carrier, which takes only a few seconds, it automatically disconnects the handset—the receiver goes "dead." The modem is now connected directly to the line and the handset is disconnected so that when it is set in its cradle it neither goes "on hook" (disconnected), nor generates a glitch in the data stream.

The unit has three front-panel LED's (see Fig. 2). One indicates when the system is in the TALK mode—regular telephone use, one indicates a modem carrier is being received, and one indicates data flow. There is no on-off switch. The disconnect can be forced by a long or short space from the terminal, but few personal computers functioning as terminals can provide the proper space. Alternately, setting the terminal to the LOCAL mode can force the disconnect, but again, few personal computers can simulate that type of disconnect. When we need a fast release of the modem from the line and can't wait the 20 seconds or so for the automatic disconnect, it's done by simply pulling the power plug from its outlet. A simple power-switch would be a lot more convenient.

A somewhat different approach to a direct-connect originate/answer modem is the model *UM1*, a special version of the *Microconnection* from the Microperipheral Corporation. The usual *Microconnection* modem has the standard RS-232 I/O; that model is made to interface directly with the data-bus connector on the back of the keyboard of the Radio Shack *TRS-80 Model I* computer as shown in Fig. 3. It eliminates the necessity of spending \$100 for Radio Shack's RS-232 interface. Even if you use the expansion interface for disk drives, the modem can still be connected to the keyboard's data bus connector along

with the connection between the keyboard and the expansion interface. And best of all, that modern will work even with the 4K Level I *Model I*—the necessary driver-software is provided on cassette tape.

A somewhat unusual feature is a set of jacks that allow you to connect a cassette recorder so that you can record signals for later playback directly over the telephone line.

The rest of the features are more or less standard. There is manual on-off, manual selection of the originate and answer modes, and voice/data-mode selection—the data mode seizes the telephone line so you can hang up the telephone. Power and carrier indicator-lamps are provided.

While we're talking about relatively low-cost modems, let's take a look at some that use acoustic coupling. Modern versions of the old 701A are now available from several sources for slightly more than \$100. The only substantial difference in operation is that the latest versions now provide for both originate and answer operation. One slightly different modem of that type is the model MJF-1230 inductively coupled modem from MJF Enterprises, a company relatively unknown in computer circles but with a long track record in amateur radio. Their contribution to modern technology is to use inductive coupling to receive the incoming signal. Supposedly that reduces ambient-noise interference. However, since we've never had problems with ambient-noise interference, even with an acoustic coupler sitting on top of a teleypewriter, we can't be certain that inductive coupling is of any extra value. Essentially, the unit performs like a standard originate/answer accoustic modem. Other features include full/half-duplex selection, TTL and CMOS I/O in addition to standard RS-232 (that should appeal to computer experimenters), and cassette recorder I/O ports that let you record incoming or outgoing signals (see Fig. 4).

Moving up in price, we find some high-technology modems such as the Novation *Auto-Cat*, a miniature originate/answer, auto-answer modem that is directly hooked up to the telephone line through a modular connector. The computer I/O is through a standard RS-232 interface.

Instead of mechanical switches, that modem uses a membrane-switch front panel to select originate or answer operation; the front panel also features three LED indicators.

A RESET front-panel switch clears the unit so that you can select the operating mode. For example, to originate a transmission, first the RESET switch is depressed. Next, the remote computer is called on the regular phone, and when the answer carrier is heard the ORIG (originate) switch is depressed and the phone is hung up. The modem seizes the line when switched to ORIG. The same procedure can be used for manual answer between two personal computers, or the answer connection can be controlled by the terminal through the DTR (Data Terminal



FIG. 3—THIS SPECIAL MODEL of the *Microconnection*, the model *UM1* from the Microperipheral Corporation, works with the Radio Shack *TRS-80 Model I* and eliminates the need for the RS-232 expansion interface.

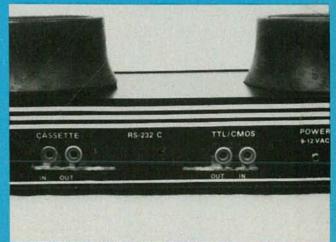


FIG. 4—IN ADDITION TO inductive coupling, some of the extra features found on the *MFJ-1230* modem from MFJ Enterprises include TTL/CMOS and cassette-tape I/O.

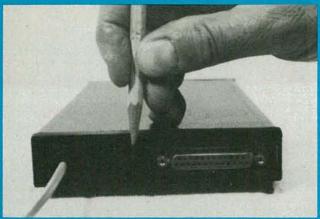


FIG. 5—A REAR-APRON SWITCH on this Auto-Cat from Novation lets you choose between normal operation and one of two test modes.

Ready) signal on RS-232 pin 20. In the auto-answer mode, the modern automatically seizes and connects to the line when the phone rings.

The Auto-Cat has some interesting self-testing features. As shown in Fig. 5, a switch on the rear apron is used to select among NORMAL, AL, and DL operation. When set to AL (meaning, Analog Loopback) the telephone line is busied-out, and the modems's output is returned to the input so that the display shows the keyboard entries. If you're having problems on the other end of the communications circuit, and you check out in the AL mode, you know that your terminal (or computer) and modem are working all right.

The DL mode (meaning, Digital Loopback) is a remote check. All data received is looped back to the remote station for verification. (Yes, an operator is required at the remote station.)

The modem "bails out" quickly if something goes wrong. Loss of carrier results in an almost instantaneous disconnect. Loss of the DTR signal from the computer causes an instantaneous disconnect. Failure to get an answer-back carrier in the answer mode will produce a disconnect in 18 seconds. Failure to get an answer modem's carrier when in the originate mode will cause a disconnect in 10 seconds.

The Auto-Cat's operating features are more or less common to other modems within the same general price range. For example, U.S. Robotics, an outfit that's been around personal computing a long time, has a model called the Auto-Link 300 that has very similar features.

A somewhat unusual modem is the Signalman from Anchor, which is priced arround \$100. It is a direct-connect manual-dial answer/originate modem with automatic operating-mode selection. It comes up in the originate mode, and if it does not "hear" the carrier from an answer modem it switches to the answer mode and transmits an answer carrier. The modem can only be used with a modular telephone having a plug-in handset. The handset plugs into the modem, and the modem plugs into the telephone's handset jack. When the modem is set for VOICE, the telephone can be used normally; when switched to DATA, the handset is disconnected and the modem goes "on-line." unit is powered by an internal 9-volt battery or an optional AC adapter. It is available with an RS-232 connector, or with special cables for direct connection to the Osborne 1 and most commodore PET/CBM computers. Cables are also available for the Atari 850 and the Texas Instruments TI 99/4A interfaces.

For many users, however, the ultimate modem for personal computers has been the D.C. Hayes *SmartModem*, which is available in a standard RS-232-configuration for somewhat under \$300, and in a special version for the Apple and S-100 computers. The unit has its own on-board Z-80 microprocessor. It connects directly to the telephone line through a modular connector and no telephone of any kind is required because all operating functions, including the dialing, is done directly from the terminal or computer keyboard. However, there is a modular



FIG. 6—ALTHOUGH SMALL ENOUGH TO FIT under a telephone, you don't need one to use the SmartModem from D.C. Hayes; all dialing is done from the computer or terminal keyboard.

phone connector on the back of the device. When the modem is connected to the telephone jack, the phone connection itself is moved to the rear of the modem. In fact, the modem is specifically designed to fit under a standard desk-telephone so that they become an "integral unit" as shown in Fig. 6.

There are no mode switches, because, like everything else, mode selection is done from the keyboard. Other than a power switch and a volume-level adjustment for a built-in speaker, there are no controls. The operating status, test, and checks are indicated by seven front-panel LED indicators.

An internal speaker allows the user to monitor the telephone circuit to hear dial tone, ringing, and the answer. When the call is answered by a carrier, the carrier is heard briefly and then the speaker is automatically muted for the remainder of the session.

Most of the operating parameters are programmable through the keyboard. For example, you can select either pulse (simulated rotary) or *Touch-Tone* dialing, or a combination of the two; such as pulse dialing a computer and then controlling the computer with *Touch-Tone* signals. You can set how many rings are required before the modem automatically answers the line (from 0 to 255), how long to wait after a ring before the modem is reset for another count, what you want the ASCII escape code to be, the ASCII values of the carriage return, line feed, and back space, time delay for dialing to accommodate "dial 9" (outside calls from an office) circuits, waiting time for answerback carrier before disconnecting from the line, echo on and off, loopback, etc. In addition, the default parameters can be configured through a DIP selector-switch that is accessible when the front panel is removed (see Fig. 7).

The operating features of the *SmartModem* are simply too extensive to cover completely here; but though extensive, the modem is unsually easy to use. The only difficulty, if it can be called that, is that few stores are able to demonstrate it adequately. We tried two of the largest local computer shops and found that none of the clerks at either knew what they were talking



FIG 7—The SMARTMODEM'S OPERATING PARAMETERS can be set from the keyboard or through the use of this DIP switch; the switch is concealed behind the front panel of the device.

TABLE 1—DIRECTORY OF INDEPENDENT MODEM MANUFACTURERS

Modems are available from computer manufacturers, and also from many independent manufacturers, such as the ones listed below.

ANCHOR AUTOMATION

6624 Vallean St. Van Nuys, CA 91406

ANDERSON JACOBSON

521 Charcott Avenue San Jose, CA 95131

APF ELECTRONICS, INC.

1501 Broadway New York, NY 10036

BIZCOMP

Box 7498 Menlo Park, CA 94025

HAYES MICROCOMPUTER PRODUCTS

5385 Peachtree Corners East Norcross, GA 30092

LEXICON CORPORATION OF MIAMI

1541 NW 65th Avenue Plantation, FL 33313

LIVERMORE DATA SYSTEMS

2050 151st Place NE Redmond, WA 98952

MFJ ENTERPRISES, INC.

921 Louisville Rd. Starkville, MS 39759

THE MICROPERIPHERAL CORP.

2643 151st Place NE Redmond, WA 98052

MULTI-TECH SYSTEMS, INC.

82 Second Avenue SE New Brighton, MN 55112

NOVATION

18664 Oxnard St. Tarzana, CA 91356

OMNITECH DATA

2405 South 20th St. Phoenix, AZ 85034

QUEST ELECTRONICS

P.O. Box 4430E Santa Clara, CA 95054

RACAL-VADIC INC.

222 Caspian Drive Sunnyvale, CA 94086

RIXON, INC.

2120 Industrial Parkway Silver Springs, MD 20904

TNW CORP.

3351 Hancock St San Diego, CA 92110

US ROBOTICS

203 N. Wabash, Suite 1718 Chicago, IL 60601

UNIVERSAL DATA SYSTEMS

5000 Bradford Drive Huntsville, AL 35805

about. One even wanted to sell us the Apple model for use on a Heathkit H89 computer. If you want information on the unit, write directly to D.C. Hayes,

We've touched only on the highlights of several modems that offer the most common operating features. When you shop for

your own unit you're sure to see many more (for your convenience, we've included a list of manufacturers—see Table 1). By looking at the features of the modems listed here, you'll be able to figure out which ones you need or want before you get to your local dealer or place your order.

ATTENTION TECHNICIANS

ARE YOU TIRED

of being

"only a serviceman" "just a technician"?

THE LETTERS "CET AFTER YOUR NAME SPELLS

"PRIDE"

TRY IT Take pride in

our profession

becide to be a CET	
For information about: exal requirements; study	

Send to: NESDA/ISCET 2708 W. Berry St. Fort Worth, TX 76109 (817) 921-9101

Name				
	435		-71	
Address				

St. Zip City



Learn the wonders of digital electronics and see how quickly you are designing your own circuits with the SUPERKIT which contains:

Seven TTL integrated circuits, breadboard, LED's, and all the DIL switches, resistors, capacitors and other components to build interesting digital circuits; plus a very clear and thoroughly tested instruction manual. This course teaches Boolean logic, gating, R-S and J-K flipflops, shift registers ripple counters and half adders. You will learn about fault finding, improvisation and sub-system checking and the manual asks plenty of questions, but never leaves you stuck for an answer. You don't even need a soldering iron! Using the same breadboard you may construct literally millions of different circuits\$39.95

Order one of our written Courses to complement your SUPERKIT.

Digital Computer Logic & Electronics - An introduction to digital electronics designed specifically for the raw beginner. If you're just starting with Digital Electronics this is the Course for you \$13.95

DIGITAL COMPUTER DESIGN - A totally revised and updated Course using the programmed learning system. This book is not intended for beginners but is ideally suited to engineers, technicians and hobbyists who want to know more about digital electronics. . . . \$17.95

A PRACTICAL DIGITAL **ELECTRONICS KIT FOR** LESS THAN Suitable for Beginners

Meet the challenges of today's incredibly rapid changes in electronics quickly and easily. This innovative kit is as exciting as the circuits you build and explore.

TO ORDER BY MAIL

Just send your check or money order to the address below. Make sure you enclose your address and specify which Courses you are ordering. Payment must be in US Dollars drawn on major US Bank Mass. Residents add 5% sales tax. Company Purchase Orders also accepted.

PHONE ORDERS - FREE

To order by phone call (617) 664-3657 with your credit card information. It won't cost you a dime, because we'll deduct the cost of the call from the cost of the Courses you order.

NO RISK GUARANTEE

There's absolutely no risk to you. If you're not completely satisfied, simply return your order within 30 days. We'll send you a full refund.

AIR MAIL

The prices shown include surface mail postage. For Airmail shipment please write for additional cost, specifying Courses to be ordered.

CAMBRIDGE EARNING Inc.





1 Judith Drive, North Reading, MA 01864

Radio Electronics YOUR DWN PAPRIL 1983

Accessory Boards

Increase RAM, add color and/or high-resolution graphics, and even add a second CPU to your system with one of these add-on accessory boards. Here's a look at what's available and what they can do.




BACK AT THE DAWN OF THE PERSONAL-COMPUTER AGE, CIRCA 1975, a company named MITS introduced the first true personal computer—the *Altair 8800*. An interesting facet of that computer's design was that its circuitry was built on several boards and those boards were electrically connected to each other through a wiring structure called a *bus*.

What exactly is a bus? Simply stated, it is a group of wires that carry all of the signals from all of the boards throughout the computer. The importance of that is that all the signals from all the various parts of the computer—memory, processor, video, etc.—are available at any point along the bus; to access those signals, all you need do is tap into it. The cleanest, and most useful way to do that is to insert a card connector into the bus. Then, whatever circuitry that you want to have access to the signals on the bus is simply mounted on a PC board that slips into the connector. Often those card connectors are all mounted on a single PC board called a motherboard.

Using some type of bus structure allows your system maximum flexibilty because upgrading or modifying it is greatly simplified. If you want more memory, better graphics, a direct-connect modem for telecommunications, or even a second microprocessor, all you need do is slip in an add-on board into one of the connectors.

The bus developed by MITS for their Altair 8800 is now known as the S-100 bus; it is the most widely used bus structure for microcomputers. That doesn't mean, however, that it is the only one. Another popular bus is the SS-50 used in computers from Gimix, Southwest Technical Products, and others. Several popular computers, such as the Apple II, Zenith Z-89 (also known as the Heath H-89), Radio Shack's TRS-80 Model II and Model 16, and the IBMPC for instance, also are bus oriented but use their own type of bus structure. That means an accessory card for an Apple computer won't work in an IBM PC, and vice versa. And, not all S-100-bus boards will work on every S-100-bus machine. Although a formal standard exists, not all compa-

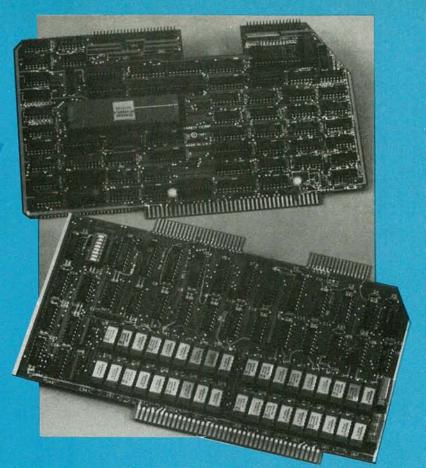

nies adhere to it and that can sometimes lead to problems. Thus, before you buy any accessory board, make sure that it will run in your machine.


Memory boards

One of the most popular types of accessory board is the memory board. That should come as no surprise, however, since no matter how much memory your microcomputer has, it never seems to be enough. It always seems that sooner or later even 64K of RAM just isn't able to handle the tasks you want to do. The answer, of course, is to add more RAM. That's easy enough to do, particularly for users of 16-bit machines like the IBM PC.

A 16-bit machine, by virtue of its having 24 address lines, can, in theory, access over 16 *megabytes*. In general, however, most memory boards feature a maximum of 256K, although we've seen a couple of boards sporting 512K and one with 576K. Thus, if you're running a 16-bit microprocessor, all you need do is select a board with as much memory as you need or can afford, and slip it into one of the edge connectors.

Actually, it's not quite that simple. If you just slipped the card in and did nothing else, the added memory would never be used simply because the microprocessor would not even know that it was there. Every byte of memory in the computer has a specific address. Before the accessory board is added, the computer is configured so that the microprocessor knows that all the RAM memory lies between two addresses. It will not attempt to store data at a memory location outside those addresses because, at least as far as the microprocessor is concerned, there is nothing there. Thus, before the memory can be accessed, a couple of DIP switches must be reset assigning the new RAM a starting address within the computer's memory.

An 8-bit microprocessor, on the other hand, has just 16 address lines, which means, at least in theory, that the most memory it can address is just a bit more than 64K. In reality, however, even 8-bit machines can access much more, but to do

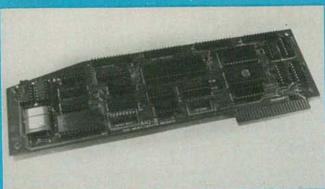

INTERFACE BOARD, model AIO-II from SSM Microcomputer Products, provides the Apple II with a full function, highly flexible serial/parallel interface.

that you've got to play a few tricks on the system. One common trick is to use a technique known as bank select. When that is done, the memory is assigned to an I/O port and all of the data to and from that board is up- and down-loaded through that port. Hobbyists with 8-bit machines have been known to run as much as a megabyte of RAM.


Let's now take a look at some of the memory boards currently available. Turning first to a 16-bit machine, in the relatively short time since its introduction, the IBM PC has become one of the best supported machines in the industry. Among its nice features are provisions for easy expansion—i.e., the machine provides five card-connectors for easy installation of accessory boards. Memory boards for that machine are available from Microsoft, Microtek, Davong, Qubie Distributing, Aegis Systems. Seattle Computer, Quadram, Vista, and others. Prices vary from less than \$250 to over \$1700, depending on memory capacity, manufacturer, and supplier. In addition, many of the boards offer more than just memory expansion. The Quadboard from Quadram, for example, also offers a clock/calander, parallel-printer I/O, and an RS-232 interface.

The S-100 bus allows for up to 24 address lines, so either 16or 8-bit computers can use that bus structure. Pick up an issue of almost any computer magazine and you'll see dozens and dozens of advertisements for S-100 boards, and prominent among them are memory boards of all capacities. Memory boards for S-100-bus machines are available from Intercontinental Micro Systems, Electronic Control Technology, Inc., Netronics, Memory Merchant, and Lomas Data Products to name just a very few. Boards for SS-50 systems are a little harder to find, but are available from several sources, including Gimix.

The Apple II is among the most popular 8-bit machines on the market. As it too features a user-accessible bus for easy expansion, there are a variety of accessory boards, including memory boards, available for it. Most of those are 16K boards for upgrading the 48K machine to 64K. A few boards, however, offer as much as 128K. One extremely interesting board is the Bubble Memory Disk Emulator from MPC. As the name indicates, it is a bubble memory (featuring 128K of storage) that attaches to a disk I/O-port and takes the place of a disk drive. Bubble technology is ideal for such an application as it is non-volatile—if power is removed from the device, the contents of the memory are not destroyed. More conventional memory boards are available from many suppliers including Advanced Logic Systems, Microtek, Wesper Micro Systems, Saturn Systems, and Davong

Microprocessor boards

One of the few serious drawbacks of the Apple II is that its microprocessor is a 6502. Although that is a fine microprocessor in its own right, some of the best 8-bit operating systems, and some of the best 8-bit software, are designed to be run on a Z80 microprocessor. But that doesn't mean you're out of luck. Several manufacturers, such as Microsoft and Personal Computer Products make accessory boards with that CPU for the Apple

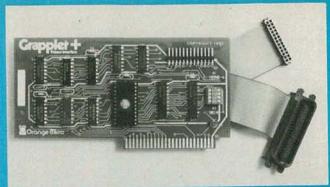

THIS PRINTER INTERFACE, the Grappler + from Orange Micro, can add many printing features to the Apple computers.

computer. Simply install one of those boards in your machine, and you can run CP/M, Wordstar, dBASE~II, and any other Z80-based software with no difficulty. Boards with other microprocessors, such as the 16-bit 8088 (used in the IBM PC) are also available.

A variety of microprocessor boards are also available for S-100-based machines. Those machines are designed to run using just about any 8-bit or 16-bit microprocessor. A user needs only to select a board with the microprocessor he wants to run and install it. Also note that several manufacturers make dual microprocessor boards—most often incorporating an 8-bit and 16-bit microprocessor. Cromemco and Radio Shack, for example, make boards that contains both a MC68000 16-bit microprocessor and the 8-bit Z80. Radio Shack's board is sold as part of an upgrade kit for their *Model II*. With that upgrade, the user gains all of the advantages of the new *TRS-80 Model 16*, including the ability to run both 16-bit *Model 16* and 8-bit *Model II* software. Cromemco's board is for S-100-bus systems

Graphics boards

Another popular type of accessory board is the graphics board. Those are popular for a number of reasons, but primarily because few users are satisfied with the graphics capability of their machine as supplied. For instance, some offer only monochrome displays, others offer only a 40-column (or even smaller) display, while others lack an interface that will allow it to be used with an RGB monitor. Boards to solve each of those problems are available from a variety of sources.

Most graphics boards for the Apple II are intended to provide an 80-column display for that machine. As supplied, the Apple's display is just 40-columns, hardly adequate for some applications such as word processing. Most of those cards also allow the display of upper- and lower-case characters.

Although they're a little harder to find at times, there are many boards on the market designed to bring color graphics to the Zenith Z89; as supplied, those computers can generate 24 lines × 80 characters on a built-in monochrome display. Typically, the accessory boards provide good resolution (256 × 192 pixels) and have 15-color capability; of course, you'll need to use a separate color monitor. Some sources for boards for Heath/Zenith computers include Kres Engineering, Mako Data Products, and New Orleans General Data Services.

Turning to S-100 based systems, there are several boards on the market that allow you to generate some rather impressive graphics. One of those boards, the *Microangelo* from Scion, can produce a 512 × 480 pixel monochrome display. As to character generation, it can display 40 lines × 85 characters of text. To add color capability more boards are added, each generating its own monochrome "transparency." The output of the boards are combined by the color mixing board. If eight boards are used, the maximum that can be handled by the system, an image with 255 colors could be generated. An advantage to this type of graphics generation is that colors can be easily added or deleted without otherwise affecting the image.

RADIO-ELECTRONICS

ACCESSORY BOARD SUPPLIERS

Adisa Corp. Box 1364 Palo Alto, CA 94301

Advanced Digital Corp. 12700-B Knott St. Garden Grove, CA 92641

Advanced Logic Systems 1195 East Arques Ave. Sunnyvale, CA 94086

Aegis Systems 202 W. Bennett St. Saline, MI 48176

Antex Data Systems 2630 California St. Mountain View, CA 90404

Apparat Inc. 4401 S. Tamarac Pkwy. Denver, CO 80237

ASAP Computer Products 1198 E. Willow St. Signal Hill, CA 90806

AST Research Inc. 2372 Morse Ave. Irvine, CA 92714

Axion Inc. 170 North Wolfe Rd. Sunnyvale, CA 94086

Cactus Technology Inc. 3024 North 33rd Dr. Phoenix, AZ 85017

California Computer Systems 250 Carribean Dr. Sunnyvale, CA 94086

Chrislin Industries 31352 Via Colinas Westlake Village, CA 91362

Comemco 280 Bernardo Ave. Mountain View, CA 94040

Computer Peripherals 1117 Venice Blvd. Los Angeles, CA 90015

Davong Systems Inc. 1061 Terra Bella Ave. Mountain View, CA 94043

Daystar Systems Inc. 10511 Church Rd. Suite A Dallas, TX 75238

Dual Systems 2530 San Pablo Ave. Berkeley, CA 94702

Electronic Control Technology Inc. 763 Ramsey Ave. Hillside, NJ 07205

1337 W. 37th Place Chicago, IL 60609 Godbout Electronics Box 2355

Oakland Airport, CA 94614

GSR Computers 60-10 69th St. Maspeth, NY 11378

Hayes Microcomputer Products 5835 Peachtree Corners East Norcross, GA 30092

Hurricane Labs 5149 Moorpark Ave. San Jose, CA, 95129

Independent Business Systems 5915 Graham Ct. Livermore, CA 94550

Indigo Data Systems Inc. 100 E. NASA Rd. 1 Suite 107 Webster, TX 77598

Intercontinental Microsystems Corp. 1733 S. Douglass Rd. Anaheim, CA 92806

Intermedia Systems 10601 South De Ansa Blvd. Cupertino, CA 95014

Intex Micro Systems Corp. 755 West Big Beaver Rd. Suite 1717 Troy, MI 48084

JC Systems 1075 Hiawatha Ct. Fremont, CA 94538

John Bell Engineering Inc. 1014 Center St. San Carlos, CA 94070

Kres Engineering PO Box 17328 Irvine, CA 92713

Legend Industries Ltd. 2220 Scott Lake Rd. Pontiac, MI 48054

Lomas Data Products 729 Farm Road Marlboro, MA 01752

Macrolink Inc. 1150 East Stanford Ct. Anaheim, CA 92805

Macrotech International Corp. 22133 Cohasset St. Canoga Park, CA 91303

Magnolia Microsystems 2264 15th Ave. W. Seattle, WA 98119

Matco 427 Perrymont San Jose, CA 95125

Mako Data Products 1441-B N. Red Gum Anaheim, CA 92806 Memory Merchant 14666 Doolittle Dr. San Leandro, CA 94577

Memory Technologies Inc. 25 Main St. Twelve Mile, IN 46988

Memotech 7500 West Yale Ave., Suite 200 Denver, CO 80227

Microcomputer Business Industries Corp.
1019 8th St.
Golden, CO 80401

Micro Intercontinental Systems Corp. 1733 S. Douglass Rd. Suite E Anaheim, CA 92806

Micromint Inc. 561 Willow Ave. Cedarhurst, NY 11516

MicroSoft Corp. 10700 Northrup Way Bellevue, WA 98004

Micro Synergy 1327 Whiteacre Dr. Clearwater, FL 33516

Microtek 9514 Chesapeake Dr. San Diego, CA 92123

Mosaic Electronics Box 748 Oregon City, OR 97045

Mountain Computer 300 El Pueblo Rd. Scotts Valley, CA 95066

MPC Peripherals Corp. 9424 Chesapeake Dr. San Diego, CA 92123

Netronics 333 Litchfield Road New Milford, CT 06776

N.O. General Data Services 7230 Chadbourne Dr. New Orleans, LA 70216

Orange Micro Inc. 1400 North Lakeview Anaheim, CA 92807

PDS Universal Inc. 2630 Walnut Ave. Suite G Tustin, GA 92680

Personal Computer Products Inc. 16776 Bernardo Center Dr. San Diego, CA 92128

Persyst 15801 Rockfield Suite A Irvine CA 92714

Precision Technology Inc. Computer Products Div. 2970 Richards St. Salt Lake City, UT 84115

Pure Data Ltd.

950 Denison St. Markham, Ontario, Canada L3R 3K5

Qubie Distributing 918 Via Alondra Camarillo, CA 93010

Quadram Corp. 4357 Park Drive Norcross, GA. 30093

Rana Systems 20620 South Leapwood Carson, CA 90746

Renaissance Technology Corp. 1070 A Shary Cir. Concord, CA 94518

Saturn Systems Inc. PO Box 8050 3990 Varsity Dr. Ann Arbor, MI 48107

Scion 12310 Pinecrest Rd. Reston, VA 22091

S.C. Digital Box 906 1240 N. Highland Ave. Suite 4 Aurora, IL 60507

ACCESSORY BOARD SUPPLIERS

Seattle Computer 1114 Industry Dr. Seattle, WA 98188

Sierra Data Sciences 26112 Lorain Ave. Fairview Park, OH 44126

Sigma Designes Inc. 1400 Coleman Ave. F23 Santa Clara, CA 95050

Sigma Designs, Inc. 3866 Eastwood Cir. Santa Clara, CA 95055

Sonic Micro Systems 1500 N.W. 62nd St. Ft. Lauderdale, FL 33309

Southwest Technical Products 219 W. Rhapsody San Antonio, TX 78216

SSM Microcomputer Products, Inc. 2190 Paragon Dr. San Jose, CA 95131

Static Memory Systems 401 State Bank Center Freeport, IL 61032

Systems Group 1601 W. Orangewood Ave. Orange, CA 92660

Tara Computer Products 3648 Southwestern Blvd. Orchard Park, NY 14127

Tarbell Electronics 950 Dovlen Place Suite B Carson, CA 90746

TK Engineering Box 1936 Corona, CA 91720

Videx Inc. 897 N.W. Grant Ave. Corvalis, OR 97330

Vista Computer Co. Inc. 1317 E. Edinger Santa Ana, CA 92705

Votrax Speech Synthesis 500 Stephenson Hwy. Troy, MI 48084

VR Data 777 Henderson Blvd., N-6 Folcroft, PA 19032


Wesper Micro Systems 3188 Pullman St. Costa Mesa, CA 92626

Finally, for best resolution, an R-G-B rather than a video output is desirable. Boards that provide R-G-B outputs for computers that lack them are available from a variety of manufacturers.

Printer interface boards

While there are a great many boards on the market whose sole purpose is to provide a serial or parallel interface for use with a printer, there are a couple of types of printer-interface boards that do quite a bit more. One type is the high-resolution graphics interface, an example of which is the *Grappler +* from Orange Micro. That board interfaces an Apple II (or III with additional software) with any one of several popular printers. Among its features is the capability of providing high-resolution screen dumps to your printer.

Another popular type of printer-interface board is the spooler or buffer. Its primary purpose is to allow the computer to perform a new task while printing is going on. If you've ever just sat around and waited during a lengthy printout, you can imagine why that type of accessory board is in demand.

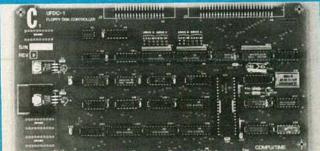

FLOPPY DISK CONTROLLER, model UFDC-1 from GSR Computers, is capable of connecting up to four floppy-disk drives to an S-100 system.

Miscellaneous boards

We've only touched on a few types of accessory boards available. A quick look through almost any computer magazine will quickly reveal that there is a board for just about any function. Among the other popular types are modem boards, speech-synthesizer boards, sound-effects boards, PROM- and EPROM-programmer boards, and instrument-controller boards. It is also possible to combine several functions in a single board, an example is Quadram's Quadboard.

In addition, while we've been concentrating on boards for bus-oriented systems as those types of systems allow for the easiest expansion, boards are also available for non-busoriented systems. The major problems with some of those is installation—while some simply replace existing boards in a machine, others require some modifications to the computer.

All of the types of boards mentioned in this article will help a microcomputer user get the most possible computing power out of his system at a relatively low cost. Still, there are some problems of which you should be aware. First, it's necessary to check the power requirement of any board you may be considering. If your microcomputer is already on the ragged edge of its power-providing capability then it's likely that any additional expansion boards will send it over the edge. In that event, the only alternative is to "beef-up" your computer s power supply. Another potential problem that could be caused by adding a

Another potential problem that could be caused by adding a board is heat production. If your computer is already running hot, adding another board may just push it over the brink to self-destruction if the system is incapable of handling the heat. If your system is running hot, it is best to add a cooling fan or upgrade an existing one. In fact, if your system is running hot, it's best to do that whether or not you're adding another board.

All-in-all, however, those problems are easily corrected, as we've shown, and should not keep you from upgrading your system with one of the many types of accessory boards we've discussed.

R-E

How to save on ZX81



THE ORGANIZER An information storage program. Store the names, address es, phone numbers, birthday and anniversary dates of your friends and business acquaintances.



THE BUDGETER Keep track of your personal budgets and expenditures in categories such as food, clothing, rent/mortgage, medicine, education, savings, auto, and more.



THE LOAN/MORTGAGE AMORTIZER Compare the cost of loans from different banks, review the details of your home mortgage. Be aware of the cost and how to minimize that cost.



THE COUPON MANAGER Keep track of coupons you save showing what they are for, where they are offered, starting and ending dates for validity.



THE CAR POOLER Keep track of car usage by driver, destination, and date. Rider data and time of departure is logged.



THE STAMP COLLECTOR Inventory and store up to 600 SCOTT numbers in a single session showing quantity on hand, by major classification, and provide full want list susport.



THE STOCK OPTION ANA-LYZER Evaluate stock options quickly, Output includes an unexercised ROI, annual ROI, and NET worth. Last trading day calculated by computer.



THE HOME IMPROVEMENT PLANNER Store up to 20 room measurements (length, width, height), compute total area in each (wall, floor), estimate costs of painting, wall papering and carpets and draw house bluernits.



THE HOME ASSET MANAGER A home inventory program that can be very valuable in case of fire or theft. Records date of purchase, place of purchase, description, price, serial # and model #.



REAL ESTATE INVESTMENT ANALYSIS Two different investment strategies. The first selection allows the user to choose between renting or buying. The second selection consists of a detailed analysis of the rental investment property.



PERSONAL FINANCE PLAN-NER Perform calculations, finance a house, a car, keep savings accounts, repay loans and calculate an amortization schedule which can be generated for any of the financial programs,



PORTFOLIO ANALYSIS Program performs minimum risk and market sensitivity calculations for a portfolio composed from a set of stocks. A portfolio is formed which gives the minimum amount of nonmarket risk for a given level of sensitivity.



VU-CALC This program constructs, generates, and calculates large tables for financial analysis, budget sheets, and pro jections. An immensely powerful analysis



SUPER MATH Drill yourself on addition, subtraction, multiplication, and division with five levels of difficulty. Each problem graphically depicted.



THE LIST MANAGER Mailing List keeps track of personal or business mailing lists of up to 115 names by name, address or zip code. Phone Book—keeps track of personal or business numbers for up to



STATES AND CAPITOLS Test yourself on the fifty states and their capitols. Three options of review are available (1) States, you provide capitols. (2) Capitols, provide states. (3) A mix of states and capitols.



THE FLIGHT SIMULATOR Take control of highly maneuverable light aircraft. With full controls, instrumentation and navgational airds to avoid hazards in landing.



STOCK MARKET—TECH.
ANALYSIS I Program uses "technical analysis" of price and volume data to fore-cast the direction of the Market or of any stock. Track up to 6 stocks without reloading. You need 30 trading days of data, closing price and day's volume. Analytical summary of each stock average is computed.



CHESS AND CHESS CLOCK Six levels. All the legal moves including castling and enpassant. Keeps a separate record of plays made for easy reference. Play another opponent or match wits with the computer.



BACKGAMMON AND DICE A perfect blend of chance and skill. Uses machine code to choose its moves. Full game including graphics board, rolling dice, and double cube. Play the computer or another opponent.



THE GAMBLER Match your Blackjack skills with the ZX81 or TS1000. Full graphical display of cards dealt and winnings. Includes Double Down, Min-Max betting. Also a Slot Machine complete with rolltons turbules a part for in the card for in-



THE CUBE GAME The cube can be displayed in three views: (1) Solid; (2) Two-Dimensional (unfolded); and (3) See-thru cube (3-D). You start with the cube solved, set it up any way you like, or pick up from a previous session.



GRIMM'S FAIRY TRAILS A super game involving a young prince trapped in a maze, being chased by relentless maze dwellers. You control the prince and the chase is on. Life crystals and sacred stones are the noal.



THE MIXED GAME BAG I Bowling—roll your ball down the alley controlling its flight from a keyboard. Robot War—you are pitted against evil KORKON ROBOT in a duel of wits. Bingo Caller—use ZX81 or TS1000 to randomly call a Bingo game.

or TS1000 software.



SUPERMAZE Navigate your way through a three-dimensional maze, with trapdoors, gold bars, marker stones, and compass. Ten separate mazes. Threedimensional graphics.



BIGFLAP ATTACK You're being attacked by giant birds! To defend yourself shoot the birds right between the eyes. 10 levels of play ability.



PINBALL Plays like real pinball complete with flippers, bumpers, "nudge," bonus points and more. Uses fast, efficient machine code to choose its moves.



STOCK MARKET GAME Bull or bear? This realistic simulation lets you analyze information, buy and sell stocks; take out and pay off loans and win, if you can accumulate \$50,000 in "The Market."



FORTRESS OF ZORLAC A super fast game in which you are the commander of a fleet of spaceships. Your mission is to rid the galaxy of the dreaded allen, ZORLAC.



MANUFACTURING CONTROL
A comprehensive manufacturing system,
Monitor cost factors, track work in progress, keep daily account on details that
mean profit or loss for up to 150 products.



THE PUZZLER Comes with two options: Inversion and Double Inversion, Inversion takes at least 250 moves to solve it. Double Inversion is twice as hard.



CHECKBOOK MANAGER A personal or business checking account program to store and sort banking transactions. On 90-minute tape, up to 3.600 transactions can be stored.



INVENTORY CONTROL STOCK I—keeps track of inventory levels, suppliers, re-order levels and types for up to 400 items STOCK II—keeps track of inventory levels for up to 2.500 items.



SPACE RAIDERS, BOMBER Timex/Sinclair version of the popular arcade games full of bombs and rockets and collisions with skyscrapers.



FROGGER Plays like the arcade game Hop the frog over traffic, snakes, crocodiles, and treacherous diving turtles before time runs out.



ATOR THE ABC GATOR Designed to teach recognition and sequence of the alphabet. Combines computer instruction, music and video games.

Sinclair, the company that invented the world's most affordable computer, has invented a way for you to order the most affordable software—right from your home!

You've never had this wide a selection before. You can play games that challenge you, instead of bore you. You can learn new household applications and business programs that reduce work dramatically.

Only Sinclair offers this special software savings. Only ZX81 or Timex TS1000 owners are eligible.

The more you buy, the more you save. A serious Sinclair software offer.

The first cassette you buy, you buy at normal cost: \$15.00. But every cassette thereafter, you get at a savings.

The list below explains how much you save, based on how much you buy. It couldn't be easier. You were smart to buy the ZXSI or the

You were smart to buy the ZX81 or the TS1000. You'll be even smarter to take us up on this software offer. All cassettes listed at left work on both the ZX81 and the TS1000. All cassettes are 16K, which means you need the 16K Memory Module. (If you want more information on this

component, please write Sinclair at the address listed below.)

But don't delay. This is a limited time software offer while supplies last.

How to order today!

Just call our toll-free number and use your MasterCard or VISA. Or send this coupon with a check or money order. It's as easy, as that.

Call toll-free: 800-543-3000. Ask for operator 509. In Canada call 513-729-4300, operator 509. Have your MasterCard or VISA ready when calling. Phones open 24 hours a day, 7 days a week. These numbers are for *orders only*.

If you simply want information, please don't call, write Sinclair Research, Ltd., 2 Sinclair Plaza, Nashua, NH 03061.

(Sorry, no refunds on software. Defective cassettes will be replaced.)

Call toll free

800-543-3000

Ad. code: Mail to: Sinclair Research, Ltd. B4RE One Sinclair Plaza, Nashua, NH 03061 Check the boxes of all cassettes you want. Check or money order enclosed. ☐ Bigflap Attack #42 ☐ The Organizer #10 □ Portfolio Analysis #41 □ VU-CALC #11 ☐ The Budgeter #38 ☐ Pinball #35 □ Loan/Mortgage Super Math #14 ☐ Stock Market Game #27 Amortizer #39 ☐ List Manager #45 □ Fortress of Zorlac #36 Coupon Manager #12 ☐ States and Capitols #32 Manufacturing Control #51 ☐ Flight Simulator #6 Car Pooler #40 ☐ The Puzzler #48 Stamp Collector #31 ☐ Stock Market—Tech. ☐ Checkbook Manager #49 Stock Option Analyzer #13 Analysis I #46 □ Inventory Control #50 Home Improvement Chess #7 Space Raiders, Bomber #5 ☐ Frogger #37 Planner #29 ☐ Backgammon #8 Home Asset Manager #47 ☐ Gambler #43 ☐ Ator the ABC Gator #33 ☐ Real Estate Investment ☐ Cube Game #9 Analysis #30 ☐ Grimm's Fairy Trails #44 Personal Finance ☐ Mixed Game Bag I #26 Planner #28 ☐ Supermaze #34 Fill in the space beside total for your total payment Plus Shipping/Handling \$5.00 ☐ 1 cassette: \$15.00 ☐ 4 cassettes: \$45.00 ☐ 2 cassettes: \$25.00 (save \$15.00) (save \$5.00) ☐ 5 cassettes: \$50.00 Total: ☐ 3 cassettes: \$35.00 (save \$25.00) (save \$10.00) ☐ 6 cassettes or more: \$10.00 each \$ U.S. Dollars Street State *Sinclair technology is the heart of both the ZX81 and the Timex/Sinclair 1000.

RADIO-ELECTRONICS

GLOSSARY OF COMMONLY USED COMPUTER TERMS

For those readers unfamiliar with computer terminology, we have included the following glossary of some commonly used computer terms.

Address—The label or number identifying the register or memory location where a unit of information is stored.

ALU—Arithmetic Logic Unit. The part of a CPU where binary data is acted upon.

ASCII—Acronym for American Standard Code for Information Interchange. A seven-bit code used to represent alphanumeric characters. It is useful for such things as sending information from a keyboard to the computer, and from one computer to another.

Assembler—A program that translates assemblylanguage instructions into machine-language instructions

Assembly language—A machine oriented language in which mnemonics are used to represent each machine-language instruction. Each CPU has its own specific assembly language. See CPU and machine language.

Baud rate—Serial-data transmission speed. Originally a telegraph term, 300 baud is approximately equal to a transmission speed of 30 bits-per-second.

Binary—Refers to the base-2 number system in which the only allowable digits are 0 and 1.

Bit—Acronym for *BI*nary digi*T*. The smallest unit of computer information, it is used to represent either a binary 0 or 1.

Bubble memory—A relatively new type of computer memory, it uses tiny magnetic "pockets" or "bubbles" to store data.

Bus—Parallel lines used to transfer signals between devices. Computers are often described by their bus structure (i.e. S-100-bus computers, etc.).

Byte A group of eight bits.

Clock-The timing circuit for a microprocessor.

Compiler—A program that translates a high-level language, such as BASIC, into machine language.

CPU—Acronym for Central Processing Unit. The part of the computer that contains the circuits that control and perform the execution of computer instructions.

Data base—A large amount of data stored in a wellorganized manner. A data-base management system is a program that allows access to the information.

Disk operating-system—Program used to transfer information to and from a disk. Often referred to as a DOS.

EPROM—A PROM that can be erased by the user, usually by exposing it to ultraviolet light. See *PROM*.

File A collection of data that is treated as a unit.

Firmware—Programs stored in PROM or EPROM.

Hardware—The physical components that make up a computer.

Hexadecimal—Refers to the base-sixteen number system. Machine language programs are often written in hexadecimal notation.

Interface—The connecting device between a computer and a periphiral.

K-Abbreviation for kilobyte (1024 bytes).

Machine language—Instructions, written in binary form, that a computer can execute directly. Also called machine code or object code.

Microprocessor—A one-IC CPU. One common microprocessor often used in personal computers is the Zilog Z80.

Modem—Acronym for *MO*dulator/*DEM*odulator. A device that transforms electrical signals into audio tones for transmission over telephone lines, and does the reverse for reception.

Motherboard—In a bus-oriented system, the board that contains the bus lines and edge connectors to accommodate the other boards in the system.

Port—A channel through which data is transferred to and from the CPU. An 8-bit CPU can address 256 ports.

PROM—Acronym for *P*rogrammable *R*ead *O*nly *M*emory. A semiconductor memory whose contents cannot be changed.

RAM—Acronym for Random Access Memory. A semiconductor memory that can be both read and changed during computer operation. Unlike other semiconductor memories, this one is volatile—if power to the RAM is cut off for any reason, all data stored in the device is lost.

ROM—Acronym for Read Only Memory. A semiconductor memory containing fixed data—the computer can read the data but cannot change it in any way.

Software-Programs stored on tape or disk.

Source code—A non-executable program written in a high-level language. A compiler or assembler must translate the source code into an object code (machine language) that the computer can understand.

Word—Number of bits treated as a single unit by the CPU. In an eight-bit machine, the word length is eight bits; in a sixteen-bit machine, it is sixteen bits.



4300 West 62nd Street P.O. Box 7092 Indianapolis, Indiana 46206

Repeated By Popular Demand!

SAMS 20% DISCOUNT SALE

Once again, Sams helps you invest in your future with a flat 20% discount on genuine Sams Computer Books, the same ones you'll find in our latest regular catalog!

The sale includes our brandnew 1983 titles as well as our best-sellers—books about the Apple II®, IBM® PC, Timex Sinclair 1000®, VIC-20, Commodore 64, TRS-80®, and more!

If you're into computing, you need to be into a Sams Book now!

SAMS/WAITE PRIMERS

UNIX PRIMER PLUS

A clearly written, friendly introduction to the powerful UNIX operating system. Ideal for students, office workers, new computer users, and others learning about or starting on a UNIX-based system. By The Waite Group, Inc.

Ask for No. 22028 \$19.95 Now Only \$15.96



CP/M® PRIMER

Start reading CP/M Primer today and start using CP/M tonight! Your complete, one-stop source book for terminology, concepts, system startup, and software! By Stephen Murtha and Mitchell Waite.

Ask for No. 21791 \$14.95 Now Only \$11.96

CP/M is a registered trademark of Digital Research, Inc.



BASIC PROGRAMMING PRIMER

(2nd Edition)
Improved and expanded edition
gives you fundamental key-

words, statements, and functions usable with any computer running a variation of Microsoft BASIC, including the IBM PC. Also contains new advanced BASIC coverage, new game-program listings (Rubik's Cube, Microspace Invaders, Word Scrambler), and many new self-tests with answers to help your progress. Highly useful and user-friendly material for beginners and more advanced users alike, regardless of occupation. By Mitchell Waite and Michael Pardee.

Ask for No. 22014 \$17.95 Now Only \$14.36



COMPUTER GRAPHICS PRIMER

Amaze yourself! Create computer animation and other graphics routines and techniques with this colorful Sams best-seller. Many examples, all in BASIC. By Mitchell Waite.

Ask for No. 21650 \$14.95 Now Only \$11.96



PASCAL PRIMER

You'll generate powerful programs in UCSD™ Pascal as this Sams powerhouse guides you through program structure and procedures—clarifies statements, variables, and more! Ideal for beginners. By David Fox and Mitchell Waite.

Ask for No. 21793 \$16.95 Now Only \$13.56

UCSD is a trademark of UC Regents, San Diego campus.




MICROCOMPUTER PRIMER

(2nd Edition)

Excellent for readers seriously interested in the whys and hows of a microcomputer's workings, and an ideal companion to CRASH COURSE IN MICROCOMPUTERS. Has five appendixes! By Mitchell Waite and Michael Pardee

Ask for No. 21653 \$14.50 Now Only \$11.60

COMPUTER FUNDAMENTALS



HOWARD W. SAMS CRASH COURSE IN MICROCOMPUTERS

No previous computer knowledge is necessary, because this one's intended for those who need to know about microcomputers and programming FAST! Self-teaching format makes it excellent for learning on your own. By Louis E. Frenzel.

Ask for No. 21634 \$19.95 Now Only \$15.96



GUIDEBOOK TO SMALL COMPUTERS

Presents an unbiased review of the capabilities of 21 currently popular microcomputer systems from 14 different manufacturers. Helps you make an informed choice. By William Barden, Jr.

Ask for No. 21698 \$6.95

Now Only \$5.56



PERSONAL COMPUTERS HANDBOOK

You'll need this practical guide that explains the hows and whys of your micro's microprocessor, memory, peripherals, programming, and hardware/software troubleshooting. By Walter H. Buchsbaum.

Ask for No. 21724 \$12.95 Now Only \$10.36



FOUNDATIONS OF COMPUTER TECHNOLOGY

Thorough introduction to computing history, evolution, and current concepts. Examines basic elements and systems as well as technology. Requires no prior knowledge of computers, electronics, or math. Excellent basic text. By Joseph C. Giarratano.

Ask for No. 21814 \$22.95 Now Only \$18.36

MODERN COMPUTER CONCEPTS

Covers memory types and devices, CPUs, data communications, computer networks and architectures, videotex in major countries, and more. Sequel to No. 21814. Best if you're already familiar with basic electronics, number systems, and so forth. By Joseph C. Giarratano.

Ask for No. 21815 \$22.95 Now Only \$18.36

Now Only \$31.96

Both books, ask for No. 21816 \$39.95

APRIL 1983



BASIC: FUNDAMENTAL CONCEPTS

This comprehensive introduction to BASIC and its dialects can also help you learn to convert BASIC programs from one dialect to another and understand the problems that come up when a program in the wrong dialect runs on your computer. Many programs included. By Joseph C. Giarratano.

Ask for No. 21941 \$22.95 Now Only \$18.36

BASIC: ADVANCED CONCEPTS

Continues the fundamental BASIC commands and concepts begun in No. 21941, this time using BASIC as a tool to help you understand program storage within the computer, explore floating-point arithmetic, examine number systems commonly used, and more. By Joseph C. Giarratano.

Ask for No. 21942 \$22.95 Now Only \$18.36

Both books, ask for No. 21943

o. 21943 \$39.95 Now Only \$31.96

All four books together, ask for No. 22045 \$69.95.

Now Only \$55.96

DICTIONARIES



COMPUTER DICTIONARY

(3rd Edition)

More than 12,000 definitions in this paperback reference translate computing terminology into language you can easily understand. Good for computer veterans and novices alike. By Charles J. Sippl.

Ask for No. 21652 \$15.95 Now Only \$12.76



MICROCOMPUTER DICTIONARY

(2nd Edition)

Most current, down-to-earth, and complete explanation of microcomputer products, procedures, systems, techniques, and components available. More than 5,000 terms and definitions

in all! By Charles J. Sippl.

Ask for No. 21696 \$15.95 Now Only \$12.76



COMPUTER DICTIONARY & HANDBOOK (3rd Edition)

Largest, most complete reference book available on all phases of computers and their applications. More than 22,000 definitions and fourteen appendixes. By Charles J. Sippl and Roger J. Sippl

Ask for No. 21632 \$34.95 Now Only \$27.96

COMPUTER MATH



MICROCOMPUTER MATH

Excellent introduction to binary, octal, and hexadecimal numbers, plus arithmetic operations on all microcomputers and more. Many practical examples and self-tests. By William N. Barden, Jr.

Ask for No. 21927 \$11.95 Now Only \$9.56

BOOLEAN ALGEBRA FOR COMPUTER LOGIC

A basic introduction to Boolean algebra as applied to the design of computer circuits. Covers everything from the binary number system to Karnaugh maps. No knowledge of higher math or advanced electronics needed. By Harold E. Ennes.

Ask for No. 21554 \$7.95 Now Only \$6.36



PRACTICE PROBLEMS IN NUMBER SYSTEMS, LOGIC, AND BOOLEAN ALGEBRA

(2nd Edition)

You'll need no special math background to use this 64-lesson introduction to digital computer math. Covers number systems, conversions, binary and octal arithmetics, Boolean algebra, and implementing Boolean relationships in gating and inverting circuits. By Edward Bukstein.

Ask for No. 21451 \$9.95 Now Only \$7.96

MICROCOMPUTER PROGRAMMING & INTERFACING

NEW P & I BOOKS!

SOUL OF CP/M®: USING AND MODIFYING CP/Ms INTERNAL FEATURES

Teaches you how to modify BIOS, how to use CP/M system calls in your own programs, and more. You'll need to read CP/M PRIMER or otherwise understand CP/Ms outer-layer utilities, though. By Mitchell Waite.

Ask for No. 22030 \$14.95 Now Only \$11.96

CP/M® BIBLE: THE AU-THORITATIVE REFERENCE GUIDE TO CP/M

Simple, easy-to-use handbook that gives you fast access to all CP/M conventions, keywords, commands, utilities, and more. Includes CP/M-86, MP/M-80 and 86, and CP/Net, too. By Mitchell Waite.

Ask for No. 22015 . . . \$18.95 Now Only \$15.16

THE WORLD CONNECTION

Powerful information that shows you how to select and use a modem for sending and receiving electronic mail, making use of computer networks like CompuServe and The Source, using electronic bulletin boards, and more! By Timothy Orr Knight.

Ask for No. 22042 ... \$10.95

Now Only \$8.76 WHAT DO YOU DO AFTER YOU PLUG IT IN?

Complete tutorial covers use of microcomputer hardware, software, languages, operating systems, data communications, and more, followed by another tutorial on workable solutions to the practical problems you'll meet while using them. By William Barden, Jr.

Ask for No. 22008 \$10.95 Now Only \$8.76

26 BASIC PROGRAMS FOR YOUR MICRO

Features 26 previously unpublished, simple-to-complex games you can run on almost any brand of microcomputer as long as you have enough RAM on board. Most take between 500 and 5000 bytes, with the highest taking 13K. Conversion charts included. By Derrick Daines.

Ask for No. 22047 \$11.95 Now Only \$9.56



ELECTRONICALLY SPEAKING: COMPUTER SPEECH GENERATION

Learn the basics of generating synthetic speech with an Apple II, TRS-80, or another popular microcomputer! Includes techniques, a synthesizer overview, advice on problems, and more. By John P. Cater.

Ask for No. 21947 \$14.95 Now Only \$11.96



11

FORTH PROGRAMMING

Shows you the differences between FORTH-79 and fig-FORTH, and how to write or modify software using either dialect. Includes more than 50 fast-acting, useful programs. By Leo J. Scanlon.

Ask for No. 22007 \$16.95 Now Only \$13.56



1

STD BUS INTERFACING

Gives you all information and circuitry needed to use your STD bus computer system for controlling instruments or processes, or for acquiring data from an electrical device. Has immediately usable assembly language software, too. By Christopher A. Titus, Jonathan A. Titus, and David G. Larsen.

Ask for No. 21888 \$13.95 Now Only \$11.16



Helps you understand how a human "voice" is electronically created, explains the three current digital synthesis technologies used, and tells you what you can expect in speech quality as it relates to data rate and the cost of memory devices. By Neil Sclater.

Ask for No. 21896 \$8.95 Now Only **\$7.16**

GENERAL PROGRAMMING



DON LANCASTER'S MICRO COOKBOOK, Volume 1: FUNDAMENTALS

Includes some ground-zero basics, a real-world set of rules for the novice micro-user, pragmatic number systems and logic, usable codes, memory, and memory devices. Dedicated to helping you build your beginner-level microcomputing skills into knowledge you can profit from and enjoy. By Don Lancaster.

Ask for No. 21828 \$15.95 Now Only \$12.76



COMPUTER LANGUAGE REFERENCE GUIDE

If you know at least one language, this small book can help you understand six more! Seven chapters cover seven languages and an eighth presents a keyword dictionary. By Harry L. Helms, Jr.

Ask for No. 21786 \$9.95 Now Only \$7.96



INTRODUCTION TO FORTH

A fundamental approach to programming in all versions of FORTH, using MMS FORTH in particular. Program examples are directly compared to the same program written in Microsoft Level II BASIC for clarity. By Ken Knecht

Ask for No. 21842 \$10.95 Now Only \$8.76



BASIC PROGRAMMER'S NOTEBOOK

A valuable book with many time-saving BASIC subroutines and programming practices usually known only to highly experienced programmers. Also contains several debugged and easily modified program samples.

By Earl R. Savage.

Ask for No. 21841 \$14.95 Now Only \$11.96



EXPERIMENTS IN ARTIFICIAL INTELLIGENCE FOR SMALL COMPUTERS

Takes you into the fascinating world of artificial intelligence, where you and your computer directly participate in sessions involving reasoning, problemsolving, creativity, and verbal communication. By John Krutch.

Ask for No. 21785 \$9.95

Now Only \$7.96



THE CHEAP VIDEO COOKBOOK

Shows you how to build and use a \$20, seven-IC circuit that lets your computer provide any alphanumeric or graphics format, including high resolution and a four-color mode, via software control. By Don Lancaster.

Ask for No. 21524 \$7.95 Now Only \$6.36



SON OF CHEAP VIDEO

Brings you specs for a low-cost, do-it-yourself custom EPROM character generator, plus lower-case for an Apple II, cheap video for 8080/Z-80, a complete video display for \$7, and more! By Don Lancaster.

Ask for No. 21723 ... \$10.95 Now Only \$8.76 Both books, ask for No. 21766\$15.95 Now Only \$12.76



TV TYPEWRITER COOKBOOK


Shows you how to put words and pictures onto an ordinary TV screen with TVT! Introduces you to basic TVT system design, including memory types, interface circuitry, hard-copy output, and color graphics. By Don Lancaster.

Ask for No. 21313 \$11.95 Now Only \$9.56

BUSINESS PROGRAMMING

WORD PROCESSING IS FOR SMALL BUSINESSES

Tells you about doing practical word processing on a personal



Ask for No. 21929 \$11.95 Now Only \$9.56

HOW TO WRITE COBOL PROGRAMS IN AN MP/M® ENVIRONMENT

Shows you how to write COBOL programs for a multiple-terminal, Z-80/8080, CP/M-based microcomputing system that lets more than one user access the same file at the same time without interfering with each other. Describes system design and more. By Neil G. Gelb.

Ask for No. 21936 \$12.95 Now Only \$10.36



MICROCOMPUTER DATA-BASE MANAGEMENT

Create your own data base program! Complete tutorial shows routines you can use to control and access large amounts of data with a microcomputer. Also explains operation of 3 commercial data base programs now on the market. By E. G. Brooner.

Ask for No. 21875 \$12.95 Now Only \$10.36



BASIC BUSINESS SOFTWARE

Explains the fundamentals of business software development, how to evaluate canned software, and how to write some of your own. Covers information storage and retrieval, inventory control, payroll, and general ledger programming. By E. G. Brooner.

Ask for No. 21751 \$11.95 Now Only **\$9.56**







COMPUTER PROGRAMS FOR MACHINE DESIGN

Ready-to-use BASIC programs to help mechanical and material engineers, machinists, technicians, and students solve everyday problems in machine technology. Data can be manipulated repeatedly to note design variables. By Robert J. Wenzel.

Ask for No. 21960 \$21.95 Now Only \$17.56

GENERAL INTERFACING



THE S-100 AND OTHER **MICRO BUSES**

Discusses microcomputer bus systems in general, examines 21 of the most popular ones in use, and explores ways you can use to interface one with another. By Elmer C. Poe and James C. Goodwin II.

Ask for No. 21810 \$9.95 Now Only \$7.96



COMPUTERS AND PROGRAMMING GUIDE FOR SCIENTISTS AND **ENGINEERS**

(2nd Edition)

Outlines the capabilities and limitations of a computer, explores its use in problem solving, and helps you develop the skills necessary to use a computer in science and engineering rather than business. By Donald D. Spencer.

Ask for No. 21693 \$15.95 Now Only \$12.76



COMPUTER-ASSISTED HOME ENERGY MANAGEMENT

Helps you create a working energy monitor, using your microcomputer, inexpensive temperature sensors and other hardware. Includes BASIC and 8080/Z-80 programs, construction details, operational analysis, and suggestions. By Paul E. Field. Ask for No. 21817 \$15.95

Now Only \$12.76

INTERFACING & SCIENTIFIC DATA COMMUNICATIONS **EXPERIMENTS**

Focuses on using the universal asynchronous receiver/transmitter (UART) chip in order to help your understanding of communication chips. Explores operation of teletypewriter interfaces and serial transmission circuits. By Peter R. Rony.

Ask for No. 21546 Now Only \$6.36

APPLE® PROGRAMMING & INTERFACING

THE APPLE II CIRCUIT DESCRIPTION

Provides you with a detailed circuit description of all Apple II motherboards, including the keyboard and power supply. Comes complete with timing diagrams for major signals and a discussion of differences between the various revisions. By Winston D. Gayler.

.. \$22.95 Ask for No. 21959 Now Only \$18.36



POLISHING YOUR APPLE

Clearly written, highly practical, concise assembly of all procedures needed for writing, diskfiling, and printing programs with an Apple II. Positively ends your searches through endless manuals to find the routine you need! By Herbert M. Honig.

.. \$4.95 Ask for No. 22026 Now Only \$3.96

INTERMEDIATE LEVEL APPLE II HANDBOOK

Hands-on aid for exploring the entire internal firmware of your Apple II and finding out what you can accomplish with its 6502 microprocessor through machine- and assembly-language programming. By David L. Heiserman.

Ask for No. 21889 \$16.95 Now Only \$13.56



APPLESOFT LANGUAGE

Only complete text available on Applesoft BASIC! Self-teaching format simplifies learning and lets you use what you learn FAST. Ideal for businessmen, hobbyists, and professionals! Many programs included. By Brian D. Blackwood and George H. Blackwood.

Ask for No. 21811 \$10.95 Now Only \$8.76



APPLE II ASSEMBLY LANGUAGE

Shows you how to use the 3-character, 56-word vocabulary of Apple's 6502 to create powerful, fast-acting programs! For beginners or those with little or no assembly language programming experience. By Marvin L. Delong.

Ask for No. 21894 \$15.95 Now Only \$12.76



APPLE INTERFACING

Brings you real, tested interfacing circuits that work, plus the necessary BASIC software to connect your Apple to the outside world. Lets you control other devices, monitor many events, and communicate with other computers, modems, serial printers, and more! By Jonathan A. Titus, David G. Larsen, and Christopher A. Titus.

Ask for No. 21862 . Now Only \$8.76



ENHANCING YOUR APPLE II, Volume 1

Shows you how to mix text, LORES, and HIRES anywhere on the screen, how to open up whole new worlds of 3-D graphics and special effects with a one-wire modification, and more. Tested goodies from a trusted Sams author! By Don Lancaster.

Ask for No. 21846 \$15.95 Now Only \$12.76



MOSTLY BASIC: APPLICATIONS FOR YOUR APPLE II, Book 2

Now, a second goldmine of fascinating BASIC programs for your Apple II, featuring 3 dungeons, 11 household programs, 6 on money or investment, 2 to test your ESP level, and more-32 in all! By Howard Berenbon. Ask for No. 21864 \$12.95 Now Only \$10.36

COMMODORE **PROGRAMMING &** INTERFACING



COMMODORE 64 PROGRAMMER'S REFERENCE GUIDE

This creative programmer's working tool for the Commodore 64 includes a complete, detailed dictionary of all Commodore BASIC commands, statements, and functions, followed by BASIC program samples showing how each item works, and much, much more! By Commodore Computer.

Ask for No. 22056 \$19.95 Now Only \$15.96

COMMODORE 64 USER'S GUIDE

Shows you how to set up, program, and operate your Commodore 64, including how to do arcade-type color animation, music, and sound effects. Same book that comes packed with every Commodore 64 computer! By Commodore Computer.

Ask for No. 22010 ... \$12.95 Now Only \$10.36



VIC 20 PROGRAMMERS REFERENCE GUIDE

An easy-to-use, detailed manual that helps you program your VIC 20 like a pro in either BASIC or machine language! Includes a special section on VIC 20 I/O operations, too. By Commodore Computer.

Ask for No. 21948 \$16.95 Now Only \$13.56



COMMODORE SOFTWARE **ENCYCLOPEDIA**

(2nd Edition)

Comprehensive software directory for the Commodore PET, including business, educational, games, firmware, and more-10 categories in all. Updated regularly. By Commodore Computer.

Ask for No. 21944 \$9.95 Now Only \$7.96



MOSTLY BASIC: APPLICATIONS FOR YOUR PET®, Book 2

A second collection of ready-torun BASIC programs that includes three dungeons, eleven household programs, seven on money and investment (three of which are on the stock market), two that test your ESP level, and more! Thirty-seven in all. By Howard Berenbon.

Ask for No. 22001 \$13.95 Now Only \$11.16



PET® INTERFACING

Provides you with unique information about interfacing the PET through each of its different output ports by means of a BASIC program and a custom interface you can build yourself. Has complete hardware and software instructions. By James M. Downey and Steven M.

Ask for No. 21795 . . . \$16.95 Now Only \$13.56

IBM® PROGRAMMING & INTERFACING



USING YOUR IBM® PERSONAL COMPUTER

Part One gets you started with off-the-shelf programs, and shows you how to use the PC's system hardware. Part Two teaches you to program in PC BASIC, and includes graphics, music, sound effects, and more. Fully indexed and illustrated. By Lon Poole.

Ask for No. 22000 . . . \$16.95 Now Only \$13.56

8088 ASSEMBLER LAN-**GUAGE PROGRAMMING:** THE IBM PC

Shows you how to program the PC with 8088 assembler language. Includes a complete functional description of the 8088 microprocessor, plus a detailed analysis of the IBM PC architecture and how to make full use of it. By David C. Willen.

Ask for No. 22024 \$15.95 Now Only \$12.76

TIMEX/SINCLAIR **PROGRAMMING &** INTERFACING



ZX81 BASIC BOOK

Neatly and effectively teaches ZX81 BASIC language, instructions, and programming techniques to owners of the ZX81 personal computer. Includes many examples and exercises. By Robin Norman.

Ask for No. 21957 . Now Only \$10.36 **TRS-80® PROGRAMMING**

& INTERFACING

TRS-80 COLOR COMPUTER INTERFACING

Teaches you the interfacing techniques, inner workings, and operation of the TRS-80 Color Computer and its highperformance 6809 microprocessor. Shows how you can control | necessary. Provides everything

and monitor various equipment and events. By Andrew C. Staugaard, Jr.

Ask for No. 21893 \$14.95 Now Only \$11.96



TRS-80 FOR KIDS FROM 8 TO 80, Volume 1

Amazingly effective information suitable for beginning TRS-80 programmers of any age, especially youngsters. No special background is needed. Same principles used at National Computer Camp help you learn quickly and easily. By Michael P. Zabinski.

Ask for No. 22046 Now Only \$7.96

CLEAN SLATE WORD PROCESSING FOR THE **TRS-80**

Possibly the most precisely detailed word-processing software documentation on the market, complete with program source code and author commentary. Shows you how to make the most of your CLEAN SLATE program and how to modify it to suit your taste or special needs. By Henry Melton.

Ask for No. 22005 . . . \$17.95 Now Only \$14.36

TRS-80 MODEL I, III, AND COLOR COMPUTER INTERFACING PROJECTS

A unique book for beginning interfacers which includes 14 simple, useful, and easy-to-build construction projects to help you make use of your TRS-80 model 1, 3, or Color Computer in the real world. By William Barden, Jr. Ask for No. 22009

.. \$14.95 Now Only \$11.96



REAL-TIME CONTROL WITH THE TRS-80

Shows how to use your TRS-80 for sophisticated, low-cost control of mechanical or electrical devices. Only an ordinary knowledge of Level II BASIC is needed, and no computer modification is

101

7

you need, including where to find the sensors and actuators. By Russell M. Genet.

Ask for No. 21831 \$14.95 Now Only \$11.96



TRS-80 ASSEMBLY LANGUAGE MADE SIMPLE

Learn how to plan, write, and hand-assemble your own assembly language programs in memory, using the T-BUG and Level II BASIC ROM subroutines. Provides immediate, short-cut results for the user who can simply use existing routines. By Earles McCaul.

Ask for No. 21851 \$12.95 Now Only \$10.36



TRS-80 INTERFACING, Book 1

Introduces you to the various I/O signals of the TRS-80 and suggests their use in a number of practical circuits. Many interesting experiments for those with a fairly good understanding of Level II BASIC. By Jonathan A. Titus

Ask for No. 21633 . . . \$10.95 Now Only \$8.76

TRS-80 INTERFACING, IJ

Gives you a number of advanced ways to use the knowledge from Book 1, including generation of control voltages and currents, driving high-voltage and high-current loads, and many more. Complete software furnished. By Jonathan A. Titus, Christopher A. Titus, and David G. Larsen.

Ask for No. 21739 \$11.95 Now Only \$9.56

16-BIT MICROPROCES-SOR PROGRAMMING & INTERFACING



16-BIT MICROPROCESSORS

Carefully steps you through the complexities of programming and designing with powerful 16-bit microprocessors. Covers the 68000, 8086, Z8001/2, 9900, and NS16000. By Christopher A. Titus, Jonathan A. Titus, Alan Baldwin, W. N. Hubin, and Leo Scanlon.

Ask for No. 21805 \$15.95 Now Only \$12.76



THE 68000: PRINCIPLES AND PROGRAMMING

Systematically guides you through the 68000's complex architecture, instruction set, pinouts, and interfacing techniques. Excellent for design engineers, programmers, and students. By Leo J. Scanlon.

Ask for No. 21853 . . . \$14.95 Now Only \$11.96



6502 MICROPROCESSOR PROGRAMMING & INTERFACING

6502 SOFTWARE DESIGN

Shows you how to place the powerful 6502 under assembly language program control. Contains 88 debugged and usable sample programs, and a wealth of additional material. By Leo J. Scaplon

Ask for No. 21656 \$13.50 Now Only \$10.80



PROGRAMMING AND INTERFACING THE 6502, WITH EXPERIMENTS

Good any time, but excellent if you don't have much 6502 assembly language programming or chip-level interfacing experience. Simple I/O techniques, instructions, and interfacing that can be reinforced by a KIM, SYM, or AIM system. By Marvin L. Delong.

Ask for No. 21651 \$16.95 Now Only \$13.56



ADVANCED 6502 INTERFACING

Contains many valuable design techniques for machine control using the 6502 and 6800 microprocessor families. Teaches interface design, understanding of LSI devices, and solutions to typical problems encountered. By John M. Holland.

Ask for No. 21836 \$12.95 Now Only \$10.36

6800 MICROPROCESSOR PROGRAMMING & INTERFACING



6809 MICROCOMPUTER PROGRAMMING AND INTERFACING, WITH EXPERIMENTS

Instructional text and applications handbook giving you a solid understanding of the 6809 high-performance chip. Covers all aspects and includes much software. By Andrew C. Staugaard, Jr.

Ask for No. 21798 \$14.95 Now Only \$11.96



USING THE 6800 MICROPROCESSOR

No special background in digital electronics is needed to use this book, which steps you through the conception, configuration, writing, and running of a variety of programs that demonstrate the powerful 6800's practical applications. By Elmer Poe.

Ask for No. 21512 \$8.95 Now Only \$7.16



HOW TO PROGRAM AND INTERFACE THE 6800

Introductory tutorial to Motorola's popular 6800, emphasizing real-world applications. Covers internal structure, instruction set, programming, hardware, and interfacing techniques. Many experiments! By Andrew C. Staugaard, Jr.

Ask for No. 21684 \$15.95 Now Only \$12.76

8080/8085 MICRO-PROCESSOR PROGRAM-MING & INTERFACING



8085A COOKBOOK

A design-it-yourself guide to basic microcomputing concepts for the 8085A microprocessor and its family-compatible chips. Helps you design a number of completely operational, 8085A-based microcomputers. By Jonathan A. Titus, David G. Larsen, and Christopher A. Titus.

Ask for No. 21697 . . . \$15.95 Now Only \$12.76





8080A MICROCOMPUTER INTERFACING AND PROGRAMMING

(2nd Edition)

Teaches you device select pulse generation, microcomputer output, microcomputer input, and interrupt servicing in the context of 8080A-based microcomputers so you can develop your own interfaces to other digital devices. By Peter R. Rony.

Ask for No. 21933 .. \$17.95 Now Only \$ 14.36



INTRODUCTORY EXPERIMENTS IN DIGITAL **ELECTRONICS AND 8080A** MICROCOMPUTER

PROGRAMMING AND INTERFAC-ING, BOOKS 1 AND 2 Introductory, self-instructional information about digitals, 8080A interfacing, device select pulses, the 8080A instruction set, data bus and I/O techniques, and much more. By Peter R. Rony.

Book 1, ask for

No. 21550 \$16.95 Now Only \$13.56

Book 2, ask for

No. 21551 \$14.95

Now Only \$11.96

For both books, ask for \$26.95 No. 21552

Now Only \$21.56

Z-80 MICROPROCESSOR PROGRAMMING & INTERFACING



Z-80 MICROPROCESSOR ADVANCED INTERFACING WITH APPLICATIONS IN **DATA COMMUNICATIONS**

Helps you learn to exchange information and access data bases all over the world, using a system based on the Z-80 or almost any other 8- or 16-bit microprocessor. Includes much portable software. By Joseph C. Nichols, Elizabeth A. Nichols, and Keith A. Musson.

Ask for No. 22003 \$19.95 Now Only \$15.96



Z-80 MICROCOMPUTER **DESIGN PROJECTS**

Even a novice can get first-hand Z-80 operations experience! You actually build a small but fully operational Z-80 microcomputer having 2K of EPROM and 128 bytes of RAM, program it, check it out, and use it in more than 75 pages of projects! By William Barden, Jr.

Ask for No. 21682 . . . \$14.95 Now Only \$11.96



Z-80 MICROPROCESSOR PROGRAMMING AND **INTERFACING, Book 1**

Introduces you to the Z-80 and its machine- and assemblylanguage software. Requires NO background in computer science, programming, or digital

electronics. By Joseph C. Nichols. Elizabeth A. Nichols, and Peter R.

Ask for No. 21609 \$12.95 Now Only \$10.36

Z-80 MICROPROCESSOR PROGRAMMING AND **INTERFACING, Book 2**

Covers the interfacing of digital circuits with Z-80 CPU, PIO, and CTC chips. Assumes you have read Book 1 or are familiar with Z-80 assembly and machinelanguage programming. By Joseph C. Nichols, Elizabeth A. Nichols, and Peter R. Rony.

Ask for No. 21610 \$16.95 Now Only \$13.56

For both books, ask for No. 21611 \$25.95 Now Only \$20.76



Z-80 MICROCOMPUTER HANDBOOK

Acquaints you with the hardware of the Z-80 and discusses its software aspects, including use of machine and assembly language. Also looks at the microcomputers using that chip. By William Barden, Jr. Ask for No. 21500 \$13.95

Now Only \$11.16

Bug symbol is a registered trademark of The Blacksburg Group, Inc. and denotes those books in the Blacksburg Continuing Education Series.

Apple II and Apple II Plus are registered trademarks of Apple Computer, Inc. IBM is a registered trademark of International Business Machines, Inc.

TRS-80 is a registered trademark of Radio Shack, a Tandy Corporation PET is a registered trademark of Commodore Business Machines CP/M and MP/M are registered trademarks of Digital Research, Inc. UCSD is a trademark of UC Regents, San Diego campus Timex/Sinclair 1000 is a registered trademark of Timex Computer Corporation

IMPORTANT-HERE'S HOW TO ORDER

1. Look through the Sams Book listings in this ad and find the books that

ings in this ad and find the books that fit your interests or the interests of someone you know.

2. To get your books at this special discount, and in the shortest possible time, complete and mail the handy order card attached. If the order form on this page or stapple if the your purshare or stapple if the your purshare. this page or staple it to your purchase order.

order.

3. Charge your books to your MasterCard or VISA account, or include your check or money order for the full amount due. Be sure to add \$2 for handling.

4. If you'd rather order by phone, call the Sams Order Desk at 800-428-3696 toll-free or 317-298-5566 and charge it to MasterCard or VISA. Give the Order Desk operator the code number in the box at the bottom of the order form when she asks for it. Order Desk hours are 8:00 AM to 4:30 PM Monday thru Friday, EST the year round. the year 'round. 5. Mail your order to:



4300 West 62nd Street P.O. Box 7092 Indianapolis, IN 46206

SAMS 20% DISCOUNT SALE ORDER FORM Catalog No. Oty. Special Price Total Catalog No. Oty. Special Price Total

		744 A
☐ Check ☐ Money Order ☐ MasterCard ☐ VISA Account Number	Subtotal Add Local Sales Tax Where Applicable Add Handling Charge Total Amount Enclosed Expires	2.00
Name (print) Signature Address	State Z	ip

Howard W. Sams & Co., Inc. In Canada, contact Lenbrook Industries, Ltd., Scarborough, Ontario M1H 1H5. Howard W. Sams & Co., Inc., 4300 W. 62nd, P.O. Box 7092, Indianapolis, Indiana 46206 (List Price \$299)

\$13900

(when you buy 6 tape programs at sale prices)



We Love Our Customers
Our Prices and Service
Prove It!

 One Day Delivery Express Mail

We Have Commodore 64 Computers In Stock

- Commodore 64 Programmers Reference Guides
 Free With Purchase
- Over 500 Programs To Choose From
- Free Catalogs

You get the COMMODORE VIC-20 Computer for only \$139.00 when you buy 6 tape programs on sale for only \$59.00. These 6 tape programs its for \$96.00 to \$132.00! You can choose one of these three tape program packs: 6 GAME program pack \$59.00 (Alien Invasion, Target Command, Artillery, Chase, Snake Out, Cattle Round Up). 6 HOME FINANCE program pack \$59.00 (Check Book, Calculator, The Budgeter, Home Inventory, Income Tax, Utility Bill Saver). 6 SMALL BUSINESS program pack \$59.00 (Accountant, Accounts Receivable and Payable, Inventory, Order Tracker, Estimating and Bidding, Appointments).

33K COMMODORE VIC \$199 WITH 2½ TIMES MORE POWER

For only \$199.00 you get the COMMODORE VIC-20 Computer plus WE ADD 8,000 BYTES OF USER MEMORY to give you 2½ TIMES MORE PROGRAMMING POWER! This powerful full-sized extra featured computer includes the 6502 microprocessor (LIKE APPLE) 20,000 bytes ROM with a 16K extended LEVEL II Microsoft BASIC, 13,000 bytes RAM, a total of 33,000 bytes memory, plug in expandable to 60,000 bytes, 66 key typewriter professional expanded keyboard with graphic symbols on keys, color command keys, high resolution graphics, 512 displayable characters, text display is 22 lines 23 characters, sound and music, real time, upper lower case, full screen editing cursor, floating point decimal and trig functions, string arrays, scrolling, multi statement lines, file management, PEEK AND POKE. Assembly machine language is available. We have easy to use self teaching books and programs. Accepts TAPE-DISK AND PLUG IN CARTRIDGES, connects to any TV, includes AD adaptor, R.F. modulator, switch box, self teaching instruction book, comes in a beautiful console case.

41K COMMODORE VIC \$249 WITH FOUR TIMES MORE POWER

For only \$249.00 you get the 41K COM-MODORE VIC with 400% MORE PROGRAMM-ING POWER THAN VIC-20! We add 16,000 bytes user memory to the VIC-20. You get a total of 41,000 bytes memory (20,000 bytes ROM, 21,000 bytes RAM and extended LEVEL II BASIC) plus all the extra features listed!

49K COMMODORE VIC \$299 WITH SIX TIMES MORE POWER

For only \$299.00 you get the SUPER POWERED 49K COMMODORE VIC with 600% MORE PROGRAMMING POWER than VIC-20! We add 24,000 bytes user memory to the VIC-20. You get a total of 49,000 bytes memory (20,000 bytes ROM, 29,000 bytes RAM and extended LEVEL II BASIC) plus all the extra features listed!

TRACTOR-FRICTION PRINTER \$399

This all new COM-STAR deluxe line printer, prints 8½" x 11" letter quality full size, single sheet, roll or fan fold computer paper, labels, etc. 40, 66, 80, 132 columns. Impact dot matrix, bi-directional, 80 CPS. Includes special cable that plugs direct into the VIC-20 printer port — no other costly interface is needed! List \$599.00 Sale \$399.00.

SUPER 10" COM-STAR PRINTER \$499

Has all the features of the COM-STAR printer shown above, PLUS! 10" carriage 100 CPS, Dot addressable bit image graphics, 2.3 buffer, 18 character sets, 40, 48, 66, 80, 96, 132 columns, prints true descender, super and subscript, underlining. Includes special cable to plug into the VIC-20 printer port. List \$699. Sale \$499.

60K MEMORY EXPANDER \$79

Allows memory expansion to 60K total (20K ROM and 40K RAM). Has six slots to add six cartridges — you can switch select any combination of memory or programs. Stop and start any program with reset button, you don't have to remove cartridges or turn off computer. This expander is a must to get the most out of your VIC-20 Computer!

PLAY ATARIGAMES ON VIC-20 \$79

WOW!! Plug in our new "GAME LOADER" and you can play all ATARI video game cartridges, Activision, Imagic M-Network on your VIC-20 computer. List \$99. Sale \$79.

LOW COST PLUG IN EXPANSION

Accessories plug in direct to this computer, extra RAM memory, data cassette, telephone modem \$99.00, deluxe 80 column printer \$399.00, 170K disk drive \$349.00 all plug in direct! You do not have to buy an expensive expansion interface!!

WE HAVE THE LOWEST PRICES

We sell direct to customers and you save the profit margin normally made by computer stores, department stores and distributors, we are willing to take a smaller margin to develop volume. WE LOVE OUR CUSTOMERS — OUR PRICES PROVE IT!

IMMEDIATE REPLACEMENT WARRANTY

If your computer fails because of warranty defect within 90 days from date of purchase, you simply send your computer to us via United Parcel Service prepaid. We will "immediately" send you a replacement computer at no charge via United Parcel Service prepaid. This warranty applies to all products we sell because WE LOVE OUR CUSTOMERS!!

15 DAY FREE TRIAL

D	ON'T MISS THIS SALE-ORDER NOW
	VIC-20 for only \$139. plus \$59. for 6 pack of programs Specify pack wanted
	33K-VIC for only \$199.
	41K-VIC for only \$249.
	49K-VIC for only \$299.
H	Tractor Friction Printer \$399.
H	Super 10" Printer \$499.
H	60K Memory Expander \$79. Game Loader—Atari \$79.
_	Gaille Loadel — Atali 979.
	ess
City	
State	Zip Code ISA
Cred	it Card No.
Expi	ration Date
tax. HAW OTH Encl Pers	\$10.00 for shipping, handling and ince. Illinois residents please add 6'Add \$20.00 for CANADA, PUERTO RICHAIL orders. WE DO NOT EXPORT TER COUNTRIES. OSE Cashiers Check, Money Order onal Check. Allow 14 days for delivery, days for phone orders, 1 day express
	ada orders must be in U.S. dollars.


GET \$300.00 FREE SOFTWARE WHEN YOU BUY A COMMODORE 64 COMPUTER!!

PROTECTO

ENTERPRIZES (FACTORY-DIRECT)

BOX 550, BARRINGTON, ILLINOIS 60010 Phone 312/382-5244 to order

106

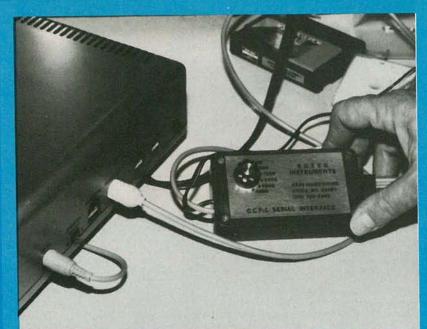

Radio Electronics YOUR OWN PAPEL 1983

Gadgets and Cizmos

A true computer system consists of more than just a computer. It also includes many accessories to make the computer more efficient.

HERB FRIEDMAN

THE RANGE OF GADGETS AND GIZMOS THAT ARE AVAILABLE FOR personal computers is astounding. What is available includes rock-bottom-priced aids such as keyboard overlays that make software even easier to use; I/O converters that permit high-performance printers to be used with low-cost computer systems for word processing on a budget; and even disk simulators that add hundreds of thousands of bytes of RAM to a conventional 8-or 16-bit computer.

To show how an add-on can greatly increase a computer's capability or ease of use, let's start our tour through aftermarket hardware with a device that is made for Radio Shack's Color

Computer: a serial-to-parallel printer converter.

The Radio Shack Color Computer—or "CoCo" as it is often called—has been a great value since its introduction. One reason is that it includes a serial output port that can be used for either a modem or a printer. Unfortunately, that port has some unusual characteristics, and until recently it could be connected only to a general-purpose printer that was really best suited for program listings. It wasn't possible to use one of the many high-performance, low-cost parallel printers on the market, such as the Epson MX-80.

First to rush in to change that was The Micro Works. Their *PI80C* serial-to-parallel printer adapter converts the serial output from the *Color Computer* to a parallel output. That allows the use of the Epson, or any of the other high-performance Centronics-type printers dumped on the market at rock-bottom prices—such as the Centronics 737, and even Radio Shack's *Line Printer VII* that was sold off in some stores for the bargain

price of about \$300.

When the *Telewriter-64* software was introduced by Cognitec, it established the *Color Computer* as a full-featured, professional-quality word processor. The trouble was that there was no suitable low-cost daisy-wheel printer that would work with the *Color Computer* with or without the then-existing adapters. That problem was resolved by Botek Instruments' model *CCP-1* serial-to-parallel converter that works with every popular printer including the low-cost Smith-Corona *TP-1* daisy-wheel printer. With the Botek adapter, it doesn't matter whether you're using one of the old, new, or "salvage" parallel printers—they all work with the *Color Computer*.

Now that we have a picture of how drastically an add-on gadget or gizmo can affect a personal computer and its use, let's take a look at some others that are available and what they can

Software aids

Not all computer accessories are electronic. Some add-ons simply make a certain program easier to use. We previously mentioned keyboard overlays that can make software easier to use. They are available for WordStar, dBase II, and SuperCalc. WordStar and dBasell are two of the best but most complicated programs to use because they have so many control codes and procedures. If you don't use one of those programs on a steady basis you will have to make frequent and frustrating references to the operating manual. SuperCalc isn't as bad-it's among the easiest of all the spreadsheet programs to use, but it also has an arm's-length list of command codes. However, with the Kleertex template for the Osborne (shown in Fig. 1), the operation of all three are simplified and they become almost a delight to use. I think that those Kleertex overlays by Creative Computer Products are possibly the best operating aids on the market. The precision die-cut keyboard overlays are made of heavy, flexible plastic. They have the commands grouped around the keys, and the grouping is better than the summary cards that the manufacturers supply with their software! The Kleertex aids have had test users up and running the three programs in hours rather than days or weeks. And they can quickly get you running a program that you haven't used in a while. They are supposed to



FIG. 1—KEYBOARD OVERLAYS from Kleertex can have you running software in hours rather than days.

be in the Xerox stores sometime in 1983. Personally, if I didn't own an Osborne I'd cut the templates down to fit my computer—which is how I'm going to fit the *Kleertext* template for *Word-Star* to a Heath *H19* terminal.

Timex/Sinclair accessories

One of the great things about computer accessories is that they can increase the power of even the most inexpensive machine. One of the most popular low-cost computers is the Sinclair ZX81 and/or the Timex/Sinclair 1000. (The only difference between them is that the Timex, with 2K of RAM, has twice the memory of the ZX81.) That computer is used by some perople as a trainer for children; by others who are on a budget as a "main" computer; and it's even used by owners of full-blown personal computers who want a portable that fits into an attache case. To say that the Timex has limitations is an understatement—but it is a remarkably powerful computer for the money. The "official" accessory is a plug-in 16K RAM module. Another Timex accessory, the printer (not yet available in the US), is tiny and uses thin rolls of thermal printer paper that are best suited for listings. But there are aftermarket outfits that turn out professional accessories for the Timex/Sinclair computers. For example, Memotech Corp. makes memory modules of 16K and 32K RAM and even 64K RAM. They also make a Centronics-type printer interface that permits the use of a standard parallel printer with the Timex and also a module for high-resolution graphics (198 × 248 pixels). As shown in Fig. 2, each module connects to the rear expansion port and has its own expansion port on the rear so that other modules can be plugged in and stacked. At the end of the line Timex's own 16K module can be installed. (For 32K total RAM you could use a Memotech 16K module and the Timex 16K RAM module.) The "award winner" of all those modules is the Centronics-type parallel printer interface. That lets the user step up to professional quality printing-no more little strips of paper.

Because the Timex/Sinclair computer is low cost and massmerchandized it might well prove to be the most popular (at least the most widely sold) computer, so we can expect to see many more "expansion" devices offered as accessories. Already, full-sized, typewriter-like replacements for the hard-to-use membrane keyboard are hot sellers, as are keyboard "beepers" that let you know when you hit a key. We have read advertisements describing clock/calendars that plug into the expansion port, and even a communications modem and an EPROM programmer; but inquires to date have failed to turn up a production model—all appeared to be in the "final stages of production" at the time this article was prepared.

Printer accessories

Another gadget for printers-there are lots of them-is hardware generally described as a microbuffer. That's an 8K or 16K RAM specifically intended to connect between your computer and the printer. There are even models that provide as much as 64K or 256K of RAM. What's the advantage of one of those devices? You would know if you ever had to wait for your printer to finish printing a document before you could get back to using your computer for something else. The typical matrix printer for a personal computer runs at a top speed of approximately 80 characters-per-second. Some daisy-wheel printers are even slower, some as slow as 12 or 14 characters-persecond. If you have a long document it can take quite a while, perhaps 5 to 10 minutes to print 4000 words (24,000 characters). In "computer time," 5 minutes is a lifetime, and during that period your computer sits unused for any purpose other than to print the document. That's a most intolerable situation.

But if you connect a microbuffer RAM between the computer and the printer then the computer can dump characters into microbuffer RAM at speeds up to 120,000 characters per second, 2600 words in the blink of an eye. When enough RAM is free in the microbuffer the computer does another high-speed dump to fill the buffer RAM. While the printer extracts its data



FIG. 2—ADD-ON MODULES for the Timex/Sinclair computer from Memotech Corp. are stackable.

slowly from the microbuffer, the computer has its RAM free and can be used for other purposes.

Microbuffers are available under many different brand names for a host of computers and printers. Some get built into the printer, such as the one for the Epson printer from Practical Peripherals, Inc. Others are outboard accessories such as the Printer Optimizer from Applied Creative Technology, Inc.

We previously discussed a serial-to-parallel converter for the *Color Computer*, but other computers or computer users could also use such a converter. (That's not only for printers, but for any other parallel device.) Presume, for example, that you have just replaced some of your early computer equipment and discover that the new stuff is made for serial printers only. Or perhaps for some other reason you decide that serial is the way to go. But all your old printing equipment is parallel, and its trade-in value is zilch. What do you do? No, you do not mortgage the old homestead. Rather, you connect a \$79.95 standard (Ho! Ho!) RS-232 serial-to-parallel interface adapter between the computer and the printer (or between the computer any other parallel accessory).

That adapter converts the computer's serial output to Centronics-type parallel, and if all goes as expected, everything should work. One standard serial-to-parallel adapter is manufactured by Engineering Specialties. Its lowest baud rate is 150 (rather than the more or less "standard" 300 baud) and the device will therefore work with Centronics-type parallel I/O, most IBM Selectric printer conversions, and the slow daisywheel printers such as the Smith Corona TP-1 (which can be a real problem with serial/parallel converters because the computer is sending the second character before the first is printed). The Engineering Specialties converter has a one byte memory which allows the printer to finish before it receives the next character, and the printer will work even if the computer cannot send 110 baud. Because nothing in the world of computers is standard. I would suggest that you phone ahead and ask them if their gizmos will work with your system.

Take careful note that your printer, or the computer, must provide the 5V at 20-mA needed for the adapter. Most printers, but not all, have 5 volts on RS-232 pin 18. If not, you must provide the 5 volts from somewhere else.

When trouble comes

Having trouble interfacing your printer or your modem to your computer? Does your printer's output have no relation to the specified formatting? Surprise! Standard RS-232 doesn't turn out to be all that standard; sometimes it seems that everyone puts a zinger or two into their RS-232 connections so you have to purchase their software and hardware. (How I remember spending hours trying to get a modem working until I discovered that Heath held pin 20 of their RS-232 connection at five volts—why?)

If you like to use a lot of hardware peripherals, or if you are using several computers, a gadget that you might want is something called a *Model 50 Breakout Box* from Remark Datatcom, Inc. It has male and female RS-232 I/O connectors, and DIP switches in series with each signal line that permit you to open any of the 24 signal lines. Terminals on both sides of the switches allows the user to patch any input signal to any output terminal. It even has four common bus areas so you can connect two or more terminals together (some modem circuits need that). Six patch cords are supplied, and for those of us with poor memories, the standard RS-232 signal list is imprinted on the enclosure.

If your RS-232 hardware configuration doesn't work right then you can switch open the questionable signal lines, patch the input to what you figure is the output, and when everything works right you simply make up an ordinary patch cable with the wiring configuration that you worked out. The *Breakout Box* is shown in Fig. 3 and it can save hours of troubleshooting and calculations. While the \$79 price of the device is a bit stiff for a one-time installation, its a great device for local users' groups. A slightly less sophisticated version (without the DIP switches, just patch terminals) is available for less than \$40.

Male or Female?

It never fails: The connectors on your new peripherals are always the reverse of what you've been using. If all your connecting cables are male-to-male the next piece of hardware will require a female connector. Most of the gender problems with RS-232 style connecting cables are easily resolved with a Gender Reverser from B & B Electronics. Those are simply small printed-circuit cards with matching RS-232 connectors on each end (male to male or female to female). Attach your present RS-232 cable and voila, the gender on one end of the cable is reversed. The price of \$19.95 is somewhat high, but that's about what it would cost you if you went out and purchased the connectors and cable from a local store, and the gender reverser is a lot smaller and more convenient. Normally, female-to-female is the most convenient reverser, so if your budget can only afford one, get the female model.

One megabyte on-line RAM.

No, you don't need a maxi-computer to get a megabyte, or even 8 megabytes of RAM on-line; all you need is lots of money and a device known as a disk simulator or semidisk. Consider your disk drive(s); if it's single density you can write about 100K. If it's double density about 180K. If it's double-sided double-density, 360K. Two drives? 740K and so on, all the way up to the megabyte range. Now imagine if you will that you replace the drive with RAM that is driven to operate as if it were a disk drive. The computer will write and read from the "disk;" but now, instead of a disk drive taking (what seems like) forever to locate the desired data, the signals zip through the RAM in microseconds.

To run a disk simulator you simply connect the device in place of a disk(s) drive and run an installation program. The computer then sees the simulator's RAM as a disk, and the data is stored in the RAM at it would be on a disk. There are two important differences: The RAM gives you virtually instant access to the data, and it is volatile. (When you turn off the computer's power, the RAM's data is lost.)

Disk simulators can be obtained as outboard add-on accessories or as cards specifically designed to plug directly into a computer in place of the disk drive. They are available for S-100 computers, the TRS-80 *Model II*, the IBM *Personal Computer*, and the Apple *II*. They are so successful that we can expect models will soon be available for every personal computer that uses a disk system.

One problem with disk simulators is that they lose their memory contents when power is shut down or interrupted. That, of course, is because of the properties of RAM. There is, however, a disk simulator that does not suffer from that short-coming: the *Bubdisk* from MPC Peripherals Corp. That device is

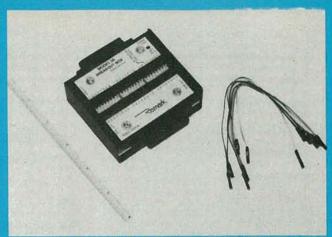


FIG. 3—IF YOU HAVE TROUBLE with a "standard" RS-232 interface that is not standard, the *Breakout Box* can help you figure out what's wrong.

a bubble-memory disk simulator. Bubble memories feature the read/write abilities of RAM's along with the non-volatility of ROM's, and the mass-storage capabilities of a tape or disk.

The 128 K Bubdisk has an interesting feature. In the event of a power failure or brown out, the board will automatically power down to ensure the reliability of the stored data.

What happens to the disk-operating system, utilities, and the like? That's all on the first disk drive. The simulators are used in place of the second, third, or fourth drive, depending on the particular computer installation. You can use the simulator RAM for program development, or whatever, and store the end result or data on the remaining disk drive(s).

As with all new things, simulators don't come cheap. A 512K simulator goes for almost \$2000—but that's today's price.

More Color Computer accessories

One of the major limitations of the Color Computer is that you can have only one ROM module plugged in at a time because there's only one ROM module port. Considering that aftermarket distributors are packaging their software in their own ROM modules, it's conceivable that there will soon be a need to run several modules at one time. For example, a disk drive (which uses the module port), a BASIC AID module, and who knows what else-the Color Computer is fast becoming a giant in low-cost computing. Among the leading gadgets to expand it is the Basic Technology's BT-1000 color computer expander, which is a device that converts the single ROM module port into five ports that can handle either ROM or RAM modules. Why would you use a RAM module on a ROM port? To expand RAM. The ROM port address is located above the internal RAM, so RAM used on the ROM port will provide additional RAM at the top which can be used to store utilities, etc.

For those who want to add professional-quality time keeping to their "CoCo" programs, Basic Technology has a crystal-controlled module for a real-time clock/calendar that provides the day, date, month, year, hours, minutes and seconds. An internal NiCd battery keeps the module running when the computer is turned off.

For those owners who want to design and build their own hardware, Computer Accessories of Arizona has a breadboard that plugs into the ROM module port and brings out the data, address, and control signals. It provides 16 square inches of pre-drilled breadboarding area with plated-through holes that are compatable with wirewrap accessories.

There are probably more accessory joysticks available for the *Color Computer* than for all the video arcade games. Those "high performance" or professional (professional?) joysticks can let you zap more Klingons, protect more cities, destroy more missiles, than any other. Each claims to be a breakthrough in the state of the art of joystick technology.

Moses Engineering (PO Box 11038, Ardmore Highway Sta-

SUPPLIERS

Applied Creative Technology 2723 Avenue E East, Suite 717 Arlington, TX 76011

Basic Technology PO Box 511 Ortonville, MI 48462

B&B Electronics PO Box 475 Mendota, IL 61342

Botek Instruments 4949 Hampshire Utica, MI 48087

Cognitec 704 Nob Ave. Del Mar, CA 92014 Computer Accessories of Arizona 5801 E. Voltaire Dr.

5801 E. Voltaire Dr. Scottsdale, AZ 85254

Engineering Specialties 1501-B Pine Street PO Box 2233 Oxnard, CA 93030

General Automation 9600 Roosevelt Blvd. Philadelphia, PA 19115

Giltronix, Inc. 970 Sab Antonio Rd. Palo Alto, CA 94306

Memotech Corp. 7550 West Yale Ave. Denver CO 80227 MPC Peripherals Corp. 9424 Chesapeake Drive San Diego, CA 92123

Practical Peripherals, Inc. 31245 La Baya Dr. Westlake Village, CA 91362

Remark Datacom, Inc. 4 Sycamore Dr. Woodbury, NY 11797

RKS Industries 4865 Scotts Valley Dr. Scotts Valley, Ca 95066

The Micro Works PO Box 1110 Del Mar, CA 92014

tion, Huntsville, AL 35805) has a light pen that plugs into one of the *Color Computer's* joystick ports. It takes some programming skill in BASIC to use the light pen, but you can write programs where the pen "selects" the correct answers from a screen full of words, patterns, or anything else. That light pen needs some better documentation if it's to be used by beginners and newcomers to BASIC, but if you know what light pens are all about you probably can make it do many tricks.

For those who need a larger computer but have so much invested in their *Color Computer* that they can't bail out for something larger, there's an expansion interface from General Automation. That gizmo—or is it a widget?—is disk compatable; it provides 64K RAM access for the 32K Revision-E model of the *Color Computer*. It provides a parallel port for a printer or I/O—leaving the RS-232 port available for simultaneous modem use, selects up to 7 more peripheral cards, and can even handle a speech synthesizer.

Expansion

If you're having trouble trying to run several peripherals on one I/O port then you should be aware that Giltronix, Inc. makes "black boxes" that eliminate plugging and unplugging equipment when you want to substitute, say, a printing terminal for a CRT terminal, or a printer for a modem, and so on. Their model ASU-3 is an automatic port selector that will connect any one of three peripherals to a CPU or CRT by simply entering a command on the keyboard; the appropriate baud rate is set automatically when the peripheral is switched. For those of you trying to get microcomputers to run like a data-processing system, Giltronix has models that switch 5 or 7 peripherals.

Killing the killer


It takes but a single transient surge on the power line to zap hours of programming effort loaded into RAM if it rides through your computer's power supply. Now the kind of surge we're talking about isn't one that dims the lights or shrinks the video display. Rather, it is one so brief that you never know it occurred until you look up and see your screen is filled with "garbage." The fact is that even a lightning hit miles away can cause a transient that will zap your computer. There are many devices on the market designed specifically to squash that type of transient. They go under various brand names but they all accomplish the same result. One example that we will give is the Surge Sentry from RKS Industries. That is a protector that plugs into the powerline and the computer plugs into it. Transient surges that exceed approximately 180 volts are suppressed by the device before they even get a chance to enter the computer.

Controlling the world

In the early days of computing, no newspaper article on computers was complete without some anecdotes about computerists who "enhanced" their lives with a home controlled by a computer-or was it really a computer that controlled their lives? The computer turned the lights on and off, answered the phone when no one was home, put up the coffee in the morning, turned on the lawn sprinklers, and kicked the cat out for the night. What those articles failed to spell out was that most of the hardware was customized, very expensive, difficult for the non-engineer to install, and usually wasn't worth the effort: Do you really want coffee made from water that's been standing out all night? But, if you want your computer to control the outside world, it's now easy and relatively inexpensive. Radio Shack has a controller priced at \$39.95 that works in conjunction with the BSR controller modules-the same modules that are used with the BSR X-10 Wireless Remote Control System. As determined by your BASIC program, the controller broadcasts a BSR-type signal through the AC powerline, causing the individual modules to apply or remove AC power from an attached appliance. Though Radio Shack has been more or less the leader in utilizing the BSR-type device for control of the outside world, from time to time other control devices for other computers appear in the marketplace. As a general rule they are usually some form of parallel output port providing a TTL signal to which you must connect a lot of extra switching hardware; or they provide a low-current "dry" contact closure for eight or more circuits. Again, you provide the rest of the hardware. Except for the BSR-type controller, the other designs come and go because they are simply too much trouble for the nontechnical personal-computer user. But if a BSR-type controller becomes available for your particular computer, snatch it up. even if you have no use for it at the moment. (It's amazing the uses you find for it after you own one.) They are relatively inexpensive and a delight to use-meaning they are userfriendly; they actually can switch a small room-size air conditioner directly, without any intermediate hardware.

As you have probably noticed we haven't even touched on hard disk drives, disk-storage cabinets, disk-drive cleaning kits, covers, protectors, add-on monitors, or a dozen other things. Those are all standard equipment used or desired by almost all computerists. We've concentrated on the gadgets and gizmos that are relatively unknown or unused, but that can put a lot of power and/or pleasure into your computer system. Often, a gadget you never thought you would need (or maybe that you never even thought of at all!) suddenly becomes the key to a whole new direction in personal computing.



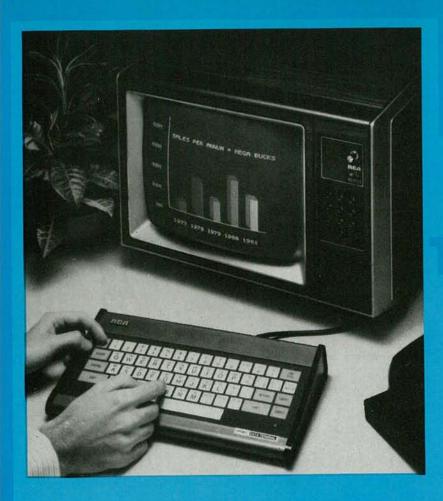

Radio Electronics YOUR OWN APRIL 1963

Data erminals

If you want to access dial-up information networks or data bases, but don't need the power—or expense—of a home computer, then here's an attractive alternative.

MARC STERN

ONE OF THE MOST EXCITING RESULTS OF THE COMPUTER REVOlution is the ability with which we can access and use information. We now have more information we can access than ever before, such as stock reports, world news, and other data. That data is available from the wide variety of information networks that have been established in the last several years—and all of it is only a phone call away.

Those information systems (sometimes called remote databases) include The Source, CompuServe, and Dow Jones, to name just three of the major, general-interest networks. However, there are many other smaller and more specialized services available, too.

Access to those services has been somewhat limited until now. That's because if you wanted to connect to such a database, you had to have a computer and a modem with which to link the computer to the service. However, that left a wide segment of potential users out of the system, because many of them didn't have computer facilities available.

But that situation is rapidly changing as low-cost home computers are becoming more widespread. Any of those personal microcomputers, when used with the right software and a telephone modem, can connect to one of the information networks. It is necessary, of course, that you have a subscription to the service.

However, there are some people in the population who really might not care to own a microcomputer, but still want some way to access one or more of the many networks. What are those people to do? They can opt for any of the personal data terminals available on the market. Those range from keyboard-only "dumb" units to "intelligent" terminals that include their own display screen, modem, and more.

Although some terminals do offer a number of features, none can do as much as a personal computer can. What, then is the advantage of a terminal? The answer, obviously, is cost. Ter-

minals are available as complete units in a price range from \$399 to about \$700. Compare that to a cost of about \$1,000 for the average home computer configured with the equipment and software needed to act in a terminal role. That includes not only the software package that can run up to \$150, in some cases, but also the modem, display screen, necessary memory, and possibly a printer. Yes, it is true that a top-of-the-line intelligent terminal with a printer can approach that price level, too, but for the average user who wants to save some money, a terminal is the best bet.

Dumb or intelligent?

Before we go any farther, there are several terms which have to be defined, and we'll start with "dumb" and "intelligent." A dumb terminal is just what the name implies—it cannot act for itself and must be driven by another system. It can be driven by a mainframe computer, a minicomputer, or a microcomputer. That type of terminal, available from many sources, is incapable of all but the most elementary functions, such as rudimentary screen editing and cursor movements.

An intelligent terminal, on the othr hand, is usually driven by an 8-bit microprocessor. While it is capable af acting as a dumb terminal, it can really do much more. It allows you to have a great deal more interaction with the system or network to which it is attached.

Let's now take a closer look at each of those types of terminals, and the features and capabilities that you can expect from each.

Essentially, the dumb terminal is a slave to the system to which it is connected, and the user must access the system's functions to support the terminal's actions. The terminal may include a port for connection to a modem, but it includes little else except for a keyboard processor that decodes the keyboard inputs, a ROM that contains character-generating information,

and a video driver that produces the screen display. It might also include a small amount of RAM—maybe enough to store three or four pages of information from an information network or from a mainframe system. However, it is incapable of supporting any other peripheral equipment, such as a line printer for hard copy.

If we now look at the intelligent type of terminal, we find that the motherboard not only includes an 8-bit microprocessor, but also a good bit of RAM and ROM. The intelligent terminal is also capable of driving a printer for hard copy, and it contains a line editor so you can compose and edit messages for transmission as electronic mail. It might also have some special features. For example, it might be capable of instant access to such services as The Source or CompuServe if its ROM is programmed for that.

ASCII

If you shop for a terminal, another term that you will run into is the acronym ASCII (American Standard Code for Information Interchange). Essentially, ASCII is a a binary data code that takes the information generated by your system and turns it into a binary or machine-level number or code. Its purpose is to allow for information exchange between equipment made by different manufacturers. Since the code is almost universal, the information generated by your XYZ Co, terminal will be readable either by an ABC Co. terminal, a mainframe computer, or a distant database or network. Conversely, your terminal will recognize the information coming into it from any (ASCII encoded) source. If you are in the market for a terminal, be sure that it is an ASCII-capable unit. All of the terminals mentioned in this article use the ASCII code.

In most terminals, the generation of the ASCII codes is handled by an input/output (I/O) processor. The I/O processor contains the necessary code-generating information in ROM, especially if the terminal doesn't use ASCII on its own internal communications bus. The I/O processor takes the digital information it receives from the screen memory or RAM, and then performs the necessary encoding to turn it into properly-coded signals, so that the terminal can communicate with others. If the terminal uses a different internal data-encoding format, then the small I/O processor will turn the ASCII code it receives into machine-usable form. However, it should be noted that most terminals are able to use or generate ASCII directly, so the somewhat complex circuitry needed for translation and code generation isn't normally necessary.

Although ASCII is almost universal for data communication, there are some companies which still insist on using their own coding. A good example of this is IBM which still has many systems in the field using EBCDIC (Extended Binary Coded Decimal Interchange Code).

Input/output

In order for the terminal to communicate with a computer, an information network, a printer, etc., it must have some type of I/O port. There are two major kinds: parallel and serial. We'll try to explain the difference between the two without going into too much detail. A parallel port sends/receives data eight bits at a time. In contrast to that, a serial port sends/receives data serially—one bit at a time. Therefore, a parallel port can handle data much more quickly than a serial port can. However, a serial port is a more reliable method of data transmission, because it is less susceptible to noise pickup, especially over long distances. Furthermore, we should mention that serial transmission is used over the phone line. Parallel transmission, on the other hand isn't really feasible on any but a hard-wired, dedicated system. (It cannot be used with phone lines.)

On some terminal systems, you will not see a serial port. Instead, you will see a modular phone jack. However, don't be misled; inside the box there is an interface to handle the work of input and output. What the manufacturer has done is to put the modem inside the terminal. All you have to do is plug in your (modular) phone plug.

Displays

The quality of the display that you can obtain is limited by both the terminal's ability and the ability of the display screen itself. First, we'll start with the terminal.

If you look closely at the display, you'll see that the characters are actually made up of dots. The quality or clarity of the characters is determined by the size and number of the dots in the *dot matrix*. A matrix of 5 dots (width) by 9 dots (height) will yeild characters with reasonable definition. However, a 7×9 matrix is better because the dots are closer together and therefore the letters have more clarity.

Just because the terminal's character generator is capable of producing characters with high resolution, that doesn't assure you of having a readable display. The capability of the display screen comes into play here. The display screen is divided into a series of pixels (a horizontal measurement) and picture lines. It is the interaction of those two parameters that defines the sharpness or clarity with which you will see a graphic display or character. The more picture lines and the more pixels you have, the sharper will be the characters you can obtain. Thus a highresolution screen may have a display capability of 512 × 250 (512 pixels × 250 lines) and will give a good display. Conversely, a display with a resolution of 140 × 200 will have relatively poor graphics or character-generating capability. That principle can be seen easily by comparing a magazine photo to one from a newspaper. Although both are made up of dots (look closely!), the magazine photo is sharper because its dots are

The display on an intelligent terminal is normally 24 lines × 80 columns—the commonly accepted industry standard. On most of those terminals there is a 25th line. That is the *status line*, and it gives the operator an indication of what mode the terminal is in.

The status line usually appears at the top of the screen and it is a non-changing feature of the screen. It will display the mode the terminal is in, whether it is on-line or off-line etc.

Menus

Many terminals are also user-friendly in that they display a series of *menus*. A menu gives the user a list of commands and the key to push to execute any of those commands. This prompting guides the user through the steps needed to access a function. The menu routine is usually accessed via a HELP key or keyboard routine. An example of a menu for an auto-dial function is shown in Fig. 1. Note that it tells the user exactly how to use the function. For example it says to press a letter to dial, to press F2 to change the directory, etc. If a system is menu-operated, even a first-time user should have little problem in running it.

Now we have covered some of the basics that you'll have to know when you are first in the market for a terminal. However,

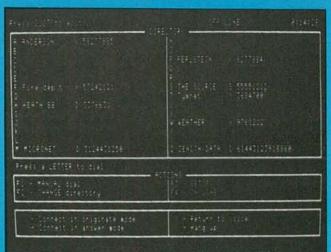


FIG. 1—A menu-operated system is easy to use even for someone with no previous experience.

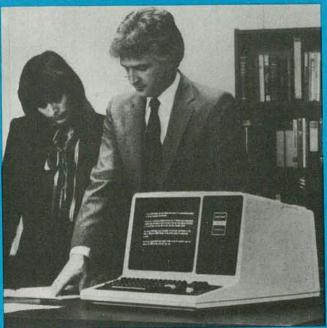


FIG. 2-Radio Shack's TRS-80 DT-1 is a high quality data terminal.

there are other things to be considered, and we'll get to those next.

Modems

Because modems are covered in detail in another article in this magazine, we will not discuss them here in great detail. We will, however, mention a couple of considerations to keep in mind. First, the modem should be Bell 103 compatible. That is a communications protocol which allows transmission at 300 bits per second or 300 baud. If it is Bell 202/212 compatible it is possible you may not be able to log onto an information network. (That type of terminal or modem runs at 1,200 baud and most information systems are geared to run at 300 baud.) If, however, the network offers a 1,200 baud option, and you can use it, then do—you'll save a lot of time.

Many terminals themselves can be configured to run at many speeds up to 9,600 baud of more and can be hard-wired to a local mainframe or dedicated minicomputer. But, unless you have a dedicated phone line or circuit, then the highest speed possible for reliable communication over a phone line is 1,200 baud. After that, the bandwidth taken by the signal is too broad and there are too many chances for error.

Two more items about computer communication by phone of which you should be aware are the method of dialing and the phone-jack requirements. If your terminal is capable of autodialing and it uses the DTMF (Dual Tone Multi-Frequency) system (commonly called Touch-Tone) but your phone system hasn't been computerized and still uses the older form of pulse (rotary) dialing, then it is possible that you won't be able to access the information network directly from the keyboard. Instead, you'll have to use your phone to establish communication. Further, if your terminal is equipped with a modular plug and your home has only the older-style block terminals, then you'll have to buy an inexpensive adapter.

Some examples of terminals

Now that we have looked at the different types of terminals and what they can do, let's take take a look at representatives of the types of terminals available for you. Those include the dumb terminal, the intelligent keyboard-only unit, and the all-in-one intelligent terminal.

The TRS-80 DT-1 (from Radio Shack, One Tandy Center, Fort Worth, TX 76102) shown in Fig. 2, is a good example of a dumb terminal. Although it is best-suited for hard-wiring to a



FIG. 3—The RCA VP3501 Videotex Data Terminal includes, among other features, a built in modem and built in tone and white-noise generators.

mainframe computer or interoffice information network, it can also be used, with a modem (not included in \$699 purchase price), to access an information network. The video display is in black-and-white and it is capable of displaying the standard 80 columns by 24 lines and both upper and lower case letters. That display is housed along with a standard keyboard (with separate number keypad) in one cabinet.

Ten data transmission rates are keyboard-selectable, and range from 75 to 19,200 baud. Also included in the *DT-1* is an RS232C-compatible communications port and serial and parallel printer ports.

An interesting feature of the terminal is that it is codecompatable with four popular terminals: the TeleVideo 910, Lear Siegler's ADM-5 and ADDS 25 and the Hazeltine 1410. The particular configuration that you want to use is keyboard selectable.

The second type of terminal that we will give an example of is the keyboard-only intelligent terminal. That type is best typified by the RCA 3301 (RCA MicroComputer Products, New Holland Ave., Lancaster, PA 17604). That terminal is intelligent because it has many features including user-definable characters, full control over color graphics, tone generator, and more. It features a membrane-type keyboard, rather than a typewriter-like keyboard. However, the embossed characters are arranged in standard "QWERTY" typewriter style.

The 3301 is priced at \$369. That does not include the external modem which must be used for network access. (A similar RCA terminal, the \$399 3501 is shown in Fig. 3. It does include an internal, direct-connect modem. It also includes a built-in printer interface, and can be hooked up to RCA accessories to make it capable of such funcions as auto-dialing to make it even more intelligent.) It offers the choice of interfacing with a standard color or black-and-white television or a computer-grade monitor (which will provide better resolution than the standard TV). However, this keyboard unit is capable of generating a display which is only 40 columns wide-that is half of the 80-column industry standard. In another mode, the characters become double-sized, cutting the display in half to 12 lines by 20 columns. The dot matrix is 5 by 6, which means, the letters do not have good definition. Besides generating 52 upper and lowercase characters, 10 numerals, 32 punctuation and math characters, and 31 control characters, there are also some userdefinable characters. Also, since it is intended to be linked to a color terminal or TV, it can display eight colors in eight levels of

The unit also offers the option of setting transmission parameters. For example, six baud rates from 110 to 19,200 can be selected. Also, even or odd parity can be chosen. (Parity refers to a error-checking code where the total number of 1's or 0's in a character code is counted. If even parity is chosen, and

an odd number is counted, then you know that an error has occured in the transmission.) If even or odd parity is not chosen, then you can select the status of the eighth bit of a character to be either a mark or a space.

Full or half duplex can also be chosen. Let's see what that means. In the full-duplex mode, when you type in a character, the terminal waits for an *echo* from the computer or network before it displays it on the screen. In the half-duplex mode, whatever you type on the keyboard is shown on the screen while it is transmitted.

Another example of a keyboard-only intelligent terminal is Radio Shack's TRS-80 videotex terminal. That \$399 terminal is shown in Fig 4. It features a full, standard keyboard and interfaces with either a color TV or a monitor. The unit features a 6809E eight-bit microprocessor. It also has 16K of RAM so a user can store up to 32 pages of information for later viewing. One advantage of that is that in some cases it can cut down the amount of time that you are connected to the network, thus

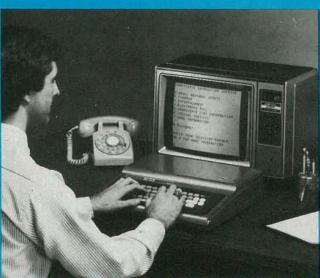


FIG. 4—The Radio Shack TRS-80 videotex terminal includes a built-in modem and 16K RAM.

saving you money. A user also has the option of interfacing a 128K disk for mass storage.

Another type of intelligent terminal is best typified by the Zenith Data Systems ZT-1(1000 Milwaukee Ave., Glenview, IL



FIG. 5—The ZT-1 from Zenith is one of the most intelligent terminals on the market. Its built-in prompts also make it one of the easiest to use.

60025). That terminal, one of the best on the market, is shown in Fig. 5. The ZT-I is menu-driven—it displays the choices available from the moment the power is turned on. A series of menus makes it possible to use one key to perform most functions.

One of the interesting features of the ZT-1 is its built-in auto-dial modem, which we mentioned previously (the phone directory is shown in Fig. 1). You can store a directory of up to 26 phone numbers in battery backed-up RAM. Then, to make a call, all you need do is press the single key that the menu indicates.

A real-time 24-hour clock runs when the ZT-1 is turned on. That can be used to keep track of on-line time, or just to keep track of the time of any telephone call.

The \$699 ZT-1 includes a 12-inch green-phosphor monitor that displays the industry-standard 24 lines of 80 characters (plus a status line). It is also capable of producing a double sized display. The character dot matrix size is 5×9 . It will also support both RS-232C and TTL communications at rates from

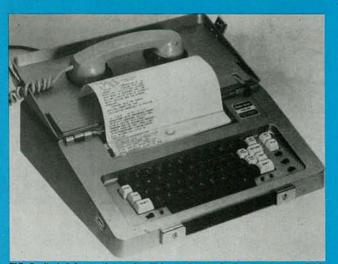


FIG. 6—Its briefcase size and built-in modem and printer makes the TRS-80 PT-210 ideal for anyone who needs a portable data terminal.

110 to 4,800 baud.

The next termal that we will look at is different from those discussed above. This terminal—Radio Shack's *PT-210* portable data terminal (shown in Fig. 6)—is not meant to be used with a display screen. Instead, it contains a built-in non-impact thermal printer. Also built in is an originate-only modem with acoustic coupler. An RS-232C interface module, which allows you to connect the *PT210* directly to a host computer, is available from Radio Shack for \$70.

The unit comes with a full-sized, ASCII-encoded keyboard. It will operate at 110 or 300 baud, in duplex or half-duplex modes, and with even or odd parity. Although the keyboard does not contain a separate numeric keypad, it does include an interesting feature: a switch-selectable number-entry keypad. When that feature is chosen, thirteen of the letter keys form a calculator-style keypad so that you can easily enter numbers and signs.


The built-in printer uses a 5×7 dot matrix and it offers a variable contrast control. Seventy-one characters are printable, with lowercase letters printed as their uppercase equivalent. Each line can be the industry-standard 80-characters long.

So, is a personal terminal for you? Well, in short, a terminal is perfect if you want to be able to "enter the information age," but do not want (or can't afford) a microcomputer. It might also be ideal for you if you do have a microcomputer. For instance, you might want to quickly check the latest stock market report at the same time you are using your computer for another task. With a terminal, you can get that report while your microcomputer keeps on working.

Electronics In the Your OWN In the House of the House o

- Budget Software
- · What-If Software



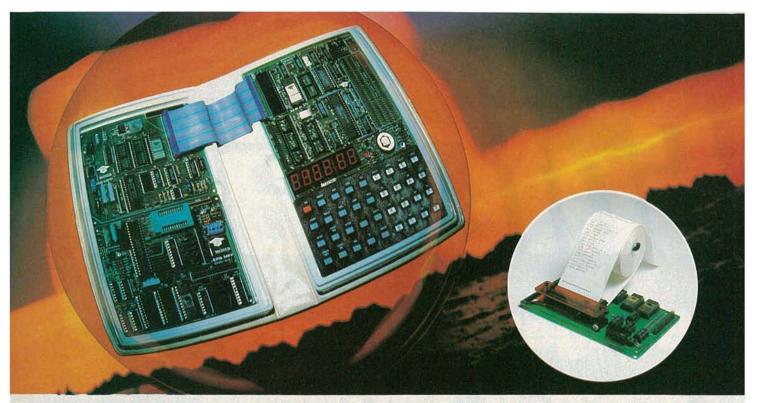

LEARN HOW MICROPROCESSORS WORK FOR \$149.95. INTRODUCING THE MICRO-PROFESSOR.

The Micro-Professor MPF-1 is a serious, hands-on teaching device used by colleges and universities, technical schools, corporate training programs, and individuals, worldwide.

The heart of the MPF-1 is a Z-80 microprocessor. It is specifically designed to aid you in learning the architecture of the most popular 8-bit central processing unit on the market. In addition, with the MPF-1 you can do breadboarding and prototyping for both hardware and software applications.

The Micro-Professor MPF-1 features

- 2k bytes of RAM (expandable to 4k)
- 2k bytes of ROM (expandable to 8k)
- 36 key calculator-type keyboard
- Tiny BASIC interpreter for help in learning assembly language
- Built-in speaker
- Cassette recorder interface for program storage
- 24 input/output lines
- 3.5 x 1.36 inch breadboard area
- Two 40-pin busses for the standard CPU and optional CTC/PIO allows for full expansion to Z-80 architecture capabilities
- AC power supply included
- Three instruction manuals include source monitor listing plus 18 experiments in hardware and software and the Micro-Professor comes in an attractive book-style carrying case for a micro price of only \$149.95 with a 90-day unconditional written warranty.

Z-80 is a registered trademark of Zilog Inc.

User options include

- Thermal Printer (PRT-MPF) \$99.95 20 column, alphanumeric, printer, in BASIC, with disassembler.
- EPROM Programming Board (EPB-MPF) \$169.95 For all 5

volt EPROMs (1KB, 2KB, 4KB). Read, copy, list and verify capabilities.

■ Speech Synthesizer Board (SSB-MPF) \$139.95 A vocabulary

of 1200 + words plus more in the future.

If you're serious about learning (or teaching) how microprocessors work, now is the time to order the Micro-Professor.

Individuals using the Micro-Professor MPF-1 outside of structured classroom situations should have at least a

rudimentary knowledge of microcomputer technology. We will provide a list of appropriate literature to those who request it.



To order call toll free: 800-538-1542 In California call 408-773-8400



Multitech Electronics Inc. Sunnyvale, CA 94086

Name (Please Print) ____ Address ____ State _____ Zip ____ SSB-MPF Speech Synthesizer Board
Signature _____ Shipping and Handling Check or money order enclosed Visa Mastercharge Card No. ____ ____ Expires ___

For further information or order: In U.S. and Canada mail to:

Multitech Electronics Inc.

195 West El Camino Real Tel: 408-773-8400 Tex: 176004


MPF-1 Micro-Professor PRT-MPF Thermal Printer California residents add sales tax

Outside of North America mail to: Multitech Industrial Corporation 977 Min Shen E Road, 105 Taipei, Taiwan, ROC Tel. 02-769-1225 TWX 19162 MULTIIC. 23756 MULTIIC

Amt. \$99.95 EPB-MPF EPROM Programming Board \$169.95 \$139.95 \$4.95 4.95 TOTAL

Budget Software



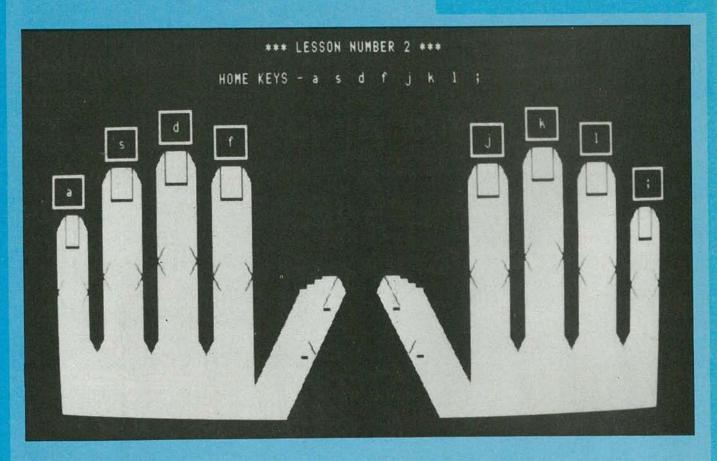

Need some software to perform an unusual task—or even an ordinary one—at a reasonable cost? There are quite a few low-cost, sometimes unusual, and almost always overlooked programs available that just may do the trick.

HERB FRIEDMAN

RESPONDING TO A CRITIC'S REMARK ABOUT "...A LITTLE-known work that never got the credit it deserved," the great playwright Noel Coward observed that: "Little-known works that never got the credit they deserved never deserved any."

As a general rule of thumb, Coward's observations are true, except when it comes to personal computers—where quite a bit of good, low-cost software is ignored in favor of the more expensive, more sophisticated, and more famous programs whose very names have become so well known that they have become almost synonymous with their function: Wordstar for word processing; VisiCalc and SuperCalc for electronic spreadsheets; dBase II for database management, etc. There were, of course, good reasons for the success of VisiCalc and the others—they stood, and in some instances still stand, head and shoulders above the competition, and their performance often exceeds what's available for mini- and mainframe computers.

But not every user of personal computers needs all of the power offered by that sophisticated software. In fact, many of you probably have no need for any of the high-priced programs. Often, all the computer functions you truly need may be available at a rock-bottom price in a small, unsophisticated program, or from the highly specialized but underadvertised software that

is available from the smaller software houses (some of which are no more than someone's garage or kitchen table).

Little things can cost a lot

When looking for low-cost or unusual software that really works, keep in mind that a seemingly insignificant variation in features or function can represent a substantial increase in programming effort and a corresponding increase in price; you may have to accept a compromise to get the computing power you want at a price that fits your budget. For example, one of the largest auto-rental companies catering to driving schools keeps its records on a minimal computer system (no disk drives) using a \$19.95 software package. It provides all the records needed by almost 50 schools and their students, the individual driving instructors, the State Motor Vehicle Bureau, and the tax accountant. How is all that possible for under \$20? Simple—the program does not keep track of auto repairs or write the checks for those repairs. After much testing, the rental company discovered it could easily keep track of service on 3 × 5 file-cards, and the total number of checks per month for repairs never exceeded 12. A program to keep track of repairs and pay the bills would have cost several hundred dollars, required a computer with at least two disk drives, and a fairly competent and experienced staff of CRT-terminal operators. The reason that adding repairs and repair payment to the program would sharply increase the program's complexity and cost is that software features generally interlock. If a programmer decides to provide extra function A, he may have to rewrite the code for functions B, C, D, K, L, M, and Z. And, modifying C may require new code for O, P, and Q, which in turn may affect the original work for A. That is why a so-called "simple" patch for commercial software often ends up as a series of patches.

While the \$19.95 software-package has none of the esoteric functions of the super-duper database systems presently being touted for even the casual personal-computer user, it nevertheless does the job—and that's the purpose of any piece of soft-


ware.

Ideas to work with

Whether it's widgets, gizmos, or computer software, locating the obscure or inexpensive is usually simply a matter of knowing what you're looking for, or at least having some idea of what's available that can possibly be used as a substitute; so we'll take a look at some of the programs that have never received the attention they deserve—usually because they don't offer high-powered features. And we'll look at some highly specialized software whose value isn't apparent at first—or even second—thought. Most of it is quite decent for the money and a good idea of what's available in "far out" software. While some examples are listed specifically by name and computer type, similar software is generally available for most, if not all, of the popular computer systems.

Looking up

Heading our list of unusual software is the most expensive of all, because the package takes at least 6 disks. That gem is something called *THE WORD Processor*. No, it isn't yet another text editor or word processor, it is actually a database for the King James version of the Bible. The software allows the user to search out any information or reference in the Bible by range—such as Genesis 1:1 to Genesis 50:12—or by text, phrase, or word—like locating "Beer-sheba." Using combined search criteria (several words or phrases) it's possible to look for complex relationships of words or text. It's also possible to construct a dynamic (easily modified) index of specific words or phrases—a library of Biblical research-materials. You can merge indexes, modify indexes, delete indexes, and print just about any combination of anything. As a research tool for the home, or for the college student majoring or minoring in

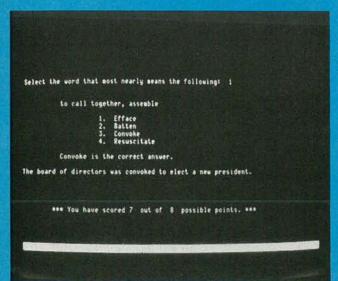

VOCABULARY BUILDERS may offer you a choice of words, one of which fits the definition supplied by the computer. Examples of usage may also be given.

religious studies, the program is dynamite—it would be nice if most commercial data-bases were done as well. *THE WORD Processor* is from Bible Research Systems and was originally written for Radio Shack's *TRS-80 Model III*, Apple computers, and 8-inch *CP/M* systems. If you have a different computer write to the company. (Its address is in the list of suppliers elsewhere in this article.)

While on the subject of indexes and the like, a program not to be overlooked by the serious-and involved-personalcomputerist is Index-80 by MTS, Inc., a yearly indexed disk catalog of all the articles that appeared in 80-Micro (a publication specifically for TRS-80 users). Simply enter the words or phrases and the software will locate the related articles and the issue they appeared in. While there have been many so-called "magazine indexes," this one offers perhaps the best implementation, and its style appears to have been copied for disk indexes for other specialized computer publications. If you're into one specific type or model of computer you cannot go wrong with a yearly index to a publication specializing in it. It's probably the only thing that will locate some obscure reference to a software patch you barely remember seeing about six months ago-the one you skipped over because you thought you would never own the software.

There are probably more label-printing programs than there are word processors, but there's only one Lablmakr, from ETS Center. It's specifically for use with the Radio Shack TRS-80 Model I and TRS-80 Model III, and an Epson printer. Lablmakr can produce twenty kinds of highly unusual "standard-size" labels using both text and graphic representations of text, and virtually every combination of character styles is provided automatically by the software. Each label type comes up on the screen as a template complete with a character count for each line, and simply touching the space bar provides automatic centering of a line. If you like, a software-constructed file will save your labels for future use. A companion program called Casslabl prints cassette labels. The difference between the two is that the cassette version spaces the text lines to allow for the cutout in the cassette labels. The key to the success of this software is the printer, not the computer, so it's logical to assume that similar software will become available for other

Next to mailing-label programs, word-processing programs are probably the most common. Unfortunately most of the better ones are somewhat expensive, and the inexpensive ones, most designed for "entry-level" computers, usually leave a lot to be desired. The exception to both rules is something called Telewriter-64, by Cognitec, for the Radio Shack Color Computer. This piece of software far outshines anything similar on the market. Instead of 20 to 32 characters per line (and often upper case only) this word processor is able to create upper or lower case characters and line lengths of 51, 64, or 85 characters. While there is no way anyone is going to be able to display 85 characters clearly on a TV set, that feature does allow the user to see how the actual print will appear-which is something some high-priced word processors can't do. Now for the best part: the program is available in a cassette version for only \$50, and will run on any version of the Color Computer with 16K or more of memory.

In the end you must pay

With the income-tax season in full swing, it's no wonder that "income tax" software seems to be all over the place. Actually, except for the stuff specifically intended for accountants, which is very expensive, much of what's available has little value because the really complicated parts of the tax calculations—the schedules—aren't part of the package. You generally have to do that part by hand and plug the calculated values into the software, and the whole thing ends up taking longer than doing the return by hand. Also, the tables change yearly, and updates don't come cheap. But for those of you who want the fun of being an amateur tax-accountant and don't need the absolute precision of a "professional" program, there's a very nice

package called *Tax Forecaster* by the Micromatic Programming Company. That program asks for pertinent tax information entries and then gives a very close approximation of how much you'll have to pay to—or get back from—Uncle Sam. It does not prepare the tax return itself, it just does all the hard arithmetic, and it allows you to ask the question "What if?" and then instantly recalculate the results. For example, "What (happens to my taxes) if I donate \$500 to charity?" It's a fun program, not expensive, and if you want to provide entertainment for friends it can be a lot of fun at parties and charity fund-raisers; but remember, it doesn't prepare the tax return and it's not a substitute for an accountant.

If you'd like to knock hours off preparing your taxes come every April 15 there's an excellent record-keeping system specifically intended for tax time. It's called *The Color Accountant*, from The Programmer's Institute and, at present, versions are available for the Atari 400 and 800 and for the Color Computer. In addition to the usual checkbook maintenance and summary files, you can record bills, analyze various accounts of stocks, even color-graph any of the files. The Atari versions need a little extra in the way of RAM, so make certain you have enough.

Faster BASIC


Because of the mass distribution of the Timex/Sinclair 1000 computer, many programmers, both amateur and professional, have been exposed to the advantages of single-key entry of BASIC commands. Instead of typing out every command such as GOTO, GOSUB, FOR, NEXT, PRINT, etc., a command is entered simply by touching a single key; the computer seems to know when the touch represents a command and when it's actually the key's character.

Utilities and programming aids that provide single-key entry of BASIC commands have been around for a long time, but they have usually concentrated more on adding obscure enhancements to BASIC than on making it easier to write programs. (Of course, the subject is debatable.) By not getting tangled up in yet more "new enhancements" to BASIC, Spectrum Products has produced an outstanding single-key command-entry program for the Color Computer called BASIC Aid. It is supplied as a plug-in ROM module, and a plastic overlay template for the keyboard shows every single-entry function as well as the standard key characters. There is no complex software routine for single-key entry—a touch of a key switches the single-key function on and off. Would you believe all that, including the ROM module, is only \$40? It makes you wonder why some other software costs upward of \$200 or \$300.

Speaking of making programming easier, there is no substitute for touch-typing. Even if you don't program, with computers becoming so commonplace, you'll almost certainly eventually face the task of spending some hours entering data into a computer terminal. That job becomes a lot easier if you can touch-type. There is an almost endless list of software available



CLEAR PLASTIC TEMPLATE with overprinting for BASIC Aid fits over Color Computer's keyboard. Now, single-key BASIC commands are easy.

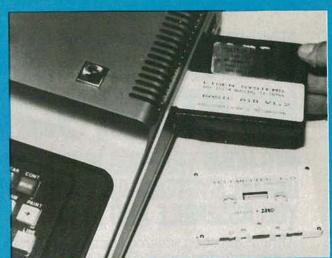

ROM CARTRIDGE CONTAINING the BASIC Aid program fits into Program Pak slot in Color Computer.

for touch-typing training. In general, most work in the same manner—the computer displays several characters that the "student" must type on the keyboard. Depending on whether or not the computer has a sound output, either the screen blinks, or a tone beeps when the wrong key is struck. Sometimes there's a beep when you strike the correct key and a honk when you strike the wrong key. At the end of the lesson the computer tells you know how many errors you made and calculates your typing speed. Just about all typing programs work well, whether it's for Radio Shack, Commodore, or Heathkit/Zenith computers.

While were're on the subject of self-improvement, there are some remarkably good "vocabulary builders" floating around for all age groups. Texas Instruments has some award-winners for children, while many of the others are aimed at the high-school/adult level. Most of the programs have a basic vocabulary of approximately 200 words (that can usually be modified by the user), which can be used to "test" by definition, synonym, antonym, or a random combination of the three (those 200 words go a long way). Similar software is available for building vocabularies in a foreign language, and there is software that allows you to write your own "vocabulary exams"—you can plug in the new words learned at school and have the computer scramble them in a "test" format.

As for learning a foreign language on your own, every week or so some new brand of self-teaching language software comes into the marketplace-some of it good, some of it worthless; the problem is that you can't really know how good it is until you get it home and try it (and by then it's too late). On the other hand, the self-teaching conversational foreign-language software from Atari for their 400 and 800 computers is actually better than it appears in the TV commercials-and it comes off great on TV. If you want to learn any foreign language on your own, and you don't have an Atari computer, ask a friend who speaks the language to look over the software's documentation before you buy it. And, whatever else you do, make certain that the program comes with audio cassette-tapes that teach the proper word pronunciation. (Would you believe someone actually sold a language program for one of the most difficult languages to learn without supplying a pronunciation tape? And, would you believe people bought the software?)

Whistles, squeaks, and other noises

While we're on the subject of education, a word or two about educational software for the younger members of the family. As a parent or relative you have their best interests in mind, and computer programs that put them one-up the rest of their nursery-school class in number and word recognition are most appealing. That's why it comes as little surprise that as soon as you see that mountain of pre-school software for sale at the local

EQUIPMENT AND TRAINING NO OTHER SCHOOL CAN MATCH.

NTS HOME TRAINING INVITES YOU TO EXPLORE MICROCOMPUTERS, DIGITAL SYSTEMS AND MORE, WITH STATE-OF-THE-ART EQUIPMENT YOU ASSEMBLE AND KEEP.

Without question, microcomputers are the state of the art in electronics. And NTS is the only home study school that offers you training for this booming field with a choice of 3 production-model micro computers.

We'll explain the principles of troubleshooting and testing your microcomputer and,

best of all, we'll show you how to program it to do what you want.

You'll use a digital multimeter, a digital logic probe and other sophisticated testing gear to learn how to localize problems and solve them.

Send for the full color catalog in the electronics area of your choice – discover all the advantages of home study with NTS!

NTS also offers courses in Auto Mechanics, Air Conditioning and Home Appliances. Check card for more information.

1.

We believe that training on production-model equipment, rather than home-made learning devices, makes home study more exciting and relevant. That's why you'll find such gear in most of NTS's electronic programs.

For instance, to learn Color TV Ser-

For instance, to learn Color TV Servicing you'll build and keep the 25" (diagonal) NTS/HEATH digital color TV.

In Communications Electronics you'll be able to assemble and keep your own NTS/HEATH 2-meter FM transceiver, plus test equipment.

But no matter which program you choose, NTS's Project Method of instruction helps you quickly acquire practical know-how.



RADIO-ELECTRONICS

PARTIAL LIST OF SOFTWARE SUPPLIERS

Acorn Software Products, Inc. 634 N. Carolina Ave. S.E. Washington, DC 20003

Activity Research, Inc. PO Box 4875 Hayward, CA 94550

Addison-Wesley Publishing Co. 2725 Sand Hill Road Menlo Park, CA 94025

Apple-Cations 21650 W. Eleven Mile Road Suite 103 Southfield, MI 48706

Artworx Software Co. 150 N. Main Street Fairport, NY 14450

Avant-Garde Creations PO Box 30161 Eugene, OR 97403

Bargainbyte PO Box 23195 Harahan, LA 70183

Basics And Beyond, Inc. Box 10 Amawalk, NY 10501

Bell And Howell 7100 N. McCormick Road Chicago, IL 60645

Bible Research Systems 8804 Wildridge Drive Austin, TX 78759

Bluebird's Computer Software 2267 23rd Street Wyandotte, MI 48192

Brain Box 601 W. 26th Street New York, NY 10003

Business And Pleasure Software 6011 San Felipe Houston, TX 77057

California Software PO Box 275 El Cerrito, CA 94530

Class 1 Systems 17909 Maple Street Lansing, IL 60438

Cognitec 704 Nob Ave Del Mar, CA 92014

Comm® Data Systems PO Box 325 Milford, MI 48042

Commsoft 665 Maybell Ave. Palo Alto, CA 94306

Compumax, Inc. PO Box 1139 Palo Alto, CA 94301 Computer-Advanced Ideas, Inc. 1442A Wainut St. Suite 341

Berkeley, CA 94709

Computer Aided & Managed Instruction PO Box 2030 Goleta, CA 93118

Computer-ED 1 Everett Rd. Carmel, NY 10512

Computer Information Exchange PO Box 159 San Luis Rey, Ca 92068

Computer Learning Connection One Boston Place Boston, MA 02108

Computronics 50 N. Pasack Rd. Spring Valley, NY 10977

Cottage Software 614 N. Harding Wichita, KS 67208

Creative Computing 39 E. Hanover Ave. Morris Plains, NJ 07950

Creative Software 201 San Antonio Circle 370 Mountain View, CA 94040

Cybertronics International 999 Mt. Kemble Ave. Morristown, NJ 07960

Dynacomp 1427 Monroe Ave. Rochester, NY 14618

Educational Activities 1937 Grand Ave. PO Box 87 Baldwin, NY 11510

Educational Micro Systems PO Box 471 Chester, NJ 07930

Edu-Ware Services, Inc. PO Box 22222 Agoura, CA 91301

Entelek Ward-Whidden House The Hill PO Box 1303 Portsmouth, NH 03801

Etronix 14803 NE 40th St. Redmond, WA 98052

ETS Center Box 651 35026-A Turtle Trail Willoughby, OH 44094

EZ Software PO Box 591 Novato, CA 94947 Futureview PO Box 101 Joplin, MO 64802

Gooth Software 931 S. Bemiston St. Louis, MO 63105

J.L. Hammett Company, Inc. Hammett Pl. PO Box 545 Braintree, MA 02184

Hartley Software PO Box 431 Dimondale, MI 48821

Hayden 50 Essex St. Rochelle Park, NJ 07662

Howe Software 14 Lexington Road New City, NY 10956

Information Unlimited Software 281 Arlington Ave. Berkely, CA 94707

Instant Software Peterborough, NH 03458

Intelligent Investor 810 Camelview Plaza 6900 E. Camelback Rd. Scottsdale, AZ 85251

International Software Marketing, Ltd. 120 E. Washington St. Syracuse, NY 13202

Interpretive Education 2306 Winters Dr. Kalamazoo, MI 49002

Investor Software 48 Iron Ship Plaza San Francisco, CA 94111

J&S Software 140 Reid Ave. Port Washington, NY 11050

Kate's Komputers PO Box 1675 Sausalito, CA 94965

Kensoft 2120 50th St. Kenosha, WI 53140

Krell Software 21 Millbrook Dr. Stony Brook, NY 11790

Learning Tools Inc. 4 Washburn Pl. Brookline, MA 02146

Level IV Products Inc. 32461 School Craft Livonia, MI 48150

The Liberty Software Co. 635 Independence Ave. SE Washington, DC 20003

PARTIAL LIST OF SOFTWARE SUPPLIERS

Lighting Software PO Box 11725 Palo Alto, CA 94306

L&S Computerware 1589 Fraser Dr. Sunnyvale, CA 94087

Macrotronics, Inc. 1125 N. Golden State Blvd. Suite G Turlock, CA 95380

Manhattan Software PO Box 1063 Woodland Hills, CA 91365

Mastertype PO Box 5223 Stanford, CA 94305

Masterworks Software Inc. 1823 W. Lomita Blvd. Lomita, CA 90717

Mentor Software PO Box 791 Anoka, MN 55303

Mercer Systems Inc. 87 Scooter Lane Hicksville, NY 11801

Micrognome 5834 Montgomery Rd. Elkridge, MD 21227

Micro Lab 2310 Skokie Valley Rd. Highland Park, IL 60035

Micro Learningware PO Box 2134 N. Mankato, MN 56001

Micromatic Programming Co. PO Box 158 Georgetown, CT 06829

Micro Power & Light Co. 12820 Hillcrest Rd., No.224 Dallas, TX 75230

Monument Computer Service Village Data Center PO Box 603 Joshua Tree, CA 92252

MTS, Inc. Box 596 Niceville, FL 32578

Muse Software 347 N. Charles St. Baltimore, MD 21201

National Software Marketing 4701 McKinley St. Hollywood, FL 33021

Optimized Systems Software 10379 Lansdale Ave. Cupertino, CA 95014

Options-80 PO Box 471 Concord, MA 01742 Osborne/McGraw-Hill 630 Bancroft Way Berkeley, CA 94710

PCD Systems PO Box 143 Pen Yan, NY 14527

Pear Systems Corp. 27 Briar Brae Rd. Stamford, CT 06903

Powersoft Corp. PO Box 157 Pitman, NJ 08071

Practical Programs 1104 Aspen Dr. Toms River, NJ 78377

Prentice-Hall Sylvan Ave. Englewood Cliffs, NJ 07632

Prescription Learning 1301 S. Wabash Ave. Chicago, IL 60605

Program Design, Inc. (PDI) 11 Idar Court Greenwich, CT 06830

The Programmer's Institute PO Box 3191 Chapel Hill, NC 27514

Programs For Learning PO Box 954 New Milford, CT 06776

Program Research And Software Corp. 257 Central Park West New York, NY 10024

Quality Education Design PO Box 12486 Portland, OR 97212

Quality Software 6660 Reseda Blvd. No. 105 Reseda, CA 92335

Rell 1145 Stanford Ave. Redondo Beach, CA 90278

Resource Software International 140 Sylvan Ave. Englewood Cliffs, NJ 07632

Scott, Foresman & Co. 1900 East Lake Ave. Glenview, IL 60025

Serendipity Systems, Inc. 225 Elmira Rd. Ithaca, NY 14814

Silwa Enterprises, Inc. PO Box 400 Big Flats, NY 14814

Softbyte Computing Box 217 Wallingford, CT 06492 The Software Connection 10703 Meadowhill Rd. Silver Spring, MD 20901

The Software Exchange 6 South St. Milford, NH 03055

Software Resources, Inc. 286 Alewife Brook Pkwy. Suite 310 Cambridge, MA 02138

Southfork Software 68 Fairlake Dr. Hattiesburg, MS 39401

Spectrum Products 93-15 86th Drive Woodhaven, NY 11321

Stekette Educational Software 4639 Spruce St. Philadelphia, PA 19139

Storybooks Of The Future 527 41st Ave. San Francisco, CA 94121

Tara PO Box 118 Selden, NY 11784

Terrapin, Inc. 678 Massachusetts Ave. Cambridge, MA 02139

T.H.E.S.I.S. PO Box 147 Garden City, MI 48135

3R Software PO Box 3115 Jamaica, NY 11431

TYC Software 40 Stuyvesant Manor Geneseo, NY 14454

Tycom Associates 63 Velma Ave. Pittsfield, MA 01201

Max Ule And Co., Inc. 6 E. 43rd St. New York, NY 10017

Unicom 297 Elmwood Ave. Providence, RI 02907

Versa Computing, Inc. 3541 Old Conejo Rd. Suite 104 Newbury Park, CA 91320

We Software 800 Greenwich Dr. Chico, CA 95926

Window Inc. 469 Pleasant St. Watertown, MA 02172

XPS Inc. 323 York Rd. Carlisle, PA 17013 FOR ONLY \$129.95 Learn Computing From The Ground Up

Build a Computer kit that grows with you, and can expand to 64k RAM, Microsoft BASIC, Text Edi-tor/Assembler, Word Processor, Floppy Disks and more.

EXPLORER/85

Here's the low cost way to learn the fundamentals of computing, the all-important basics you'll need more and more as you advance in computer skills. For just \$129 sto you get the advanced-design Explorer(86 motherboard, with all the features you need to learn system that is a match for any peen all can empirer on the market. Look at these features you need to learn system that is a match for any peen all can empirer on the market. Look at these features you have a store that the seasons "heart" of the Explorer(85 (join the millions who will buy and use the 6000/6005 this year alone!) Frut 8-bit plux one 6-bit input/output ports from which you can input and output your programs as well as control exterior swith hes. relays, lights, etc. a cassette interface that lets you store and reload programs you've learned to write include 2000 hyte operating system/monitor makes it easy to learn computing in several important ways. It allows simpler, faster writing and entering of programs. It permits access by you to all parts of the system so you can check on the status of any point in the program of It allows tracing each program step by step, with provision for displaying all the contents of the CPU (registers flags, etc.) — and it does much more!

You get all this in the starting level (Level A) of the

contents of the CPU (registers flags, etc.) • and it does much more!

You get all this in the starting level (Level A) of the Explorer/85 for only \$129.95. Incredibile! To use, just plug in your 8VDC power supply and terminal or tephoard/display — if you don't have them, see our special offers below.

Level A computer kit (Terminal Version) 5129.85 plus \$3 PAI.*

Level A kit (Hex Keypad/Display Version) \$129.85 plus \$3 PAI.*

plus 33 PAI.

LEVEL 8 — This 'building block converts the mother-board into a two-siot S100 bus (industry standard) computer. Now you can plug in any of the hundreds of S100 cards available.

□ S100 bus connectors (two required) 54.85 each postpaid.

postpaid.

LEVEL C — Add still more computing power: this "building block" mounts directly on the motherboard and expands the S100 bus to six slots

Level C kit ... \$39.95 plus \$2

DEVEL D—When you reach the point in learning that re-quires more memory, we iff the worknices either add 4k of a memory directly on the mutherboard, or add 16k to 64k of memory by means of a single \$100 card, our famous

LEVEL E — An important "building block" it activates the 8k ROM/EPROM space on the motherboard. Now jus-plug in our 8k Microsoft BASIC or your own custom

plug in our 8a Microson accesses and programs.

□ Level E kit.

\$5.95 plus 50c P81

□ Interpol BASIC

□ It's the language that allows you to talk English to your computer! It is available three ways.

□ 8k cassette version of Microsoft BASIC (requires Level B and 12k of RAM minimum, we suggest a 16k 500

□ 8k ROM version of Microsoft BASIC, (requires Level B and Level E and 4k RAM, just plug into your Level E sockets

8 Level E and 4k RAM, just plug into your Level E sockets

\$100 | William | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |

TEXT EDITOR/ASSEMBLER — The editor/assembler is a software tool (a program) designed to simplify the lask of writing programs. As your programs become longer and more complex, the assembler can save you many hours of programming time. This software includes an editor program that enters the programs you write, makes changes and saves the programs on cassettes. The assembler performs the cliencal task of translating symbolic code into the computer residable object code. The editor/assembler classes where the computer seatable object code. The editor/assembler classes where the computer seatable object code. The editor/assembler classes the version requires Level.

assembler program is available either in cassette or a
SOM version

Editor/Assembler (Cassette version requires Level
B* and 8k (min.) of RAM — we suggest 16k /IAWS'—
see above) . \$59.85 plus \$2 Pk1.

Editor/Assembler (ROM version supplied on an \$100
card: requires Level B and 4k RAM (min.) — we suggest
either Level Dor 16k /IAWS' . \$59.85 plus \$2 Pk1.

B* FLOPPY DISK — A remarkable building block.
Add our 8* floppy disk when you nevel facter uperation,
more convenient program storage: perhaps a business application, and access to the literally their-saids of programs
and program languages available today. You simply plug
them into your Exploger/RS disk seviem—it accepts all
IBM-formatted CP/M-Brograms.

B* Floppy Disk Drive . \$199.85 plus \$12 Pk1.

Disk Drive Cablets (set up for two drives). \$25.00 plus
\$150 Pk1.

Drive Cables (set up for two drives) ... \$25.00 plus 50 P&I *

5.50 PAL*

□ CP/M 2.2 Disk Operating System, includes Text Editor/Assembler, dynamic debugger, and other features that give your Explorer/85 access to thousands of existing CP/M-based programs. ■ \$150.00 postpaid.

NEED A POWER SUPPLY Consider our AP-1. It can supply all the power you need for a fully expanded Explorer/85 (note disk drives have their own power supply). Plus the AP-1 fits nearly into the attractive Explorer steel cabinet (see below).

□ AP-1 Power Supply kit (8V # 5 amps) in delux steel cabinet. ■ \$2.98.80 pilus \$2.78.1.

NEED A TERMINAL? We offer you choices the least expensive one is our Hex-keypad/Display kit that dis-plays the information on a calculator-type screen. The other choice is our ASCII Keyboard/Computer Terminal kit that can be used with either



4 Flug in Level E here explict Microsoft (BASIC)

1. Plug in Netronic's Hes Editor/Assembler in HCM (Reppol/Display)

2. Add Level B to convert to to Add you own instant\$100\$ 3 Add 4k RAM

a CRT monitor or a TV set (if you have an RF modulator) ☐ Hex Keypad/Display kit \$69.95 plus \$2 P&1.*

FASTERM - 64 TERMINAL KIT ASCII Keyboard, 128 character set upper and lov 75 ohm output, 8 baud rates 150 to 19,200 (swit able), RS232/C or 20 MA culput, 32 or 64 charac plus \$3 P&1 *

☐ Fan for cabinet \$15.00 plus \$1.50 Pat.*



ORDER A SPECIAL-PRICE EXPLORER/85 PAK — THERE'S ONE FOR EVERY NEED.

Beginner Pak (Save \$26.00) — You get Level A (Ter-

□ Begianer Pak (Save \$25.00) — You get Level A 1 erminal Version) with Monitor Source Listing (\$25.5 value)
AP-1.5-amp, power supply, Intel 8085 Users Manual
(Rec. \$199.85) SPECIAL \$199.80 plus \$4 Pak.

□ Experimenter Pak (Save \$33.40) — You get Level A
(Hex Keypad/Display Version) with Hex Keypad/
Display Intel 8085 (187.5 min) power supply
(Reg. \$279.95) SPECIAL \$218.95 plus \$6 Pak.

□ Special Microsoft BASIC Pak (Save \$103.00) — You get
Levels A (Terminal Version) = B. D (48 AM). E. ik
Microsoft in ROM, Intel 8085 User Manual Level A Monitor Source Listing, and AP-1.5-amp, power supply
(Reg. \$439.70) SPECIAL \$323.95 plus \$7 Pak.

□ Add a Rom-Version Text Lettorf Assembler (Requires)

☐ Add a Rom-Version Text Editor/Assembler (Requires levels B and D or \$100 Memory) \$99.95 plus \$2 P&I*

PAGE 2 A DOWN THE RESIDENCY SERVICE SE

PFI stands for "postage F insurance" For Canadian or ders, double this amount.

Continental Credit Card Buyers Outside Connecticut:

TO ORDER Call Toll Free: 800-243-7428

To Order From Connecticut, or For Technical Assistance, Call (203) 354-9375

CELL	d is a reg tr	auemia	RK OI L	egitat t	
*	(Clip and	mail	entire	ad)	A

SEND ME THE ITEMS CHECKED ABOVE

☐ Personal Check ☐ Cashier's Check/Money Order

LI VIAN	☐ MASTER CA	KL7 (Dallin, 141)
Acct No.		Exp Date
Acct No.		Exp Dair

Zip

NETRONICS Research & Development Ltd. 333 Litchfield Road, New Milford, CT 06776

software shop, you're absolutely certain that your three-year-old niece or nephew is ready to learn the numbers 1 through 20 from a computer. The question remains, however: "Is the Sesame-Street style of computer software with exploding color and shricking sound a substitute for parents or relatives?" At certain ages, and for certain subjects, the computer's capacity for untiring repitition makes for a great study or training aid, but for pre-schoolers it's better to be sure of what you're getting ahead of time; if the dealer is reluctant to demonstate the program you're interested in, it may be because he has something to hide. Sesame-Street-style effects have proven very effective on TV but on a computer they can range from the superb efforts of Texas Instruments (with a long and excellent record with such products as their Speak-&-Learn machines), to junk so poor that it might actually do more harm then good. Thus, as a parent or relative, be extra careful when purchasing software for the

A computerized paintbrush

Moving along to the fun part of computing, there's a lot of software for both computer art and graphics coming on-line all the time. One of the more typical graphic-art programs is Pioneer Software's disk-based drawing program called Crayon, which allows the user to draw graphic designs on the screen and then make the graphics part of a BASIC program (up to 30 separate screens depending on the available memory). The graphics screen is called through a USR function. Alternately, the program can be used just to create camera-ready computer art for photo-offset printing because the software can put both graphics elements and alphanumeric characters on the screen at the same time.

There are many different types of computerized pallets, paintbrushes, and whatever available for almost every model computer. The exact type of graphics creation and display, and whether it's in black-and-white or color, will depend on the computer and software. This is one of the few areas where just about everything is good, because everything is different.

For commercial applications, we are seeing more and more software that creates charts and graphics from either userentered data, or using the data from another program.

If you're just starting

With few exceptions, technicians, electronics hobbyists, and students must have a working knowledge of how to write programs in BASIC. If you are part of that group, or have just bought your first personal computer, you've probably given some thought to using one of the "computer courses" that use cassette-based instruction, a manual, and your computer. Beware-look before you buy. Many of those courses are so elementary, or so confusing for the beginner, that you'll be better off without them.

On the other hand, if you have a Color Computer, the best entry-to-intermediate level course you are going to find anywhere at any price, or in any format, is Radio Shack's own Color Computer Learning Lab. It comes on eight cassettes, has outstanding documentation at a real beginner's level that takes you through sorts, color graphics, game design, and even dynamic debugging. The course is integrated with "hands on" use of any model of the Color Computer, and in less than a week anyone can be a decent BASIC programmer. Considering that both college and continuing-education courses in BASIC are usually priced between \$100 and 400, it's the best \$49.95 investment you can make.

You're not alone

Perhaps the most important thing to keep in mind if you need something unusual is that there are probably many others with the same needs, and most likely some of them have already written the program you need and are selling it from their garages or kitchen tables. You'll more likely to find what you're looking for if you search out the little known and unusual, rather than the best known and most expensive.



	Feb	Mar 3	Dec	Total
		4	1710 74	15017 17
250.00	262.50			37(7.2)
1550.00	1812.50	1903.13	2952.37	27299.8
		11		7776.0
			THE COURSE WATER	
50.00	52.50			
1200.00	1124.17	1055.65 1	690.55	10763.6
350.00	688.33			16536.1
			9 100.00	1200.0
	250.00 1550.00 1000.00 50.00 100.00 50.00	300.00 500.00 250.00 262.50 1550.00 1812.50 1000.00 916.67 50.00 50.00 100.00 50.00 50.00 52.50 1200.00 1124.17	300.00 500.00 525.00 6 250.00 262.50 275.63 7 1550.00 1812.50 1903.13 9 1000.00 916.67 840.28 12 50.00 50.00 50.00 10.25 16 50.00 52.50 55.13 11 1200.00 1124.17 1055.65 1	300.00 500.00 525.00 6 814.45 250.00 262.50 275.63 7 427.58 1550.00 1812.50 1903.13 9 2952.37 10 1000.00 916.67 840.28 12 384.00 50.00 50.00 50.00 13 50.00 100.00 105.00 110.25 14 171.03 50.00 52.50 55.13 15 85.52 1200.00 1124.17 1055.65 17 690.55

Stop wearing out those pencils and erasers, vvitn an electronic-spreadsneet program you can see how changing one piece of data can affect hundreds, or even thousands of others—instantly!

HERB FRIEDMAN

TO MANY OF US WHO STARTED OUT AT THE BEGINNING OF personal computing, the single most important piece of software after MicroSoft BASIC was VisiCalc. Overnight, VisiCalc transformed the personal computer from a plaything for the hobbyist into a required tool for anyone engaged in planning anything: the financial structure of a school district, town, or city; how much dirt, fertilizer, and weed killer you'll need to keep your garden green, or even how much soda, pretzels, and potato chips to order for your school's homecoming-game pep rally.

VisiCale (from Visicorp) is an example of "What If?" software; meaning, it lets you ask the question: "If I do A, what will

happen to B, C, D, and a hundred other things?"

In the not-so-good old days—before computers—to answer that required that you tape several sheets of paper together into one giant sheet, draw a grid (matrix) of many boxes called cells, and then fill in the cells with facts and figures showing how they related to each other. The information or data in the cells was

interlocked with—and affected by or related to—other cells. The interrelationships of the cells meant that one change in one cell could affect several hundred cells. Changing the cells to reflect those changes wore down many erasers and pencils because every change in cell data produced by the question "What If?" resulted in yet another round of changes in the matrix.

That type of matrix or "model" has an official name when used for financial planning: it's called a spreadsheet. Depending on the size of the spreadsheet, the variations produced by changing the value of a single cell could require hours for recalculation of all the affected cells.

Now this is precisely the kind of job best done by a computer because a computer can be programmed to take the variation in cell information produced by the question "What If?", and in the blink of an eye recalculate hundreds of cell changes and instantly show the new spreadsheet on a video display, or provide a hard copy on a printer. Instead of having to scrub away

RADIO-ELECTRONICS

at a penciled spreadsheet to erase all the affected cells, the planner, accountant, etc., just has to key in the new information for a cell and the computer takes care of the rest. Just imagine how convenient that all is if there are two cell changes, or ten, or twenty, or fifty, or a hundred.

VisiCalc, which was initially written for the Apple computer, was the first of the electronic spreadsheets for personal computers, and many feel it is the reason for Apple's commercial success. Since its introduction, there have been numerous spinoffs, knockoffs, and customized electronic spreadsheets. Today, the "Calc" or spreadsheet program, is one of the major and most popular types of software for users of both home-and-family and business personal computers.

There are many different versions of spreadsheet software priced from less than \$20 to well over \$200. Each, of course, claims to be the best. Actually, though most are similar in concept, there are wide variations in features, capacity, flexibility, and, most importantly, speed. One does not expect the \$17.95 VU-Calc program (from Timex) for the Timex/Sinclair 1000 computer to be the equal of the \$200 SuperCalc (from Sorcim) software, though VU-Calc is a most surprising piece of software (more on VU-Calc later).

Other than the major differences determined by price, within the price range there are minor differences in features and performance that can make one brand of spreadsheet software better than the others for a particular application. In other words, one may be easier to use than the others depending on the application. As a general rule, however, spreadsheet software is being continuously upgraded—becoming more and more complex—and the latest versions are so intricate and can do so much they are often treated like a programming language.

A closer look

Figures 1 and 2 show how a spreadsheet works. The basic arrangement of a spreadsheet, the interrelationships between the cells, is called a template. The template for the spreadsheet shown in Fig. 1 does many things. After the user enters the first value at the top of the column labled 100%, the spreadsheet automatically adds "1" to the entered number, and then prints a total of all the numbers in the column at the bottom of the column. The same will occur in the other columns with the exception that 10% will be added to the value of the previous column. The columns with the automatic increase of 10% are labled 110%, 121%, 133.1%. (Read this over carefully if you don't follow it. It's important you know what's happening.)

		100%	110%	121%	133.1%
ENTER	VALUE	1	1.1	1.21	1.331
11000	add 1	2	2.2	2.42	2.662
	add 1	3	3.3	3.63	3.993
200	add 1	4	4.4	4.84	5.324
	add 1	5	5.5	6.05	6.655
	TOTAL	15	16.5	18.15	19.965

FIG. 1—THE VALUES SHOWN ARE CALCULATED the instant the first value is entered in the 100% column.

	SA	MPLE	SPREADSH	EET
a de	100%	110%	121%	133.1%
ENTER VALUE	2	2.2	2.42	2.662
add 1	3	3.3	3.63	3.993
add 1	4	4.4	4.84	5.324
add 1	5	5.5	6.05	6.655
add 1	6	6.6	7.26	7.986
TOTAL	20	22	24.2	26.62

FIG. 2—WHEN THE VALUE at the top of the 100% column is changed, all the values in all of the columns are recalculated

If you imagine that Fig. 1 is a computer display, the screen would show no values until "1" was entered at the top of the column labeled 100%. The instant "1" was entered, the spreadsheet filled out with all the values shown in the figure.

Figure 2 shows what happens when we change the entry from 1 to 2. Instantly, the spreadsheet calculates the new values and enters the correct values in all the cells.

How it works

The cells of the template can be empty (waiting for user input), can contain a label that might describe anything at all, or can contain a simple or complex formula that might use data input by the user, data from other cells, data calculated by other cells, or any combination of data, computations or whatever. In short, within limits, anything goes. As a general rule, spreadsheet software can be programmed to multiply, divide, sum, average, compare relationships, etc. The precise type of calculations are determined by the specific spreadsheet program, but most are similar.

The spreadsheet exists only in a computer's memory, not on the video display. The spreadsheet itself might represent cells formed by a matrix of 60 columns by 244 rows (14,640 cells). Obviously, that much data cannot be displayed on even a 80 column by 24 row CRT. The screen serves only as a window for a small part of the total spreadsheet stored in RAM. The window can be moved around to examine any part of the spreadsheet, and the video window can even be split vertically and horizontally so data from any part(s) of the spreadsheet can be displayed side by side for comparison. (With the exception of the rock-bottom priced spreadsheet software, all can provide at least one vertical or horizontal split-screen display, or both.)

Of course, if the spreadsheet is small enough it can all fit on the video display. Figures 3 through 6 show how a small spreadsheet is created using the Heath/Zenith version of *SuperCalc*. While *SuperCalc* is similar to many other spreadsheet programs, it is the only one that simultaneously indicates all cell values and formulas directly on the video display.

Figure 3 shows how the spreadsheet's template appears on the video display. Note that each row is designated by a number while each column is designated by a letter. A similar scheme is used in all software of this type as it is the only sane way to set up the template. The junction of each column and row is a cell, and each cell is identified that way (i.e. cell B10). You can enter a label, formula, or value into a cell, or leave it blank for the entry of values when you test for "What If?".

1 A	II B II OUT OF POCKET CAR EXPENSE	C I
31	1982	1983
41	THE RESERVE THE RESERVE THE PROPERTY OF THE PERTY OF THE	
5:ESTIMATED REPAIRS 6:MILES DRIVEN		(B5*1.15) B6
71\$ PER GALLON OF GAS		(B7*1.10)
8: PER QUART OF OIL		(BB#1.10)
9! INSURANCE		(B9*1.10)
10 MILES PER GALLON		B10
11 I TOTAL GAS USED	(B6/B10)	(C6/C10)
121COST OF GAS	(B11*B7)	(C11*C7)
1310IL USED (QT./500 MI.	(B6/500)	(06/500)
14:COST OF OIL	(B13*BB)	(C13*C8)
15!	(B5+B9+B12+B14) (C5+	C9+C12+C14)

FIG. 3—SUPERCALC TEMPLATE used for calculating out-of-pocket car expenses. This is what you see as you are assembling the template.

The template shown in Fig. 3 is the spreadsheet for calculating estimated out-of-pocket auto expenses based on assumed cost of insurance, repairs, gas per gallon, and oil per quart, as well as the estimated mileage, how many miles the car travels per gallon of gas, and how much oil is expected to be used. The spreadsheet takes into account assumed inflation factors and changes in individual costs. The blank (empty) cells are for the information to be filled in by the user. The other cells contain the information or the formulas to be to used to calculate the desired information.

Everything within brackets is a formula that uses information from other cells. Entries not in brackets are simply instructions to use the same information from another cell. For example, note that total gas used in 1982 is represented by the formula (B6/B10). If you look at cell B6 you'll find it represents MILES DRIVEN, while B10 is the MILES PER GALLON delivered by the car. When the B6 and B10 values are filled in by the user cell B11 will automatically calculate total gas used. On the other hand, note that for 1983 cell C7 shows we believe the price of gas will be 10% higher than the value we plug into cell B7 for 1982 (B7 \times 1.10), while cell C6 will use the same information the user stores in B6. (Study the template until you get a clear understanding of how the cells can interrelate and interreact.)

Okay! That's enough theory—let's do the calculation as shown in Fig. 4. For a neat presentation, we turn off the border, and set up the display so the formulas are no longer displayed. When there are no values for a formula to work with, SuperCalc shows the word Error so you know some data hasn't been entered. In Fig. 5 we have filled in the data needed for cells B5 through B10. That is how the display would appear when all the variable data was entered if SuperCalc were set for manual calculation—the user must specifically press a key to force the spreadsheet calculation. (Usually, the recalculation is set to AUTO, and the recalculation is performed the instant enough information to perform the calculation(s) is entered.

רטס	OF POCKET CAR EXPENSE	
	1982	1983
ESTIMATED REPAIRS		.00
MILES DRIVEN		.00
PER GALLON OF GAS		.00
* PER QUART OF DIL		.00
INSURANCE		.00
MILES PER GALLON		.00
TOTAL GAS USED	ERROR	ERROR
COST OF GAS	ERROR	ERROR
OIL USED (QT./500 MI.)	.00	.00
COST OF OIL	.00	.00
TOTAL CASH CAR COST	ERROR	ERROR

FIG. 4—HOW THE SCREEN APPEARS before the required information is inserted in the 1982 column. The "errors" are caused by the template not yet having all the information needed to make the calculations.

- Control of the Cont		
OUT O	F POCKET CAR EXPENSE	
	1982	1983
ESTIMATED REPAIRS	500.00	.00
MILES DRIVEN \$ PER GALLON OF GAS	10000.00	.00
\$ PER QUART OF DIL	1.45 450.00	.00
INSURANCE MILES PER GALLON	15.50	.00
TOTAL GAS USED COST OF GAS	ERROR ERROR	ERROR ERROR
DIL USED (QT./500 MI.) COST OF DIL	.00	.00
		ERROR
TOTAL CASH CAR COST	ERROR	ERRUR

FIG. 5—IF SET FOR MANUAL RECALCULATION, this is how the screen will look when the required information is entered (see Fig. 6).

Figure 6 shows what happens when the last piece of data is entered if *SuperCalc* is set for automatic calculation, or if the manual-calculate key is pressed. Instantly, the spreadsheet fills with all values for the years 1982 and 1983.

Preparing the template is not all that difficult even if you're using hundreds of cells because most of the spreadsheet programs have an assortment of cell-handling functions that simplify the construction of the template; those include functions such as *replicate* and *tag*. Replicate permits you to write a few cells and then, at the touch of one or two keys, have the software automatically replicate them across hundreds of rows or columns. With tag you "stick" a cell's entry to the cursor, move the cursor directly to a desired cell or cells and "drop" the attached data into the new cell. You might also be able to instantly move or exchange columns or rows of "written" cells.

	OUT OF POCKET CAR EXPEN	SE
	1982	1983
ESTIMATED REPAIRS MILES DRIVEN \$ PER GALLON OF GAS \$ PER QUART OF OIL INSURANCE	500.00 10000.00 1.39 1.45 450.00	575.00 10000.00 1.53 1.60 495.00
MILES PER GALLON TOTAL GAS USED COST OF GAS OIL USED (QT./500 MI COST OF OIL	15.50 645.16 896.77 .) 20.00 29.00	15.50 645.16 986.45 20.00 31.90
TOTAL CASH CAR COST	1875.77	2088.35

FIG. 6—ATTHE TOUCH of the recalculation key the screen would blink and all the cells fill with the calculated values as shown. If the program were set up for automatic recalculation, that would happen as soon as the last required value were entered.

The exact number and degree of cell-handling procedures depend on the particular software used, but within a given price range most offer similar features.

The exception to most of our illustrations is the plug-in ROM module (not disk) version of Radio Shack's *Spectaculator* for the *Color Computer*. Though it is an electronic spreadsheet, it does not permit individual cell calculations. The calculation for each cell in a column or row is the same for every cell in the row or column. This is somewhat limiting for general use, but it's particularly useful for calculations where two out of three variables are known. For example, it is easy to use—and a decided convenience—when calculating frequency, reactance, dimensions, volume, or anything else where two values are used to calculate a third. Figure 7 is a sample of what the program can do when calculating reactance. The spreadsheet is set up to calculate the reactance of inductors at 3 MHz.

The frequency in MHz is fixed throughout column 2. The user enters the inductor values in column 1. When the command keys to calculate are pressed, the display ripples through the spreadsheet and shows the calculated reactance values in column 3.

SAMPLE SPECTACULATOR

L (UH)	3 MHZ	REACTANCE
0.15	3.00	2.83
0.25	3.00	4.71
0.50	3.00	9.42
1.00	3.00	18.84
1.50	3.00	28.26
2.00	3.00	37.68
2.25	3.00	42.39
2.50	3.00	47.10

FIG. 7—USING SPECTACULATOR to calculate reactance. This program is particularly useful for calculations involving three variables where one is known.

Only a little bit at a time

Since the video display is only a "window" into the spreadsheet stored in RAM, the more sophisticated spreadsheet programs such as *SuperCalc*, *VisiCalc*, and *ScratchPad* (from SuperSoft) allow you to divide the video display into two or more smaller windows so several sections of the memory can be simultaneously seen for comparison. For example, we could have had our auto-expense spreadsheet calculate expense until the year 2000, and then split the video display and show only the years 1982 and 2000 side-by-side for comparison. If we had thirty, forty, fifty, or a hundred items in each column or row, we

could still control each screen "window" independent of the other, and roll or scroll each window independent of the other. Usually, we can even treat each window as a separate spreadsheet, and ripple through one without affecting the others.

Though the more popular electronic spreadsheets can be used with several different computers, the exact nature of the implementation often depends on the available features of the computer or the associated terminal. Sometimes it works out that the same spreadsheet software is somewhat more convenient to run on one computer than another. For example, while SuperCale generally uses a blinking-line cursor or created brackets to denote the cell's boundaries, the Heath/Zenith implementation uses the "smart" features of the H89 computer and H19 terminal, and the cell area is completely filled by a reverse video (white) rectangle, while the computer's built-in function keys are used for direct access to a HELP table and a keyboard shift. On the Osborne computer, the operating system provides a directional arrow shift specifically tailored for Super-Calc, while the software itself can be customized for the user's printer.

More money means more features

As with almost everything else in this world, the more you pay the more you get. In particular, the higher the price the greater the permitted mathematical operations, such as automatic summing, averaging, relational operators, sine and cosine functions, etc. The object is to decide what specific math functions you will need and then make your selection from the software that does the required calculations. In almost all instances the necessary math functions are more important than the maximum size of the available matrix (number or rows times number of columns).

The less-than-\$20 cassette-tape based VU-Calc for the Timex/Sinclair 1000 computer is extremely powerful for the money, will probably handle most household projections, and is a superb spreadsheet trainer for schools, but it is limited to the basic arithmetic operations of addition, subtraction, multiplication, and division. However, its template of 26 rows × 36 columns (936 cells) is quite adequate for small jobs. (The program is written in BASIC and would be frustratingly slow to run if the template were larger.) The basic matrix takes almost three minutes to load, and a SAVE of even a small template using but a portion of the available matrix can take more than five minutes; but the price is a real winner.

About double the price of *VU-Calc*, the ROM module version of *Spectaculator* for the Radio Shack *Color Computer* handles a template of 99 rows × 99 columns (9801 cells). Since it's supplied in a ROM module it is up-and-running almost as soon as the power is turned on. The program is among the easiest systems to use, but it has the limitation we mentioned earlier of not permitting individual cell formulas.

Just about everything else is in the \$150-and-up price range, is disk-based, and often proves to be some variation of SuperCalc, VisiCalc, or ScratchPad. Between discounting and special implementations, the same spreadsheet software might cost between \$150 and \$400.

ScraichPad, which has an unusually small number of commands, features many mathematical functions, both terminal and printer customizing, and virtual memory. Virtual memory is a means whereby the disk is used as RAM when the computer's RAM runs out. The usual matrix for a 56K RAM is 26 rows × 100 columns (2600 cells), but memory won't run out because the disk provides virtual memory when running. What is placed on the disk is transparent to the user when the session is completed so there is no loss of disk space as unusable files.

If for nothing else, SuperCale stands alone because it's supplied with outstanding sample business and scientific templates (for practice and understanding) and because it allows the user to see all the cell formulas in their respective cells, not one at a time on a command line in some distant corner of the screen. Its matrix is 254 rows × 63 columns (16,002 cells). A full matrix

would exceed the capacity of most personal computer RAM areas, but different portions can be used for different templates, then interrelated, interlocked, etc, It also provides the usual assortment of advanced math functions. The instruction manual is an absolute gem, easily understood by non-hardware oriented users. The problem with SuperCale is that it came on the scene after VisiCale, and simply never got the credit it deserved.

VisiCalc is the grandfather of all the personal computer spreadsheets. While legend has it that it got its reputation from the Apple implementation for business use, most computer hobbyists are most likely familiar with it through Radio Shack, who has always featured it as its centerpiece for both personal and business software. The original implementation for Radio Shack's Model I computer had a matrix of 254 rows × 63 columns (16002) cells, the same as the typical SuperCalc versions. It, too, provides advanced math functions, sectional interlocks and relationships, etc. The thing with VisiCalc is that it's dynamic; it's constantly growing, with features being added all the time to accommodate the latest computer features. Some implementations are so sophisticated, VisiCalc has become what is essentially an independent programming language. There are VisiCale "programmers" who specialize in spreadsheets that might take weeks of preparation.

Being the most famous of the spreadsheets VisiCalc has the most aftermarket support, particularly in the area of pre-written templates for both home-and-family and business use. Pre-written templates are precisely what they imply; instead of you designing the template and calculating the cell structure and formulas, you simply load in from a disk a pre-written template that most approximates what you need. You can customize the pre-written template if necessary. (Most users find pre-written templates require some slight changes—but many hours, days, or weeks of programming can be saved through their use.)

SPREADSHEET SOFTWARE SUPPLIERS

Chang Laboratories 10228 North Stelling Road Cupertino, CA 95014

Micropro 1299 4th Street, Suite 400 San Rafael, CA 94901

Microsoft Corporation 10700 Northup Way Bellevue, WA 98004

Pocket Info Corporation 7795 S.W. 184th St. Beaverton, OR 97007

Radio Shack One Tandy Center Ft. Worth, TX 76102 Sorcim Corporation 405 Aldo Ave. Santa Clara, CA 95050

SuperSoft PO Box 1628 Champaign, IL 61820

Timex Corporation 1579 Straits Turnpike Middlebury, CT 06762

VisiCorp 2895 Zanker Road San Jose, CA 95134

Something new every day

It often appears that each new issue of a computer magazine has advertisements for a new type of electronic spreadsheet. In fact, that is what's been happening because there are more and better programmers coming on-line almost daily. However, most of the latest electronic spreadsheets are essentially variations of the best known programs with some highly specialized features or implementations.

If there is perhaps one general rule of thumb for selecting an electronic spreadsheet it's to purchase one that offers easist use of the features you really need. Also be sure that it comes with an instruction manual you can understand. Some of the best software is unusable because the accompanying documentation is almost incoherent.

Enter The New ROBOTICS AGE =

An age where formerly impossible tasks become everyday reality. The mechanization of many laborious physical and intellectual tasks of industrial, commercial and domestic life is coming about through the technology of intelligent machines. We see innovative applications of microprocessors, simulations, sensor electronics, real time control, effector design, machine design, aerospace robots and autonomous systems.

This is the world of Robotics Age, the Journal of Intelligent Machines. Make this world yours. In Robotics Age you'll find topics from the realities of industrial automation to the prospect of personal robotics. Integrating it all is modern software engineering. As illustrations, we show how you can perform practical design explorations with inexpensive personal computers.

Recently published titles include: Avatar, A Homebuilt Robot; The Physics of One-Legged Mobile Robots; Constructing an Intelligent Mobile Platform; An Inexpensive Hand; Natural Language Understanding; Applying Robot Vision To the Real World; Telecommunications Robots. In every issue you'll find features like Patent Probe, New Products, Letters and Design Forums.

Don't miss out. Subscribe today. With your paid subscription accompanied by the coupon below, we'll send you a free reprint of the article Avatar:



meet AVATAR: A Homebuilt Robot

Sign me up for a 6 issue trial st Send an issue and bill me \$ Enclosed is \$15.00 (6 issue:	15.00 for 6 in all.
reprint)	RE
Name	mer Harde
Address	
Town	Marilla de
State	Zip
Charge My [] Master Card	[] Visa
Number	Expires

Robotics Age Magazine

174 CONCORD ST., PETERBOROUGH, NH 03458 (603) 924-7136

Huntington's Disease Kills on and on and on an



NATIONAL HUNTINGTON'S DISEASE ASSOCIATION

Suite 501, 1441 Bri 212-966-4320

acommodore

MONITORS - GREAT RESOLUTION (64 OR	VI
Amdek Color I.	\$3
Amdek II or III	. (
Comrex 6500 - 13" Color	2
NEC JC 1212	3
Transtar 20 (High Resolution Green Fhosphor)	1
Video/Audio Cable	

PRINTERS-LETTER QUALITY

CBM 8300, 40 cps	\$1450
Diablo 620, 25 cps	995
ComRiter 17 cps	899
Transtar 130, 16 cps (auto load, wp features!)	769
NEC 7700 series	2350
NEC 3500 series	1600
PRINTERS-DOT MATRIX	
The state of the s	200

CBM 4022, 80 cps/graphics	
CBM 8023, 150 cps/graphics	
Epson FX Printer	
Okidata 82A, 120 cps (serial and parallel)	
NEC 8023A (parallel)	
IDS Microprism.	
Star Gemini	
Star Gemini (15)	
Epson MX 80 Ribbons	

COMMODORE BUSINESS SERIES

SuperPet (5 languages, 2 processors)	1409
CBM 8032 Computer, 80 Column	1029
CBM Memory Expansion, 64K	359
PET 4032, 40 Column	879
CBM 8050, 1 mg. Dual Drive	1259
CBM 8250, 2 mg. Dual Drive	1500
CBM D9060, 5 mg. Hard Disk	2240
CBM D9090, 7.5 mg. Hard Disk	2600
CBM 4040. 340K Dual Drive	919
CBM 2031, 170K Single Drive	489
DC Hayes Smart Modem	220
BUSINESS SOFTWARE	

BPI A/R, G/L, Job Cost, Inventory, Payroll MasterCard, Visa, Money Order, Bank Check

COD (add \$5) accepted. Add 3% surcharge for credit cards. In stock items shipped within 48 hours, F.O.B. Dallas, TX All products shipped with manufacturer's warranty.

TO ORDER CALL TOLL FREE 800-527-4893 800-442-1048 (Within Texas)

SOFTWARE FOR CBM 64

Word Processing (WordPro 3+)	901
Word-Pac (tape)	60
The Assistant Series	
Writer's Assistant (easy and flexible)	99
File Assistant (database with merge)	99
Spreadsheet Assistant	99
Personal Finance Assistant (great reports)	45
Coco (computer tutoring game)	44
Coco II (build your own games easily)	45
Home Accounting Package	39
General Ledger A/R, A/P (with check writing)	175
CBM EasyFinance	50
Data Manager	70
Stock (investment analysis)	80
Pet Emulator (emulates 4.0 basic)	30
Sprite-Magic (use joystick to design sprites)	15
Assembler Package (cassette or disk, compiled.	
includes editor, loader, disassembleri	39
Motormania (arcade tape)	27
Renaissance.	27
Colorsketch (draw on screen w/joystick, paint,	
save to tape or disk)	11
Spacebelt	20
Matchmaker	15
Retroball	34
INTERFACES AND ACCESSORIES	

Retroball	34
INTERFACES AND ACCESSORIES	
80 Column Expander	159
VIC 1600 Modem	95
VIC 1650 (auto answer, auto dial)	150
VIC 1525 Graphic Printer	329
VIC 1530 Datasette Recorder.	65
VIC 1541 Disk Drive	329
VIC Switch (connect 8 64's or Vics to printer,dd)	149
IEEE Interface	85
PET-IEEE cable	33
IEEE-IEEE cable (2m)	39
Parallel Interface (Epson, Okidata, IDS, NEC)	80
RS-232 Printer Interface (Okidata, Diablo, etc.)	60
Apple Loader	90
Programmers Reference Guide	18
Verbatim Diskettes (10 per box)	26
Victree	75
VIC PRODUCTS AND ACCESSORIES	
8K RAM Memory Expansion Cartridge	44
16K RAM	85
24K RAM	129
VIC IEEE Interface	75
VIC 3 Slot Expander	39

Victree	75
VIC PRODUCTS AND ACCESSORIES	
8K RAM Memory Expansion Cartridge	44
16K RAM	85
24K RAM	129
VIC IEEE Interface	75
VIC 3 Slot Expander	39
VIC 6 Slot Expander	70
RS232 Printer Interface	65
Cassette Interface	27
Intro to Basic I or II	22
Home Finance Package (6 tapes)	47
Gorf	30
Omega Race	30
Video Vermin	29
Heswriter (wp cartridge)	29
Turtle Graphics (cartridges)	33
Arcade Joystick - Heavy duty w/2 firing	
buttons! Great for the VIC or 64	25

SJB DISTRIBUTORS, INC.

(214) 343-1328

M-F 8 to 6 Sat. 10-2


Prices are subject to change without notice.



APRIL 1983

Active receiving antennas can offer a surprising improvement in the capabilities of your receiver. However, as we will show you, building one does not have to be difficult.

R.W. BURHANS

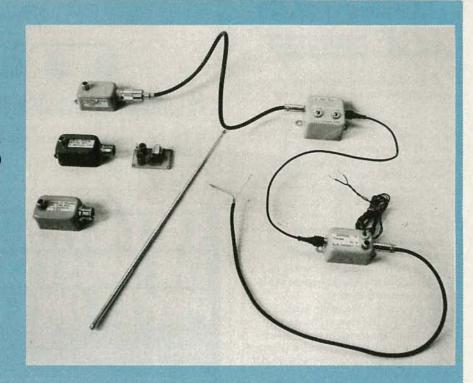

Part 3 IN THE PREVIOUS TWO parts of this series on VLF-HF receiving techniques, we covered both the fundamentals of active receiving antennas and some practical circuits. Now we are ready to discuss the actual construction of those antennas.

The active-antenna system consists of three main parts: a whip antenna, a preamplifier, and a receiver coupler. The whip antenna is directly attached to the preamplifier, and both are remotely mounted. The receiver coupler is mounted at the receiver, and is connected to the preamplifier by a length of coaxial cable. Let's now take a look at the components of the system in more detail.

Wideband preamplifier

The wideband preamplifier circuit was discussed in the March 1983 issue of **Radio-Electronics.** Its schematic is reproduced in Fig. 1.

The wideband preamplifier is assembled on a printed-circuit board. The foil pattern of that PC board is shown in Fig. 2, and its parts-placement diagram is shown in Fig. 3. You should note that there are some "extra" pads near the input terminal. They are there to accommodate different input filter networks and/or variations in the size of the components used. The board is intended to fit snugly in a 1½ × 2 × 1 inch drawn-steel case, although it can be used, of course, with a larger box. The only "fussy" component is the toroidal transformer.

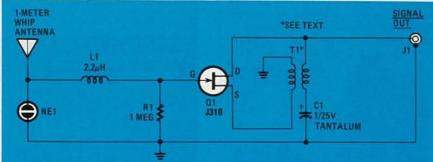


FIG. 1—WIDEBAND PREAMPLIFIER SCHEMATIC. The neon bulb, NE1, provides adequate input static charge protection.

The toroidal transformer is wound by first measuring out two 15-inch lengths of different-colored, 30 gauge, solid, insulated, wire-wrap wire. Those wires are twisted together about 8 turns-per-inch, and then that cable made up of the twisted pair of wires is wound for 17 turns on an Amidon (12033 Ostego St., North Hollywood, CA 91607) part No. FT50-75 (or similar) ferrite core. The windings should be tight, with a small gap at the start/ finish point. The wire is held in place at the ends with a small drop of cement, and about 1 inch is left for connection to the circuit board. The insulation at the ends of the wires is stripped back about 1/2 inch for soldering to the board.

One important note is that the windings should oppose each other. What that means, is that while one wire at one end of the two-wire cable is connected to

ground, the other wire at the same end is connected to the drain of the JFET. To furthur clarify that, Fig. 3 shows a dot at the one end of each winding—the dots are at a common end of the cable.

After the transformer wires are connected through the circuit-board holes, the core assembly should be cemented to the board perpendicularly. Be sure to follow Fig. 3 and make sure that the necessary jumper wires are also connected on the board for the wideband version (a version of the preamp for restricted VLF and LF use uses the same circuit board, but some different components).

The lower 3-dB point (where the response of the preamp drops 3 dB from its maximum) is at 10 kHz, where the toroidal transformer has an inductance of about 1 mH. At high frequencies, the core material effectively disappears, and the




FIG. 2-FULL SIZE foil pattern for the the preamplifier circuit-board.

PARTS LIST WIDEBAND ANTENNA PREAMP

R1-1 megohm, 1/4 watt

C1—1 µF, 25 volts, tantalum Q1—J310 FET (Siliconix or equivalent)

NE1-NE99 neon lamp

L1-2.2 µH (Mouser 43LS226 or equivalent) T1-Bifilar wound transformer on Amidon

FT50-75 core or equivalent (see text) Miscellaneous:PC board, case, coaxial connectors, hardware, etc.

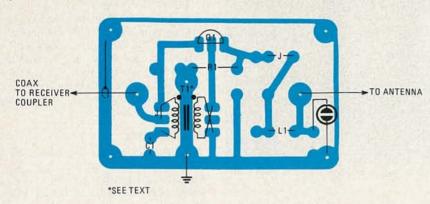


FIG. 3—PARTS-PLACEMENT DIAGRAM for the wideband version of the preamp.

response might be good to 100 MHz or so. However, the 2.2 μ H input inductor (L1)—along with the board, the JFET capacitance, and the steel case-limits the preamp's upper 3-dB point to about 30 MHz. That helps to reduce interference from signals outside the desired bandsay, TV and FM signals.

The receiver coupler

The foil pattern of the receiver-coupler board is shown in Fig. 4. (The receivercoupler circuit was discussed in Part 2 of this series, in the March 1983 issue of Radio-Electronics. The schematic of the receiver coupler is reproduced here in Fig. 5). The board's parts placement is shown in Fig. 6. The board for the receiver coupler is the same size as that used in the preamp, and can be mounted in a similar case, if desired. In addition to the coaxial input and output terminals, a twisted pair of insulated wires are included for the power-supply leads (8-12 volts) and are fed through a small grommet or hole in the receiver-coupler case.




FIG. 4-FULL SIZE foil pattern for the receivercoupler circuit-board.

We will not discuss the construction of a power supply.

Preamplifier for VLF-LF

The circuit for the VLF-LF preamplifier was discussed in Part 2 of this series. in the March 1983 issue of Radio-Electronics. For your convenience, we have reproduced the schematic of that circuit in Fig. 7.

The circuit board for restricted VLF-LF operation is the same as the one used for the wideband preamp. (of course some components are different, and the jumpers that were used in the wideband case are not used here.) The partsplacement diagram is shown in Fig. 8. The RF chokes are short, encapasulated types that are designed for vertical PCboard mounting. The winding "polarity" or the start of the windings are indicated in Fig. 8 by black dots and on the choke package by a label dot and a longer lead.

The output transformer that we chose will fit exactly into the holes indicated, with the correct winding polarity already provided. Therefore-unlike the torroidal transfomer-it is unnecessary to cross over the transformer leads.

If you are in doubt about which side of the transformer is the primary or secondary, check with an ohmmeter. The higher resistance reading (around 20 ohms) will be the primary winding.

Preamplifier variations

In Part 2, we discussed several different resonant input circuits that could be used to provide low-frequency cutoffs, or to yield operation at a small, fixed band of frequencies. (The input networks were discussed in the "Resonant input circuits" section of Part 2.) The preamplifier can be modified with one of these input networks with relative ease. For example, a microminiature trimmercapacitor can be soldered on the foil side of the board, directly across the 1megohm input resistor (R1) after the board is mounted in the box. One possible source for the inductors and capacitors is Mouser Electronics (11433 Woodside

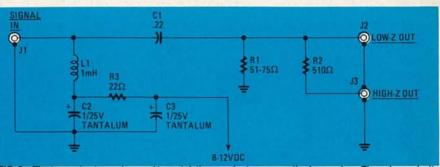


FIG. 5—The two outputs can be used to match the coupler to your particular receiver. They also make it easy to use the coupler with a receiver and monitor the coupler output with a scope at the same time.




FIG. 6-PARTS-PLACEMENT DIAGRAM for the receiver-coupler board.

PARTS LIST VLF-LF ANTENNA PREAMP

R1-1 megohm, 1/4 watt

C1-1 µF, 25 volts, tantalum

C2-0.001 µF, ceramic

Q1-J310 FET (Siliconix or equivalent)

NE1-NE99 neon lamp

L1, L2-6.8 mH (Mouser 43LH268 or equivalent)

T1-Audio transformer (Mouser 42TL004 or equivalent)

Miscellaneous:PC board, case, coaxial connectors, hardware, etc.

	TABLE					
Frequency/Application	3-dB Bandwidth	Antenna length	Ca	L	C2	Gain
180 kHz Experimenters' Band	170-190 kHz	10 meters	120 pF	33 mH	.001	+20 dB
180 kHz Experimenters' Band	175-185 kHz	1 meter	10 pF	39 mH	.001	+15 dB
100 kHz LORAN-C	95-105 kHz	1 meter	10 pF	120 mH	.01	+6 dE
100 kHz LORAN-C	91-108 kHz	10 meters	120 pF	100 mH	.01	+12 dE
60 kHz WWVB	55-65 kHz	10 meters	120 pF	150 mH	.01	+10 dE
60 kHz WWVB	58-63 kHz	1 meter	10 pF	300 mH	.01	+6 dE

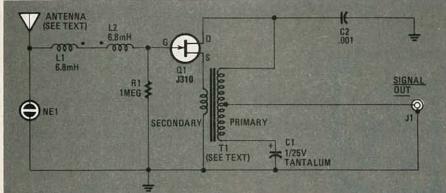


FIG. 7—THE INPUT INDUCTORS and circuit capacitances form a lowpass filter that makes this amplifier for restricted use in the VLF-LF range.

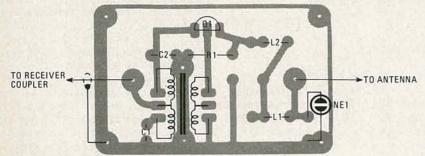


FIG. 8—PARTS-PLACEMENT DIAGRAM for the restricted-use (VLF-LF) version of the active antenna preamp.

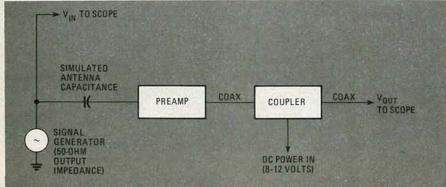


FIG. 9-USE THE APPROXIMATION of 1-pF per meter to determine the antenna capacitance

Ave., Santee, CA 92071), although other suppliers can be found by checking the ads in the back of this magazine.

You may have to bend the leads or change the part orientation if a particular component will not exactly fit the board holes. If you use 100–150-mH RF chokes (for a tuned amplifier for 60-kHz to 100-kHz operation), they will be quite close to the board edges because of their larger size. That will alter the circuit capaci-

tance somewhat when the board is placed inside the box. The small trimmer capacitor—on the foil side of the board—can be used to compensate for that.

For wideband, lower-Q circuits with no trim capacitor, it may be necessary to check the response of the preamp after temporarily mounting it in the shield/ case. The board can, of course, be used in a much larger box, with larger inductor assemblies, but keep in mind that for For information on availability (including custom-built active-antenna preamps and coupler assemblies), send a SASE to R. W. Burhans, 161 Grosvenor St., Athens, Ohio 45701

maximum antenna sensitivity with a minimum antenna height (in other words, for maximum efficiency), the input capacitance at the antenna terminal should be as low as possible.

Table 1 shows the results of tests made with different inductor-capacitor combinations for covering different segments of the 60–200 kHz range. (See Part 2—Figs. 1, 4, and 5 for the particular circuits.) Note that in some cases the value of the preamp's output capacitor (C2) at the drain of Q1 is changed to improve the low-frequency cutoff.

Bench testing

A signal generator and suitable oscilloscope are used to observe the response of the active antenna system with a setup as shown in Fig. 9. When tuning any of the

PARTS LIST RECEIVER COUPLER

All resistors are 1/4 watt, 5% unless otherwise specified

R1-51 ohms

D0 510 ohn

R2-510 ohms R3-22 ohms

C1-0.22 µF, Mylar

C2, C3-1 µF, 25 volts, tantalum

L1—1 mH (Mouser 43LR103 or equivalent)

amplifier variations on the bench, or when checking the response of the amplifier, a small coupling capacitor-of a value equal to the expected antenna capacitance-is connected to the input terminal of the preamp. (A vertical or slant-wire antenna will have an approximate capacitance of about 10 pF-permeter.) That will roughly simulate the response of the electric field at the antenna. A tuned preamp assembly can be aligned on the bench and then the antenna can be plugged in for operation. The input/output response obtained this way will fairly-well resemble the response that you will obtain in the field-except for the K factor that is dependant on the local ground-shielding effect.

Preamp and coupler housing

The amplifier and coupler boards have been designed to fit in a small cast aluminium or drawn-steel case such as Mouser part No. 537-M12 for compact assembly. (See Fig. 10.) The circuit boards are held in place in the boxes by short, solid jumper wires that are soldered to the antenna input terminal and to the coax receptacles. The ground connections can be

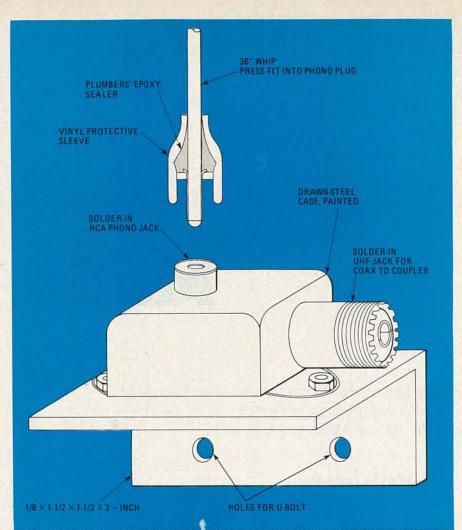


FIG. 10—TO WEATHER-PROOF the case, seal all joints and drill a small bleed hole for drainage.

either short jumper wires to the ground lug on the cable receptacle or the circuit board ground can be directly soldered to inside edges of the drawn-steel case.

The case should be mounted on an angle bracket for bolting to a short mast. A press-in or solder-in type RCA phono receptacle (Mouser part No. 16PJ051) is soldered on the inside of the box for the antenna terminal. That has a capacitance of only 5 pF at most, and it is suppled with a ceramic spacer. The output coax connector can be a UHF type. We have used SO-239 type receptacles by breaking off the flanges and pressing into a hole carefully reamed to fit. The output coax connector can be a single-hole-mounting type that uses a nut on the inside of the case. However, that takes up room inside the case and the PC board will have to be further cut and filed. Whichever type of connector you use, make sure you solder it to the inside of the case.

Prior to mounting the connectors, the box should be degreased with solvent, polished with steel wool both inside and out, and (after soldering the connectors) it should be painted outside with automobile primer and finally with a clear plastic spray. When painting the box, temporarily cover the connectors with masking tape to avoid getting paint on them.

To mount the circuit board in the drawn steel case, solid copper wires (22 to 20 gauge) are soldered to the center terminals of the antenna and coax connectors. Those wires are then bent to align with the holes on the circuit board. It is necessary to file the edges of the board to round the corners, in order for the board to fit inside the case. The board is then slipped down over the input/output wires so that the foil side of the board faces outside and the components inside. The board should be about 3/16 inch below the outer edge of the box for clearance. The ground of the board is then tack-soldered at a couple of points to the inside of the cleaned box. Be sure to solder the input/ output wires to the terminals on the foil side and cut off all excess length from component leads.

The receiver-coupler box can be assembled in a very similar manner. Again, the fit can be compact, although it will be so newhat crowded if UHF fittings are used. It is better to use RCA phono connectors for all the coax fittings and to use shielded phono plugs with good quality RG-58U cable for interconnecting the preamp to the coupler and the coupler to the receiver. However, it is common practice to use the old-fashioned large size UHF fittings for RF, even though the metal-sleeve RCA phono types are much more compact and convenient to use. You can also use BNC type cable fittings and receptacles if desired. Some commercial systems even use type-N RF fittings for the antenna mount in place of the RCA solder-in receptacle.

Final assembly

For a short whip antenna, a mobile VHF-type stainless steel whip about 36 inches long will fit inside the typical RCA phono plug connector pin for a tight press fit. If that type of whip is not available, a copper-coated welding rod can be substituted and soldered into the phono-plug pin. After the antenna is mounted in the plug's center pin, the fitting is sealed with plumber's epoxy putty and a vinyl sleeve pushed down over the whole assembly to aid in waterproofing. A wire antenna can also be used—it is soldered to the center pin, and the phono connector is sealed similarly. For final assembly and mounting of both the antenna connector and the coax output connector at the preamplifier, we wrapped the connector with Coax-Seal, a putty-like tape, for extra waterproofing. The preamp box is bolted to the angle bracket and the joint sealed with cement or a gasket made from Coax-Seal tape. As an extra precaution against water in the box, a small bleed hole is drilled directly under the box mounting area to drain away any moisture that may enter the assembly.

Your receiver may have an auxiliaryoutput power source already available. For the RF input, the observer should first try the 500-ohm output from the coupler box at the VLF-LF region. More signal can sometimes be developed if the other output of the coupler is used. That indicates that the receiver is not too sensitive to antenna output-impedance. In all cases, the appropriate receiver inputterminal that is designed for the frequency range should be used. The 50-ohm coupler-output is almost always required for receivers operating in the range of 2

MHz to 30 MHz.

It may be convenient to connect a monitor oscilloscope to the 500-ohm output of the coupler and use the 50-ohm coupler terminal to drive the receiver. The scope display is useful for monitoring interference and the dominating signals in your area. By selecting various scope sweep-rates, you can get an approximate indication of the frequency of the various signals that are present. Thus, once you figure out what is causing the interference (for example, you may be able to see 60-Hz harmonics), then you can take steps to minimize it. Do not forget, however, that a wideband preamplifier is sensitive to all frequencies present at the antenna input bandwidth-not only the ones you want to amplify. R-E

APRILIBUILD THIS

Spot

Matic

Do you have difficulty seeing into those hard-to-reach recesses in your construction projects? Build the Spot-A-Matic and find out.

ROBERT GROSSBLATT

EVERYONE WHO BUILDS ELECTRONIC CIRcuits knows that it's hard to see the finished project inside its case. If something goes wrong and you have to look inside, it would be helpful if some gadget made it easier to inspect the circuit. Because that happened to me so many times, I stopped my other work and built the Spot-A-Matic.

I didn't want to spend a lot of time on it, so I kept the circuit as simple as possible and used things I could find around the house. As you can see in the schematic (Fig. 1), I used standard components except for the box marked "X" and, as they say. "X marks the Spot-A-Matic."

I discovered, quite accidently, that a length of transformer wire exhibits certain strange properties when massive amounts of current are passed through it. First it gets hot, then it starts to turn color, and finally it burns up. I'm just a simple electronics tinkerer-not one of your fancy nuclear physicists with a lot of initials and other junk after my name-but it seemed to me that if I could keep the wire from destroying itself there was a good chance it would keep on glowing without burning up.

X marks the spot

I'll spare you the endless agonies of my research and just share the results. I finally realized that I could keep the wire from burning up by surrounding it with a vacuum. Since oxygen was needed to support combustion, I reasoned that placing the wire in an oxygen-free environment would solve the problem. By experimenting, I found that my reasoning was sound.

I took a small soda bottle and, after disposing of the contents, scraped off the label and drilled three holes in the captwo small ones and one larger one. I used a soda bottle because it was the right shape, made of durable glass and, to be honest, I like soda. I wrapped five inches of stripped transformer wire around a glass swizzle stick, and glued the assembly in position inside the bottle using twopart epoxy. The two leads were brought out through the small holes in the cap. The larger hole allowed me to insert the end of a length of plastic tubing. I used

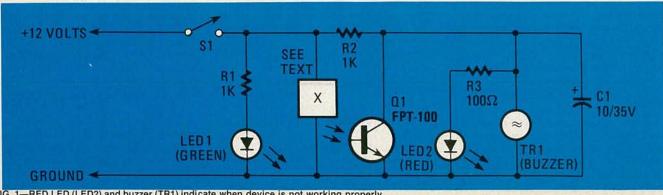


FIG. 1—RED LED (LED2) and buzzer (TR1) indicate when device is not working properly.



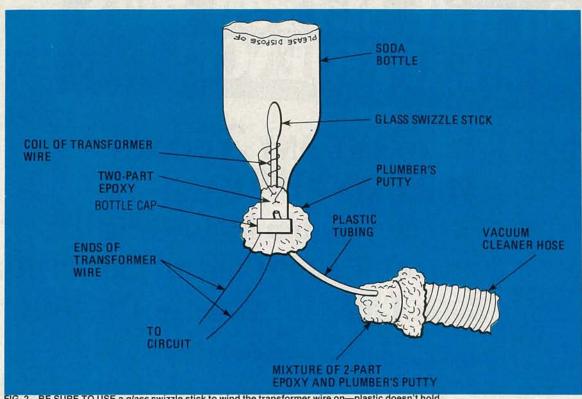


FIG. 2—BE SURE TO USE a glass swizzle stick to wind the transformer wire on—plastic doesn't hold up well.

PARTS LIST

All resistors 5%, 1/4 watt, unless otherwise specified

R1, R2—1000 ohms R3—100 ohms

Capacitors

C1-10 µF, 35 volts, electrolytic

Semiconductors

Q1—FPT-100 phototransistor LED1—jumbo green LED LED2—jumbo red LED TR1—12-volt buzzer S1—SPST switch

Miscellaneous: soda bottle, transformer wire, two-part epoxy, plumber's putty, glass swizzle stick, vacuum cleaner, perforated construction-board, solder, etc.

plumber's putty to seal the cap and make sure everything was airtight.

The other end of the plastic tubing was connected to the hose of my wife's vacuum cleaner. (Make sure that you ask your wife before you go ahead with the construction. If your wife is not as understanding as mine is, you might have to find an alternate means of producing a vacuum. Some friends of mine have used swimming-pool filters and have obtained excellent results.) I made up a mixture of

plumber's putty and two-part epoxy to make an effective seal. The two leads of the transformer wire were connected to the points indicated in Fig. 1.

How it works

When you close S1 and apply power to the Spot-A-Matic, a green indicator, LED1, lights up as current begins to flow through the assembly in the bottle. As the wire gets hotter, a strange thing happens—it begins to glow more and more brightly. The radiant energy emitted turns on Q1, a phototransistor, which lowers the voltage across the red indicator, LED2, and TR1, a standard buzzer, disabling them. Capacitor C1 delays things until the wire is glowing brightly in the bottle. If the wire should break, Q1 will stop conducting and LED2 and TR1 will turn on; that will give you a visual and audible signal to warn you that something is wrong with the wire.

I've found that it's best to turn on the vacuum cleaner before closing S1: the better the vacuum, the better your Spot-A-Matic will function. Details of the construction of the box marked "X" are shown in Fig. 2. The only thing to be careful of is to make sure you have good seals at both the bottle cap and the plastic tube—vacuum hose interface. The rest of the circuit can be assembled in whatever manner you like—perforated

construction-board and wire-wrap construction are fine. Figure 3 would have shown the completed unit, but it was destroyed in an unfortunate accident I'd rather not discuss.

Variations

The transformer wire is made of copper, so my Spot-A-Matic gives off a green glow. If you find that color unsuitable you can experiment with different kinds of wire—just make sure it's really thin wire because thick wire doesn't seem to work as well and keeps blowing fuses. I haven't tried bottles with different-colored glass or other shapes. My bottle was made of clear glass, but any color should work as well. Different types of bottles—e.g., ketchup, mayonnaise, and so on—may pose problems I did not encounter. The equations indicate they should work but, of course, that's only theory.

My Spot-A-Matic is a great addition to my workbench. I don't have a problem any more in seeing into the dim recesses of my projects, and the device is a great help in finding things when I drop them on the floor.

As soon as I finish troubleshooting my computer kit I plan to spend more time investigating the basic principles of the Spot-A-Matic. As I said, I may not be a high-paid rocket scientist, but I know when I'm on to something good.

Go with McGraw-Hill's EXPERIENCE!

INTUITIVE IC ELECTRONICS: A Sophisticated Primer for En-gineers and Technicians. By

M. Frederiksen. 208 pp., Covering both the simplest and the most complicated IC designs, this lively, easy-to-read volume provides a sophisticated, nonmathematical explanation of the basic internal mechanisms common to all semiconductor devices.

\$19.95

RADIO HANDBOOK, 22/e. By W. Orr. 1,136 pp., more than 1,300 illus. Here's the latest edition of what is universally regarded as the most useful reference in the industry. It's a "course" in communications, a fact-packed reference, and a how-to guide-all in a single book!

582442-6B (Counts as 2 of your 3 books)

MICROWAVE SEMICONDUCTOR ENGINEERING. By J. F. White. 558 pp., 319 illus. Packed with an awesome amount of never-before-published material, this reference contains a wealth of formulas, constants, and practical design techniques needed by everyone who works in the field of microwave engineering. 582553-8 \$28.50

MANUAL OF ACTIVE FILTER DESIGN, 2/e. By J. L. Hilburn and D. E. Johnson. 225 pp., 157 easy-to-use design graphs. This ingenious manual enables you to design filter circuits for virtually any application in minutes—without making a single computation! Covers all the latest designs. sians.

287/694B (Counts as 2 of your 3 books)

MICROPROCESSOR DATA BOOK. By S. A. Money. 350 pp., 220 illus. Easily the most comprehensive collection of data on microprocessors and their support chips available anywhere! Provides important facts on a wide range of popular devices from American, European, and Japanese manufacturers.

427/062B \$35.00 (Counts as 2 of your 3 books)

HANDBOOK OF SEMICONDUCTOR AND BUBBLE MEMORIES. By W. A. Triebel and A. D. Chu. 416 pp., illus., over 50 worked-out problems This detailed, comprehensive guide brings you right up to the minute on such newly developed devices as the PLA, FIFO, CAM, CCD, and magnetic bubble memory—as well as all the standard storage devices from ROMs and RAMs to shift registers.


INTRODUCTION TO RADAR SYSTEMS, 2/e. By M. I. Skolnik. 698 pp., 244 illus. This new edition of a widely used text on radar from the systems engineer's point of view brings you full discussions of the many major changes that have occurred in the field recently.

(Counts as 2 of your 3 books)

TAKE ANY 3 BOOKS FOR ONLY \$100 EACH when you join McGraw-Hill's **Electronics and Control Engineers'** (Values up to \$87.00)* **Book Club**

McGraw-Hill's long-established club that saves you BIG money on the important new books of all publishers!

*If you join now for a trial period and agree to purchase three more books-at handsome discounts-over the next year. (Publishers' prices shown)

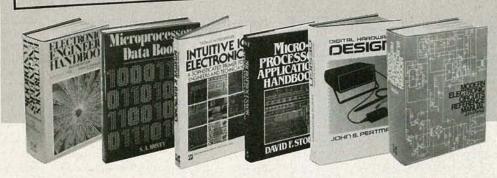

MAGNETIC CORE SELECTION FOR TRANSFORMERS AND INDUCTORS: A User's Guide to Practice and Specifications. By W. T McLyman. 768 pp., 400 illus. This giant volume is brimming with time-saving tips to help you select the right magnetic core for virtually any application. 582494-9A \$65.00 (Counts as 3 of your 3 books)

ELECTRONIC COMMUNICATION, 4/e. By R. L. Shrader. 801 pp., 870 illus. This thoroughly updated edition offers all the theory and fundamentals you need to prepare yourself for the FCC commercial and amateur grade license exami-nations—and pass them the first

DIGITAL HARDWARE DESIGN. By J. B. Peatman. 428 pp., over 400 illus. Taking you beyond the microcomputer, this guide reexamines traditional techniques and focuses on the de-sign of circuitry too fast for the microcomputer alone.

(Counts as 2 of your 3 books)

MICROPROCESSOR APPLICATIONS HANDBOOK. Editor-in Chief, D. F. Stout. 472 pp., 284 illus. At last — a reference guide to microprocessor applications to help you make your systems timely, versatile, and cost-effective.

\$35.00 (Counts as 2 of your 3 books)

SIGNALS AND SYSTEMS. By A. Oppenheim, A. Willsky, and I. Young. 869 pp., more than 350 illus. This unique volume presents a comprehensive discussion of methods for analyzing discrete-time systems. Includes a look at feedback, convolution, and other concepts not treated in depth else-

582674-7B (Counts as 2 of your 3 books)

MODERN ELECTRONIC CIRCUITS REFERENCE MANUAL. By J. Markus. 1,264 pp., 3,666 circuit dia-grams. Complete with values of com-ponents and suggestions for revisions, plus the original source of each circuit in case you want additional performance or construction details.

(Counts as 3 of your 3 books)

ELECTRONICS ENGINEERS HANDBOOK, 2/e. Edited by D. G. Fink & D. Christiansen. 2,272 pp., 2,189 illus. This updated and enlarged edition covers the latest knowledge in the field, including new advances in integrated circuits, pulsed and logic circuits, laser technology, telecommunications, and much more 812A \$75.00 (Counts as 3 of your 3 books) 209/812A

PCM AND DIGITAL TRANSMISSION SYSTEMS. By R. Owen. 320 pp., 186 illus. This useful volume allows newcomers to the field to familiarize themselves with its problems and equipment in two weeks, instead of the three months it would ordinarily take.

(Counts as 2 of your 3 books)

ANTENNA THEORY: Analysis and **Design.** By C. A. Balanis. 816 pp., illus. Packed with equations, design procedures, and plenty of nuts-and-bolts know-how, this is the first place to turn for answers to all your antenna design questions.

(Counts as 2 of your 3 books)

ELECTRONICS ENGINEERING FOR PROFESSIONAL ENGINEERS' EX-AMINATIONS. By C. R. Hafer. 336 pp., more than 200 illus. Actually two books in one—a quick preparation manual to help you pass your P.E. exams on the first try and a rich source of practical electronics engineering information and know-how.

254/303 \$27.

16-BIT MICROPROCESSOR SYSTEMS. By Texas Instruments, Inc. 576 pp., Illus. This broad-based guide presents a comprehensive overview—from basic concepts to advanced design principles. Covers programming methods, instruction sets, I/O design, memory design, and much more.

637/601B \$45.00 (Counts as 2 of your 3 books)

OPTICAL FIBER SYSTEMS: Technology, Design, and Applications. By C. K. Kao. 197 pp., Illus. From a basic explanation of optical fiber systems to the economic ramifications of their use, this volume provides full coverage of a rapidly developing field.

DIGITAL CIRCUITS AND MICRO-PROCESSORS. By H. Taub. 608 pp., heavily illus. This fast-paced, carefully written guide gives you thorough explanations of all the basic principles of digital systems and logic design—plus a solid introduction to microprocessors and microprocessor-based designs.

629/455B \$32.95 (Counts as 2 of your 3 books)

McGraw-Hill's NATIONAL ELECTRICAL CODE® HANDBOOK, 17/e. By J. F. McPartland. 1,162 pp., 1,096 illus. Bigger and better than ever! This mammoth reference explains and clarifies the many complex provisions of the current (1981) Code® to help you meet rules exactly and pass inspections the very first time.

INTEGRATED CIRCUIT FABRICATION TECHNOLOGY. By D. J. Elliott. 480 pp., 220 illus. Covering every step in the transformation of a silicon chip to an integrated circuit, this is the first book to combine, in a single volume, a cohesive examination of the equipment, materials, and techniques of IC fabrication.

192/383 \$29.75

NETWORK SYSTEMS. By R. Sharma, P. DeSousa, and A. Inglé. 321 pp., illus. Here's the first book to describe, concisely and comprehensively, all current stored program-controlled (SPC) telecommunication network systems that use integrated modeling, analysis, and design techniques. Gives you the know-how you need to meet design specifications. \$82557.0

HANDBOOK OF ELECTRONIC PACKAGING DESIGN AND ENGINEERING. By B. Matisoff. 480 pp., 312 illus. This handy volume examines the broad array of packaging techniques available today, providing the data you need to select the best one for a given application. Stresses the interplay between design criteria 582515-5B \$32.50 (Counts as 2 of your 3 books)

STANDARD HANDBOOK FOR ELECTRICAL ENGINEERS, 11/e. By D. G. Fink and H. Beaty. 2,448 pp., 1,414 illus. Today's most widely used source of electrical engineering information and data serves you as no other single work when you need detailed, timely, and reliable facts

209/74XA \$65.95 (Counts as 3 of your 3 books)

Be sure to consider these important titles as well!

RADAR TRANSMITTERS. By G. W. Ewell. 198/438 \$26.95

USER'S GUIDEBOOK OF DIGITAL CMOS INTEGRATED CIRCUITS. By E. R. Hnatek 290/679 *29.00

ELECTRONIC CIRCUITS NOTEBOOK: Proven Designs for Systems Applications. Edited by S. Weber. 192/448B \$35.50 (Counts as 2 of your 3 books)

ELECTRONIC FILTER DESIGN HANDBOOK. By A. B. Williams. 704/309B \$41.50 (Counts as 2 of your 3 books)

INTRODUCTION TO THE THEORY AND DESIGN OF ACTIVE FILTERS. By L. P. Huelsman & P. E. Allen. 308/543B \$34.50 (Counts as 2 of your 3 books)

MICROELECTRONICS. By J. Millman. 423/27XB \$35.95 (Counts as 2 of your 3 books)

HANDBOOK OF OPERATIONAL AMPLIFIER CIRCUIT DESIGN. By D. E. Stout & M. Kaufman. 617/97XB \$38.00 (Counts as 2 of your 3 books)

MICROCOMPUTER-BASED DESIGN.
By J. Peatman.
491/380B \$35.95
(Counts as 2 of your 3 books)

BIT-SLICE MICROPROCESSOR DE-SIGN. By J. Mick & J. Brick. 417/814 \$29.50

DESIGNING WITH FIELD-EFFECT TRANSISTORS. By Siliconix, Inc 574/499 \$29_50


ENGINEERING MATHEMATICS HANDBOOK, 2/e. By J. J. Tuma. 654/298B \$31.25 (Counts as 2 of your 3 books)



McGraw-Hill Book Clubs

Book Club

Electronics and Control Engineers'

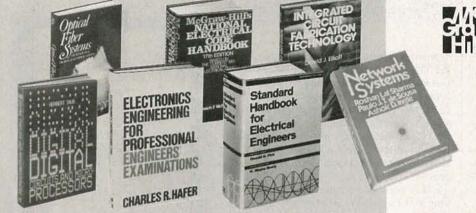

Why YOU should join now!

■ BEST AND NEWEST BOOKS IN YOUR FIELD! Books are selected from a wide range of publishers by expert editors and consultants to give you continuing access to the best and latest books in your field.

■ BIG SAVINGS! Build your library and save money too! Savings ranging up to 30% or more off publishers' list prices—usually 20% to 25%.

BONUS BOOKS! You will immediately begin to participate in our Bonus Book Plan that allows you savings up to 80% off the publisher's prices of many professional and general interest books!

■ CONVENIENCE! 12-14 times a year [about once every 3-4 weeks] you receive the Club Bulletin FREE. It fully describes the Main Selection and alternate selections. A dated Reply Card is included. If you want the Main Selection, you simply do nothing—it will be shipped automatically. If you want an alternate selection—or no book at all—you simply indicate it on the Reply Card and return it by the date specified. You will have at least 10 days to decide. If, because of late delivery of the Bulletin you receive a Main Selection you do not want, you may return it for credit at the Club's expense.

As a Club Member you agree only to the purchase of three additional books during your first year of membership. Membership may be discontinued by either you or the Club at any time after you have purchased the three additional books.

Other McGraw-Hill Book Clubs:

Accountants' and Controllers' Book Club • Architects' Book Club • Byte Book Club • Chemical Engineers' Book Club • Civil Engineers' Book Club • Mechanical Engineers' Book Club

For more information, write to:

P.O. Box 5	2, High	tstown,	New Je	rsey 085	20
Please enr choices I I tax, postag the books canceled tional boo lined unde and handl Indicate be pensive bot than one of	ave liste e, and h within agree to ss during r the Clu ng charg elow by r oks (note	ed below nandling 10 days o purcha g my firs nb plan d ge is add number	Bill me and my ase a mi st year o lescribed to al the bool	e only \$3 atisfied, member nimum of f member I in this a I shipmer as you wa	00 plus lo 1 may returship will of three ad rship as o d. A shippints. ant. A few
than one c	noice.			1	
		455			The Carlo
Name				W. I.	
Address/Apt				No.	links.
City/State/Zi	,	100	Town.		
This order subject to members. cepted.	change v	without	notice. (Offer good	only to n
					FOOFO

APRIL 1983

THE DRAWING BOARD

Finishing up the keyboard encoder


ROBERT GROSSBLATT

FOR THE LAST TWO MONTHS WE'VE BEEN designing a keyboard encoder. As we left off last month, the encoder was neither easy-to-use nor useful. This month we're going to change all that. When a piece of equipment is designed and put on the market, one of the phrases that gets bandied about is "human engineering." In actual fact, that is more of an advertising phrase than a technical one and the more competitive the market, the more often you hear it. All it means is that the product was designed to make it easy to use. That, I suppose, is to set it apart from all those products that were designed to be hard to use. Advertisements for technical equipment with an esoteric market will stress accuracy and reliability; consumerproduct advertising usually deals with color, shape, and sex appeal. Anyone who has ever tried to get detailed technical information about a consumer product knows exactly what I'm talking about.

As we finish up the design of our keyboard encoder, we're going to throw in a bit of "human engineering" in the form of—are you ready for this?—audio keyboard-feedback. How's that for a bit of psuedo-technical jargon? In any event, it's a nice convenience feature and since we get it for practically nothing we may as well throw it in. Our scan oscillator, IC2 (a 555), was set to run at a rate of about two kHz or so. That frequency was chosen for two reasons. First of all, it's highly unlikely that anyone would be able to enter data fast enough to "beat the clock" so to speak, and secondly, two kHz is a nice frequency for an audible "keypressed" indicator. The trick is to use the oscillator without interfering with the operation of the encoder. It's clear that we will need two things: a switch to connect the 555 to the speaker, and some way of throwing the switch every time a keypad switch is closed. Let's automatically rule out double-pole double-throw switches at the keyboard and see if we can take care of business in a more elegant fashion. For us, that means using inexpensive components, and whatever unused silicon there is left in the circuit as it is so far.

Designing the beeper

Figure 1 shows a possible solution to the problem. It's not the only way to get the job done and, if you can dream up something slicker, so much the better.

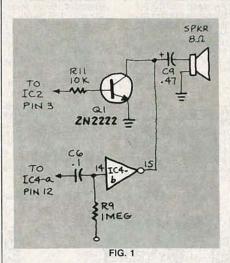


Transistor Q1 is used as a switch between the 555 and the speaker, and the action of that switch is controlled indirectly by the "any-key-pressed" output of the encoder. I say "indirectly" because there's some silicon on the line. As long as we hold the collector of Q1 low the transistor is in cutoff and there's no audio. When a keypad switch is closed, the "any-key-pressed" line goes high, and that turns on the transistor and sounds the beep. As long as the keypad switch remains closed the beep will sound. That works perfectly, but we can make it slicker and use up some spare silicon at the same time.

We still have an unused inverter in IC4, so we'll build ourselves a half monostable with a period of about 100 milliseconds (0.1 second). We want it to output a positive-going pulse when a keypad entry is made; that means that using the "anykey-pressed" signal isn't possible since it's an active-high. As you now know, if you use an inverter to build a half monostable, a positive pulse at the output is produced by a positive-to-negative transition at the input. As it happens, we have such a signal available to us because we inverted the "any-key-pressed" signal to disable the 4518 BCD counter. All we have to do is pick up the trigger from the output of IC4-a, route it through our new edgedetector, and we'll get a clean beep lasting a tenth of a second whenever we enter a digit. Capacitor C9 keeps the eight-ohm impedance of the speaker from loading down the output of IC4-b, and R11 isolates that section from the rest of the cir-

A data bus

Let's now turn our attention to the data bus—or rather the lack of one. So far, our encoder displays entered digits, but the data isn't available to us for use. That's a serious problem—since we want more out of this exercise in circuit design than an elaborate do-nothing box, a real databus is a must. At the moment, data from the keyboard goes directly to the display circuitry. What we have to do is change that so that the display shows whatever is on the data bus. That means we have to put some storage space between the encoder and the display. The easiest way to

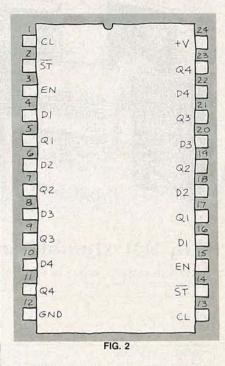

do that is to put some hold-and-follow latches there and use them to remember the entered numbers.

Figure 2 shows the pinout of exactly what we need—a 4508 hold-and-follow latch that has the added bonus of Tri-State outputs. It's dual 4-bit latch, and each half of the IC can be used independently of the other. The EN (enable) pin controls the outputs, and bringing it high puts them into a high-impedance state without having any affect on the operation of the latch itself. The ST (store) pin controls the loading of the latch. If it's held high, the latch is transparent, but taking it low will



FOR CABLE TV SWD-1 Video Converter is utimove the KHz's signal from a distorted video (channel 3 in/ out) and also pass thru the normal undistorted/detected audio signal. Rocker switch operating mode to remove KHz's distortion from the video or pass all other channels normally. Simple to assemble-less than 30

VTR ACCESSORIES

SIMPLE SIMON VIDEO STABILIZER



Simple Simon Video Stabilizer, Model VS-125, eliminates the ver-tical roll and jitter from "copy guard" video tapes when playing through large screen projectors or on another VTR. Simple to use, just adjust

the lock control for a stable picture. Once the control is set, the tape will play all the way through without further adjustments, includes

, Reg. 54.95 ... \$39.95 VS-125 Video Stabilizer, wired .

MODULATOR

Not a Game Type Modulator The MPS-1 Kit converts Video/Audio signals to a crystal controlled RF output for TV Channels 3 and 4. The MPS-1 Modulator inputs are designed to match all TV Cameras and VCR's and features a voltage regulated power supply, power switch and LED indicator. No Tuning Required.

MPS-1Kit

UHF ANTENNAS and ACCESSORIES

MDS-AMATEUR-ETV 32 ELEMENT

YAGI ANTENNA

• 23dB Average Gain • Commercial Grade • Die Cast Waterproof Housing with 41/4" x 21/2"

 Includes P.C. Probe. F-61 Connector and Mounting Hardware MAE-2 32 Element YAGI Antenna \$23.95

Kato Sons' Down Converter Kit ★1.9 - 2.56Hz★

Designed for Simple Simon by former Japanese CQ Amateur Magazine's UHF Editor/Engineer. Unit utilizes new ingenious Printed Circuit Probe for maximum gain. Circuit board fits inside MAE-2 antenna housing. Requires 1 hour assembly. IC and capacitors pre-soldered

Model KSDC-KIT 1.9 - 2.5GHz Down Converter Kit \$34.95

Kato Sons' Regulated Varible DC Power Supply

For use with KSDC-KIT 1.9 - 2.5GHz Down Converter. Completely assembled with Attractive Cabinet, TV/Converter Mode Switch, Frequency Control and

SPECIAL

ORDER ALL THREE ITEMS MAE-2, KSDC-KIT and

KSPS-1A for Only Regular price if ordered separately \$82.85 CO-AX CABLES ARE NOT INCLUDED

ZYZZX VHF-UHF Wideband Antenna Amplifier





Revolutionary New HYBRID IC Broadband Amplifiers

50 MHz - 900 MHz

Model ALL-1 12dB Gain

hese units are not available anywhere else in the world. Each unit will serve many purp vailable in Kit or Assembled form. Ideal for outdoor or indoor use. I/D impedance is Amplifiers include separate co-ax feed power supply. Easily assembled in 25 minutes. No coils

ALL-1 Complete kit w/power supply \$24.95 ALL-1 Wred/Tested w/pwr supply \$34.95 ALL-2 Complete kit w/power supply 34.95 ALL-2 Wred/Tested w/pwr supply 44.95

Our New STVA 14.5dB GAIN, 14 ELEMENT CORNER REFLECTOR YAGI ANTENNA



Switch to Bambi[™]!

Electronically

Bambi Electronic Video Switch ... makes switching of your VCR/VTR. Pay TV Decoders, Cable TV, Video Discs. Video Games, Closed Circuit TV. Antennae and Microcomputer as easy as pushing buttons.

The Bambi Electronic Video Switch is an electronic switching network which can accept up to six different sources of video signals and provide the flexibility of directing the inputs to any or all of the three outputs.

Now you can eliminate ... the drudgery of disconnecting and reconnecting your video equipment each time you use it ... the tangled mess of cables which are impossible to trace out ...not being able to use more than one function

Bambi lets you enjoy using your video equipment the way it should be ... electronically and on line at the push of a button

Model BEVS-1 Completely Wired and Assembled, Includes comprehensive Instruc-tion/Operation Manual and Decal Set for

user in mind. Computer styled construction.

with soft-touch keyboard (rated for over 10

nillion operations), arranged in matrix form

allows easy input/output selection without

refering to charts. Functions selected through the keyboard are immediately displayed on

the 18 LED status indicators



much higher priced competition. All solid state electronic switching provides low atten-(3dB), wide frequency response (40-890 MHz), and excellent isolation between signal sources (each I/O section individually sheilded for 65dB min. isolation).



Input Return Loss Isolation

4dB ±1dB 12dB min. 65dB min. 117VAC 50 Hz, 2W W × 6% D × 3% H 4½ lbs

FREE

Bambi

Poster

Power Req. Dimensions

7+11 PWD PARTS

INTRODUCING OUR 7+11 PWD



PARTS KITS Varactor UHF Tun \$24 95 Printed Circuit Board Pre-drilled 18.95 PCB Potentiometers 4-20K, 1-.5K, 2-10K, 2-5K, 1-1K, and 1-50k. (11 pieces). 8.95 Resistor Kit, 14W, 5% 29-pcs, 1/2 W 2-pcs 4.95 ver Transformer, PRI-117VAC, SEC-24VAC at 500ma 9.95 Panel Mount Potentiometers and Knobs, 1-1KBT and 1-5KAT with switch . . 5.95 IC's 7-pcs, Diodes 4-pcs, Regulators 2-pcs Transistors 2-pcs, Heat Sinks 2-pcs 29 95 Electrolytic Capacitor Kit. 14-pieces 6.95 Ceramic Disk Capacitor Kit. 50 WV. 20-pcs 7.95 Varible Ceramic Trimmer Capacitor, 5-65pfd, 5-pieces . . . Coil Kit, 18mhs 3-pcs, .22sths 1-piece (prewound inductors) and 2 T37-12 Ferrite Toroid cores with 6 ft. #26 wire. IC Sockets, Tin inlay, 8 pin 4-pcs, 14 pin 1-pc and 16 pin 2-pcs. Enclosure with PM Speaker and Pre-drilled Backpanel for mounting PCB and Ant. Terms . 14.95 Misc. Parts Kit, Includes Hardware, (6/32, 8/32 Nuts & Bolts), Hookup Wire, Solder, Ant. Terms 14 14MISC-PWD DPDT Ant. Switch, Fuse, Fuseholder, etc. 9.95 15 15MC16-PWD Mylar Capacitors, 14-pcs and Silver Mica Capacitors 2-pi When Ordering All Items, (1-15), Total Price................. 159.95


CUSTOMER NOTICE: BUY WITH CONFIDENCE... BEWARE OF LOW QUALITY IMITATORS. All of Operation, not factory seconds or stock close-outs. We service your completed kits that you've purchased and built. You will never get stuck with a BAG OF PARTS when ordering from Simple Simon.

SIMPLE SIMON ELECTRONIC KITS,™ Inc. 3871 S. Valley View, Suite 12, Dept. R, Las Vegas, NV 89103

NEED 6 OR MORE OF AN ITEM! WRITE FOR QUANTITY DISCOUNTS

In Nevada Call: 702-871-2892 QUANTITY DISCOUNTS 1-800-782-3716

Available by Mail Order Only Send Check* or Money Order. Minimum Order: \$16.95. Add 10% Shipping and Handling on orders under \$40.00. For orders over \$40.00, add 5%. Minimum Shipping and Handling \$2.00. Cat. \$1.00 VISA and Mastercard Acceptable ck orders will be held 30 days before shippi

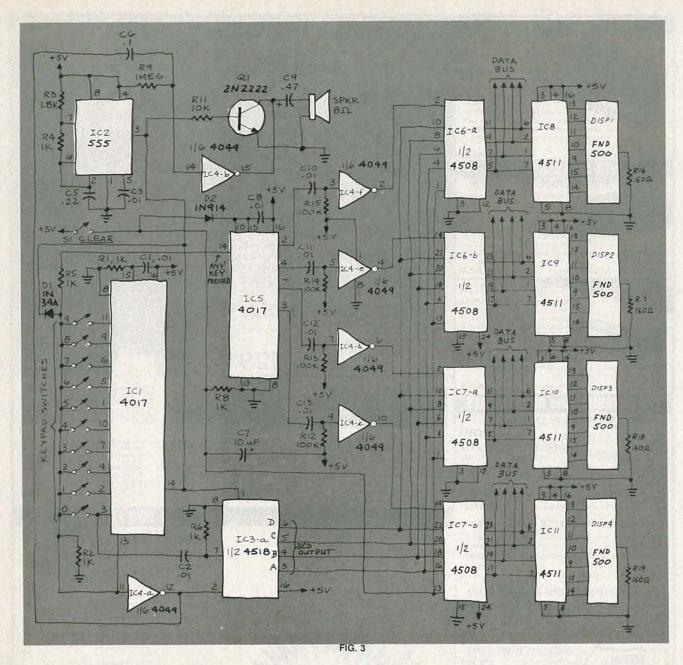

close the latch and store whatever was at the inputs at that time.

On the face of it, there would seem to be a major problem in using a 4508 with the circuit we've designed so far, because the latch in the 4511 is enabled high and the 4508's latch is enabled low. A little thinking can solve that problem when we remember that the half monostables we're using to enable the latches are really edge-not level-detectors. As the circuit stands now, we're using the leading edge of the 4017 outputs to trigger the edge detectors. Well, what goes up must come down, so we can use the trailing edge instead and reconfigure our edge detectors to provide a pulse of the correct polarity. What that means in terms of circuit design is that instead of latching the first thing on the bus when a digit selector output goes high, we're grabbing the last thing on it before if goes low. Since the 4518 BCD counter is disabled

while the keypad switch is thrown, the data remains unchanged.


Figure 3 is the complete schematic of our keyboard encoder. We've kept it down to four digits because the principle is the same for any amount of digits. Note that the 4508's have been put between the encoder and the display, and a true Tri-State bus now exists to display whatever data is put on it. The half monostables have been reconfigured and the digit selector, IC5, has been reconnected so that the first digit is now selected by pin 3, the zero output.

A "clear" function

The last piece of business we have to take care of to satisfy our original design criteria is to create a keyboard "clear." Now that the latches are in place, that becomes a simple problem. The CL pins of the 4508's are tied together and held at ground by R8. Throwing the CLEAR

switch (S1) on the keyboard clears the latches and they output zeros. The same "clear" signal is sent on to IC5, the digit selector, to reset that to zero as well. Diode D1 prevents the normal resetting of the digit selector from clearing the latches. Capacitor C7 should be familiar by now. It provides a power-on reset pulse for the latches so they always power up with zeros. Resistor R9 forces a high on the collector of Q1 so that hitting the CLEAR switch will cause the beep to sound.

The EN pins of the 4508's have been tied to ground. If you're going to use the Tri-State feature of the data bus, some sort of selector logic will be needed to control access to the bus. It's a "one-and-only-one" sort of situation, and you should be able to do it with a few simple gates. Which ones you use will depend on the particular application, but the basic continued on page 160

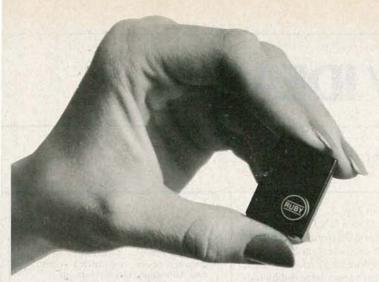

Bionic "Ears"

Tiny, powerful electronic sensors give you superhearing — through walls, up to 1/2 mile away.

The Dyna-Mike **Transmitter**

It's smaller than a quarter. But DYNA-MIKE will transmit every sound in the room to an FM radio tuned to the proper unused frequency, up to half a mile away

If you're at a neighbor's home a block from your own, you can hear your baby's cry, or you can tell the instant your spouse comes home. If two of you are driving tandem in two cars, one or both of you can communicate with the other even if other cars drive



even if other cars drive between you.

DYNA-MIKE has as many uses as your imagination can think of. For a business conference, let the tiny microphone sit unobtrusively on the table or concealed on a shelf, and you'll be able to record every word. For businesses, put an FM receiver in a warehouse or remote office and "broadcast" instructions or orders to be filled.

Public speakers never had a better friend than

Public speakers never had a better friend than the DYNA-MIKE. No wires or setup — just turn on one or more radios and your speech will come through with perfect fidelity. Put one on the front porch. If you hear a suspicious sound, turn on the radio and you'll hear the doorbell or even a muttered conversation.

Choose Your Model

New Horizons is introducing three models of the DYNA-MIKE supersensitive broadcast microphone. Model AR-7 is the world's smallest microphone. it's a miracle of electronic miniature power, with a range of 750 feet and a battery life of 90 hours. Introductory price is \$129.95 (two for \$119.95)

each).
Model 9-DX is a long-range microphone,
broadcasting an unbelievable half-mile distance.
This miniaturized wonder is \$149.95 (two for only
\$139.95 each). Normal battery life is 25 hours, or
you can have the special Power-Pak, which
operates 200 hours, for \$19.95.
The AR-7 and 9-DX are sensitive. They'll pick up

sounds from 40 feet away. But for super-sensitivity, nothing beats the A-5.

The A-5 will pick up a whisper from more than 60 feet away and broadcast it to a receiver 750 feet distant. The A-5 comes with a special 200-hour long-life battery and is introductory-priced at \$99.95 (two for only \$89.95 each).

The Telephone Voice Changer

It's right out of James Bondt Push a button and the VOICE CHANGER gives your voice completely different characteristics. The person on the other end of the phone won't

know it's you.

The VOICE

CHANGER is more than an "electronic handkerchief" - it doesn't cause your voice to sound filtered. It literally changes tone and timber

Choose from two separate, distinct Changer Channels. If you're alone in a business office, it'll sound like an employee answering. If you live alone, you can get rid of pesky calls by pushing Channel 1 or Channel 2 and saying, "Sorry, that person isn't in.

How It Works

The VOICE CHANGER is powered by two ordinary penlight batteries. One set of lead-in wires connects to your telephone base; the other clips to the wires leading to the handset.

Pushing the button labeled "Ordinary" puts your normal voice through the line. Pushing "Channel 1" changes timber and texture. Pushing "Channel 2" creates different characteristics from Channel 1. Thus you have three voice options - your own,

plus two changed voices.

MAKE NO MISTAKE! THE VOICE CHANGER DOESN'T MUFFLE YOUR VOICE OR MAKE IT UNINTELLIGIBLE. It literally changes the quality of sound — space-age electronics at work. Use the VOICE CHANGER to reach that doctor, lawyer, or business executive whose secretary

lawyer, or business executive whose secretary knows your voice and who always is "out" when you call. Use it to screen your own incoming calls. Use it for just plain fun. Any time you like, during a conversation, push the "Ordinary" button and your regular voice returns to the wire.

The VOICE CHANGER is yours for \$99.95 — two for \$89.95 each (plus \$2.50 shipping per total order). When you consider the many uses of this brilliant electronic instrument, it's a real bargain Of

brilliant electronic instrument, it's a real bargain. Of course it has the standard New Horizons

The Super Ear

You'll hear it all. Effortlessly, you can hear not just a baby's cries, but quiet breathing — through a concrete wall a foot thick. Put the earphone in your ear and place the SUPER-EAR on the wall. That's all there is

to it. SUPER-EAR hears SUPER-EAR hears everything — and, even more astouding, hears it clearly. It's as though the wall weren't there. If you're coming home late at night and think intruders are in your residence, let SUPER-EAR find out for you. EAR find out for you. Want to know if the meeting is over in the room with the closed door? SUPER-EAR will

tell you in a second.

SUPER-EAR is undetectable from the other side

SUPER-EAR is undetectable from the other side of the wall. The quality of sound has amazing fidelity — good enough to record, and SUPER-EAR has its own built-in recorder jack.

Because SUPER-EAR is the ultimate listening device, you can use it to pinpoint hidden squeaks in your car or the source of mysterious engine noises. Construction experts use it to check for flaws or creeks in buildings. cracks in buildings

It Works Anywhere!

Ever put your ear to a railroad track to try to hear the train? Try it with SUPER-EAR. You'll hear that train many miles away. Use it as a powerful stethoscope on yourself, a friend, or a pet. You can even hear a bird's breathing.

The only source for SUPER-EAR is New Horizons. Choose from two models — Model SB-5, with ultrasensitive microphone, \$139.95 (two for only \$129.95 each); or Model SB-1, with suction-type microphone, \$99.95 (two for only \$89.95 each).

The Private Transmitter/Receiver



The NCZ-10 broadcasts on a special radio band. No one without equipment can hear your transmitted messages. The reception is unbeliev-

ably clear and bright mercial broadcast quality.

Your receiver clicks into any of three separate channels. In the suburbs the range is up to 2000 feet, and in the city 850 feet

With your special receiver is an inconspicuous high fidelity earphone. You can put three transmitters in three locations and then switch back and forth, monitoring all three. Someone with an FM or police band receiver can tune his dial all day, but he won't pick up these signals. With two receivers, you can have a complete

two-way system without the inconvenience and annoyance of the semi-public CB channels. The

NCZ-10 channels are private.

NCZ-10 channels are private.

This professional-quality electronic miracle is easy to use and completely dependable. Monitor your baby's room. Leave a transmitter in an inconspicuous place in your office or your home, and you'll hear anything going on in that room.

One NCZ-10 receiver with one transmitter is \$279.95; with two transmitters (two separate bands), it's \$379.95; with three transmitters (three separate bands), it's \$479.95.

For a complete private communications system, order two receivers, each with a transmitter (we'll send them with different bands). Special highperformance batteries enable you to operate the receiver for 40 hours continuously, the transmitter for 35 hours

We Absolutely Guarantee!

Use any electronic instrument acquired from us for up to 30 days. If you decide for any reason you don't want to keep it, return it for a 100% refund.

ORDER TOLL-FREE

For fast delivery on credit card orders, call toll-free 24 hours a day, seven days a week:

800-824-7888

Ask for Operator no. 55 (in California, call 800-852-7777)

Or send check or money order. Please add \$2.50 per total order for shipping. Order any or all these state-of-

- total order for shipping. Order any or all these statethe-art electronic instruments:

 Dyna-Mike AR-7, \$129.95
 (two for \$119.95 each)

 Dyna-Mike 9-DX, \$149.95
 (two for \$139.95 each)

 9-DX rechargeable power-pak, \$19.95

 Dyna-Mike A-5, \$99.95
 (two for \$89.95 each)

 Super-Ear Model SB-5 microphone, \$139.95
 (two for \$129.95 each) (two for \$129.95 each)
 - * Super-Ear Model SB-1 microphone, \$99.95 (two for \$89.95 each)
 - * Voice Changer, \$99.95 (two for \$89.95 each)
- NCZ-10 transmitter and receiver, \$279.95 (two transmitters, one receiver, \$379.95) (three transmitters, one receiver \$479.95)

NEWHORIZONS

DEPT. RE-4 • 245 Fifth Ave. • New York, NY 10016

NEW IDEAS

Crystal tester

IF YOU FREQUENT HAMFESTS, ELECTRONics flea markets, or any other type of surplus outlet, you know the pros and cons of buying from those sources. On the one hand, they're an excellent source of hard-to-get parts as well as a haven for bargain hunters. On the other, however, just about everything is sold "as is," with no guarantee of any kind—it's strictly "let the buyer beware." If you've ever come home with a pile of components, only to find out that half of them were useless, you know that not all bargains are what they seem.




FIG. 1

The ideal solution to that problem, of course, is to find some way to weed out the obviously bad parts before you buy them. The circuit I'll be describing here has proved useful for just that purpose when digging through stacks of crystals, as well as in troubleshooting my equipment. It is small, easy-to-build, and will, at a glance, let you know if a particular crystal will oscillate. Let's look at the

circuit shown in Fig. 1.

Transistor Q1, a 2N3563, and its associated components form an oscillator circuit that will oscillate if, and only if, a good crystal is connected to the test clips. The output from the oscillator is then rectified by the two 1N4148 diodes and filtered by C1, a .01-μF capacitor. The positive voltage developed across the capacitor is applied to the base of Q2, another 2N3563, causing it to conduct. When that happens, current flows through LED1, causing it to glow. Since only a good crystal will oscillate, a glowing LED indicates that the crystal is indeed OK. The circuit is powered by a standard nine-volt transistor-radio battery and the SPST pushbutton power-switch is included to prolong battery life.

The circuit is easy to build, with size—for easy portability—the only real consideration. While just about any construction technique will work well, it's easiest to use a small piece of perforated construction-board.

To use the crystal tester, simply connect a crystal to the test leads and close the SPST pushbutton power-switch. If the crystal is OK, the LED will glow brightly. If the LED does not glow, or just glows dimly, the crystal is bad and should not be used.

One note on the intended use for the tester is in order here, however. This tester will check any crystal for oscillation. However, it will not necessarily make the crystal oscillate at the frequency that it is supposed to; so you can't use this tester with a frequency counter to test for that. What the circuit will do is give you a way to quickly weed out crystals that are obviously bad, and, after all, that is half the battle.—Jack Fernandes

NEW IDEAS

This column is devoted to new ideas, circuits, device applications, construction techniques, helpful hints, etc.


All published entries, upon publication, will earn \$25. In addition, Panavise will donate their *model 333*—The Rapid Assembly Circuit Board Holder, having a retail price of \$39.95. It features an eight-position rotating adjustment, indexing at 45-degree increments, and six positive lock positions in the vertical plane, giving you a full ten-inch height adjustment for comfortable working. (See photo below.)



I agree to the above terms, and grant Radio-Electronics Magazine the right to publish my idea and to subsequently republish my idea in collections or compilations of reprints of similar articles. I declare that the attached idea is my own original material and that its publication does not violate any other copyright. I also declare that this material had not been previously published.

Title of Idea		
Signature		
Print Name		Date
Street	State III	
City	State	Zip

Mail your idea along with this coupon to: New Ideas Radio-Electronics, 200 Park Ave. South, New York, NY 10003

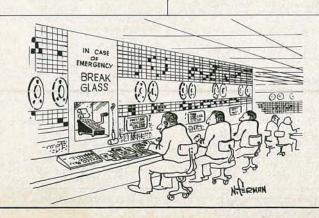

VARIABLE MHZ DOWNCONVERTER

ANTENNA KIT \$1695 31 SPACERS MOUNTING BRACKET 6" RG 174 COAX 'F' CONNECTOR • 35" ROD 61/2" x 4" P.V.C. PIPE 2 DRILLED END CAPS HARDWARE

OWER SUPPLY



POWER TRANSFORMER COURSE TUNE POT. FINE TUNE POT. 3 'F' CONNECTORS RESISTORS & CAPS LED WITH HOLDER TERMINAL STRIP

P.C. BOARD RF CHOKE KNOB WIRF 2 SWITCHES 4 DIODES LM 317 REG.

WOOD GRAIN CABINET WITH SILK SCREENED front and back \$10.95 Extra

BUILT POWER SUPPLY.....\$34.95

PARTS

Converter P.C. Board
Distant the second
Plated through holes
for stability\$4.95
Power Supply
P.C. Board2.95
P.C. Board2.93
MRF 9012.00
NEO21354.95
2835 Diodes95
.001 Chip
Caps 10/3.95
Choke Set of 41.95
LM 317 Regulator 1.25
'F' Connectors
Chassis50
Wall Transformer
12 VAC 700 MA4.95
'U' Bolt95
BALUN
75 to 300 ohm1.95
BALUN
for rabbit ears2.95
*RG 59/U COAX
WITH CONNECTORS

FACTORY MADE \$17.50 50 Ft. 9.50 25 Ft. 3 Ft.



BOARD PRE-DRILLED P.C. SOLDER PLATED WITH PLATED THROUGH HOLES FOR A MORE STABLE PIC-2137 HOT TRANS ... TURE.

MRF 901 TRANSISTOR

HP 2835 Diodes

.001 Chip Caps.

Resistors

Prewound chokes Electrolytic Cap.

Pre Made Probe

* WIRED P.C. BOARD TEST-ED, READY TO CONNECT TO CAN WITH PROBE & CABLE CONNECTOR ATTACHED.

\$24.95

We will tune converter board for \$12.50 trouble shoot add7.50 trouble shoot

power supply..\$12.50

plus any parts needed

We will accept telephone orders for Visa & Mastercard No C.O.D. Orders

10 pcs

25 pcs.

100 pcs. 1000 pcs.

DCS.

Complete

Down Converter

System

INCLUDES

ANTENNA KIT POWER SUPPLY KIT

CONVERTER KIT

SPECIAL \$49.95

QUANTITY

DISCOUNTS

Any Price in Adv.

No Mixing for

Quantity Discount

12% off 18% off 25% off 30% off 35% off

To Order Call 800-428-3500 317-291-7262 Complete Kit Weighs 10 pounds. Please add Sufficient Postage 6254 La Pas Trail Indianapolis, Indiana 46268

ELECTRONIC RAINBOW

SATELLITE TELEVISION RECEIVER



Rainbow makes a top-of-the-line Receiver affordable

The Electronic Rainbow Receiver consists of a receiver with an external down-converter that mounts at the antenna, feeds the voltage to the LNA through the coax cable. The 4GHz signal is down converted to 70 MHz and is fed through the RG59/U coax to the receiver. Rainbow Kits are supplied with simple step by step in-structions. All the circuits that you need expensive test equipment to do are pre wired and tested. All printed circuit boards have the outline of each part printed on

RECEIVER FEATURES

Built in RF modulator • Detent Tuning-3.7 to 4.2 GHz • Variable Audio-5.5 to 7.5 MHz • Invert Video • Channel Scan • Voltage monitoring • Meter output • Remote Tuning SPECIFICATIONS:

SPECIFICATIONS:
Single Conversion Image Rejection
Downconverter ● Threshold 8 db
CNR ● IF Bandwidth 24MHz ● Output IV Audio and Video ● IF Frequency 70MHz ● Video Bandwidth
4.5MHz ● Size 3½"Hx8½"Dx11½"W

Complete Satellite TV Receiver

KIT #1 — Contains:

- Mainboard Tuning Board Down-converter Board Modulator Board All parts needed to complete receiver Down Converter built in case.
- Cabinet, attractive black brushed ano-dized metal with silk screened front and back for a professional look 70 MH2 Filter is pre-wired and tested.
- Complete instruction \$395.00 Manual.


- KIT #2 Board Kit Contains: Main Board Tuning Board Downconverter board • Modulator Board
- Parts List, assembly and alignment
- 4GHz local oscillator and 70MHz filter is pre-wired and tested. \$129.00

Instruction manual. Contains printed circuit board layouts, parts placement, and alignment instructions. \$25.00

Ask about guaranteed to play

We will accept telephone orders for Visa & Mastercard No C.O.D. Orders


To Order Call 800-428-3500 317-291-7262 Complete Kit Weighs 10 pounds. Please add Sufficient Postage 6254 La Pas Trail Indianapolis, Indiana 46268






TRIPLETT

LEADER



KEITHLEY





- Mode automatically shifts between CHOP and ALTERNATE
- Bright P31 blue phosphor
- Front-panel X-Y operation
- Differential input capability
- 19 calibrated sweeps—.5μSEC/cm to .5SEC/cm
- Sweep to .1μSEC/cm with 5x;
 1.5SEC/cm with uncalibrated vernier

PRECISION

30 MHz TRIGGERED SCOPE



MODEL 1479B

CALL FOR OUR GRAND OPENING PRICES

- Built-in signal delay line permits view of leading edge of high frequency pulse rise time.
- Triggers on signals up to 50MHz
- Rectangular CRT with P31 phosphor
- Mode automatically shifts between CHOP and ALTERNATE

BK PRECISION

MODEL

1570

70 MHz. Dual Time BASE SCOPE



GRAND OPENING
PRICES

- 1 mV/division sensitivity to 70 MHz
- 500 µV/division cascade sensitivity
- Four-input operation provides trigger view on 4 separate inputs.
- Alternate time base operation
- Switching power supply delivers best efficiency and regulation at lowest weight

BH PRECISION


100MHz Dual Time BASE SCOPE



- 1mV/division sensitivity to 100MHz
- 500µ V/division cascade sensitivity
- 2ns/division sweep rate with 10× magnifier
- Four-input operation provides trigger views or four separate inputs
- Selectable 1MΩ or 50Ω inputs
- Alternate timebase operation
- 20MHz bandwidth limiter for best view of low frequency signals
- Lighted function pushbuttons employing electronic switching with non-volatile RAM memory
- Switching power supply delivers best efficiency and regulation at lowest weight
- Selectable frequencies for chop operation
 PRICE DOES NOT
 INCLUDE PROBES

KEITHLEY

DIGITAL MULTIMETERS

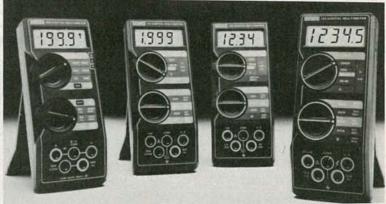

Model 128: Beeper DMM designed to meet the tough specifications of a major computer manufacturer. See/hear display includes over/under arrow and on/off beeper.

Model 131: 0.25% accuracy added to the easiest to use handheld DMM. Color-coded front panels for maximum clarity, minimum confusion.

Model 128: \$139.00 Model 130: \$124.00 Model 130: Keithley user research led to unique DMM designs. Easy to read LCDs, largest DMM displays on the market.

Model 135: First 4½-digit handheld DMM, ideal for analytical/bio-medical service. 10A range standard on all Keithley handhelds.

Model 131: \$139.00 Model 135: \$235.00

ORDERING We don't just take orders-we ship orders Advance Electronics endeavors to keep everything we advertise in stock for

immediate delivery.




VISA

Mastercharge & Visa shipped within 24 hours.

Bank checks or Money Orders shipped within 24 hours.

- Personal checks please allow 3 weeks for check to clear.
- All prices plus shipping charges. Please call for appropriate charges. Use our toll free number.
- New York State residents add appropriate sales tax.
- PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

Quantities are limited




DATA PRECISION




VIZ ROA

HICKOK



HITACHI OSCILLOSCOPES



V134	10 MHz	Dual Trace	Storage
V202	20 MHz	Dual Trace	
V203	20 MHz	Dual Trace	w/delay sweep
V209	20 MHz	Dual Trace	Portable
V352	35 MHz	Dual Trace	w/delay line
V353	35 MHz	Dual Trace	w/delay sweep
V509	50 MHz	Dual Trace	Portable w/delay sweep
V650	60 MHz	Dual Trace	w/delay sweep
V1050	100 MHz	Quad Trace	w/delay sweep
All in St	ock Ready	for immediate	shipment.

Call for our Special Grand Opening Prices.

All Hitachi Oscilloscopes feature 2 year parts and labor warranty.

41/2 DIGIT MULTIMETERS

MODEL 8060A

Frequency measurements to 200KHz



ments Basic dc accuracy 0.04%; 10 μV, 10 nA and 10 m Ω

sensitivity.

- Relative measurements
- True RMS

■ High-speed Beeper

INDUSTRIAL PRECISION TRANSISTOR TESTER \$189°5

was \$239 MODEL 520B

- Now with HI/LO Drive
- Works in-circuit when others won't
- Identifies all three transistor leads
- Random lead connection
- Audibly and visually indicates GOOD transistor





MODEL 1601

was \$354

- Isolated 0-50VDC, continuously variable; 0-2A in four ranges
- Fully automatic shutdown, adjust-able current limit
- Perfect for solld state servicing

POWER SUPPLIES



was \$375

MODEL 1650

- Functions as three separate suppl-
- = Exclusive tracking circuit
- Fixed output 5VDC, 5A
- Two 0 to 25VDC outputs at 0.5A
- Fully automatic, current-limited overload protection

Continuity and relative reference functions identical to 8060A.

True RMS measurements to 30 kHz.

Basic do accuracy 0.05%; 10 μV, 10 nA and 10 $m\Omega$ sensitivity.

Beeper

\$279°°



MODEL 8062A

PRECISION



MODEL 3010

- Sine, square and triangle output
- Variable and fixed TTL outputs
- = 0.1 Hz to 1MHz in six ranges
- Push button range and function
- Typical sine wave distortion unde 0.5% from 1 Hz to 100kHz

FUNCTION GENERATORS

MODEL 3010

was \$220.

MODEL 3020

was \$379.

SWEEP FUNCTION MODEL 3020

- Four instruments in one package— sweep generator, function generator, pulse generator, tone-burst generator
- Covers 0.02Hz-2MHz

PRECISION



MODEL 830

- Automatically measures capacitance from 0.1pF to 200mF
- 0.1pF resolution
- 0.2% basic

CAPACITANCE METERS



\$149⁹⁵ | was \$185.



MODEL 820

- Resolves to 0.1pF
- 4 digit easy-to-read LED display
- Fuse protected against charged

PRECISION COLOR PATTERN GENERATOR



MODEL 1210

- Generates 10 stable patterns in-cluding crosshatch, 7×11 dot, gated rainbow and purity.
- Compact for convenient field ser vice use



TOLL FREE HOT LINE THE TEST EQUIPMENT SPECIALISTS ELECTRONIC

26 WEST 46th STREET, NEW YORK, N.Y. 10036 212-730-7030

HOBBY CORNER

Versatile timer circuit EARL "DOC" SAVAGE, K4SDS, HOBBY EDITOR

LAST MONTH WE DISCUSSED A SOLUTION to Bob Allen's problem of adding timers to his "touch-plate" home-lightingsystem. It involved the use of a regular mechanical timer (or clock) along with a 555-timer circuit to put out the proper type of pulse. Each timing sequence, of course, required a separate timer circuit. Now we'll look at a method that can be used for any number of timing sequences and uses just one digital clock.

A typical timer—even if it is the type that can be set to activate a device several times over 24 hours-has only one output. An alarm clock (digital or otherwise) can be used to control an external circuit also (instead of only sounding an audible alarm) but it will give only one output in

There is, however, a way in which a digital clock can be modified to turn on a radio, light, and coffee-maker (or other devices) at three (or more) independent times. Any commercial digital clock can be modified, although it is admittedly easier to modify a clock kit as you build it.

LED readouts

To understand what we are about to do, let's take a close look at the digital readouts in the clock. Figure 1 shows the seven segments of such a readout with the

AN INVITATION

To better meet your needs, "Hobby Corner" will undergo a change in direction. It will be changed to a question-and-answer form in the near future. You are invited to send us questions about general electronics and its applications. We'll do what we can to come up with an answer or, at least, suggest where you might find

If you need a basic circuit for some purpose, or want to know how or why one works, let us know. We'll print those of greatest interest here in "Hobby Corner." Please keep in mind that we cannot become a circuitdesign service for esoteric applications; circuits must be as general and as simple as possible. Please address your correspondence to:

Hobby Corner Radio-Electronics 200 Park Ave. South New York, NY 10003




FIG. 1

In Fig. 2, the columns are headed by the labels of the segments and the digits displayed (shown at the left) identify the rows. If there is a dot in a block, that segment (column) is on when the readout shows the digit (row). A "1," for example, has segments "b" and "c" lighted. The most significant information in the table, however, is given by the circles and squares. They indicate the segment combinations unique to each digit. (A circle means the segment is on and a square means the segment is off).

For example, when a 0 is displayed, the "f"-segment is on and the "g"-segment is off. For no other digit is that true. You

								per un a market de la company
	a	6	С	d	e	f	9	UNIQUE
Ø				•		0		ION/IOFF
Ī		•						2 OFF
2				•	15.			1 OFF
3	•		1	•			0	10N/20FF
4						•	0	10N/20FF
5	0					Y .		ION/IOFF
6								2 OFF
7	0							10N/20FF
8		0	0		0		0	40N
9	0		•				0	20N/10FF
		Train				N. F		

labels ("a" through "g") by which they are identified. There is usually another point-segment located at the upper left or lower right that is used for decimals, colons. AM/PM and alarm-set indicators, and so on. Some clocks also have specialized readouts with dots, colons, AM, PM and other special configurations of seg-

In those displays, however, the digits 0 through 9 are created by lighting specific groupings of those segments. Figure 2 shows several interesting things about the way those digits are formed.

can easily see that by glancing at the table—"f" is on and "g" is off in no other row. Thus, if we check only those two segments, we will know immediately whether the digit being displayed is a 0.

Similarly, checking the "c"-segment is a sure way to determine whether the display is a 2. In no other digit is that segment off. In like manner, you can check segments "a" and "b" to find out whether the digit is 5 or 6 and, if so, which it is (because while both have segment "b" off, 5 has the "a"-segment on and 6 has it off).

Mention this magazine and get a free gift

Backed by Albia's famous warranty.

DESIGN MATE™ 2B LOW COST. HAND HELD FUNCTION GENERATOR

SPECIFICATIONS

Frequency Range: 10 Hz to 100 KHz in four ranges; 50 increment 10/1 cali-

brated dial calibrated within ± 5% of setting @ 10 Hz, 1

KHz and 100 KHz, 10 KHz.

2% THD over Frequence Range (Typical Waveforms: Sine Wave: 1%); Triangle Wave: linearity better than 1% over frequency range; Square Wave: rise and fall times

nsec (Typical 100 nsec).

Outputs: Sine/Triangle - switch selectable; amplitude

10V peak to peak: impedance 600 Ohms; Square Wave - amplitude 0.1V to 10V peak to peak:

impedance 600 Ohms.

Power Reg.: 105 - 125 VAC, 50/60 Hz, 2.5 Watts 6.25" × 3.75" × 2"

Size:

MODEL NO. DM-2B STOCK NO. 15-0102

INCLUDES ALBIA'S FULL SATISFACTION WARRANTY



LOW COST FREQUENCY METER MODULE DM-11 "5Hz to 100MHz"

Measure frequencies from 5Hz to 100MHz on your digital Voltmeter with a resolution of 3½ digits — easy to use — perfect for field service — lab testing - home hobbyist! Connect the DM-11 to your DVM, set the DVM to the 2VDC range, connect a signal to the DM-11 via a BNC cable (not included) and measure the frequency of any source. Hi Lo Range LEDs ensure fast accurate readings



SPECIFICATIONS

- Frequency Range 5Hz to 100MHz
 Input Impedance 1 MegOhm
- 100Hz 80MV 100Hz 60MHz 30MV 60MHz 70MV - Input Sensitivity:
- Size 6.25" × 3.75" × 2"
 External 9V DC power supply included
- BNC input cable accessory Model PSA-2 Stock No: 110027 add \$14.99

MODEL NO. DM-11 STOCK NO. 15-0011

LOW COST DM-8 CAPACITANCE METER MODULE

Connect this high quality low cost Capacitance Meter Module, DM-8 to your digital Volt Meter and turn it into a Digital Capacitance Meter - the Low Cost Way!




SPECIFICATIONS

- 2V output
- Accuracy better than 5%
- Push to read range (button) from 1 pF to 20,000 F
- Zero Calibration control
- In one easy to use, self-contained package.
- Battery powered, with "push to read" battery saver circuit
- (9V batteries not included). Size 6.25" × 3.75" × 2"
- Includes Model 336 Test Clips

MODEL NO. DM-8 STOCK NO. 15-0008

Includes Albia's Satisfaction Warranty

PRICES & SPECIFICATIONS SUBJECT TO CHANGE . SPECIAL ENDS MAY 30th



FOR FASTER SERVICE **USE YOUR** CREDIT CARD.

44 KENDALL STREET

NEW HAVEN, CT. 06512 MOST ORDERS SHIPPED NEXT DAY.

CALL TOLL FREE 1-800-243-6953



EST





PAIA Electronics, Inc.

1020 W. Wilshire , Oklahoma City, OK 73116 (405)843-9626

Rush my Vocal Zapper Kit, \$24.95 plus \$3 postage & handling enclosed.

Send assembled Vocal Zapper, \$39.95 plus \$3 postage age enclosed.

Send Free Catalog name_______
address________
city_______ state ______ zip______
PAIA Electronics, dept 3R 1020 W. Wilshire, Okia, City, OK 73116

CIRCLE 46 ON FREE INFORMATION CARD

YOUR EXCITING NEW HOBBY!

- Enjoy fantastic savings by assembling your own organ or piano.
- It's easy. No technical knowledge required.
- Just follow our clear, pictured instructions.
- Choose from many models from portables to consoles.
- Ask about our interest-free installment plan.





WERSI Dept. M40 P.O. Box 5318 Lancaster, PA 17601

☐ Free Info. Pack: ☐ Organ ☐ Piano ☐ Catalog & Demo Record renclose \$60

Address		
City	State	Zip
Phone ()	LI NA TINE	100

Rep inquiries invited

Suppose, for example, we wanted to activate a circuit at 5:30. It could be lights, a coffee maker, the radio, or almost anything at all. You can use simple IC gates to determine when the hours digit gets to 5 and the ten-minutes digit gets to 3.

Reading the display

There are a great many ways that can be done. Fig. 3 shows just one of them. You can track through those gates and see that only when the hours display shows 5 and the ten-minute display shows 3 will the relay be actuated. Note that the relay is one of the many sensitive types made for low-power use. Normally, the contacts of those relays will not handle much current. and the control of high-current external circuits will require a change in the output. If you are operating a coffee-maker, for example, you can make one of two changes. You can use the light-duty relay to operate a relay with high current capacity or, as an alternative, have the final gate operate the heavy-duty relay through a transistor switch.

As shown in Fig. 3, the relay will be actuated at 5:30 AM and 5:30 PM. If that is not desirable, you should add another gate or two to "read" the clock's AM/PM indicator and combine it with the output from the two digits. In a 24-hour clock, you could read the tens-of-hours digit for that determination, though for the same time you would check the unit-hours digit for a "7" (as in 1730 hrs—the same as 5:30 PM) instead of "5."






FIG. 3

If your use requires an output in the form of a pulse (as Bob Allen needs for his touch-plate lighting system), you may put one of the circuits in Fig. 4 between the final gate and the relay. For a pulse on the falling edge, use the circuit shown in 4-a. Use the one shown in 4-b for detection of the leading edge. Figure 5 shows one of many possible ways to extend the versatility of your system. The divide-by-seven counter will operate the external circuit only once a week! (Sunday morning?)

Well, so far, so good. But how are you better off than if you had used the alarm already built into the clock? As stated earlier, that will allow you only one activation each 24 hours (unless it is reset daily). In this system, however, you can





connect several gates to the same segments and have any practical number of external circuits controlled by that one clock. It is unlikely, but if your need exceeds the available "fan-out" of the clock drivers, you can insert a buffer gate to increase the capacity.

The major disadvantage of the system presented here is the problem of changing the time of activation of any given circuit. The best way I have found to get around that is to install a panel of small switches by which segment combinations and/or gate configuration can be changed. It isn't entirely satisfactory, but it does work reasonably well.

Often a system like the one described here is used for a dedicated purpose—for example, only to control various groups of lights in the evening. In that case, you can adjust to daylight saving time and changing hours of sunset just by resetting the time on the clock. Then, the separate circuits will remain synchronized and, as a result, will not have to be changed individually.

R-E



"Brilliant, Master but is it a marketable application of VLSI technology?"

STATE OF SOLID STATE

An interesting expander circuit for your hi-fi

ROBERT F. SCOTT, SEMICONDUCTOR EDITOR

IN THIS COLUMN, WE TRY TO BRING YOU news and details of new and interesting semiconductors and related matters without any month-to-month continuity. This month, because of long-time reader interest in volume expanders and audio noise reduction, we are deviating from the established format to show the circuit of the volume expander that complements the volume compressor discussed last month.

The hi-fi expander in Fig. 1 includes de-emphasis and attack and decay times to complement the compressor. Again, an external op-amp is substituted for the one in the Signetics NE570 compandor IC. In this case, the circuit performance demands a slew rate better than the 0.6 volts-per-microsecond provided by the NE570 op-amp. The expander, like the compressor, has a unity-gain level of 0 dBm. Adjustments are provided for harmonic distortion and DC shift.

Make the THD TRIM adjustments first using a 10-kHz 0-dBm (774.6 mV) signal. Adjust the DC SHIFT TRIM for minimum envelope bounce when tone bursts are fed through the circuit.

Performance is reported to be spectacular when the expander is applied to consumer tape recorders.

Op amp and voltage-reference IC

The National Semiconductor LM10-

series comprises a group of monolithic linear IC's consisting of a precision voltage reference, an adjustable reference buffer, and an independent high-quality op-amp. The device has an absolute maximum supply-voltage rating of 45 volts for the LM10, LM10B, and LM10C; and 7 volts for the LM10BL and LM10CL. Supply voltage can be as low as 1.1 volts. Typical supply current is 270 μA .

The complementary output stage in the independent op-amp is capable of swinging to within 15 mV of the supply voltage or delivering +20-mA output current with +0.5 volt saturation. The reference output can be as low as 200 mV with 0.1% regulation.

The LM10's ability to operate from a single power supply with high output-current capabilities make it a very versatile general-purpose device. It can operate in a floating mode, independent of fixed supplies so it can be used in such applications as remote amplifiers for vibration sensors, flame detectors, resistance thermometers, optical pyrometers, and logarithmic light sensors. Its ability to operate from a wide range of voltages and currents makes the LM10 applicable in a wide range of voltage and current regulators.

The LM10 features such characteristics as 2.0 mV (max) input offset voltage,

0.7 nA (max) input offset current, 20 nA maximum input bias current, and offset-voltage drift of 2 microvolts-per-°C. The device comes in a metal can and an 8-pin dual-in-line package.

Full electrical specifications, including 33 typical-performance-characteristics charts are in the 15-page data booklet along with 33 schematics illustrating typical applications.—National Semiconductor, Literature Dept., M/S 16251, 1090 Kifer Rd., Sunnyvale, CA 94086

SCR's go MOS


Motorola's new state-of-the-art MCR1000 series of SCR's uses MOS technology to offer the designer three devices that have the high input-impedance and fast turn-on time of a power MOS-FET and the regenerative latching action of a thyristor. The new 200-ns turn-on SCR's can be driven directly from logic circuits without the need for interfacing devices.

The MCR1000 MOS SCR series has a 15-amp current rating and is designed primarily for high-speed switching and high-current pulse applications such as laser modulators, printers, fluorescent lighting, and switching power supplies. Features include: A forward voltage application rate of 1000 volts-permicrosecond at $T_j = 125$ °C and a fast switching (turn-on) time of 200 ns at $T_j = 25$ °C. (T_i is the operating temperature)

25 °C. (T_j is the operating temperature.)
The MCR1000-4, -6 and -8 devices are in TO-220 packages and feature peak forward blocking voltages of 200, 400, and 600 volts, respectively. Prices are \$5.20, \$5.70, and \$6.90 in 100-999 quantities.—Contact Chris Field, **Motorola Semiconductor Products**, PO Box 20912, Phoenix; AZ 85026

1-watt power MOSFET's

International Rectifier has introduced a family of four new n-channel transistors using the company's HEXFET technology. A particular advantage of the devices is their low on-state resistance—about half that of many similar devices. Designated IRFD1Z0 through IRFD1Z3, the four devices have typical rise and fall times of 15 ns and 10 ns, respectively when I_D (continuous drain current) is 0.25 A. On-state resistance is 2.4 ohms for the IRFD1Z0 and -1Z1 and 3.2 ohms for the IRFD1Z2 and -1Z3.

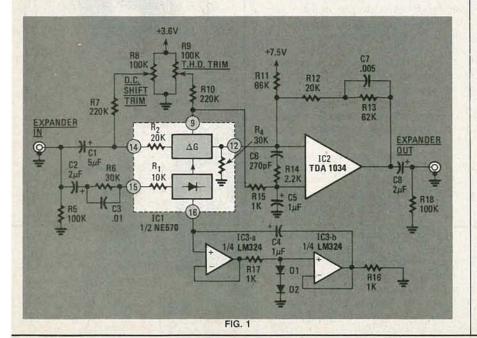

CABLE TV CONVERTERS DESCRAMBLERS

BUY DIRECT & SAVE



40 CHANNEL CONVERTER \$38 Regular \$69

Advanced Solid State design and ciruitry allows you to receive mid & super band channels. Restores programming to Video Recorders



36 CHANNEL REMOTE CONTROL CABLE CONVERTER \$88.00

LINDSEY JET 1 WIRELESS THE ULTIMATE CABLE T.V. CONVERTER



36 CHANNEL **INFRARED** REMOTE CONTROL COMPLETELY \$169.00 PROGRAMMABLE

Send \$1 for Complete Catalog VISA . MASTERCARD . COD

DIRECT VIDEO SALES

P.O. BOX 1329 JEFFERSONVILLE, INDIANA 47130

> CALL TOLL FREE 1-800-626-5533

CIRCLE 41 ON FREE INFORMATION CARD



MICROCOMPUTER

A superb learning tool for students, instructors, hobbyists.

Nothing else needed. Just plug in and start learning! Complete experimenters manual, easy instructions. 18 experiments. Fully expandable for Z80-CTC, Z80-PIO, EPROM, Breadboarding and prototyping. Invest with confidence. Now only \$129.95, two for only \$239.95 2KB BASIC interpreter now available, only \$19.00. Full money back guarantee!

*Olus-*FREE GIFT

☐Check this box for FREE -80 Microprocessor Programming and Interfacing textbook when you order within 7 days. \$12.95 value.



ETRONIX Dept. RE-043 1-800-426-1044

NAME	WA 98052	11 2 77	16
ADDRESS	THE SELECTION		11
CITY		ST	ZIP
□ VISA	☐ MSTCRD	EXP	NEW YAR
ACCT. NO.			E 00

Prices for those devices range from \$0.89 to \$1.16 in OEM quantities .-International Rectifier, Semiconductor Div., 233 Kansas St., El Segundo, CA 90245

Phase-locked-loop

The Exar XR-2213 is a highly stable phase-locked-loop IC designed for use in tone-detection applications and in FM detectors, tracking filters, and frequency synthesizers. Its circuit consists of a highstability VCO, an input preamp, loop phase detector, lock phase detector, and a high-gain voltage comparator.

The XR-2213 has an operating frequency range of 0.02 Hz to 300 kHz and a preamp input voltage range of 2 mV to 3 V rms. The VCO and comparator supply TTL-compatible output signals and both Q and \overline{Q} outputs. The 5-page data sheet includes design equations and examples along with circuit diagrams that illustrate various applications. Sample circuits include a tone detector, and a frequency synthesizer developing a 40-kHz output from a precision 10-kHz input signal.-Exar Integrated Systems, 750 Palomar Ave., Sunnyvale, CA 94088.


Semiconductor substitution guide

The Power Semiconductor Cross-Reference Guide, from Westinghouse, covers all rectifiers, transistors, SCR's and assemblies available from the company. It includes more than 10,000 JEDEC, Westinghouse, and competitive part numbers from 23 manufacturers. The guide is free -Westinghouse Corp., Semiconductor Div., Youngwood, PA 15697.

Linear-IC guide

Audio/Radio Products is a 19-page booklet prepared to introduce National Semiconductor's line of linear IC's for use in radio and audio products. Section 1 contains a 69-entry glossary of terms, definitions of maximum ratings and other IC parameters; and a check-list of do's and don't's for optimum performance from IC's. This check-list covers everything from power-supply selection and bypassing to circuit layout and heatsinking. Section 2 is the selection guide, listing devices under such application headings as tape processors, audio driver IC's, stereo decoders, audio power-amplifiers, and tone-control amplifiers. Key technical specifications are listed in tables and charts. Section 3 is a pocket containing about 2 dozen data sheets of typical devices that are covered in the previous sec-

The glossary and check-list alone make this booklet a valuable addition to the libraries or technical data files of engineers, designers and others interested in IC's for radio and low-power audio applications.-National Semiconductor Corp., 2900 Semiconductor Drive. Santa Clara, CA 95051.

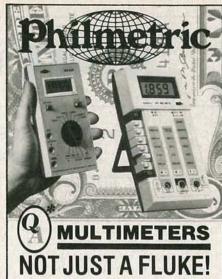

Compare new Philmetric Multimeters for performance, accuracy and price. Discover the quality that's no accident, yet costs far less. You get Pushbutton and Rotary dial Models; 0.5% accuracy; 31/2 digit readout; AC/DC; 26 Ranges; 2 year warranty

And there's more! A free \$5.00 factory-direct cash bonus when you buy our Model 150 Pushbutton - to prove that Philmetric measures up as the "best buy"...*Quality-Assured for Performance and Price.

Send for Free Catalog & Details. "We Measure Up . . . !



Philmetric Philmetric, (a Div. of Philmore Mfg. Co.) 40 Inip Drive, Inwood, NY 11696 Tel: 516-239-6161

CIRCLE 49 ON FREE INFORMATION CARD



SERVICE CLINIC

Old sets, new sets JACK DARR, SERVICE EDITOR

don't understand these new TV sets! They're so complicated. Why can't they make them simpler, like the old ones?" Friends, I've had that same feeling! But I finally managed to find the best way to attack the late models. And we can use the same methods and tests that we've always used.

We do know how a TV set works—many of us have been making a living at it for a long time. And if we know how one TV set works, we know how they all work. Believe it or not, the new sets do the same things the old ones did, and in exactly the same order. But while they do do some of those things a little differently, all the old familiar stages and functions (see Fig. 1) are still there. So, if we can diagnose problems in old sets, we can do it in new ones, too.

One thing that makes some new sets different from older ones is that whole functions can be wrapped up in a single IC. For instance many new TV sets use an IC for the whole IF strip. If the complaint is "no video," you should check to make sure that the normal signal from the tuner is getting to the IC input. (The best way is to substitute a tuner.) Then (if the signal from the tuner is getting to the IC) see whether the video signal is coming out of it. If it isn't, and the DC supply voltages are normal, then we've got a "black box" with a normal input and normal voltage supply-but no output. Hmm. Input, but no output. The signal is lost between those two points. So, what would you do in an older tube or transistor set? You'd read the DC voltages on each amplifier stage to see if any were missing. The same test can be used with the IC,

They're dandy clues to the cause of a problem. Let's say that pin 12 shows +3.6 volts, and that it should be about 12 volts. That could be a definite sign of trouble inside the IC. Usually there will be other pins that also have incorrect voltages. But before you replace the IC, be sure to check external parts, like resistors (open or changed in value), capacitors (for shorts or leakage), coils (for continuity), and so on. If you see a signal at the input but none at the output, and there's only one thing between those two points (the IC), then the chances are that it's faulty.

New circuits?

I've also heard a lot of people say, "There are so many new circuits here!" No—that's not so. Not even in the most complex all-electronic tuners. All the new tuners use VCO's (Voltage Controlled Oscillators). A new circuit? Look at the horizontal-oscillator AFC circuit in almost every TV set ever made! The AFC voltage controls the frequency of the horizontal oscillator! That's a VCO, too.

The control voltages are a good way of checking those tuners. If the tuner doesn't work, it could be a fault in the tuner itself or it could be a fault in the stage that supplies the tuning voltages; that is usually called the "tuner control unit" or another similar name. There are two control voltages. One is the tuning voltage that determines the oscillator frequency that puts the tuner on the desired channel. That voltage often goes to only one terminal on the tuner. The DC controlvoltages will change if the control unit is working. For example, the voltage might be 5-10 volts for low band VHF, 15-20 volts for high band VHF, and 25-30 volts for UHF. (Those are not actual figures; they're just for illustration.) The tuning voltages are applied to a varactor diode (voltage-variable capacitor) that does the actual tuning. In the service data, there will be (or at least there should be!) a table of tuning voltages for each band and

Anything wrong in the control stage will throw the tuner off. For example, a missing DC voltage may keep it from going to high-band VHF, while low-band stations come in. Here's a test: look up the DC voltage for given channel, say Channel 9. Feed that voltage to the tuning-

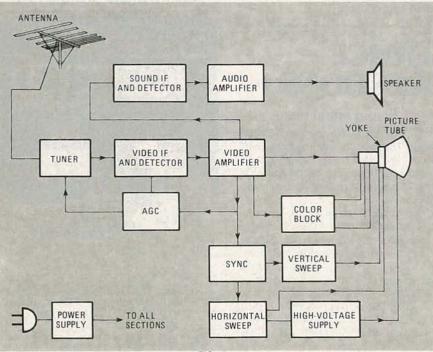


FIG. 1

Every set, old or new, has a tuner, IF amplifier, detector, video amplifier, color-amplifier stage, color detector and three color outputs. Another thing common to all the sets is that to trace trouble, you have to use the signal; follow it until you find where it is being lost, or distorted, and there you'll find the problem.


although you can't get to the individual stages.

You'll see that there are quite a few pins that have no external voltage applied, yet they show a small DC voltage. (There may be a resistor to ground, a capacitor, a coil, etc.) Those are *internal* voltages, developed inside the IC.









Be safe. Desolder PC components with Endeco irons. Get proper HEAT TO MELT and strong VACUUM ACTION TO LIFT solder and cool both PC board and component without damage.

These PC components replaced fast with Endeco desoldering or soldering tools.



Endeco professional features include safety light that denotes *high*, *low* and *off* on switch models, SS construction for long life, light weight and balance for easy use.

Contact your distributor for Endeco desoldering and soldering irons, kits and equipment—or write us today.

Enterprise Development Corp.

5127 East 65th Street Indianapolis, IN 46220 Phone: (317) 251-1231 voltage test point (from a bench DCsupply) and see whether the tuner works. If it does, the control stage is bad.

Often, the tuning-control stage is a separate unit that can be replaced without changing the tuner. That type can be repaired (if its construction permits) or it can be replaced as a unit.

Other diodes (aside from the varactors) are used in those tuners also; they are the switching diodes. Normally, there are three of them that switch the tuner from low- to high-VHF, and to UHF. The switching voltages come from the tuner control unit, just like the tuning voltages. Problems like getting only low-band VHF and the like are often the fault of the switching voltages. Always read them and compare them with the switching voltages shown in the voltage table for the tuner unit.

As we said in the beginning, there is nothing new in any of those circuits as far as function goes. They just do it in a slightly different way. (What? Show you a switching diode in a tube TV? OK: How about the B + rectifier? A 5U4 conducts or cuts off, depending on the polarity of the applied voltage. Full-wave rectification is just switching so that current can flow with only one polarity—right?)

So how do you repair a recent-model set? All you need to do is isolate the defective function, find that stage on the chassis, and then check it in the same way you've always done.

SERVICE QUESTIONS

SOUND PROBLEM

I have a sound problem in this GE 10HE chassis. The sound-IF adjustments are all "funny." They don't react normally at all. The quad coil is very critical, and so is the sound-IF tuning. I don't get it—G.G., Murphysboro, IL

Check some components around the circuit, especially bypass capacitors such as the plate-return bypass on the IF transformer, the bypass on the low end of the quad coil, and so on. I see that there's a bypass capacitor on the sound-detector tube (17BF11). Check that too.


(Feedback: Got it! It was a bad bypass on the cathode of the 17BF11. Now, everything tunes up OK and the set sounds good. Thanks.)

HANDY HINT

Jerry Ahedo of Tampa, FL sends this tip in. When he was working on a Zenith 23HC45 with no picture (or schematic), he found a 10-watt ceramic resistor that was open. The part number and value had been completely removed by overheating. He took the resistor out and held it under an ultraviolet light. All numbers.



CIRCLE 44 ON FREE INFORMATION CARD



No costly School. No commuting to class. The Original Home-Study course that prepares you for the FCC Radio-telephone license exam in your spare time! Passing the exam is your "ticket" to thousands of exciting opportunities in Communications, Broadcasting, Mobile two-way systems, Microwave stations, Radar installations, Aerospace and more-

NO NEED TO QUIT YOUR JOB OR GO TO SCHOOL YOU learn how to pass the FCC License exam at home at your own pace with this easy-to-understand, proven course. Within a few short weeks you could be on your way to being one of the highest paid workers in the electronics field. It's that easy! U.S. Federal law requires you to have an FCC License if you want to operate and maintain virtually any communications system—you don't need a College degree to qualify, but you DO need an FCC License. With this Home-Study course, you'll be ready to pass the FCC Government licensing exam in a remarkably short time. Send for FREE facts now. No obligation. No salesmen will call. MAIL COUPON TODAY!





including the value were clearly visible! That might also work for other parts where ID numbers have disappeared.

Thanks, Jerry. Ultraviolet lamps are available from several sources (check the ads in the back pages of Radio Electronics).

NO COLOR

I had several problems in a CTC-70AJ. Replacing the Chroma I module cleared up a short and restored the picture, but only in black and white. All voltages looked good on the IC, but checking with my scope, I found that, although there was a chroma signal at the input, there was none at the 3 color-outputs. I again installed a new Chroma I module, and the set worked beautifully. I can only assume that I managed to get a bad IC the first time around.—J.P., Hollywood, FL.

That happens too often, and there's not too much we can do except check and cuss.

MAN WITH A PROBLEM

Mike Shelton (Electronic Services, 2708 May Drive, Burlington, NC 27215) says that he's in desperate need of an IF module for a Heathkit GR-900 TV. The module, number 100-93502, is no longer available from Heath and no other sources have yet been found. Any help will be appreciated.

DON'T **FORGET**



USE YOUR READER SERVICE CARD



CIRCLE 37 ON FREE INFORMATION CARD

REPRINT Radio-Electron

☐ Build Your Own Satellite TV Receiver	
8-Ball Satellite TV Antenna	
☐ Build Your Own Robot	\$12.00
☐ TV Descrambler (January, February 1981)	\$3.00
☐ Video Entertainment (January 1982)	\$2.00
☐ Your Own Computer (October 1981)	
Radio-Electronics back issues (1982) (January 1982 not available) Write in issues desired	
Radio-Electronics back issues (1980) (March, May 1980 not available) Write in issues desired	\$4.00
To order any of the items indicated above, cl you want. Complete the order form below, it ment, check or money order (DO NOT SEND	nclude your pay-


to Radio-Electronics, Reprint Department, 200 Park Ave. South, New York, NY 10003, Please allow 4-6 weeks for delivery.

If you need a copy of an article that is in an issue we indicate is unavailable you can order it directly from us. We charge 50¢ per page. Indicate the issue (month & year), pages and article desired. Include payment in full, plus shipping and handling

MAIL TO: Padio Electronice

Radio-Electronics back issues (1981) \$3.5 (March, December 1981 not available) Write in issues desired
☐ Radio-Electronics back issues (1978-79)
Special Projects (Winter 1980) \$4.0 Special Projects (Spring 1981) \$4.0 Special Projects #4 (Summer 1982) \$4.0 Special Projects #5 (Winter 1983) \$3.0 Radio-Electronics Annual 1983 \$2.5 How to Make PC Boards \$2.0 All About Kits \$2.0
ARTICLE
MONTH YEA
PAGES
TOTAL PAGES @ 50¢ each


Reprint Department, 200 Park Ave. South, New York, NY 10003	All payments must be in U.S. funds
Total price of order	
Sales Tax (New York State Residents only)	
Shipping & Handling (U.S. & Canada only) (Includes FIRST CLASS POSTAG	E) \$1.00 per item \$
All other (\$2.00 per item, sea mail)	\$
Total Enclosed	
Name	
Address	
City State	Zip

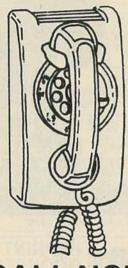

CALL NOW AND RESERVE YOUR SPACE


- 6 × rate \$550 per each insertion.
- · Reaches 220,500 readers.
- Fast reader service cycle.
- · Short lead time for the placement of
- · We typeset and layout the ad at no additional charge.

Call 212-777-6400 to reserve space. Ask for Arline Fishman. Limited number of pages available. Mail materials to: mini-ADS. RADIO-ELECTRONICS. 200 Park Ave. South. New York. NY 10003



TELEVISION MODULE includes VHF, UHF, and CABLE-TV TUNERS, IF AMPLIFIER VIDEO DETECTOR, SOUND DETECTOR and AMPLIFIER, and SYNC PROCESSOR: \$85.00. TELEVISION SIGNAL PROCESS-ING MANUAL explores standard and nonstandard television: \$15.95. Add 5% handling and shipping. Catalog \$2.00. VISA and MC accepted. ORDER DESK (415) 439-7470. ABEX, PO Box 26601-Rz, San Francisco, CA 94126.

CIRCLE 56 ON FREE INFORMATION CARD



ULTIMATE UHF FRINGE AREA RECEP-TION. The system includes a 114 element antenna, 39db LNA (booster), a match maker+ signal extrator for \$199.95. Complete documentation and return policy if not satisfied. Also 2 hour VIDEO TAPES on how to receive snow-free UHF-VHF pictures-\$29.95. VHS or Beta, Visa/Mastercard, Dealers welcome. Specify channels. DX TELE LABS, 3822 N. Paradise Rd., Flagstaff, AZ. 86001, 602-774-4735.

CIRCLE 61 ON FREE INFORMATION CARD




TELTONE DTMF RECEIVER KITS turn phones into control devices. Teltone's DTMF Receivers let you turn the phone system into a control network. They outperform other receivers in noisy environments and operate over a wide dynamic range. Two DTMF kits are available. The TRK-947 kit at \$53.00. decodes DTMF. For both Rotary and DTMF. order the TRK-927 for only \$75.00. Both include a 3.58 MHz crystal and a DIP socket. To order call: (800) 227-3800 ext 1130 (In CA, (800) 792-0990 ext 1130).

CIRCLE 58 ON FREE INFORMATION CARD



PROFESSIONAL HEAT GUN 6977 has the capacity to master such heavy-duty jobs as molding and welding plastics, softening & forming plastic laminates, paint stripping, curing large volumes of epoxies, heat-shrinking cables and softening floor tiles and putty. Specifications: Temperature 975°F, 800 watts at 120 volts, AC only, Air flow 6.9 cfm at 2650 fpm, 3-wire grounded cord, 6 ft. cord, oil and heat resistant. Weight: 28 oz. \$85.00. See a demo at your Ungar distributor or call Ungar, (213) 774-5950.

CIRCLE 57 ON FREE INFORMATION CARD



MAGNIFIER LAMP FOR LESS All metal construction, UL approved 5", 3 × magnifier, 22 watt fluorescent circline lamp. 45" arm reach, heavy duty clamp mount. Only \$59.95 plus shipping. (California residents add sales tax.) To order call (800) 423-5336. In California, (800) 382-3663 or send \$59.95 plus \$5.00 shipping to ORA ELECTRONICS, 18215 Parthenia St., Northridge, CA 91325 (213) 701-5848.

CIRCLE 62 ON FREE INFORMATION CARD



HI TECH CASSETTES. Now on 2 hour color video tapes "Learn how to improve your tv picture plus receive weak UHF-VHF station snow free. Detailed step by step instructions in the art of distance tv signal reception .-\$29.95. Satellite TV-\$29.95. Audio cassette version \$14.95 each. Beta or VHS, Visa-Mastercard, Dealers Welcome. DX TELE LABS, 3822 N. Paradise Rd., Flagstaff, Az. 86001, 602-774-4735.

CIRCLE 60 ON FREE INFORMATION CARD

ectronics mini-AD




NEW PRODUCT - Computerized Addressable Cable T.V. Descrambler In/out Channel 3. Restores picture to normal Sync. Passes undistorted Audio signal. Kits \$59.95 Wired and tested \$119.95. Check, money orders, COD only. Add 5% for shipping and handling. Quantity discounts. Send \$2.00 for Complete catalog on Converters and unscramblers. MEAN ELECTRONICS, PO Box 347, Boston, Mass. 02188, 617-337-7303.

CIRCLE 55 ON FREE INFORMATION CARD




DC-700MHZ OSCILLOSCOPE ADD ON Upgrade your low-bandwidth-oscilloscope into a Dual-trace DC-700MHz bandwidth Delayed Sampling Oscilloscope with our S-500 Equivalent-Time SAMPLER (\$480) with 500ps/div-100ns/div Timebase and our DC-500MHz P-700 FET-PROBE (\$63). IN-TERNATIONAL TEST INSTRUMENTS CORP., PO Box 1218, Cupertino, CA 95015.

CIRCLE 53 ON FREE INFORMATION CARD




DIGITAL SOUND from your analog recordings? By using dynamic expansion and filtering in sophisticated circuitry, the ASRU improves dynamic range by 18 dB. See R-E's 3-4/81 cover story or our free catalog (includes equalizers, power meters, etc.). \$120 postpaid, M/C, Visa add shipping. SYM-METRIC SOUND SYSTEMS (707) 546-3895, 856H Lynn Rose Ct., Santa Rosa, CA 95404

CIRCLE 50 ON FREE INFORMATION CARD



\$99.50 PRICE BREAKTHROUGH, Amateur hi-gain commercial grade microwave TV system converts 2.1 - 2.6 GHz signal for your home T.V. Assembled and tested. Minimal wind loading. (A problem with dish type.) Complete with antenna base, 26 element director rod, power supply, 40' & 3' co-ax cables and hardware. ONLY \$99.50 F.O.B. **OEM DISTRIBUTING CO., 9748 Jamach** Blvd., Spring Valley, CA 92077. Dealers phone (619) 698-OEMD for quantity prices.

CIRCLE 59 ON FREE INFORMATION CARD



POWER LINE PROBLEMS? SPIKE-SPIKER the solution! Clean up equipment damaging voltage spikes and conducted RF noise. Surge protection & RFI hash filtering. All units 120V, 15A. Deluxe Console 8 outlets \$79.95, Quad Plug-In 4 outlets \$59.95, Mini Plug-In 2 outlets \$44.95. VISA, MC, or check we pay UPS. COD's add \$3.00 plus UPS. Pa. residents add 6% sales tax. KALGLO, 6584 Ruch Road, Dept. RE, Bethlehem, PA 18017 (215) 837-0700, (800) 523-9685, TWX 510-651-2101.

CIRCLE 54 ON FREE INFORMATION CARD






ONLY \$89.95 complete with the following 75 to 300-ohm balun * balun for rabbit ears * 20" fiberglass parabolic dish * low noise probe/down converter * 60 ft. factory made coax * 3 ft. coax * power supply * mounting hardware and instructions. All for only \$89.95 plus \$5.00 shipping & handling Visa, Mastercharge or C.O.D. cash or certified check. NATIONWIDE G.H.Z., 6825 N. 16th St., Phoenix, AZ 85016 (602) 274-1199.

CIRCLE 52 ON FREE INFORMATION CARD



SOLDERING STATION FOR LESS Front display of tip temperature, adjustable temperature 200°F to 900°F. UL listed, low current leakage, high insulation. Complete as shown. 7 tips available, also takes standard tips. ORDER MODEL XY-168. \$79.95 plus shipping. To order call toll free: (800) 423-5336. In California (800) 382-3663. Or send \$79.95 (California residents add sales tax) plus \$5.00, shipping to ORA ELECTRONICS Dept. RE, 18215 Parthenia St., Northridge, CA 91325 (213) 701-5848.

CIRCLE 63 ON FREE INFORMATION CARD



ONE MAN CRT FACTORY, easy operation. Process new or rebuild old CRT's for tv's, bus. machines, monitors, scopes, etc. Color, b&w, 20mm, foreign or domestic. 3×6 ft. space required. Profits??? Average CRT rebuilding cost - \$5. Sell for \$100 = \$95 profit; × 5 CRT's = \$475 daily; × 5 days = \$2375 weekly profit. Higher profits outside U.S.A. Investigate this opportunity today. We service the entire world. Write or call: CRT Factory, 1909 Louise St.,

Crystal Lake, II. 60014, (815) 459-0666. CIRCLE 100 ON FREE INFORMATION CARD



MEASURES CAPACITORS AND DE-TECTS LEAKAGE ANDERS CM-100A is a rugged battery powered portable instrument capable of measuring capacitors from 10pF to 500 µF. The instrument can detect capacitor leakage of 1 na or .005 CV whichever is greater. Send check or money order for \$89.95 plus \$3.50 shipping and handling to: ANDERS PRECISION INSTRUMENT CO., 4 Bridge St. Plaza, PO Box 75, Willimantic, CT 06226 or call (203) 423-7940.

CIRCLE 51 ON FREE INFORMATION CARD



No commuting to class. Study at your own pace, while continuing your present job. Learn from easy-to-understand lessons, with help from your home-study instructors whenever you need it.

In the Grantham electronics program, you first earn your A.S.E.T. degree, and then your B.S.E.T. These degrees are accredited by the Accrediting Commission of the National Home Study Council.

Our free bulletin gives full details of the home-study program, the degrees awarded, and the requirements for each degree. Write for Bulletin R-83.

Grantham College of Engineering 2500 So. LaCienega Blvd. Los Angeles, California 90034

CALL TOLL FREE 1-800-373-1455 Within MASSACHUSETTS 1-617-682-6936



CIRCLE 48 ON FREE INFORMATION CARD



DRAWING BOARD

continued from page 144

problem is the same. A good exercise in design is to work out a keyboardswitchable selector without using any mechanical rotary switches. Bear in mind the fact that there is still some unused silicon in the circuit-namely, the other half of the 4518. If you work out a neat way to solve the problem, let me know and I'll pass it along.

If your particular application for the encoder requires more than four digits, it would be a good idea to consider multiplexing the display. Ten digits and ten drivers mean more than seventy connections and that's a bit unreasonable, to say nothing of power hungry. Using only one driver and multiplexing the display saves a lot of trouble when you get beyond four digits. If all you're interested in is cutting back on power consumption (and don't mind adding a bit more circuitry), you have another option-you can just multiplex the LED's themselves. That's a much simpler problem, and only calls for a clock and a multiline selector that sequentially scans the digits. You can use the cathode connections of the digits but a much slicker way is to use the blanking pins of the drivers. There are lots of ways of multiplexing and I'd be interested in seeing what you can come up with. If you're thinking of trying it, remember that the 555 can deliver up to 200 milliamps and is running at a speed that's perfectly suitable for multiplexing.

Our keyboard encoder meets the criteria we set for it, and although it's more complex than using an IC that's designed especially for the purpose, it's cheaper and much more flexible. But it's certainly not the last word in keyboard encoders. There are two important rules to remember when you're doing any circuit design. The first is not to be afraid to experiment. If you find a way to do the job that looks weird on the surface and uses components in ways they were never used before-great. It's not called "weird, " it's called "innovation." If your method works, don't be afraid to use it. Fresh minds bring fresh approaches, and something that seems perfectly obvious to you may never have occurred to anyone else.

Don't be afraid of blowing up your circuit. With prices as low as fifteen cents a gate, you can't do much financial damage. And when you've worked out a really slick way around a problem and figure that everything's taken care of, remember the second rule: There's always a better way. If you can do it with five packages, somebody else can do it with four.

As a matter of fact, if you think of a better way to build or improve our keyboard encoder, let me know and we'll let everybody else know.

Signature SCHOOLS-LABS: QUANTITY PRICING (10 or more) ON REQUEST

MARKET CENTER

FOR SALE

ANIK noise filter eliminates unwanted audio noise from Canadian Satellite fully assembled and quaranteed, \$65.00 & \$2.00 shipping. ARK ELECTRONICS, P.O. Box 5689 Toledo. OH 43612

SCANNER/monitor accessories—kits and factory assembled. Free catalog. CAPRI ELECTRONICS, Route 1R, Canon, GA 30520

CABLE TV SECRETS—the outlaw publication the cable companies tried to ban. HBO, Movie Channel, Showtime, descramblers, converters, etc. Suppliers list included. Send \$7.95 to CABLE FACTS, Box 711-R Pataskala, OH 43062

PCB \$0.15 sq-in. Free drilling. Quantity discount. INTERNATIONAL ENTERPRISE, 6452 Hazel Circle, Simi Valley, CA 93063

COLOR computer VIC-20 programs, hardware, Rtty Code. EPROM Programmer RS-232. FRANK LYMAN, Box 3091, Nashua, NH 03061

THE Intelligence Library. Restricted technical secrets—books on electronic surveillance, lock-picking, demolitions, investigation, etc. Free brochures: MENTOR, Dept. Z, 135-53 No. Blvd., Flushing, NY 11354

FAST dependable mail-order! Prime semiconductors, parts, supplies. Free 55 page catalog. THE PARTSTORE, Dept. 165, 999 44th St., Marion, IA 52302. (319)373-I803



MCGEE'S
SPEAKER & ELECTRONICS CATALOG

1001 BARGAINS IN SPEAKERS

Tel.: 1 (816) 842 5092

1901 MCGEE STREET KANSAS CITY, MO. 64108

To run your own classified ad, put one word on each of the lines below and send this form along with your check for \$1.90 per word (minimum 15 words) to:

Radio-Electronics, 200 Park Avenue South, N.Y., N.Y. 10003

ORDER FORM

PLEASE INDICATE in which category of classified advertising you wish your ad to appear. For special headings, there is a surcharge of \$15.00.

() Plans/Kits () Business Opportunities () For Sale () Education/Instruction () Wanted () Satellite Television

Special Category: \$15.00

PLEASE PRINT EACH WORD SEPARATELY, IN BLOCK LETTERS.)

1	2	3	4	5
6	7	8	9	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25
26	27	28	29	30
31	32	33	34	35

PLEASE INCLUDE FOR OUR FILES YOUR PERMANENT ADDRESS AND PHONE NUMBER.

CLASSIFIED COMMERCIAL RATE for firms or individuals offering comercial products or services). \$1.90 per word prepaid (no charge for zip code)...MINIMUM 15 WORDS. 5% discount for 6 issues, 10% for 12 issues within one year, if prepaid.

NON-COMMERCIAL RATE (for individuals who want to buy or sell a personal item) \$1.25 per word prepaid...no minimum.

ONLY FIRST WORD AND NAME set in bold caps. Additional bold face (not available as all caps) at 15c per word. All copy subject to publisher's approval. ADVERTISEMENTS USING P.O. BOX ADDRESS WILL NOT BE ACCEPTED UNTIL ADVERTISER SUPPLIES PUBLISHER WITH PERMANENT ADDRESS AND PHONE NUMBER. Copy to be in our hands on the 20th of the third month preceding the date of the issue (i.e., August issue closes May 20th). When normal closing date falls on Saturday, Sunday, or a holiday, issue closes on preceding working day.

TV shop closed out. Retired. Inventory for sale. Low price. P.O. Box 425 San Ysidro, CA 92073

MICROWAVE antennas 2100-2600 MHz downconverter probe 18' parabolic dish 50' cable, power supply, 6 month warranty MDS ASSOCI-ATES, 2116 2nd Ave. North, Minneapolis, MN 55405 JUST \$109.95

SAVE up to 50% on name brand test equipment. Free catalog & price list. SALEN ELECTRONICS, Box 82-G, Skokie, IL 60077

TUBES \$2.49. Large inventory including rare types. SASE brings lists. ADNF, 6690 7 mile, S. Lyon, MI

PICTURE tube rebuilding equipment—we sell & buy new & used equipment. Free training. ATOLL TELEVISION, 6425 Irving Park, Chicago, IL 60634. Phone (312)545-6667

APPLE'S core-microphotographs of the 6502 microprocessor. Other chips also. Free brochure. IC SHOTS, 21 Witt Ave., Denville, NJ 07834

RADIO—TV tube sale. Some scarce types. Send SASE for list. MAURER, 29 South 4th St., Lebanon, PA 17042

SURVEILLANCE device schematics, Books on electronic surveillance methods & equipment, locksmithing, covert technologies, etc. Catalog \$1.00. MENTOR, Dept Z, 135-53 N. Blvd., Flushing. NY II354

COLOR computer owners—Free hardware & software catalogue. SPECTRUM PROJECTS, 93-15 86th Drive, Woodhaven, NY 11421

BEST buys in integrated circuits! The Electronics & Computer Shopper tells you where to get them. \$3.00. TECS, 1100 Clove #30, Staten Island, NY 10301

UNUSUAL UHF subscription TV kits. Also microwave downconverters. Catalog \$0.50. TROJAN, 2920 Shelby, Indianapolis, IN 46203

AUTOMATIC telephone recording device: synchronizes cassette recorder to phone use \$20.00. Long play cassette recorder (4 hrs. per side) \$95.00. Send \$3.00 for our catalog. A.T.I.S., Box 4068, Dearborn, MI 48126

RESISTORS ¼W, ½W5%C.F. \$0.03. 1%M.F. 1 ohm through 1.1 meg. No minimums. Volume discounts. Write JR INDUSTRIES, 5834-B Swancreek, Toledo, OH 43614

ZX 81/TS 1000 Funpac—Seven exciting new programs for the entire family to enjoy. Great for parties too! Order cassette FP1. Only \$9.95. ZX-TECHNOLOGY, Route 1 Box 125, Corinth, MS 38834

RECEIVER McKay Dymek DR33C 6-digit inc. RTTY CW filters, used 5 hours, \$995 (list approx. 2K) (213) 944-0205

FREE Timex/Sinclair computer program— Software catalog—Send large S.A.S.E. PRO-GRAMS, Box 493, Groves, TX 77619

FREE speaker catalog! Woofers, mids, tweeters, hardware, crossovers, grille cloths, kits, information, much more. Discount prices. UNIVERSAL SOUND, Dept RE 2253, Ringling Blvd., Sarasota, FL 33577 (813) 953-5363

CABLE T.V. products, wireless, corded & Settop converters. Send \$3.00 for catalog. ADDITIONAL OUTLET CORP., 231 E. Commercial Blvd., Ft. Lauderdale, FL 33334

FREE catalog of surplus electronics parts & hardware. UNIVERSAL SOUND, Dept. RES. 2253 Ringling Blvd., Sarasota, FL 33577 (813) 953-5363

ROBOTS and robotics. Beginning to advanced techniques. Plans, kits. Manual \$9. Brochure \$1. ROBOTEK-FORD, Box 6827, Stateline, NV 89449

SPRING cleaning specials! Free surplus parts hardware flyer. ELECTRONIX LTD., 3214 South Norton, Sioux Falls. SD 57105

WIND Power an investment in the future. The right decision is essential. Information \$2.00. WINDE-SIGN, Box 138. Boston, NY 14025

FOR SALE

CHRONOGRAPH circuits measure bullet velocities easily. Kits or assembled. SASE brings information ICD, P.O.Box 10261C.C., Fairbanks, AK 99701

VOTEM: Analog interface for Timex Sinclair TS1000. Measure voltage and temperature with 14-bit resolution. Requires no modifications. \$39.95 kit: \$59.95 asm: Add \$3 S&H. Manual alone \$5pp. DOWN EAST COMPUTERS, PO Box 3096. Dept RA. Greenville, NC 27834

EDUCATION & INSTRUCTION

YOUR own radio station! AM, FM, cable, licensed. unlicensed. Low cost transmitter kits, free info. BROADCASTING, Box 130-F4. Paradise. CA

ED NOLL books Project, Experiment, Democircuit Send for complete outlines. Box 75, Chalfont, PA 18914

EARN your university degree through Evaluation Assessment of existing education, experience, achievements. Call (614) 863-1791, or write ASSESSMENT, Box 13130R. Columbus, OH 43213

UNIVERSITY degrees by mail! Bachelors, Masters, Ph.D.'s...Free revealing details. COUNSELING, Box 317-RE4. Tustin, CA 92680

CASSETTE Education Save \$\$\$—rent don't buy!! Free information children's to PhD. CES, Box 324-RE. Barstow. CA 92311

Get Your 2-Year SOCIATE DEGREE in **ELECTRONICS** TECHNOLOGY

No previous experience necessary...
Train at home in spare time for exciting opportunities in fast-growing space-age industries...Automation, Aerospace, Cable-TV, Electronic Circuitry, Computers, and much more. No need to quit your job. Instructors are as close as your telephone... we pay the bill. Send for free facts, color brochure. No salesman will call. CDS Electronics Center, Dept. PF023, Scranton, PA 18515. sera

ATTENTION ELECTRONIC TECHNICIANS



Highly Effective Home Study BSEE Degree Pro-gram for Experienced Electronic Technicians Our New Advanced Placement Program grants Credit for previous Schooling & Professional Ex-perience. Advance Rapidlyl Our 36th Yearl FREE DESCRIPTIVE LITERATURE!

Cook's Institute of Electronics Engineering DESK 15, P.O. BOX 20345, JACKSON, MS 39209

USA PAY-TV STATIONS

PAY-TV stations. Complete & latest data on locations, programming, equipment & more, Just \$9.95 T.C.E., Dept-R1, Box 343, Brooklyn, NY 11230

UHF CONVERTERS

UHF converters for all major cities. Catalog \$3.00. T.C.E., Dept-R1. Box 343. Brooklyn, NY 11230



LEARN COMPUTER

Train at home in spare time No previous experience needed. Ex-perts show you what to do, how to do it! Even beginners can learn how to repair small comlearn how to repair small computers. Everything explained in easy-to-understand language. You learn by doing with tools and materials included in your course. Easy home-study plan shows how you can get in on ground floor of this fast-growing business. Sand for free facts. No obligation. No salesman will call.

School of Cdmputer Repair, pept. DE033

Yes! I want to get into computer repair. Rush me free facts and color brochure.

Name

Age

Address City/State/Zip_____

OUALITY MICROWAVE TV SYSTEMS Complete Systems From \$6995

1.9 to 2.5 GHZ Antennas

Galaxy Electronics 6007 N. 61st Ave. Glendale, Az. 85301 (602) 247-1151

COD's **Dealers Wanted**



VISA



******* PLANS AND KITS

CABLE TV converters & equipment. Plans & parts. For information send \$2.00. C & D ELECTRONICS, P.O. Box 21, Jenison, MI 49428

CATALOG-Transmitters, linears, MDS downconverters, scramblers, broadcasting, CB, Hobby plans & kits \$1.00. PANAXIS, Box 130-F4. Paradise. CA 95969

PRINTED-circuit boards from your sketch or diagram. Free information. BUDGET CIRCUITS, 6201 Hilston, Dept. E. Austin, TX 78745

SAVE steps. money. Use your telephones as an intercom. Plans \$5.00 dB ENTERPRISES, Box 453R. Westwood, NJ 07675

LIGHT display sequencer kits. Send stamp for flyer. DESIGN SPECIALTY, P.O. Box 1995. Huntington Beach. CA 92647

MICROWAVE Television "Downconverters." Exclusive new five stage design. Easily assembled. Catalogue: \$2.00 (refundable). NDS, Box 12652-R. Dallas. TX 75225

SINE wave decoder problems? Manual includes trouble shooting, alignment, antenna hook-up, improvements, theory, \$15.00. SIGNAL, Box 2512-R. Culver City, CA 90230

Catalog

contains

TEST & EXPERI-

FUNCTION GENERATOR KIT \$59.95 Auto-Ranging Cap-meter kit \$79.95

Phone 415 - 447 - 3433

Write or Phone for FREE CATALOG. Average 1 minute Saturday call is 21¢

DAGE SCIENTIFIC INSTRUMENTS
BOX 1054R LIVERMORE CA 94550

TAILGATERS Beware! Clever device ends this hassle. Quick, easy installation. Kit \$4.95, two for \$8.95 TAILGUARD, 8 Alpine Place. Franklin. MA

ELECTRONIC surveillance: Amazing manual "Homebrew Bugging" reveals secret techniques used by professional eavesdroppers. (Schematics included). \$15.00. Send \$3.00 extra for catalog. A.T.I.S., Box 4068, Dearborn, MI 48126

CATCH intruders: Incredible manual "Counter-measure Cookbook" shows how to build inexpensive security systems using hidden cameras, recorders, tear gas, high voltage, hidden door locks & more. \$15.00. Send \$3.00 extra for catalog. A.T.I.S., Box 4068, Dearborn, MI 48126

one • CAPACITANCE METER 1pF to 999KuF
in • FREQUENCY COUNTER 35MHz
kit • SOUARE WAVE GEN. 1Hz to 99KHzOHMMETER - 3.58MHz Xtal - Regulated PS-Five
8" Readouts-Low cost TTL Circuits-Automatic
Decimal Placement-Be AMAZED - Build it for
\$60 or less. | Purchase the plans, drilled P.C.
board 4-3/4" by 6-3/4" and front panel decal
for \$21.79 BAGNALL ELECTRONICS, Refund179 May Street, Fairfield, Conn. 06430 able

NEW! Repair any TV... Easy. Anyone can do it. Write RESEARCH, Box 517E, Brea, CA 92621

NEAT stuff! 60 page catalog of electronics kits; parts & deals! Send \$0.50 refundable first order. BEC, Box 401244R, Garland, TX 75040

FREE phone calls made by users of this electronic device. Complete report & plans sold for informa-tion, education only, \$7.50: DISTRIBUTORS MART, Dept. RE33. Box 333, Modena. NY 12548

ELECTRONIC touch light control pad. Five modes dim medium bright delay & off. Two kits available. Write for free brochure. **EXOTIC ELECTRONIC IDEAS**, P.O. Box 446, Lake Bluff, IL 60044

NEW: single board control computer based on 28671. Has eight A to D inputs, four Triac outputs, 16K memory, & more. Low price. Write H.H.S. MICROCONTROLLERS, 5876 Old State Road. Edinboro, PA 16412

KITS, plans, devices. Miniature transmitters, telephone circuits, electronic article surveillance, radio homing, motion detection, laser, radars. Giant catalog \$2.00. INFORMATION INTERNATIONAL, P.O. Box 5162 RE. Tampa. FL 33675. (813) 949-7117

FREE wireless mike plans with catalogue of surveillance, computer, telephone, etc., plans. Send \$1.00 shipping. INTERTECH, Box 54853-A, Atlanta. GA 30308

ELECTRONIC ORGAN KITS 3-4 Manuals

THEATER and CLASSICAL Refundable Parts
Brochure \$2.00 Catalog \$2.00

Wurlitzer reproductions DEVTRONIX ORGANS, INC., Dept 60 6101 WAREHOUSE WAY, SACRAMENTO, CA 95826

ELECTRONIC debugging plans—kits—assembled units. Send \$2.00—MOUNTAIN ELECTRONICS, Rt. 2 Box 30. Charlotte, TN 37036

NEW FM transmitter kit. Great for experimenters Instructions & parts only \$19.95. Buy now. TUCKER ENTERPRISES, P.O. Box 10120, Alex., VA 22310-



SUBSCRIPTION TV sinewave type, PCB & plans \$16.50. RVB INDUSTRIES, Box 663, Skokie, IL

VIDEO game cartridges are easy to duplicate. Average cost per game \$10.00. Complete, detailed plans \$9.95. RANDOM ACCESS, Box 41770R. Phoenix. AZ 85080

SEE THE WEATHER AND SAVE \$1,000!

A leading manufacturer of commercial

weather chart recorders has developed a facsimile Weather Chart Recorder Kit for use by hobbyists, amateurs, pilots, and educators.

All you need is a stable HF generalcoverage receiver to tune in weather facsimile frequencies-your recorder will print out accurate weather charts. Major components in this easy-to-build kit are pre-assembled and tested. And the recorder is backed by a limited warranty against defects. Special kit price is \$995. Add \$5 for shipping and handling in the U.S. and Canada. (For Massachusetts delivery, add \$49.75 sales tax.) Master Card and Visa accepted.

Call or write for more information.

ALDENELECTRONICS 10 Washington Street, Westborough, MA 01581

(617) 366-8851

PLANS AND KITS

SUBSCRIPTION T.V. manual, covers both Sine Wave & Gated Sync system, only \$12.95. Includes theory, circuits, waveforms & trouble shooting hints. Information \$2.00, refundable. D&S ENTERPRISES, Box 09292R, Cleveland, OH 44109

UHF wave converter—cheapest, most superior design on market. Approximately \$20 worth of readily available parts, your old B&W TV & a basic knowledge of electronics necessary. Plans \$5.00 & a SASE. RAMP ELECTRONICS, 1500 Venera Ave., Suite 2-D, Coral Gables, FL 33146

FREE 20-page educational booklet about modern STV descrambling techniques: FV-4. On-1, Pulse-1, Sine-1 part packages with free PC Board & plan. Please write: INDEPENDENT ELECTRONICS, 75I South Central Expwy. Ste 192, Richardson, TX 75080

RADAR—Build your own using old TV set. Plans & instruction manual. Send \$5.00 to H&S RESEARCH, P.O. Box 521, Irmo. SC 29063

FREE catalog of special function IC's, & quality components. GOLDSMITH SCIENTIFIC, Box 318R, Commack, NY 11725

VIC-20

"MYSTERIOUS CASTLE" adventure game. Designed by electrical engineer especially for VIC-20. Needs no extra memory! Cassette tape \$23.95. Ask for free list of other games, programs. SHANKLE PRODUCTS, Rt5, Box 373AG, Texarkana, TX 7550!

COMMUNICATIONS EQUIPMENT

VIDEOSCAN 1000 Slow Scan TV—High resolution (amateur, phone line, surveillance, teleconferencing). CODE STAR—decode Morse, RTTY, ASCII, Large LED's or connect computer printer. MORSE-A-KEYER—CW Keyboard. Tri-voltage power supply. Kits assembled. Free brochures. MICROCRAFT CORPORATION, Box 513-RE, Thiensville, WI 53092. (414) 241-8144

CONVERTERS

DELUXE Sine Wave UHF, parts \$175. Digital phase inversion VHF Cable UHF, parts \$225. Both have sound out of TV like normal with only antenna connection to TV or VCR. Gated pulse wave UHF (speaker box type), parts \$125. All have true AGC. Quantity discounts. Plans: Large SASE (\$0.54 postage). Free shipping handling. 1-312 267-3455. LSR ENGINEERING, P.O. Box 6075, Chicago, IL 60680

HOME ASSEMBLERS WANTED

ELECTRONICS firm is looking for assemblers interested in working at home. Send \$3.00 application fee: IRDC, L'Joppa Hill Road, Manchester, NH 03102

CABLE TV

CHANNEL 3—60dB notch filter. 63.5 MHz. \$32. CROSLEY, Dept 606, Box 840, Champlain, NY 12919

LONG-PLAY RECORDERS

RECORD up to 15 hours on a single standard cassette tape! Our modified, name-brand recorders offer the longest recording times, best long-play fidelity & most features! Models as small as 1-1/2 pounds. Compare before you buy. Free brochures. EXTENDO-TAPE SYSTEMS, Box 16000LC, Temple Terrace, FL 33687

REEL TO REEL TAPES

TRUCKLOAD sale Ampex high quality open reel tape, 1800' or 2400' on 7" reels, used once. Case of 40, \$45.00. Cassettes available. VALTECH ELECTRONICS, Box 6-RE, Richboro, PA 18954

SINCLAIR/TIMEX COMPUTERS

YOUR Sinclair can drive a video monitor with our direct video kit. only \$9.95. 12" B&W video monitor \$98.45. RANDOM ACCESS, Box 41770R, Phoenix, AZ 85080

SATELLITE TV WEEK

The most complete weekly listings. We cover more than just SATCOM 3. Send \$1 for sample copy.

Satellite TV Week

P.O. Box 308, Fortuna, California 95540

Call toll free: (800) 358-9997 • California (707) 725-2476

WIRELESS MICROPHONES

SURVEILLANCE-quality professional wireless microphones that far outperform others. As small as 7 8" Sold elsewhere for \$130.00. Our price only \$89.99! Also, wireless micro telephone transmitters and 15 hour recorders weighing less than 1-1.2 pounds. Free brochures. EXTENDO-TAPE SYSTEMS. Box 16000LC. Temple Terrace. FL 33687

COMPUTERS

SAVE 90%, Build your own 68000, 8086, Z80A, or 8080 microcomputer or minicomputer system. Free details. DIGATEK CORPORATION, Suite E., 2723 West Butler Drive. Phoenix, AZ 85021

TI-99/4A owners. Send for free list of new & exciting software. DYNA, Box 124. Hicksville, NY 11801

CB RADIO

GET more CB channels & range! Frequency expanders. boosters, speech processors. FM converters. PLL slider tricks. how-to books, plans. modifications. Catalog \$2.00. CB CITY, Box 31500RE. Phoenix. AZ 85046





code		
name	(please print)	
address		
city	state	zip code
	Mail to: Radio-Flac	tronice

Mail to: Radio-Electronics SUBSCRIPTION DEPT., P.O. BOX 2520, BOULDER, COLO. 80322

BUSINESS OPPORTUNITIES

START your own business with a name brand home computer. For more information write to P.O. Box 51053, Fort Worth. TX 76105

PROFITABLE exciting home income...forwarding mail! Start immediately! Free details! HAIKU, Box 1296-RE, Makawao. HI 96768

MECHANICALLY inclined individuals desiring ownership of small electronics manufacturing business—without investment. Write: BUSINESSES, 92-R, Brighton 11th, Brooklyn, NY 11235

MAKE your computer pay its own way. Sample newsletter \$1. COMPU-PROFIT, Dept. RE3. Fair-fax Station. VA 22039-0332

\$50,000 yearly potential! No investment. Be our representative. Full or part time. Call Wade: (415) 532-2711 or write EPS, Box 5356. Berkeley. CA 94705

HIGHLY PROFITABLE ONE-MAN ELECTRONIC FACTORY

Investment unnecessary, knowledge not required, sales handled by professionals. Ideal home business. Write today for facts!

Postcard will do, Barta-RE-X, Box 248, Walnut Creek, CA 94597.

SATELLITE TELEVISION

120° Amplica LNA \$375, Telecom 1240 receiver \$399. Brand new, never used. (615) 984-7872

7 foot parabolic antennas. \$116. Send \$1.00 for brochure. **BOB'S ELECTRONIC SERVICE**, 7605 Deland, Fort Pierce. FL 33451

INTERESTED in Home Satellite Television—Don't buy anything until you've read Homesat Handbook & Buyers Guide. Our book tells everything about home satellite TV & may save you hundreds, even thousands of dollars in your selection & installation of a system! \$10.00: H&G HOMESAT SERVICES. Box 422. Seaford. NY 11783

THE BEST PLACE to BUY, SELL or TRADE NEW and USED EQUIPMENT NUTS & VOLTS MAGAZINE BOX.1111-E • PLACENTIA, CA 92670 (714) 632-7721

Join Thousands of Readers Nationwide

Every Month
ONE YEAR U.S. SUBSCRIPTIONS
57.00 - 3rd Class • \$12.50 - 1st Class
\$25.00 - Lifetime - 3rd Class



SATELLITE receiver top quality & performance PCB set \$80. Receiver manual \$20. Antenna manual \$20. Handbook & equipment guide \$5. MICROWAVE SYSTEMS, 1101 E. Chestnut, Santa Ana. CA 92701

SATELLITE cables, connectors: Type-N UG-21D U \$3.00. Elbow \$4.95, UG-57B U \$5.25, UG-29B U \$3.90. F-59A 10/2.15, RG-6 U \$0.12 ft, RG-59 U copper \$0.12 ft., RG-213 U \$0.36 ft, RG-214 U \$1.35 ft. Shipping; 10% \$3.00 minimum, Free catalog, NEMAL ELECTRONICS, 1325 NE 119 St., N. Miami, FL 33161, (305) 893-3924

SATELLITE antennas by Polar-Spherical. Build wood or metal plans \$40. Kits \$200. PROTOTYPE ENGINEERS, Box 1812, Deming, NM 88030

SATELLITE TV low noise amplifier or downconverter. Easy to build. Save hundreds! Beautiful instruction manuals include everything you need to know. \$10.00 each. Computerized antenna pointing information FREE on request with each order. Satisfaction guaranteed. XANDI, Box 25647, Dept. 21H, Tempe, AZ

Satellite ORBIT Magazine

The Complete Monthly Satellite Program Guide

\$5.00 Sample Copies Available Satellite ORBIT

P.O. Box 1700, Hailey, ID. 83333 In the U.S., call 1-800-792-5541. In Idaho or foreign countries, 1-208-788-4936.

S
65
\cong
~
0
Œ
六
\odot
щ
III
T
$\overline{\circ}$
$\overline{\Box}$
A
Œ

CPU'S & SUPPORT	8755 19.95 8251 4.50 8253 5.95
CHIPS	8255 4.50 1.5
8039 6.95 8080A 2.75	8257 (AM9517) 7.95 100
9085A 5.75 9088 29.95	6502 5.75 200 A 280A CPU 3.75 400 A
AMD 2901 8.95 8202 19.96	Z808 12.95 600
8212 1.80	Z80A P10 3.75 Z80 CTC A 3.75
8214 3.60 8216 1.75 8224 2.25	1M3 382/ NL 9.95 INTER
8224 2.25 8226 1.80	8275 16.95 FACE
8228 3.50	6810 2.50 &
8156 8.95	8355 9.95 1488 65
8237 14.00 3242 6.00	DISC 1489 .65
SHIFT	& DRIVERS 8130 2.50 Controllers 8131 2.50
REGISTERS	1771 16.50 8833 2.50
MM1402 1.75 MM1403 1.75	1791 25.00 8837 2.00
MM1404 1.75 MM5013 2.50	1793 . 35.00 8838 2.25 1795 45.00 MM5307 7.96
MM5055 2.50	1795 . 45.00 MM5307 7.95 1797 . 45.00 MM5321 9.50
MM5056 2.50 MM5057 2.50	D765C 25.00 MM5369 2.50
MM5060 2.50	TR1602B 3.95
ROM's 2708 2.95	RAM's 21L02-3 .70
2716 51/ 2.05	93L422 5.95
2532 7.95	2111AL 1.96 00000L0
2764 9.95 MC 9764 19.95	2114 4 1.10 2114 3 1.50 \$50.00
82523 1.95	2147-3 4.96 TMS3409 4.95
82S115 4.00	MK4008P 1.95
82S123 (6331) 1.95	MK40273 1.95 CRYSTALS
82S129 1.95	4116-3 1.10 3.000 8.000
3628A-3 3.00	4116-15 1.50 3.579 10.000 5101E 2.95 4.000 18.000
8256-5	26104-4 2.50 5.000 18.432 6116-3 5.50 6.000 20.000
745397 1.75	8264 (4164-2 5.75 725 (MK4802) 8.96 2.95 ea .
50 PIN RIBBON COI 40 PIN RIBBON CAI 34 PIN RIBBON CAI 20 PIN RIBBON CAI 10 PIN RIBBON CAI	NNECTORS \$3.25 BLE CONN \$3.00 BLE CONN \$3.00 BLE CONN \$2.25 BLE CONN \$1.50
25 watt Infra Re Laser Diode (Sp	d Pulse (SG 2006 equiv.) ec sheet included) \$24,95
2N3820 P FET	\$.45
2N 5457 N FET 2N 2646 UJT	\$.45 \$.45
ER 900 TRIGGE	R DIODES 4/\$1.00 UJT \$.65
DISC	CAPACITORS
1UF 16V .01UF 35V	10/\$1.00 100/\$8.00 16/\$1.00 100/\$5.00
PRINTE 4"×6" DOUBLE SID \$.60 ea.	ED CIRCUIT BOARD ED EPOXY BOARDED 1/16 THICK 5/42.60
TOGGLE	05D - SPDT 1.10 06D - DPDT 1.50
SWITCHES 2	OSP DPDT CENTER OFF \$1.75
CONTRACTOR OF THE PARTY OF THE	4)
FP 100 PHOTO TRAI	NS\$.50
RED LED's .2"	BER LARGE LED's .2". 6/\$1.00
RED-GREEN BIPOL	AR LED \$.90
HED TELLOW BIF O	CAR LED
MRD14B PHOTO DA	ARL XTOR
4N26 OPTO ISOLAT	OR \$.70
8.2, 9.1, 10, 12, 15,	.3, 4.7, 5.1, 5.6, 6.8, 18, or 22V 6/\$1.00
FLAT	DIP SWITCHES
RIBBON	CTS 206- 4 4 POSITION .75 CTS 206- 7 7 POSITION .95
GRAY	CTS 206- 8 8 POSITION .95
28 gauge	CTS 206-10 10 POSITION 1.25
40.000	DIP.
40 conductor •	
.90/ft	SOCKETS 20 PIN .25 8 PIN .10 22 PIN .25
	8 PIN .10 22 PIN .25 14 PIN .12 24 PIN .25
.90/ft 26 conductor .60/ft 50 conductor	8 PIN .10 22 PIN .25 14 PIN .12 24 PIN .25 16 PIN .15 28 PIN .35 .
.90/ft 26 conductor .60/ft	8 PIN .10 22 PIN .25 14 PIN .12 24 PIN .25

CPU	S&		19.9	
SUPE	PORT	8251	4.5	
CH		8433	5.9	
77710000		8255 8259	4.5 5.9	
8080A	6.95 2.75	8257 (AM95		
8085A	5.75	6502	5.7	
8068	29.95	Z80A CPU	3.7	400
AMD 2901	8.95	Z80B	12.9	5
8202	19.95	280A S10	12.9	
8212	1.80	280A P10	3.7	
8214	3.60	Z90 CTC A TMS 9927 N	3.7 IL 9.9	and the second second second
8216 8224	1.75	8275	16.9	
8226	1.80	6845	13.9	
8228	3.50	6810	2.5	
8156	3.50	6850	2.9	
8156	8.95	8355	9.9	1488 .65
8237	14.00	DIS	C	1489 .65
3242	6.00	& DRIV	FRS	8130 2.50
SHI	ET.	Control	(A)	8830 2.50
REGIST		Control	iers	B131 2.50
	THE RESERVE	1771	16.50	8833 2.50
MM1402 MM1403	1.75	1791	25.00	8834 2.00 8837 2.00
MM1404	1.75		35.00	8838 2.25
MM5013	2.50		45.00	MM5307 7.95
MM5055	2.50			BR1941L 8.95
MM5056	2.50		45.00	MM5321 9.50
MM5057	2.50	D765C 2	25.00	MM5369 2.50
MM5060	2.50			TR1602B 3.95
ROM	's	RAM	-	
2708	2.95	21L02-3	.70	
2716 + 5V	3.95	93L422 2101-1	5.95 1.65	
2732 2532	5.95	2111AL	1.95	68000L8
2764	7,95 9,95	2114 -4	1.10	450.00
MC 8764	19.95	2114 3	1.50	\$50.00
82523	1.95	2147-3	4.95	
825100	2.95	TMS3409	4.95	1 2/-
825115	4.00	MK4008P	1.95	
825123	X345Ex	MK4027-3	1.95	CRYSTALS
(6331)	1.95	TMS4050NL MK4096-11	2.95 1.95	2.000 6.144
82S129 82S130	1.95	4116-3	1,36	3.000 8.000
825130 3628A-3	1.95	4116-15	1.50	3.579 10.000
AM9214C	2.95	5101E	2.95	4.000 18.000
8256-5		26104-4	2.50	5,000 18,432
(74188A)	1.25	6116-3	5,50	6,000 20.000
		8264 (4164-2	5.75	
745387	1.75			2 05
74S387 74S474		8725 (MK4802)		2.95 ea.

1 20			٠.,	•	
	11	1.5A	6A	35A	110A
	100	.35	.40	1,40	
į	200	.40	.50	1.80	9.00
	400	.60	.70	2.40	12.00
i	600		1.00	3.60	15.00
1	INT				(
1	FAC B DRIVE		4001 4002 4006	- 1	5 6

LM324 M339

LM348 LF351

LF353 - .90 LF355 - .90

RS232

CONNECTORS

DB 25P male . \$2.75

DB 25S female 3.75

HOODS..... 1.25

NO. 30 WIRE

WRAP WIRE

SINGLE

STRAND

100' ... \$1.40

AD AD

SCR's

70.39.6.22.2.3570.33.30.00.3570.65万.22.45.3540.55万.35万.55.55

74S SERIES 74S96
74S90 30 74S96
74S90 30 74S96
74S02 30 74S99
74S03 30 74S99
74S03 30 74S91
74S04 40 74S133
74S05 45 74S135
74S08 40 74S138
74S10 30 74S15
74S10 30 74S15
74S10 40 74S15
74S10 40 74S15
74S10 40 74S15
74S32 40 74S156

	TRIAC's					
0A	PRV	1A	10A	25A		
	100	.35	.60	1.40		
.00	200	.50	.80	1.90		
.00	400	.70	1.00	2.60		
.00	600	1.00	1.20	3.60		
C/MOS						

74S163 74S169 74S174 74S175 74S182 74S194 74S240 74S241 74S257 74S258

74S260

GA3140 - 1.00 3900 - .45 4136 - .85 N55964

S.P. 1200 ohm coi

D.P. 400 ohm coil 1.25

6.00

\$.40

\$1.00

\$.75

\$1.75

\$1.30

\$1.75

.70 1.25 .60 1.90 .85 .50 1.10 1.25 1.10 1.25 1.10 1.25 1.25

LINEAR CIRCUITS

TIMEA TO THE CONTROL OF THE CONTROL

711CH 741C - .35

FULL WAVE BRIDGE 12V DC RELAYS

SILICON POWER RECTIFIERS

PRV 1A 3A 12A 50A 125A 100 05 14 35 90 4.25 200 .06 .17 .50 1.30 5.25

.09 25 .65 1.50 6.50 .11 30 80 2.00 8.50

20 .45 1.25 3.00 12.50

REGULATORS

TANTALUM CAPACITORS .22UF35V 5/\$1.00 15UF16V 3/\$1.00 .47UF35V 5/\$1.00 30UF6V 5/\$1.00

.68UF35V 5/\$1.00

1UF 20V 5/\$1.00 2.2UF 20V 5/\$1.00

3.3UF20V 4/\$1.00

4.7UF35V 4/\$1.00

6.8UF 20V 4/\$1.00

10UF 20V

22UF 10V

- \$.40 - \$.30

600 .11 .30 .80 2.00 8.50 15.00 800 .13 .35 1.00 2.50 10.50 18.00

20KV 250MA DIODE.

PRV 2A 6A 25A 100 140

564B - 2.25 CA3140 5665 - 96 3900 - . 567 - .85 4136 - . 709 - .25 N5596A 710 - .45 D6303B

	EPOXY GLASS VECTOR BOARD		
AC's	1/16" thick with 1/10" spacing 4½" × 6½" \$1.95		
10A 25A	14 PIN HEADERS		
.60 1.40	24 PIN HEADERS		
.80 1.90	40 PIN HEADERS		
1.00 2.60	50 PIN EDGEBOARD CONN 3.95		
1.20 3.60	26 PIN EDGEBOARD CONN 2.50		
1.20 0.00	50 PIN ANGLE CONN 3.95		
	20 PIN RIGHT ANGLE CONN 2.25		
	TRANSISTOR OPENIALS		

Į	20 PIN RIGHT ANGLE CONN	. 2.25
	TRANSISTOR SPECI	ALS
The state of the s	29404A PNP GE TO 5 1P 111	9 85 61 35 61 96 8 75 81 00 \$1 00 \$1 00 9 \$1 00 9 \$1 00 9 \$1 00 \$ 55 \$ 55 \$ 55 \$ 56 \$ 56 \$ 56 \$ 56 \$ 56
ч	DPS2000 - DUAL POWER DARL	43.95

	TTI	LIC	SEF	RIES	
7400	.17	7472	.30	74612	60
7401	.17	7473	.35	74163	.60
7402	.17	7474	.32	74164	.60
- 7403	.17	7475	.40	74165	.60
7404	.24	7476	.35	74166	.70
7405	.24	7480	.45	74170	1.60
7406	.28	7483	.50	74173	.75
7407	.28	7485	.55	74174	.65
7408	.24	7486	.35	74175	.60
7409	.18	7489	1.60	74176	.75
7410	.17	7490	.35	74180	1.90
7411	.22	7491	.45	74182	.45
7412	.30	7492	. 45	74190	.70
7413	.35	7493	.35	74191	.75
7414	.45	7494	.60	74193	.79
7416	.25	7495	.55	74194	.85
7417	.25	7496	.60	74195	.45
7420	.17	74107	.30	74196	.75
7425	.25	74116	1.50	74221	1.00
7426	.25	74121	.29	74273	.85
7427	.25	74122	.39	74279	.60
7430	.17	74123	.42	74298	.65
7432	.27	74126	.45	74365	.65
7437	.27	74145	.60	74367	:65
7438	.27	74148	1.10	74390	.90
7440	.17	74150	1.10	75324	1.75
7441	.75	74151	.50	75325	1.50
7442	.45	74153	.40	75492	1.05
7445	.65	75154	1.10	9601	.75
7446	.65	74155	.50	9602	.75
7447	.65	74157	.50	8T26	1.00
7448	.65	74160	.85	8T97	.90
7450	:17	74161	.65	8T98	.90

ı		74LS SER	IES
ı	74LS00 20	74LS109 .36	
١	74LS01 .20	74LS112 38	
ı	74LS02 .23	74LS113 .45	
4	74LS03 .23	74LS114 .56	
1	74LS04 .23	74LS123 60	74LS243 1.20
1	74LS05 23	74LS125 .45	
ı	74L508 .23	74LS126 45	
ı	74LS09 .25	74LS132 .55	
ı	74LS10 23	74L5136 .45	74LS248 1.10
١	74LS11 .25	74LS137 .95	74LS251 68
ł	74L512 .25	74L5138 .50	110000
ł	74L513 .45		
J	74LS14 40	74LS147 1.95	
	74LS15 .35	74LS151 .38	
ı	74L520 23	74LS153 40	
ı	74LS21 .25	74LS154 1.90	
ı	74LS22 25	74LS155 .60	74LS279 48
ł	74LS26 35	74LS156 .80	74LS280 1.80
١	74LS27 23	74LS157 .45	74LS283 85
ı	74L528 45	74LS158 .48	74LS290 .75
ı	74LS30 22	74LS160 70	74LS293 .95
ı	74LS32 27	74LS161 .70	74LS298 1.00
١	74LS37 30	74LS162 80	74LS320 2.00
ı	74LS38 .30	74LS163 65	74LS323 3.50
ı	74LS40 .40	74LS164 .80	74LS365 .80
ı	74LS42 .44	74LS165 80	74LS366 .80
ı	74LS47 .65	74LS166 80	
ı	74LS51 22	74LS169 1.75	74LS368 58
١	74LS54 .25	74LS170 1.50	
ı	74LS73 .35	74LS173 70	
ı	74L574 35	74LS174 .45	74LS377 1.25
١	74LS75 .35	74LS175 .40	74LS386 .65
4	74LS76 .45	74LS181 1.95	74LS390 1.30
١	74LS83 .68	74LS190 .B0	
ı	74LS85 .80	74LS191 .80	74LS398 2.50
۱	74L586 40	74LS192 65	
١	74LS90 39	74LS193 .65	74LS682 3.00
١	74LS92 .50	74LS194 .75	81LS97 1.10
١	74LS93 .50	74LS195 .90	
ı	74LS96 .70	-74LS196 .85	
ı	74LS107 .36	74LS197 .85	

		and the same of th
MULTI	TURN	TRIM POTS
50 OHM	5K	
100 OHM	10K	
500 OHM	50K	3/\$2.00
1000 OHM	500K	101100000000000000000000000000000000000
		NAME OF TAXABLE PARTY.

Ū	POSTAGE	RATES
D	10% FOR ORDER	S UNDER \$25.00
D	5% FOR ORDERS	BETWEEN \$25.00 & \$50.00
D	3% FOR ORDERS	ABOVE \$50.00
-	A CONTRACTOR OF THE PARTY OF TH	THE RESERVE AND ADDRESS OF THE PERSON NAMED IN

TERMS FOB CAMBRIDGE MASS SEND CHECK OR MONEY ORDER MINIMUM TELEPHONE, C.O.D. PURCHASE ORDER OR CHARGE \$20.00 MINIMUM MAIL ORDER \$5.00

33UF 10V

47UF 20V

68UF-16V

200UF 20V 150UF 16V

330UF 10V

SEND \$25 FOR OUR CATALOG FEATURING TRANSISTORS & RECTIFIERS 145 HAMPSHIRE ST., CAMBRIDGE, MASS 02139

SOLID STATE SALES P.O. BOX 74 D SOMERVILLE, MASS. 02143

TEL. (617) 547-7053

WE SHIP OVER OVER 95% OF OUR ORDERS WITHIN 24 HOURS OF RECEIPT

TOLL FREE 1-800-343-5230 FOR ORDERS ONLY

Free Buyers Guide

84 pages of the latest in components, tools and instruments — a must for DESIGNERS, instructors and maintenance engineers

NEW ZENITH ZXM 121

High legibility 12" green phosphor monitor. 15 Mhz bandwidth. 40 or 80 character selectable full compatability.



SPECIALS

25 PIN DB PLUG AMP P/N 205737-2 \$1.97



9 PIN DB PLUG RIGHT ANGLE FOR **HOME COMPUTERS & GAMES!** AMP P/N 207456-2 .\$.85¢

Any Quantity

MOST STANDARD VALUES 1/4 WATT 5% RESISTORS 1 OHM TO 10 MEG. OHM 2 K MIN. BUY 1 K MIN. PER VALUE \$6.50 . Per 1,000

RESISTOR BUYOUT



UHF/VHF Conversion Kit - with Genuine Mitsumi Tuner......\$119.95

CALL OUR HOT LINES IN CALIF. (714) 527-2554 OUTSIDE CAL. (800) 854-8660

SCR ELECTRONICS CENTER

5303 Lincoln Ave., Cypress, CA 90630

CIRCLE 93 ON FREE INFORMATION CARD

Gives excellent reception, 50 KHz to 30 MHz.

> New MFJ-1024 Active Receiving Antenna mounts outdoors away from electrical noise for maximum signal. Gives excellent reception of 50 KHz to 30 MHz signals. Equivalent to wire hundreds of feet long. Use any SWL, MW, BCB, VLF or Ham receiver.

> High dynamic range RF amplifier. 54 in. whip. 50 foot coax. 20 dB attenuator prevents receiver overload. Switch between two receivers. Select auxiliary or active antenna. Gain control. "ON" LED. Remote unit, 3x2x4 in. Control 6x2x5 in. 12 VDC or 110 VAC with

optional adapter, MFJ-1312, \$9.95.

129 95 \$

Order from MFJ and try it. If not delighted return within 30 days for refund (less shipping).

One year unconditional guarantee.
Order today. Call TOLL FREE 800-647-1800.
Charge VISA, MC. Or mail check, money order.
Write for free catalog. Over 100 products.

CALL TOLL FREE 800-647-1800

Call 601-323-5869 in Miss., outside continental USA, tech/order/repair info. TELEX 53-4590.

ENTERPRISES, Box 494, Mississippi State, MS 39762

DISK DRIVE FOR YOUR APPLE



QUIETER THAN SHUGGART DRIVES!

Enclosed in a handsome metal enclosure, color matched to your Apple. Connects to your Apple Disk Interface Card or to our own Apple Compatible Disk Drive Card. 90 day warranty. Includes cable. If not satisfied return within 30 days for full refund.

Disk Drive \$274.99

16K Apple Ram Card Kit

- Upgrade your 48K Apple to full 64K Ram.
- Hardware/Software compatible with Apple language card and Z80 card.
- · Run Apple Fortran or Pascal

Kit	•	•											\$39.95
Bare Card	٠	• :	٠,	٠		•	٠	•		•		*	\$13.95

R.F. MODULATOR

Combine both audio and video output onto channel 3 or 4 of your T.V. set.
Single I.C. chip (MC 1374) makes for quick and easy assembly. Single adjustment controll A must for every video recording or computer enthusiast computer enthusiast.

VH-0 Kit \$19.95

UHF T.V. PREAMP

Features:
• 25 dB gain! • Kit

Your reception will dramatically improve! This unit will enable you to pull in signals you never knew were there!

For both indoor and outdoor use. Input and output impedance 75 ohm. No adjustment! Easy assembly.

JH-0 Kit \$22.95

Tired of getting up to change channels? Get rid of that mechanical cable controller. Relax with . . . PHILIPS CTC8R Remote Cable



- Micro computer technology
 Quartz controlled IC's lock in picture & prevent drift
 60 channel selections

- Programmable time on and off
 Favorite channel memory and recall, plus scan
 Wireless hand held "infra-red" transmitter system (25 ft.)
- Adaptable to any brand television
- One year warranty service

CTC8R		\$139.95
CTC9R	(with 24 hr. LED digital clock)	\$149.95

SATELLITE TV RECEIVER KIT!!!

It's not ready yet, but we guarantee it will be revolutionary in size and price. Send or inquire for preliminary information. Priced below \$350.00. Available in April.

LSS-1 less than \$350.00



DIGITAL MULTIMETER MIC-6000Z

- 3½ Digits
- DC 0.5% Accuracy
- DCA and ACA up to 10A
- OHM up to 20 M OHM
- Audible Continuity Test
- Diode Check
- Leads and Battery Included


The MIC-6000Z is a professional Multimeter at an inexpensive price.

The 6000Z works up to 1000 hours on a common battery, also can withstand 1000 VDC loads. Resistance ranges are protected up to 400 VDC. For your added convenience the MIC-6000Z has a built-in 10 amp current capacity, so you don't need an accessory shunt.

MIC-6000Z Assembled\$89.95

MORE GAIN Than a

MODEL ELC 1045
FREQ. RANGE
UHF 470-889 MHZ
CHANNEL 14-83
OUTPUT CHANNEL 3
75 OHM INPUT Tuner






Description Part No. PWD10 Philips UHF Tuner ELC 1045...... \$23.95

AMATEUR MICROWAVE

Receiver System 1.9-2.5 GHZ

90 day warranty on PS-5!!! MICROWAVE RECEIVER SYSTEM



- Commercial grade construction
- Sturdy Parabolic aluminum reflector antenna
- High gain 50 db!
- Line of sight distance 45 miles!
- Complete system, power supply, cable, assembled reflector antenna, and downconverter.
- Downconverter mounted in attractive cabinet.

PS-5 Assembled \$109.95 Kit Form \$ 79.95

MICROWAVE PREAMP For your Parabolic Dish Antenna

- Improve your picture quality
- Increase your reception distance 15 db gain, 2 db noise factor!

- Easy assembly
 1.9 GHz to 2.5 GHz
 Mounts indoors or outdoors
 Can be used with PS-5!

DCS-1 KIT \$39.95





Digital Multimeter MIC-3300A

- Leads + battery included Easy instructions

A high quality Digital Meter Kit at an affordable price. Educational and enjoyable to build, the MIC 3300A is a high quality meter for all hobbyists and maintenance work.

MIC-3300A Kit Form \$59.95 Carrying Case \$ 9.95 Carrying Case ...

AMATEUR MICROWAVE RECEIVER KIT 1.9-2.5 GHZ CHRISTIAN CHOCKETON COOK

Assembled 32 element antenna... \$19.95 PS-2

20 dB gain microwave receiver kit with variable power supply kit . . . Complete package PS-1 & PS-2 .. \$65.00

Mounting Hardware Included

NEW

Microwave Preamp!!!

Use with PS-3 Kit. Adds 20-25 db gain to boost reception distance.

- Low NoiseHigh Gain
- · Can be used with all existing
- stop sign board receivers!!!!

 1.9-2.5 gHZ Freq. Range

PS-4



Illinois Residents (312) 564-0104 Orders Only, Toll Free # (800) 323-1327

Minimum order \$15.00. Add 10% shipping on orders under \$35.00. Orders over \$35.00, add 5%. Illinois residents add 6% Sales Tax. Catalog - \$1.00





VISA and MasterCard Acceptable



2-WAY CAR STEREO SPEAKER SYSTEM

THESE SPEAKERS COME IN HEAT RESISTANT
ASS CABINETS. EACH CONTAIN A 4" 10 OZ
WOOFER AND 2" TWEETER. 15 WATT NOM.,
45 WATT MAX. POWER RATING. COMPANE
TO \$80,00 VALUE.
SPECIAL PRICE...
\$36.00 PER PAIR.....

CASE

BLACK PLASTIC

SE COMPONIENT

BLACK PLASTIC ENCLOSURE

BLACK PLASTIC ENCLOSURE
ADJUSTABLE HEIGHT FROM
1.63" TO 2.93"; WIDTH
6.85"; DEPTH 8". BUILTIN STAND OFFS FOR P.C.
BOARDS..RROHT AND BACK
PANELS NOT INCLUDED..
\$5.25 PER CASE

PHOTO-FLASH

CAPACITORS 35 MFD 330 VOLT

170 MFD 330 VOLT

1 1/8" X 7/8" 2 FOR \$1,50/10 FOR \$7.00

600 MFD 360 VOLT 3 1/2" HIGH X 1" DIA. \$1.00 EA, 10 FOR \$9.00

但但時

750 MFD 330 VOLT

2" HIGH X 1 1/4" DIA. \$1.25 EACH 10 FOR \$11.00

1" X 5/8" DIA. 45¢ EACH... 10 FOR \$4.00



VARACTOR DIODE 16 PF

MV2205 3 FOR \$1.00

BB-103 4 FOR \$1,00 100 FOR \$22,50

120V INDICATOR

NEON INDICATOR, RATED 120V 1/3W, MOUNTS IN 5/16" HOLF, RED LENS, 75¢ EACH 10 FOR \$7.00 100 FOR \$65.00

0-15 VDC METER



THIS 2 1/4" SQUARE METER MEASURES 0-15 VDC. \$4.50 EACH

COMPUTER CAPACITOR

1700 mfd. 150 VDC \$2.00 2 1/2" DIA X 4 3/4" HIGH 3,600 mfd.

40VDC \$1.00 6,400 mfd.

6,400 mfd.
60VDC \$2.50
1 3/8*ou X 4 1/4*
12,000 mfd. 40 VDC \$3.00
2" D1A X 4 1/4" HIGH
18,000 mfd. 75 VDC \$4.00
2 1/2" D1A X 4 1/2" HIGH
22,000 mfd. 15 VDC
2" ou X 2 1/2" HIGH
22,000 mfd. \$2.00 22,000 mfd.40 VDC

2" DIA. X 6" HIGH \$3.00 24,000 mtd. 30 VDC 1 3/4" DIA X 4" HI 31,000 mtd. 15 VDC 1 3/4" DIA X 4" HI 1 3/4" DIA X 4" HI \$2.50 72,000 mfd. 15 VDC 2" DIA. X 4" HIGH \$3.50

COMPUTER GRADE CAPACITOR SPECIAL 180,000 mfd. at 6V 2½" DIA X 4½" HIGH \$1.50 CLAMPS TO FIT CAPACITORS SOC ...



4 VDC at 70 MA \$2.50 9 VDC at 100 MA \$2.00 9 VDC at 225 MA \$3.00 16.5 VAC 10 VA \$3.50 22 VDC at 60 MA \$2.50

TRANSFORMERS

120 volt primaries

5.6 VOLTS at 750 MA \$3.00 8 VOLTS at 150 MA \$1.25 16.5 V. at 3 AMPS \$6.50 18 VOLTS at 1 AMP \$4.50 18 VOLT at 2 AMP \$5.50 24 VOLT at 1250 ma \$4.50 24 VOLT at 1.2 AMP \$4.50 65 VCT. at 2 AMP \$5.50

L.E. D.'s

STANDARD JUMBO
DIFFUSED
RED 10 FOR \$1.50
GREEN 10 FOR \$2.00
YELLOW 10 FOR \$2.00
FLASHER LED
S VOLT OPERATION
RED JUMBO SIZE
\$1.00 EAO⁴
BI POLAR LED
2 FOR \$1.70
SUB MINI LE D
RED

,079"X ,098" 10 F 20 mA at 1.75 v 200 FOR \$18.00 10 FOR \$1.00

LED HOLDERS

TWO PIECE HOLDER FOR JUMBO LED

10 FOR 65¢ 200 FOR \$10,00

CRYSTALS

CASE STYLE HC33/U 2 MHZ: COLORBURST 3579.545 KC \$3.50 EACH \$1.00 EACH

FREE! SEND FOR OUR NEW 1983 40 PAGE CATALOG FREE!

MINIATURE **6VDC RELAY**

SUPER SMALL SPDT RELAY; GOLD COBALT CONTACTS. RATED 1 AMP AT 30 VDC; HIGHLY AT 30 VDC; HIGHLY POSSIBLE, OPERATES FROM 4.1 TO 6 V, COIL RES. 220 OHM. 1 3/16" X 13/32" X 7/16" AROMAT N RSD-6V

\$1.50 EACH 10 FOR \$13.50

EDGE CONNECTOR

15 PIN GOLD \$1.75 EACH

15/30 GOLD SOLDER EYELET \$2.00 EACH 18/36 GOLD SOLDER EYELET \$2.00 EACH

22/44 GOLD SOLDERTAIL (P.C. STYLE) \$2.50 EA 10 FOR \$22.50

22/44 GOLD

SOLDER EYELET \$2.50 EACH

BLACK LIGHT (ULTRAVIOLET) G.E. | F6T58L \$2.50 each

-t 50 A

riii)

4PDT RELAY

14 pin style
 3 amp contacts
 24 volt d.c. or
 120 volt a.c. (oil
 Used but fully te

specify coil voltage
LARGE QUANTITIES AVAILABLE
SOCKETS FOR RELAY 504 each

\$1.70 EACH

6 VDC RELAY MINIATURE D.P.D.T. 3 AMP CONTACTS FUJUITSU | FBR321D006 \$1.75 EA 10 / 16.00

A WATT STEREO AMP

ASSEMBLY INCLUDES VOLUME, BALANCE AND TONE CONTROLS,
CERANIC PHONE INPUT, LINE INPUT AND 8 ON GUTPUT FOR
SPEAKER OR HEADPHONES. SPEAKER OR HEADPHONES, OPERATES ON 12 VAC @ 500MA.
OUR ABOVE 12 VOLT TRANSFORMER
IS IDEAL FOR THIS APPLICATION
\$4,50 EACH

13 VDC RELAY

CONTACT: S.P.N.C.
10 AMP 8 120 VAC
ENERGIZE COIL TO
OPEN CONTACT...
VCOIL: 13 VDC 650 CHMS
SPECIAL PRICE \$1.00 EACH



COLOR LIGHT STRING AVAILABLE \$1.75 EA

FOOT CONTROL WITH SIDE SWITCH

MEASURES 4 3/4" X 9 3/4" WITH 100 K LINEAR POT AND MOMENTARY S.P.D.T. SWITCH. \$6.50 EACH

AM/FM/MPX

CHASSIS

THIS AM / FM / STEREO CHASSIS IS COMPLETE AND READY TO PLUG IN EXCEPT FOR THE SPEAKERS.... HAS CONNECTIONS FOR UP



ISLIDE POTS 500K

2 7/8"LG.- linear tape 1 3/4" TRAVEL 75¢ EACH DUAL 100 K AUDIO TAPER

SLIDEPOT

3 1/2" LONG 2 1/2" TRAVEL, \$1.50 EACH

MINI-PUSH
BUTTON
S.P.S.T. MOMENTARY
NORMALLY OPEN
1/4" BUSHING
356: EACH 10 FOR \$3.25
100 FOR \$30.00
SPECIFY COORE: RED, BLACK,
WHITE, GREEN, YELLOW.

KEY SWITCH S.P.S.T.

4 AMPS @ 125 VAC
KEY REMOVES BOTH
POSITIONS \$3.50 EA

LIGHTED **PUSH BUTTON**



RED LIGHTED 120 VAC 10 AMP. S.P.S.T. "POMER" PRINTED ON FACE. MOUNTS IN 7/8" SQUARE HOLE.. \$1.50 EA 10/ \$13.50



TERMINATES TO FLEXIBLE CABLE WITH CONTACTS ON .100 CENTERS. EDGE CONNECTOR INCLUDED...

\$4.50 PER KEYBOARD, CASE, AND CONNECTOR.....

TO 4 SPEAKERS, A TURNITABLE, RECORDING OUTPUT AND HEADPHONES. IDEAL FOR MOUNTING INTO YOUR CUSTOM CABINET... \$12.50 EACH

E 4 • Quantities Limited • Min. Order \$10.00 • Add \$2.50 • Shipping USA • Calif Res. Add 6¹.2% • Prompt Shipping NO COD

EQUIPMENT SLIDES CHASSIS-TRAK MODEL

C300S C300S

3 SECTION. LENGTH 22" CLOSED.

HOLDS TO 85 LBS, EXTENDS 23"

METAL OXIDE VARISTOR

G.E. # V82ZA12 50 VOLTS, NOMINAL D.C. VOLTAGE, 5/8" DIAMETER. 2 FOR \$1,50



\$5.00 PER PAIR SOME HARDWARE INCLUDED

TOLL FREE ORDERS ONLY 1-800-826-5432 (ORDER ONLY) ALASKA, HAWAII, CALIF OR INFORMATION (213) 380-8000

905 S. Vermont Ave.

P.O. BOX 20406 Los Angeles, Calif. 90006

products

CCTV D controls alarm systems

over 2000

passive infrareds motion detectors ultrasonic detectors magnetic contacts smoke detectors vehicle alarms accessories remotes tools

wmountain west™

4215 N. 16th Street Dept. RE-4 Phoenix, AZ 85016 1-800-528-6169 toll-free

Burglar/Fire Alarms

FREE

CATALOG

QIRCLE 91 ON FREE INFORMATION CARD



CONVERTERS DESCRAMBLERS

Largest Selection of Equipment Available \$ Buy Warehouse Direct & Save \$



36 channel converter \$4595

36 channel wired remote converter only \$8895



Send \$2 for complete catalog of converters and unscramblers


Quantity Discounts • Visa • Master Charge Add 5% shipping - Mich. residents add 4% sales tax

C&D Electronics, Inc. P.O. Box 21, Jenison, MI 49428 (616) 669-2440

"The Deluxe II"

Is The Ultimate In UHF Sine Wave **Converter Technology**

PC BOARD & PLANS \$20.00

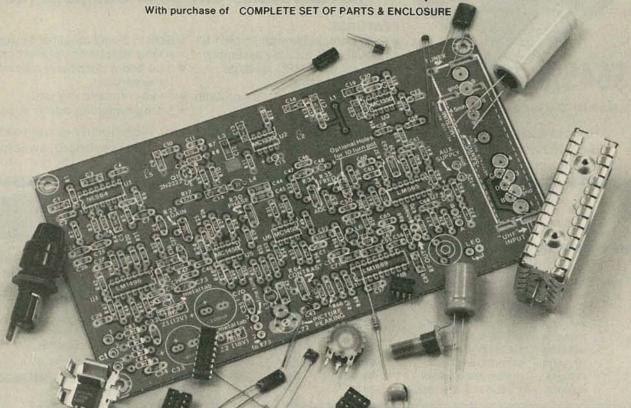

The latest state of the art electronics combined with the excellence in printed circuit manufacturing creates this high performance UHF Sine Wave Converter kit that outperforms the imitations by a long shot.

Engineered for reliable stability and outstanding reception clarity, uninterrupted modulated audio and fully illustrated instructions with the amateur in mind.

TOLL FREE

EXP. DATE_

BETA ELECTRONICS, 1700 E. DESERT INN ROAD, SUITE 222, LAS VEGAS, NEVADA, 89109 1-800-782-2701

QTY	DESCRIPTION OF ITEM	EACH	SHIPPING	TOTAL	PLEASE
	PC BOARD, PLANS, PARTS & ENCLOSURE	\$152.99	\$4.95	Content last	PRINT CLEARLY
	PARTS & ENCLOSURE ONLY	\$132.99	\$4.95	I S TV (FILLS)	
S. S. S. S.	PC BOARD & PLANS ONLY	\$30.00	\$1.50		SEND THIS
NAME			GRAND TOTAL	\$	ORDER FORM
ADDRESS				QUANTITY	DISCOUNTS AVAILABLE
CITY/ST	ATE/ZIP			ORDER DATE_	MO DAY VP

VISA

MST. CARD

CARD NO.

FOR IMMEDIATE DELIVERY MONEY ORDERS OR CERTIFIED CHECKS PREFERRED ----- PERSONAL CHECKS ALLOW 4 WEEKS FOR DELIVERY -



FORMULA INTERNATIONAL INC.

12603 Crenshaw Blvd., Hawthorne, CA 90250 For information (213) 973-1921 • Orders Only (outside Calif.) (800) 672-8758



(please add 5% shipping and handling)

neappl

The Alternative! The Compatible! The Affordable! 48K Color Computer Kit!

- ★ Singleboard for easy assembly
- ★ Popular 6502 MPU for large amount of software

10-99

- ★ Game paddle connector on both ★ 14 key numeric key-pad sides of case
- ★ Fully compatible with Apple® II+ ★ Built in 2-watt amplifier for realistic sound effect with volume control
 - ★ 8 on board peripheral connectors for expansion

 - ★ 5-amp switching power supply

Easy to assemble! All components are clearly silk-screened on the high quality double-sided mother board. All integrated circuits, IC sockets, peripheral connectors, keyboard, switching power supply and the professional high impact plastic case are included.

High Quality 16K RAM Card Kit

Same feature as the one we've been selling but without the mess of Dip-wire for Apple® & Pineapple™. \$59.95 per kit

51/4" Flexible Disc Sale

Why buy other brands when you can buy WABASH discs for much less and backed by 1-year factory warranty. All discs come with Hub Rings

M13A411X	51/4" SSDD Soft Sector	\$2.20
M43A411X	5¼" SSDD 10 Hard Sector	\$2.25
M53A411X	5¼" SSDD 16 Hard Sector	\$2.25
M14A411X	5¼" DSDD Soft Sector	\$3.65
F111111X	8" SSSD IBM compatible	\$2.45
F131211X	8" SSDD 26 sectors 128 bytes	\$3.05

16K RAM Card Kit For Your Apple® & Pineapple™ Computer



Kit includes:

• High Quality P.C. Board • 8 ea. 4116 (200ns) • All the IC's & parts • 16-pin Dip wire • Easy to assemble. You can do it in less than 30 minutes! \$49.95 per kit

5¼" Disc Drive 100% Apple® & Pineapple™ Compatible



We did it once, response was great! Now we are doing it again, don't miss it!

\$295.00 ea. w/o controller \$385.00 ea w/controller

Replacement Keyboard For Your Apple® II Computer

Got a bad Keyboard? Here's the alternative!

- * Full ASCII code
- ★ N-key rollover function
- * TTL level output
- ★ On-Off indicator
- ★ Low power consumption
- ★ With upper/lower case function



\$99.95 ea.

At last! Here's the computer case everyone has been looking for!

Ideal for your homebrew *AP-II 6502 MPU based computer. Made with high impact plastic. Color and shape are compatible with the standard Apple II computers.

Introductory Offer \$150.00 ea.

Keyboard not included see our Ad in this page.

MODEL: AP-II

*AP-II model is compatible with Apple II but not manufactured by Apple Computers, Inc. ®Apple or Apple II is a registered trade mark of Apple Computers, Inc.

6502 MPU Based Computer Motherboard! You ask for it, you got it!

- * 48K on board memory (4116)
- * 12K on board EPROM memory (2716 or 2732)
- * 8 expansion slots for peripheral cards
- ★ Composite-video output
- * size: 141/4" × 81/2"



\$99.95 ea.

Switching Power Supply For Apple®, AP-II, and Pineapple Computer

Compact size s	witching p	ower supply
Specification:	4006A	4007A
+5V at	3A	5A
-5V at	2A	3A
+12V at	.5A	1A
-12V at	.5A	1A

4006A \$99.00 ea.

Size: Width 31/2", Depth 93/4", Height 21/4"

Size and mounting holes will be same as the one used in Apple II.

Apple is a registered trademark of APPLE COMPUTERS, INC

SHIPPING AND HANDLING CHARGES Under \$50.00 Purchase Over \$50.00 Purchase

Outside Calif. (Incl. Mexico & Canada) Overseas

Minimum Order \$10.00 / Calif. Residents add 6.5% Sales Tax. Phone Orders Accepted on VISA or MC ONLY. NO. C.O.D.'s. Prices subject to change



STORE HOURS MON-FRI - 10-7 SAT - 10-6




QUALITY ACTIVE, YOUR SERVICE NUMBER ONE AVAILABILITY CHOICE Active Electronics FEATURING Your one stop source for the THE 1982 I.C. MASTER widest variety of factory \$39.95 fresh electronic components WHILE QUANTITIES LAST Extensive Product Offering Semiconductors, Integrated Circuits, Microcomputer Boards, Microprocessor and Support Circuits, Transistors, Diodes, Capacitors, Resistors, Optoelectronics, Potentiometers, Relays, Multimeters, Switches, Knobs, Connectors, Sockets, P.C. Boards, Enclosures, Data and Reference Books, Soldering Aids, AND MUCH MORE Superior Service Greater choice. Easier, faster ordering and more reliable deliveries. Active's all NEW comprehensive Fall/Winter catalog is now available — FREE OF CHARGE. Circle No. 3 on free information card or write to: P.O. Box 8000, Westboro, MASS, 01581U.S.A. Call Toll Free 800-343-0874

CIRCLE 3 ON FREE INFORMATION CARD

MASS. customers call (617) 366-0500

12" B&W MONITOR



Power Bright V-Hold

CIRCLE 99 ON FREE INFORMATION CARD

VIDEO 100 by AMDEK

FULL **FACTORY** WARRANTY

7995

for APPLE

Language Transparent COEX FACTORY WARRANTY

51/4"Floppy

All Certified-100% Guaranteed

BOX of 100... Above with Hub Rings...... \$169.00

FLOPPY DISK DRIVE

From Fourth Dimension Systems with Track Zero Micro Switch DOS 3.2.1 & DOS 3.3

CP/M and PASCAL

DESIGNED FOR YOUR

APPLE™

Controller Card

for above.......\$99.00

DOT MATRIX

- Interface with Apple,[™] Centronics RS-232, IEEE-488
- 9x7 Dot Matrix, 80 CPS, Bi-Directional Printing
- 2K Buffered Memory
- 80, 96, 132 Columns, Graphics and Block Printing
- Selectable Char Pitch, Line Spacing and Feed

COEXInterface Card to APPLE \$49.95

80x24 Video Display Card

Vista Computer Company's new Vision-80 board is a sophisticated yet easy to use video display card for the Apple™ computer.

PARALLEL INTERFACE **EPSON TO APPLE**

New From COEX

\$1 095 CABLE INCLUDED

PROTOTYPING CARDS


for APPLE.... \$19.95 for I.B.M..... \$49.95

for APPLE... \$16.95 for I.B.M.... \$19.95

"Have You Kissed Your Computer Lately"

1380 E. Edinger ● Santa Ana, Calif. 92705 ● 714/558-3972 Terms of Sale: Cash, Checks, Credit Cards, M.O., C.O.D. Calif. residents add 6% sales tax.





79¢ 15 V. BLOCK FANS \$6.95

VI30-LA-10A

ULTRASONIC BUG ELIMINATOR C BASE CIRCUITRY WITH PIEZO

Dual Computer Chip Set

CPU & MPU Systems/Dual -

512 X 8 Bi Polar Ram 50 usec.

312 A 8 B Polar Ram 30 usec 8 support R 29623 Bi Polar Ram 7415624 Volt Cont. Osc. 74121 (2) 7413 (2) 29701 64 X 8 Prom MC 8601 Monostable, Retrig.

Multivibrator (2) CA 3246 Quad 20 MA, OP AMP.

723 Reg. TMS 9901 Prog. Keybord Interface

SEND FOR

FREE 1983

CATALOG or call us at

(813) 392-0406

19.95

cks, ACLU

CA 3246 G 6503 CPU 8048 MPU

3-10 Conductor 14-16 Conductor 20-25 Conductor 26-37 Conductor 40-50 Conductor 99¢ Shielded 50 Conductor 11.09 KIT 14.95 POWER INVERTER 12V. to 115 V. Tripp Lite 450 Watt \$89.95

IDC 50 PIN

PV400 ITT Power Supply

Triple or Duot Choice Of +12V. 7A -12V 7A or 24V. 7A. And 5V. 10A. \$300.00 Orig. Teletype Cost 5" X 5" High X 14" *59.95

Voltage Regulator Choice Just hook up to transformer 12V., 9V.,6V.@ 1.5A. \$1.29 ADJUSTABLE BOARDS

KNAPCC

Varactor Diodes
Hyper-Abrupt Diode Above 1 Ghz.
Mini-L Pack Motorola BB 105

CONNECTORS

Ribbon To Edge Card

IDC 26 Pin (3M) .100 10/ 29.95 IDC 50 Pin (3M) .100 10/ 34.00

Headers or Sockets
IDC 20 PIN Your Choice
IDC 26 PIN 10 for
IDC 34 PIN \$29.95

Ribbon Cable per ft.

Must For Leadless Work
Liquid Solder 60/40 Rosin Base 7
Injection Pack Per Tube

Solder Paste 35 Gran

\$29.95

39¢ 49¢

89¢

: LIGHT GUARD :

AUIO DIGHT OFF UNIT

ADJUSTABLE DELAY—
2/12V. 10 AMP
RELAY TRIGGERED CIRCUITS
SOLD SEARS \$39.95

\$5.95

Voltage Regulators

5/\$5.50 10/\$9.95 + 15v.7815

MOTOROLA PIEZO SPEAKERS

RESPONSE 10/555.00 60 TO 30,000 Hz 100/3450.00

Milton Bradley

Computer Perfection

new boards w/ microprocessor 10/\$6.95 99\$

Piezo Elements

Fantastic 39°

Murata Transducer

TRANSFORMERS

10V./8 A + 46 V./2.5 A. C.T

DUAL DISPLAYS

Specialty Chips TMS9900KDL CPU 114 6514-5 CMOS RAM 13 MM5280K 4KRAM 13

-5v. 79M05 +6V. 7806

+12V. 7812

\$6.95

99 =

*6.95

0

RESPONSE

AUTO LIGHT OFF UNIT

Dip Tantalum Caps 6.8, 10, 15, 22, 33, 47, @ 6.3V 22, 68 @ 10V. 1.5, 3.3, 4.7, 6.8 @ 16V 29¢

MM5280K 4K RAM '3.00 IM6402 Uarts \$4.95 MC10125PBus Driver \$3.50 MNI400ML CPU \$.59 4164-15NL '8.50 RAM 64K MM1702 '3.95 Eprom 4116 200NS. 8/15.50 Ram

TI SN 76002ND (LM 384) 99 C .22, 68, 1 @ 50V. dipped and solid

RFI FILTERS

2 AMP. HOPKINS #F-85010 \$1.99

add 10% for shipping and handling min. shipping charge 2.50 ROREION H.J. Knapp of Florida, Inc. 5ENO 1.00 4750 96th St. N. St. Petersburg, Florida 33708

CIRCLE 86 ON FREE INFORMATION CARD

12VDC DIGITAL CAR CLOCK AND RALLY TIMER * O TENTO 0

CATALOGS

FRONT BEZEL & BUTTONS STYLISH BLACK FRONT BEZEL WITH SUILT IN RED FILTER AND CHROME PLATED SUTTONS FOR CLOCK

24 HOUR UNIT

C4757 \$12.95

C4834 \$12.95

1/4 W RES ASST C4451 8/82.00 C3011 7/\$1.00 PHOTOFLASH CAP 350MFD 330V REGULAR NEONS JUMBO GREEN LED 1 C4534 \$1.00 C3013 5/\$1.00 HORSESHOE JUMBO YELLOW LED FLASHTURE 1 C4752 \$2.59 C3363 5/\$1.00 MINI SLIDE SW TRI-STATE LED = -C3631 2/\$1.00 C4478 5/\$1.00 C3988 754 1000V SAMP RECT REED SWITCH LED MTG KITS

田口 C4443 5/\$1.00 C3640 5/\$1.00 C2707 12/\$1.00

CHANEY electronics inc DENVER, COLORADO 80227 303-781-5750

THE WORLD FAMOUS ETCO CATALOG OF ELECTRONICS 1000's OF FASCINATING FACTORY CLEAROUTS.
SURPLUS SPECIALS AND
BARGAIN OFFERS NOT
FOUND IN STORES OR
CATALOGS ANYWHERE . CABLE TV and much much maral **ETCO ELECTRONICS DEPT. 582** Mailing List Control Center Box 840 Champlain, N.Y. 12919 I Enclose (cash OK); Please rush postpaid \$1 for 1 year subscription to the world famous ETCO catalog. \$3 Canadian & Foreign 1 year subscription to the ETCO catalog. 304 page handbook "BUILD YOUR
OWN EARTH STATION". (TA025) \$10.00
360 page MASTER HANDBOOK OF
TELEPHONES. (TA001)......\$11.00
FREE - sample copy of the bargain packed ETCO catalog. Name. Address_ City

CIRCLE 94 ON FREE INFORMATION CARD



ECTRONICS CO.,INC.

32 pages with 47 exciting, low cost electronic projects!

at your local electronics store

CALL for store nearest you 1-800-453-1708



these electronic kits in Kit Centers throughout the



U.S.A. Digital Slot Machine

Combo-Lock



842 12-well Color Organ 844 T.V. Jammer 885 Tk-well Strobe Stick 850 Wheeper Alarm 852 Combination Lock/Alarm Cont 855 Electronic Tennis 856 Electronic Tennis 856 Big Sand Pertable Organ 858 Big Sand Pertable Organ

384 Sound Activated Color Organ, 1-channe 886 Audie Amp/Intercom 888 Librarian Termenter

Also available

PPG's Basic **Electronics Course**

NEW from PPG Electronics

available NOW! for only

Allow 2 weeks for delivery of your FREE 1982-83 PPG CATALOG.

PPG ELECTRONICS CO., INC. 791 Red Rock Road, St. George, UT 84770 1-801-628-3627

170

(602) 266-9758 (602) 234-3026



Electronic Parts

6835 N. 16th Street @ Phoenix, AZ 85016

The Most Unbelievable Electrolytic Sale In The USA!

LIIE IMOST OF	moneyante L		a ori are orie				
AXI	AL		RA	DIAL			
33/6.3	12/1.00	100	1000/10	12/1.00			
100/6.3	10/1.00	S	10/16	30/1.00*			
220/6.3	20/1.00*	=	47/16	30/1.00*			
470/6.3	10/1.00	M	220/16	25/1.00*			
220/10	15/1.00	U	470/16	20/1.00*			
1000/16	10/1.00*	Ш	47/25	20/1.00*			
2200/16	8/1.00*	0	1/100	15/1.00			
47/35	12/1.00	S	47/100	5/1.00			
220/35	10/1.00	0	100/100	4/1.00			
3300/35	1.00 each	8	4.7/160	10/1.00			
15/50	20/1.00*	-	10/160	10/1.00			
22/50	20/1.00*	40	22/160	10/1.00			
47/50	20/1.00*	-	4.7/250	10/1.00			
100/50	10/1.00	•	10/250	8/1.00			
150/50	8/1.00	S	22/250	5/1.00			
220/50	8/1.00	M	1/350	8/1.00			
10/75	12/1.00	4	3.3/350	6/1.00			
47/100	5/1.00*	ਹ	BI-POLAR				
1500/100	2/1.00*	W	100/10	10/1.00			
2.2/150	12/1.00	0	4/50	10/1.00			
3:3/150	12/1.00	S	10/50	10/1.00			
47/200	5/1.00	0	4.7/75	4/1.00			
1/250	15/1.00	ŏ	10/75	4/1.00			
2.2/250	12/1.00	\$1.00	18 10 12 1				
1/250	15/1.00	40		Il Bits 11.00 ea.			
150/350	2/1.00*		(various	sizes to 1/6")			
1/500	12/1 00						

Yes All Prices Are Correct! • \$10.00 Minimum Order on
All Above Capacitors • Some Quantity Pricing Available •

MOR	E\$1.00	SPECIA	ALS
1N4001	15/1.00	2N6055	
2N3905	5/1.00	Pwr Darlingt	
2SC828	5/1.00	7 Seg. LED Read	out
2SC644	5/1.00	HP 5082-7	650
SPS7390/E	CG123P	5/*1.0	0
	5/11.00	Horz P.C. Trimp	ots, 250Ω,
MINI D.P.D.T	Slide 4/11	500Ω, 5kΩ, 10Ω	
D.P.D.T. Roc		MC3420P	11.00
	3/1.00	SN75150	*1.00
	25/1.00	SN75150 LED's	8/1.00
	to 1N914	Transformer	
	vitch 3/1.00	12 V.C.T. 28	
	20/11.00	7805	2/11.00
	ZENER	7812	2/1.00



FLASHER KIT 95¢

(1) LM 3909 (1) LED (1) 100µ F Cap 12 Application Schematics


12V 6 A.H. Re-chargeable **GEL CELL BATTERY** \$9.95






25 W. Weller Type Iron SPECIAL \$8.95

35 W. Solder Iron ... \$4.95



ITEMS MC. VISA. COD VIA UPS



A WHOLE NEW WORLD OF TY VIEWING WITH TUSA'S NEW MODEL CYU-46, 40 CHANNEL CABLE TY CONVERTER Receive all the EXTRA CABLE TY "MIDBAND" & SUPERBAND CHANNELS on your UHF DIAL.

reliable system converts extra cable for clambes so they classifier by Pre-leaded on the UHF inner of your TV inner of your TV inner of your TV was the TLE TV in TLE TV inner of your TV inner o Now \$28.95.

NOW AVAILABLE
NEW TUNEABLE DELUXE MODEL CVU-1000

75 OHM UHF YAGI ANTENNAS

SPEAKER CABINET

Popular speaker cabinets for those famous home brew TV circuits. Speakers included.

Cabinet Dimensions: 74" wide x 9½" high x 5½" deep. Removable 1/8" thick back cover.

POWER TRANSFORMER 24V CT, 400 mA. Made in U.S.A.

3-POSITION COAXIAL

3-POSITION COAXIAL
PUSH-BUTTON SWITCH
For TV & video cassette recorder
Heavily shielded, Provides mai
mum isolation, 4 "P" connecto
accept 75-ohm coaxial cable wit
F88 fittings, Push button switch
are top mounted, Cutouts for flux
will procusion, 2 75-ohm resistor
and the push of the push of the push of the push
and the push of the push of

e top mounted. Cutouts for flush all mounting. 3 75-ohm resistors operly terminate any unused eition. Size: 3-9/16" x 2%" x 2".

3.69 ea.

10 - 49 \$2.75 ea.

12 db GAIN

*8.95 EA

6.95 EA



SC001

Sanyo 45 MHz Output Ca \$24.95

\$8.95 es

\$34.95 ··

AC LINE CORDS 多江城 R 18 gauge wire 6 ft. long cable Prestripped and tinned ends for easy installation.

TUNERS Continuous Tune Model

45MHz Output

49¢ .. Radial Lead Caps

POPULAR IC's TOP QUALITY NO SECONDS DESCRIPTION
2 watl Audio Power Amp
Levi Valdo Power Amp
Levi Valdo Power Amp
Modified Phase Locked Loop
Phase Locked Loop
Video Amp
Video If Amp
Video If Amp
Video If Amp
Video If Amp
R.F. Modulater
Dual Comp. Op Amp
Balanced ModDemodulate
PLL. Stereo Decoder \$1.49 LM-386N-1.59 3.50 1.49 1.69 2.49 2.06 1.75 2.69 1.95 3.19 4.49 2.95 PLL Stereo Deco Video Modulator 1.39 1.39 1.39 1.39 1.39

1000 mfd @ 50V ... 1 - 11 12 or more 2200 mfd @ 35V ... 1 - 11 12 or more 3300 mfd @ 35V ... 1 - 11

Ü

Waterproof Housing

UHF - VHF - FM SPLITTER

Ask For

RF2TV 1-9 \$2.49 es.

Special Purchase MV-2109 10-Up

.39 ea 5% MICA CAPS 5% 10pf .42s ea. 43pf .36s ea. 10pf .36s ea. Call for a 560pf. . 66¢ ea. 1200pf. . 89¢ ea. 3000pf . 1.39 ea.

POPULAR MICROWAVE PARTS \$2.75

PROJECT BOXES

This box is 11%"W - 4½"H -6½"D with a removable aluminum U-shaped chassis 11"W - 3½"H - 6"D inside. 10.95 ea

While They Last

12 or more ...1 - 11

10 mlog 12 on 1 · 11 1 mld@35V 1 · 11 12 or more 1 · 11

12 or more 2200 mld @ 35V . . . 1 · 11 12 or more 2200 mld @ 50V . . . 1 · 11

DELUXE SWITCH TV-1051 CATV - MATV - VCR

POPULAR MISCELLANEOUS PARTS 15 for . . . 100 for . . . 100 for . . . 100 for . . . \$1.00 5.00 1-12 ... 13-Up ... Toroids - T30-12 20-Up ... Toroids - T37-2 ... 20-Up ... 75 ohm - 90 db isolation

ORDER NOW 4IIIP 800-854-4655 714-635-5090



PAR **ELECTRONICS** 1056 N. STATE COLLEGE BLVD., DEPT. R ANAHEIM, CALIFORNIA 92806

11.49 -

SIDE CALIFORNIA PERSONAL CHECKS HELD FOR CLEARANCE
MAIL ORDERS WELCOME — INCLUDE POSTAGE — SHIPPED SAME DAY RECEIVED — NO MINIMUM ORDER

CIRCLE 83 ON FREE INFORMATION CARD

Quality Products for 18 Years

TV Sound Enhancer

"Stereo-like" sound from your TV. Hooks up between TV earphone jack and your stereo system. Includes all necessary parts, interconnecting cables, PCB, and instructions.

Order Model 150C

Only \$10.90 each





Electronic Whooper Siren

Powerful wailing sound from dual oscillator circuit. Use with any alarm circuit. Battery operated. PCB, instructions, and all parts included.

Order Model 110C

Only \$7.70 each

TV Scrambler



Jam the picture on your TV set. Tunable to all VHF stations. 30 foot range, battery operated. Comes complete with parts, instructions, and PCB.

Order Model 118C

Only \$3.90 each

Color Organ Control



3 channels total 600w of pulsing lights with no direct connection to sound source. Separate control for each channel. AC operated. Parts, PCB, instructions all included.

Order Model 152C

Only \$15.90 each


Create sounds of phasor guns, sirens, train, prop plane, space ship, and more. Battery operated. Comes complete with parts, PCB, instructions.

Complex Sound Generator

Order Model 142C

Only \$14.30 each





800-854-7393

(In CA 714-540-5480)

Send \$1.00 for Catalog [over 60 Kits] (Refundable with 1st Order)

SATISFACTION GUARANTEED

CA residents add sales tax · We pay shipping on orders

over \$25.00, otherwise add \$2.50. Sorry no COD.

Box 17359 · Irvine, CA 92713



MITSUMI UES A55F VARACTOR TUNER CHAN, 14-83 300 ohm INPUT \$17.95

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$8 95



ASTEC MODULATOR MINI VIDEO MODULATOR FOR USE WITH COMPUTER-VIDEO GAMES



GENERAL INST. UHF **TUNER MECHANICAL 12** VDC 14-83 DETENT TUNING

WITH SPECS



3/8" SQ. TRIM POTS TOP ADJUST 1K 10K

5K 20K 79¢ ea.



PANEL MT 10 TURN 500 10K

1K 20K \$5.95 ea.

VARI CAPS 10 - 60 pf 69¢ each 30 - 90 pf 69¢ each

33 uh

100 uh

10 mh

69¢ each

-OHE B-

.33 uh

47 uh

15 uh

18 uh

CHOKES

UHF AMP KIT 25 db gain

ADJ. COIL pri - .44 uh CT sec - .33 uh 3/16" form 996

NETWORK SALES, INC. 2343 W. BELMONT AVE. **CHICAGO, IL. 60618** 312-248-3202

TERMS: Visa, M.C., Check, Money Order or COD (add 3.00). Min. Order \$10.00. Add \$2.50 S&H for USA III. add 7% Tax. Mail Order Only. Phone Orders Welcome.

WRITE FOR OUR MONTHLY UN-ADVERTISED SPECIALS

CIRCLE 88 ON FREE INFORMATION CARD

PROFESSIONAL TECHNICIANS & SERVICEMEN

WE CAN SUPPLY ALL THE COMPONENTS FOR YOUR MAINTENANCE, REPAIR & DESIGN WORK

REPLACEMENT FOR ECG® TYPES (Min. 5 pcs. each type) YOUR TYPE YOUR TYPE TYPE NO. PRICE .99 85......**.30** 152. .40 375. 123A25 500A 8.95 124..................................95 523..... 10.20 165..... 2.25 526A..... 10.75 238..... **2.25** 712..... 1.25

SUPER SPECIAL (Min. 5 pc. each)

YOUR PRICE TYPE NO.

130......**.85**

5.95 276 EXACT REPLACMENT FOR SG613H

SPECIAL JAPANESE TYPES (Min. 5 pcs. each)

2SC867A 2.75 AN214Q 1.45 UPC1181H ... 1.25 M51515BL ... 2.95 2SC1172B... 2.25 UPC1182 1.25 2SC1308K...1.95 TA7205AP ... 1.25 STK435..... 3.95

FOR A COMPLETE 1983 COMPONENT CATALOG CALL OR WRITE

CALL TOLL FREE 800-526-4928 IN NEW JERSEY (201) 379-9016

COD ORDERS WELCOME (\$25 Min. Order)

D)(GITIKONI DIJEKONKONI (C

110 Hillside Avenue, Springfield, N.J. 07081

*ECG IS A TRADE MARK OF PHILIPS ECG.
DIGITRON ELECTRONIC IS NOT ASSOCIATED IN ANY WAY WITH PHILIPS ECG.

CIRCLE 87 ON FREE INFORMATION CARD

INTRODUCING A BRAND NEW MICROCOMPUTER

Venture

FULL LINE ALL PARTS & COMPUTER PRODUCTS

ECTRONICS

P.O. Box 4430C Santa Clara, CA 95054

Will calls: 2322 Walsh Ave. (408) 988-1640

Same day shipment. First line parts only. Factory tested. Guaranteed money back. Quality IC's and other components at factory prices.

		Charles and Charle		
INTEGRATED GIRGINES	Dhone	ardore	anly (onn)	E20 0106
INTEGRATED CIRCUITS	riione	nineiz	only (800)	220-0130
MOS-MEMORY RAM 8551 11.85 NO2023	2.05	IC SOCKETS	DISPLAY LEDS	

74LS00 TTL	1	MOS/MEMORY		11 85	N82523	2.95	Solder Tin Low 1		MAN72.74 CA CA	300 75
74LS00N	25	2101-1	1.95 6800	5.70	N825123	3.95	PIN TUP PIN	TUP		
74LS02N	25	2102-1	85 6802	11.95	N82S126	5.75		TUP		
74LS04N	25 25	2102AL-4	1.25 6820	4.95	N825129	4.75	8 13 22	30		
74LS05N		2102AN-2L	1.65 6850	3.50	N825131	4.95	14 14 24 16 16 28 18 20 36	.30	DL727/728 CA CO	500 1 90
74LS08N	.35	2104A-4	4.95 BOBOA	3.95	N82S137	8.75	16 16 28	40	DL747/750 CA/CO	
74LS10N	.25	2107B-4	3.75 8085A	8.50	DM8577	2.90	16 16 28 18 20 36 20 29 40	.58	FND359 CC	
74LS13N	.45	2111-1	2 99 ZBOA	6.00	2716-1	8.95	20 29 40	.49	FND500:507 CC: C/	500 99
74LS14N	99	2112-2	2.99 280 S10	18.50		10000	WIRE WRAP LEY	FL 3	FND503-510 CC C/	500 90
74LS20N	25	2114	2.24 280A S10	21.95	UART/FIFO		PIN PIN		FND800 807 CC CA	800 2 20
74LS22N	25	2114L 300ns	2.00 8212	1 85	AY5-1013	3.95		.93	10 digit display	1.25
74L528N	35	2114L 450ns	1.95 8214	3.75		26.95	14 55 24 16 57 28	1 00	7520 Clairex photocells	.39
74LS30N	25	4116 200ns	2.25 8216	1.80	3341	6.95	18 67 40	1.59	TIL311 Hex	9.50
74LS33N	55	8/4116 200ns	12.40 8224	2.50	INTERFACE			20	MAN4510 C	
74LS38N	35	MM5280	3 00 8228	4.95	8095	65	2 level 14 pm w/w	200		
74L574N	45	MM5321	9.95 8251	4.75	8096	65	CRYSTALS		MAN4710 C	A 40 95 C 56 99
74LS75N	50	MM5330			8097	65		4.50	MAN5710 C	
74LS90N	60	P5101L		8.95	8098	65	2 MHz	3.95	MANS740 CI	0 60 99
74LS93N	65	4200A		4.75	8109	1.25	4 MHz	3.95	The state of the s	
74LS95N	85	9368		8.75	8T10	1.75	5 MHz	3.95	OX WIRE WRAP TOOLS In	
74LS107N	40			6.90	8T13	1.40		3.95	Complete line of AP Produ	cts in stock
	45		10 00 1802CE plas	13.95	8T20	4.95	18 MHz	3.90		
74LS112N	45	416 TMM2016	2.50 1802E plas	17.95	8T23	1.75		3.90	KEYBOARDS	
74LS113N	75		5.95 1861P	5.95	8T24	1.75		3.90	56 key ASCII keyboard kit	\$74.95
74LS132N		HM6116-4	6.95 MSM5832	8.95	81725	3.20	32768 Hz	4 00	Fully assembled	84.50
74LS136N	49	HM6116 LP3	8 95 Z808	18.95	8T26		1.8432 MHz	4.50	Enclosure Plastic	19.95
74LS151N	75	4164 200ns		6.50		1 69	3.5795 MHz	1 20	Metal Enclosure	69.95
74LS155N	.79		CT.DV. TRAL DIA	5.95	8128	1.95	2.0100 MHz	1.95		
74LS157N	75	MICROPROCES	SOR ZBO CTC	5.95	8797	99		3 95		
74LS162N	.95	6502		8.65	8798	.95		3.95	UHF Preamp Kit \$34.95.	
74LS163N	.95	6502A		0.93	RESISTORS %	wait 5%	3 2768 MHz	3.95	Switching Power Supply I	ME 210.50.
74LS174N	95	65028	14 OC PHOM	100	10 per type	05		1.95		
	1.00		17074	4.50						

8.95

8/\$10.00

ports, parallel ports; 4 video options incl. color RCA Cosmac 1802 Super Elf Computer Kit \$106.95

VENTURE is a single

It is a learning training

computer as well as just plain fun for anyone who wants to get into a state-of-

the-art computer at rea-

sonable cost

EW! venture comes in kit form or fully assembled and tested. You can get it in its minimum configuration for as little as \$195.00 or take it all the way to floppy disks and voice. It can be expanded as a kit or fully assembled, at your own

52K RAM, Votrax voice synthesizer, sound generator, EPROM; Full Basic, disassembler, editor, assembler; metal cabinet, additional power supply, ASCII keyboard real time clock calendar

852..... 4.95

\$

\$

\$

\$

\$\$\$\$

\$\$\$

clock calendar.

Expansion Options

Floppy Disc, EPROM Programmer, light pen, universal user programmable music, sound board high resolution color/grayscale pixel mapped video board, General Purpose Instrument Bus, 8088 co-processor board.

Minimum VENTURE System \$195.00

Kit includes CPU and control with 4K of RAM, 1K of scratchpad, 2K monitor, 1861 video graphics, cassette interface and separate HEX keyboard with LED displays for address and output. Power supply is included along with 2 game cassettes. The main board is 16" x 20" and includes space for all of the previously discussed on-board options. Full on-board expansion can be completed for under \$1000.00. Call for further details, option prices etc.

pace and choice.

VENTURE is a 16" by 20" main board with separate ASCII and HEX keyboards. It runs fast, almost 4 MHz and has the capability of putting 1.5 megabytes of RAM and ROM on the board along with a variety of inexpensive onlines.

options.

On Board Options

16 channel A to D; 5 slot 60 pin bus, 2 serial

The Super Elf is a tremendous value as it combines video, digital displays, LED displays, and music, all on a single board for \$106.95. The Super Elf expansion capability is virtually unlimited and you can do it inexpensively one step at a time. Expansion includes cassette interface, additional memory, color video, Basic, ASCII keyboard, printer, floppy, S-100 bus, RS232, etc.

The Super Elf comes complete with power sup-ply and detailed 127 page instruction manual which includes over 40 pages of software, in-

Computer Kit \$106.95
cluding a series of lessons to help get you started and a music program and graphics target game. Many schools and universities are using the Super Elf as a course of study. OEM's use it for training and R&D. A monthly newsletter, Questdata is devoted exclusively to software for the Super Elf and there are many software books available at low cost.
Free 14 Page Brochure
Send or call for a free brochure on all details and pricing of the Super Elf and its expansion. "Eat & Run" cassette \$14.95

780 MicroProfessor \$135.00

Single board computer. Learning, teaching, pro-totyping. 2K RAM, keyboard, displays; cassette interface. Tiny BASIC \$19.00. All fully Elf II Adapter Kit \$24.95

UHF Preamplifier Kit \$34.95

\$2.00 shipping. Improves uhf reception dra-matically, 25 db gain assem. version \$57.50. Articles Radio Elect. Mar, May, 1981.

FREE: Send for your copy of our 1982 QUEST CATALOG. Include 88¢ stamp.

Modem Kit \$60.00

Linear CMOS and 7400 complete lines in stock Send for catalog

State of the art, orig., answer. No tuning necessary. 103 compatible 300 baud. Inexpensive acoustic coupler plans included. Bd. Only \$17.00. Article in June '81 Radio Electronics.

Z80 Microcomputer Kit \$69.00
16 bit I/O, 2 MHz clock, 2K RAM, ROM Bread-board space. Excellent for control. Bare Board \$28.50. Full Kit \$79.00. Monitor \$20.00. Power Supply Kit \$35.00. Tiny Basic \$30.00

MONTHLY SPECIALS

2114	8/\$13.95	2732-2	\$10.95
2114L3	8/\$14.95	4164-150	6.75
2764	\$14.50	1771	15.95
Z80 DMA	\$ 9.95	1791	24.95
μPD 765	\$34.95	1793	26.95
LM317K	\$ 1.50	2532	6.50

60 Hz Crystal Time Base Kit \$4.40

TERMS; \$5.00 min. order U.S. Funds. Calif. residents add 6% tax. \$10.00 min. VISA and MasterCard accepted. \$1.00 insurance optional. Shipping: Add 5%; orders under \$25.00-10%.

4116 200ns Dynamic RAM

Prices to change

CIRCLE 76 ON FREE INFORMATION CARD



Products,

VISIT OUR RETAIL STORE AND RECEIVE A 5% DISCOUNT! Inc.

3250 KELLER STREET, #9

	80	00	rin I
3035 3039 3080 A 3085 A 3088 3156 31741 3741 3741 3741 31755 3202 3212 3212 3212 3212 3212 3212 3212	6.95 7.59 3.90 7.95 34.95 7.75 8.75 29.00 14.95 27.95 3.45 1.80 3.75 2.45 1.80 4.50 4.75	8239 8243 8253 82551 8253-5 82555-5 82555-5 82577 8279 8279-5 8279-5 8282 8284 8284 8284 8287 8288	4.75 14.90 4.50 8.75 9.75 4.50 8.75 39.00 29.00 9.25 6.50 6.50 6.50 6.50 25.00 49.00

SANTA CLARA, CA 95050

16K APPLE RAM CARD

Upgrade your 48K Apple II to full 64K

BARE BOARD	14.00
KIT ASSEMBLED & TESTED	39.90
MODELIN & I LOTED	45.00

10/1.00 6/1.00 6/1.00

3.00 3.50 1.20

LEDS

CONNECTORS

Male Female Hood

Jumbo Red Jumbo Green Jumbo Yellow

6502	5.49
6502A	9.45
6504	6.90
6505	7.65
6507	9.90
6520	4.35
6522	7.95
6532	9.95
CEEL	1175

6500

6502	5.49
6502A	9.45
6504	6.90
6505	7.65
6507	9.90
6520	4.35
6522	7.95
6532	9.95
6551	11.75

702	(1ns)	3.00
708	(45ns)	2.99
716	(5v 450ns)	3.49
716-1	(5v 350ns)	7.85
532	(5v 450ns)	7.85
732	(5v 450ns)	6.49
764	(5v 450ns)	Call

EPROMS

DYNAMIC RAMS

1027	(250ns)	2.00
4116	(200ns)	1.25
4116	(150ns)	1.75
1164	(200ns)	Call
	The second second	

UPGRADE YOUR

> APPLE or

TRS-80

4116 200ns

8/10.00

STATIC RAMS

2101	(450ns)	1.85
21 L02	(250ns LP)	1.55
2111	(450ns)	2.49
2114	(450ns)	1.75
2114L-3	(300ns LP)	1.85
2114L-2	(200ns LP)	1.95
TMM2016	(200ns)	5.49
TMM2016	(150ns)	6.49
TMM2016	(100ns)	7.49
HM6116	(200ns)	Call
HM6116	(150ns)	Call
HM6116	(120ns)	Call
I P	= Low Power	

		Z80	
Z80 Z80 Z80	A	CPU PIO CTC	4.95 4.95 6.95
Call	for	Comple	te List

MICROPROCESSOR REAL-TIME CLOCK MSM 5832

6.90

WE WILL BEAT ANY COMPETITOR'S PRICES!

Call before you buy

CRYSTALS

32.768 KHZ	1.90	5.185 5.7143	3.90
1.0 MHZ 1.8432	4.50	6.5536	3.90
2.0	3.90	8.0	3.00
2.097152	3.90	10.0	3.00
2.4576	3.90	14.31818	3.90
3.2768	3.90	18.0	3.00
3.579545	3.00	18.432	3.00
4.0	3.00	20.0	3.00
5.0	3.00	22.1184	3.00
5.0688	3.90	32.0	3.90

74LS00 SERIES

74LS00	.24	74LS123	.95	74LS253	.80
74LS01	.24	74LS124	2.90	74LS257	.80
74LS02	.24	74LS125	.95	74LS258	.80
74LS02		7415125	.95		
	.24	74LS126	.79	74LS259	2.80
74LS04	.24	74LS132	.75	74LS260	.60
74LS05	.24	74LS136	.49	74LS266	.49
74LS08	.24	74LS137	.95	74LS273	1.60
74LS10	.24	74LS137 74LS138	.75	74LS275	3.25
74LS11	.30	74LS139	.75	74LS279	.49
74LS12	.30	74LS145	1.10	74LS280	1.95
74LS12	.40	74LS145	2.20	74LS283	.95
74LS13	.40		2.20		
74LS14 74LS15	.89	74LS148	1.20	74LS290	1.20
74LS15	.30	74LS151	.75 .75 1.75	74LS293	1.79
74LS20	.24	74LS153	.75	74LS295	.99
74LS21	.30	74LS154	1.75	74LS298	.99 .99 1.75
74LS22	.24	74LS155	.89	74LS324	1.75
74LS26	.30	74LS156	.89	74LS352	1.49
74LS27	.24	74LS157	.75	74LS353	1.49
74LS28	.30	74LS158	.75	74LS363	1.49
74LS30	.24	74LS160	.05	74LS364	1.95
74L532	.36	74LS161	.95	74LS365	.89
	.50		.95		
74LS33	.55	74LS162	.95	74LS366	.89
74LS37	.55 .55 .35	74LS163	.95	74LS367	.69
74LS38	.35	74LS164	.95	74LS368	.69
74LS40	.30	74LS165	.95	74LS373	.99
74LS42	.49	74LS166	1.95	74LS374	1.69
74LS47	.75	74LS168	1.69	74LS377	1.40
74LS48	.75	74LS169	1.69	74LS378	1.15
74LS49	.75	74LS170	1.69	74LS379	1.35
74LS51	30	74LS173	.75	74LS385	1.89
74LS54	.30	74LS174	.89	74LS386	.59
741.055	.35		.89	74LS390	1.79
74LS55 74LS63	1.00	74LS175 74LS181	1.09		1.79
74LS63	1.20		1.99	74LS393	1.79
74LS73	.39	74LS189	9.50	74LS395	1.59
74LS74	.44	74LS190	.89	74LS399	1.59
74LS75	.49	74LS191	.89	74LS424	2.89
74LS76	.39	74LS192	.89	74LS447	1.89
74LS78	.49	74LS193	.89	74LS490	1.89
74LS83	.75	74LS194	.89	74LS668	1.65
74LS85	.95	74LS195	.89	74LS669	1.85
74LS86	.39	74LS196	.79	74LS670	2.10
74LS90	65	74LS197	79	74LS674	9.50
74LS91	79	74LS221	1.10	74LS682	9.50
74LS92	65	74LS240	.95	74LS683	2.39
74LS93	.50	74LS241	.95	74LS684	2.39
74LS95	.39	74LS241	1.79		2.39
741.595	.79			74LS685	2.39
74LS96	./9	74LS243	1.79	74LS688	2.39
74LS107	.39	74LS244	.95	74LS689	2.39
74LS109	.79 .65 .59 .79 .79 .39 .39	74LS245	1.89		
74LS112	.39	74LS247	1.20	81LS95	1.65
74LS113	.39	74LS248	1.20	81LS96	1.65
74LS114	.49	74LS249	.89	81LS97	1.65
74LS122	.45	74LS251	1.25	81LS98	1.65

Disc Controller

1771	16.00
1791	27.95
1793	29.95
1795	49.95
1797	49.95

8T26	1.65
8T28	1.95
8T95	.95
8T96	.95
8T97	.95
8T98	.95
DM8131	2.90
DS8836	1.25

C Sockets ST W/W

COUCHELS	01	44/41
8 PIN	.10	.49
14 PIN	.12	.50
16 PIN	.15	.57
18 PIN	.20	.85
20 PIN	.25	
22 PIN	.25	1.30
24 PIN	.25	
28 PIN	.35	
40 PIN	.40	1.80
ST = Sol	derta	ill
W/W = W		

1771	16.00
1791	27.95
1793	29.95
1795	49.95
1797	49.95

Interface

8T26	1.65
8T28	1.95
8T95	.95
8T96	.95
8T97	.95
8T98	.95
DM8131 DS8836	2.90
D30030	1.23

ORDER TOLL FREE) 538-8800

(CALIFORNIA RESIDENTS) ALL MERCHANDISE IS 100% GUARANTEED

CMOS

4017 4018 4019	.90	4082 4085 4086	.30 .90
4020 4021 4022 4023	.90 .90 1.10	4093 4098 4099 4502	2.49 1.90 .90
4024 4025 4026	.75 .35 1.60	4503 4508 4510	1.90 1.90
4027 4028 4029 4030	.75	4511 4512 4514 4515	.90 .90 1.20 2.20
4034 4035 4040	2.90 .85	4516 4518 4519	1.50 1.20 1.20
4041 4042 4043	1.20 .75 .75	4520 4522 4526 4527	1.20 1.20 1.20
4044 4046 4047 4049	.90	4528 4531 4532	1.90 1.20 .90 1.90
4050 4015 4053	.50 .90	4538 4539 4543 4555	1.90 1.90 2.70

LINEAR

LM301 LM308 LM309K LM311 LM317T LM317K	.32 .75 1.25 .64 1.65 1.70	LM741 LM747 LM748 LM1310 MC1330 MC1350	.29 .75 .49 2.45 1.69 1.25
LM318 LM323K LM324 LM337K LM339	1.49 3.75 .59 3.90	MC1358 LM1414 LM1458 LM1488 LM1489	1.69 1.49 .55 .95
LM377 LM380 LM386 LM555 LM556	2.25 1.25 1.00 .38	LM1800 LM1889 LM3900 LM3909 LM3914	2.45 2.45 .59 .95 3.70
LM565 LM566 LM567 LM723 LM733	.95 1.45 .99 .49	LM3914 LM3915 LM3916 75451 75452 75453	3.70 3.70 3.70 .35 .35

STORE HOURS: MON-FRI 8:30 A.M.-6:00 P.M. SAT 10:00 A.M.-3:00 P.M.





TERMS: For shipping include \$2.00 for UPS Ground. \$3.00 for UPS Blue Label Air. \$10.00 minimum order. Bay Area residents add 6½% Sales Tax. California residents add 6% Sales Tax. We reserve the right to limit quantities and substitute manufacturer. Prices subject to change without notice. Send SASE for complete list.

.75 .39 .30 .30 .30 .30 .30 .30 .30

80C07 80C95 80C96 80C97 80C98

.90 .90 .90 .90 1.15

Computer Products, Inc. 3250 Keller Street, #9 Santa Clara, CA 95050 (800) 538-8800 Local Calif. Residents (408) 988-0697

7400 **Number of Pins of each I.C.	MICROPROCESSOR COMPONEN	NTS 🚱 Digitalker™
Part No. **Pins. Price Part No. **Pins. Pric	MICROPROCESSOR CHIPS	Price DT1050 — Applications: Teaching aids, appliances, clocks, automotive, telecommunica-
SN7404N 14 25 SN7476N 16 35 SN74162N 16 69 MCI	M2901ADC 48 CPU -4-bit silce (Com. Temp. Br.) 19.95 4116N-2 16 16.384x1 (150ns) 1. SS5592 40 MPU w/Clock (65k Oyles mem.) 9.95 4116N-3 18 16.384x1 (250ns) 1. B6802CP 46 MPU w/Clock and RAM 7.95 4116N-4 16 16.384x1 (250ns) 1.	2.44 tions, language translations, etc. 39: 2/14/58 59: 2/17/235 The DT1050 is a standard DIGITALKER kit encoded with 137 separate 49: 8/10/35 and useful words, 2 tones, and 5 different silence durations. The
\$\text{SN7405N}\$ 14 29 \$\text{SN7450N}\$ 14 69 \$\text{SN74154N}\$ 14 69 \$\text{INS}\$ \$\text{SN74154N}\$ 14 69 \$\text{INS}\$ \$\text{SN74155N}\$ 16 69 \$\text{INS}\$ \$\text{SN74765N}\$ 14 25 \$\text{SN74433N}\$ 16 59 \$\text{SN74156N}\$ 16 69 \$\text{INS}\$	58039N-6 48 CPU-Sgl.chip8-bit(128bts Ram) 5.95 4164N-200 16 65,536x1 (200ns) 7. 58040N-6 48 CPU (256 bytes RAM) 5.95 MM5261 18 1024x1 (300ns)	59: 41/9.95 words and tones have been assigned discrete addresses, making it 49: 45/4.95 possible to output single words or words concatenated into phrases 49: 42/135 or even sentences. The "voice" output of the DT1000 is a highly in- 59: 48/1-485 is all the property of the description of the des
\$N7410N 14 25 \$N7486N 14 35 \$N74170N 16 1.29 P80 \$N7411N 14 25 \$N7489N 16 2.25 \$N74172N 24 4.95 \$N7413N 14 25 \$N7490N 14 30 \$N74172N 24 4.95 \$N7413N 14 25 \$N7490N 14 30 \$N74172N 26 69 280	085A 40 CPU 5.95 MM5280 22 4098x1 (200ns) 2107 MM5280 22 4098x1 (300ns) 2107 MM5290-2 18 16.384x1 (150ns) 1 MM5290-3 16 16.384x1 (200ns) 1	3.55 ad. The vocabulary is chosen so that it is applicable to many products and markets. 59 8/12/95 The DT1050 consists of a Speech Professor Chip. MM54104 (40-pin)
SN7413N 14 35 SN7491N 14 59 SN74174N 16 69 220 SN7414N 14 49 SN7492N 14 39 SN74175N 16 69 220 SN7415N 14 25 SN7493N 14 39 SN74175N 14 69 220	0-DART 40 Dual Asynchronous Rec. /Trans. 11.95 0-DMA 40 Direct Memory Access Circuit 15.95 0-P10 40 Parallel / / Interface Controller 5.95 1101 16 256x1 (650ns)	1.69 and two (2) Speech ROMs MM52164SSR1 and MM52164SSR2 (24-pin) along with a Master Word list and a recommended schematic diagram on the application sheet.
SN7417N 14 25 SN7494N 14 69 SN7417N 14 69 Z80 SN7420N 14 19 SN7495N 14 49 SN74179N 16 1.49 Z80 SN7421N 14 35 SN7496N 16 49 SN74160N 14 69 Z80	0-510/0 40 Serial I/O (1xCB and BxCB Bonded) 15.95 2101 22 25644 (450ns) 8101 0-510/1 40 Serial I/O (1xcks DTRB) 15.95 2102 16 1024x1 (450ns) 810 0-510/2 40 Serial I/O (1xcks SYNCB) 15.95 211.02 16 1024x1 (450ns) 1.7 0-510/9 40 Serial I/O (1xcks SYNCB) 15.95 211.02 16 1024x1 (450ns) 1.7 0-510/9 40 Serial I/O (1xcks SYNCB) 15.95 211.02 18 25644 (450ns) 8111 1	DT1050 Digitalker™\$34.95 ea. DT1057 — Expands the DT1050 vocabulary
SN7423N 16 59 SN74100N 24 1.49 SN74182N 16 89 Z80 SN7423N 14 29 SN74105N 14 89 SN7418AN 16 1.95 Z80 SN7428N 14 29 SN74105N 14 89 SN7418AN 16 1.95 Z80	DA 48 CPU (MX3800N-4)/280C-114MMz 5.95 2114 18 225644 (450ns) MOS ACTC 28 Counter Lines Circuit 5.95 2114 18 102444 (450ns) 1. DA-DART 40 Dual Adynchronous Rec./Trans. 11.95 2114L 18 102444 (450ns) L. DA-DART 40 Direct Memory Access Circuit 17.95 2114L 18 102444 (450ns) L. D. DA-DMA 40 Direct Memory Access Circuit 17.95 2114L 18 102444 (450ns) L. D. DA-DMA 40 Direct Memory Access Circuit 17.95 2114L 18 102444 (450ns) L. D. D. DA-DMA 40 Direct Memory Access Circuit 17.95 2114L 18 102444 (450ns) L. D. D. D. DA-DMA 40 Direct Memory Access Circuit 17.95 2114L 18 102444 (450ns) L. D.	95 - 8/13 95 from 137 to over 260 words. Incl. 2 ROMs and specs. 25 - 8/15 95 DT1057 \$24 95 ea
SN7427N 14 25 SN74107N 14 29 SN74190N 16 89 220 SN7428N 14 49 SN74109N 16 .39 SN74191N 16 89 220 SN7430N 14 25 SN74116N 24 1.49 SN74191N 16 69 220	DA-S10/O 48 Sertal I/O (TxC8 and RxC8 bonded) 16.95 2/41-3 18 4996x1 (150ns) DA-S10/J 49 Sertal I/O (Lacks DTRB) 16.95 2/47 18 4096x1 (70ns) DA-S10/Z 48 Sertal I/O (Lacks SYNCR) 16.95 2/48 18 102/4x4 (70ns)	RADIO CONTROL CIRCUITS
SN7437N 14 25 SN74122N 14 55 SN74194N 16 69 Z80 SN7433N 14 29 SN74123N 16 49 SN74195N 16 69 Z80 SN7433N 14 50 SN74123N 16 49 SN74195N 16 69 Z80	0B 40 CPU (MK3860N-6) 6MHz 11.95 TMS4045 18 1024x4 (450ns) 198-CTC 28 Counter Timer Circuit 13.95 5101 22 256x4 (450ns) CMOS 198-P10 48 Pagarallal I/O interface Controller 13.95 MMS257 18 4096x1 (450ns) 4044	3.55 3.55 4.95 - Toys, hobby crafts, robots, trains 4.95 - Burglar alarms + IR data link
SN7440N 14 19 SN74126N 14 45 SN74197N 14 89 250 SN7414N 16 89 SN74132N 14 49 SN74196N 24 1.19 250 SN7442N 16 45 SN74136N 14 69 SN74196N 24 1.19 250	55.95 HM6116-4 24 2048b8 (200s) LP. CMOS 303 48 Serial Comm. Centroller 44.95 HM6116LP-4 24 2048b8 (200s) LP. CMOS 303 48 Counter/Timer & Parallel / O Unit 29.95 16 1644 (Sons) 3101	- Remote slide projector control - Semote slide projector control - Consumer remote data links - 7.95 - 7.95 - Consumer remote suitched lighting systems - Complete Schangel digital encoder and RE transmitter loss owners
SN7445N 16 69 SN74143N 24 2.95 SN74276N 20 1.95 MC6 SN7446N 16 60 SN74144N 24 2.95 SN74270N 16 70 MC6	0000 Senior 1 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	3 95
SN7447N 16 69 SN74145N 16 59 SN74283N 15 1.49 MCE MCE SN7448N 16 69 SN74147N 15 1.49 SN74265N 16 2.95 MCC SN7450N 14 19 SN74146N 16 1.19 SN74265N 16 2.95 MCC	58921 49 Peripheral Inter. Adapt (MC6820) 4.95 745200 16 256x1 (80ns) 93410 25628 24 Priority Interrupt Controller 15.95 745206 18 256x1 (60ns) 93411 2630L8 24 1024x8-bit ROM (MC68A30-8) 10.95 745289 16 16x4 (35ns) 3101	1 95 LM1871N RC Encoder/Transmitter Chip \$1.95
SN7453N 14 .19 SN74151N 16 .59 SN7436N 16 .55 MCE SN7454N 14 .19 SN74152N 14 .59 SN74367N 16 .55 MCE SN7454N 14 .26 SN74152N 14 .59 SN74367N 16 .55 MCE	28 Asynchronous Comm. Asipher 4 95 a25:10 16 1024:1 (50m) 0 C. (294:15) 65525 24 Synchronous Seal Data Asipher 5 75 87525 16 160.4 (50m) 0 C. (745:28) 65652 24 3-(400)cs Modulater 6 10 10 10 10 10 10 10 10 10 10 10 10 10	LM1872N RC Receiver/Decoder Chip\$2.49
\$N7450N 14 19 \$N74154N 24 1.25 \$N74390N 16 1.49 MCC \$N7470N 14 29 \$N74155N 16 59 \$N74393N 14 1.49 MCC	286000LB 84 MFU 15-Bit (BMHz) 65 55 2706 24 102448 (455ins) 65 55 8588P 46 General Purpose int. Adaptice 8.5 57 205-5 24 102448 (455ins) 806053P2 46 Multi-Potocol Comm. Centroller 24.55 1152516 2 204848 (455ins) 2718 68655P2 35 Bit Shancad Prog. Comm. Int. 8.55 1152524 2 88 81526 2 850019 116252	3.85 SRX1504 49.435MHz Crystal (LM1872N)\$3.95 5.95 SRX1505 49.890MHz Crystal (LM1871N)\$3.95
74LS02 14 25 74LS92 14 55 74LS194 16 69 TMS 74LS03 14 25 74LS93 14 55 74LS195 16 69 TMS	Machine Mach	19.95 7.95 4.95 6.95 8.95 Part No. **Pins Function Price
74L505 14 29 74L596 16 89 74L5221 16 89 68 74L506 14 29 74L507 14 39 74L506 18 20 10.09 18 20 10.00 18 20 10.00 18 20 10.00 18 20 10.00 18 20 10.00 18 20 10.00 18 20 10.00 18 20 10.00 18	587C05 29 Octal D Flip Flip Tir-State (74G374) 2.49 27580 24 1024x8 (450ns) single + 5V 2212 24 8-bit Input/Output (745412) 2.55 MM2764 28 8192x8 (450ns) 8214 24 Priority Interrupt Centrol 3.35 MM2764-3 28 8192x8 (300ns) 8216 15 B-Orrectional Blue Driver 2.25	2.95 7045IPI 28 CMOS Precision Timer 14.95 16.95 7045EV/RIT 28 Slopwatch Chip, XTL 19.95 7105CPI 40 31% Digit A/D (LOD Drive) 9.95
74LS13 14 39 74LS122 14 49 74LS245 20 149 DPB	2226 18 Bus Driver (745428) 225 745188 16 32x8 PROM 0.C. (6330-1) 8228 28 System Cont. / Bus Driver (745428) 3.49 745288 16 32x8 PROM T.S. (6331-1) 8228 28 System Cont. / Bus Driver (745438) 4.49 745288 16 32x8 PROM T.S. (6331-1) 82x8 PROM T.S. (1.49 710ECF/I/II* 46 IC. Circuit Board, Display 34.95 1.95 7107CFL 48 35 bg/s A/O (LED Drive) 11.95 1.85 719CFL/XII* 40 IC. Circuit Board, Display 23.95 1.95 719CFL 40 3% Digit A/O LCD Dis HLD. 16.95
74L515 14 .35 74L5125 14 .49 74L5248 16 1.09 NS1 74L520 14 .29 74L5126 14 .49 74L5249 16 1.09 NS1 74L521 14 .29 74L5132 14 .59 74L5251 16 .59 NS1	24 (70 Expander for 46 Series 20 5, 95 74547) 20 256x8 PROM T.S. (8309-188245 18 16-fey Keyboard Encoder (740922) 4.49 745472 20 256x8 PROM T.S. (8309-188246 20 20-fey Keyboard Encoder (740923) 4.95 745472 20 2512x8 PROM D. (8348) 58247 28 Display Confession (740931) 8.895 745473 20 512x8 PROM D. (6348)	5.95 (17 CPL 40 31) Digit AVD LED Dis. HLD. 15.95 7201IUS Low Battery Volt Indicator 2.25 4.95 7205IPG 24 CMOS LED Storwarth Virger 12.95
74LS26 14 .29 74LS138 14 .39 74LS257 16 .59 INSI 74LS27 14 .29 74LS138 16 .59 74LS256 16 .59 DRS 74LS28 14 .35 74LS139 16 .59 74LS260 14 .59 DRS	38250N 46 Asyn. Comm. Element (INS8250) 10.95 75475 24 512x8 PROM 0.C. (6340) 8251 28 Prog. Comm. (70 (USAR1) 4.48 745478 24 1024x8 PROM 1.S. (189285 253 24 Prog. Interval Timer 6.95 745570 15 512x4 PROM 0.C. (6305)	4.95 7206F IBC 46 Top Control of 14.95
74LS32 14 35 74LS153 16 59 74LS273 20 1.49 DRS 74LS33 14 55 74LS154 24 99 74LS279 16 49 DRS 74LS37 14 35 74LS155 16 69 74LS283 16 69 DRS	8257 40 Prog. DNA Control 7.95 745572 18 1024x4 PROM C. (6352) 8259 28 Prog. Interrupt Control 6.95 745573 18 1024x4 PROM T. S. (825137 8275 49 Prog. CRT Controller 29.95 82523 16 32x8 PROM C. (27518)	4.95 / 20/AEY/MT 14 Frag. Counter Chip, XTL 7.95 4.95 / 7208IPI 28 Seven Decade Counter 15.95 2.95 / 7209IPA 8 Clock Generator 3.95
74LS40 14 29 74LS157 18 69 74LS293 14 79 076 74LS42 18 55 74LS158 18 59 74LS298 18 89 076 74LS47 16 75 74LS160 16 69 74LS352 18 1.29 076	10303 20 8-bit fill-State B-Directional Trans 3-5 825123 16 32v8 PROM 1.5. (27519) 8304 20 8-bit fill-State B-Directional Trans 3-5 825125 16 32v8 PROM 0.C. (27520) 8307 20 8-bit fill-Directional Receiver 2-40 825129 16 256v4 PROM 1.5. (27521)	9.95 7215IPG 24 4 Func. CMOS Stopwatch CKT 13.95 2.95 7215EV/Kit 24 4 Func. Stopwatch Chip. XTL 14.55 3.95 7216CUI 28 8 Digit Univ. Counter C.A. 29.95 5.95 7216CUI 28 8 Digit Free, Counter C.A. 24.35
74L551 14 25 74L5163 16 89 74L5366 16 49 DP8: 74L554 14 25 74L5163 14 69 74L5367 16 49 MIII	29 Octal Labched Peripheral Driver	81) 9.95 7216DIPI 28 8 Bigit Freq. Counter C.C. 19.95) 9.95 7217UI 28 4 Digit LED Up/ Down Counter C.A. 10.95 9.95 7217UI 28 4 Digit LED Up/ Down Counter C.A. 10.95
74LS73 14 .39 74LS168 16 1.19 74LS273 20 1.29 M-2 74LS74 14 .39 74LS168 16 1.19 74LS274 20 1.29 M-2 74LS75 16 .39 74LS170 16 1.49 74LS275 18 .69 M-2 74LS778 18 .30 74LS173 16 .69 74LS275 18 .69 .60 .1044	CDP1802 User Manual 7.50 DM875190N 24 2048x4 PROM 0.C. (825190 2550 User Manual 5.00 DM875191N 24 2048x8 PROM T.S. (825191 000 1982 Intel Data Book (1405 pg.) 14.95	19.95 7220HOL 49 6 Utgli Univ. Counter
74LS78 14 39 74LS174 18 59 74LS393 14 1.19 3000 74LS83 16 65 74LS175 15 59 74LS393 18 1.49 3000 74LS85 18 69 74LS181 24 249 74LS670 18 1.49 3000	0.53 1980 Nat. Interface Book (640 gg.) 6.95 MC3470P 18 Floppy Disk Read AMP System 2005 1981 Nat. T.I. Book (674 gg.) 9.95 MC3470P 18 Floppy Disk Read AMP System 2005 1981 Nat. T.I. Book (674 gg.) 9.95 MC3470P 18 7-10 I/A Cenverter (DAC08071.C	9V 2.95 30009 1983 INTERSIL Data Book (1356p.) \$9.95
74LS86 14 39 74LS190 18 89 81LS95 28 1.49 74LS90 14 55 74LS191 18 89 81LS97 20 1.49 74LS90 14 35 74LS191 18 89 81LS97 20 1.49 74LS90 14 35 74LS90 18 74LS90 14 2.49 74LS90 14 35 74LS90 14	708 1980 Nat. Interact Applications (736 pg.) 15.95 ADC0804 20 8-bit A/D Convertor (1 LSB) 1980 Nat. Linear Applications (736 pg.) 15.95 DAC0806 16 8-bit D/A Convertor (0.78% Lin.) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (0.78% Lin.) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (0.78% Lin.) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (0.78% Lin.) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (641 pg.) 7.95 AC0806 18 8-bit D/A Convertor (1 LSB) 1983 Ziloo Data Book (1 LSB) 1983 Ziloo Data Book (1 LSB) 1983 Ziloo Data	3.49 1.95 Part No. **Plas Function Price 4.49 PAL 10HB 20 Octal 10-Input AND-OR Gate Array (High Output) \$5.95
74503 14 .35 745124 18 2.95 745251 16 1.19 74504 14 .45 745133 18 .50 745257 16 1.19 74505 14 .45 745134 18 .50 745257 16 1.19	CONNECTORS	PAI.12H6 20 Hes 12-Input AND-OR Gate Array (High Output) 5.95 PAI.14H4 20 Quad 14-Input AND-OR Gate Array (High Output) 5.95 PAI.10L8 20 Quad 14-Input AND-OR Herror Case Array (Low Output) 5.95 PAI.12L6 20 Detail 10-Input AND-OR-Invert Case Array (Low Output) 5.95 Hest 12-Input AND-OR-Invert Case Array (Low Output) 5.95
74508 14 .99 745135 16 .69 745258 16 1.19 DE 74509 14 .39 745135 14 1.39 745260 14 .79 74510 14 .35 745138 16 .89 745280 14 1.95 74511 14 .35 745139 16 .89 745287 16 1.95 0E9	B25 — D Subminiature (meets RS232) Solder Eyelet/Wire Wrap Edg t Ns. Description Price Part No. Cats. Sp. Description	e Gard PAL14L4 20 Quad 14-Input AND-0R-Invert Gate Array (Lew Quipot) 5, 95 PAL16L8 20 Octal 16-Input AND-0R-Invert Gate Array (Low Quipot) 9, 95 PAL16L8 20 Octal 16-Input Register AND-0R Gate Array 9, 95
74515 14 35 745140 14 55 745288* 18 1.95 0E9 74520 14 35 745151 18 99 745373 20 2.49 DA1 74522 14 35 745153 16 99 745374 20 2.49 DA1	15 9 Pm Sockat 1.95 18/355E 18/35 15/5 Sider Eynit 15P 15 Pin Plug 1.95 22/445E 22/44 155 Sider Eynit 15S 15 Pm Sockat 2.95 22/44PC 27/44 155 Pt type (no mtg. ears)	
74532 14 .55 745158 16 .99 745471* 20 5.95 DB 74538 14 .89 745160 16 2.49 745472* 20 4.95 DB 74540 14 .39 745174 18 50 745473* 48 48 48 48 48 48 48 48 48 48 48 48 48	325P 25 Pin Plug (Meets R\$232) 2.49 80/1005 50/100 125 Solder Eyeld 325S 25 Pin Socket (Meets R\$232) 3.25 87031-3 27244 156 WW (Pin: 0022-164) 3.25 87031-3 2724 156 WW	74C08 14 .35 74C107 14 89 74C373 20 2.49
74551 14 35 745175 18 99 745474 24 4.95 003 74564 14 39 745184 18 1.49 745475 24 4.95 003 74565 14 39 745194 16 1.49 745570 18 2.95	123-133 23 hin Night Angle Secket 5.75 R-681-2 50/100 125 Wire Wag - Level 1 177 77 hin Pag 4.93 175 37 hin Secket 5.65 Part No Description	5 35 74C10 14 35 74C151 16 2.49 74C374 20 2.49 74C374 74 74 74 74 74 74 74 74 74 74 74 74 7
74574 14 .55 745195 16 1.49 745571* 16 2.95 745186 14 .55 745196 14 1.49 745572* 18 4.95 745121 16 .55 745240 28 2.25 745573* 18 4.95 745131 14 .55 745241 28 2.25 745940 29 2.49 66.5	505 50 Pin Socket 9.93 S0739 UHF Fanel Receptacle Accessories F1.238 UHF Straight Adapter	5 8) 74032 14 39 740161 16 1.19 740911 28 8.95 40 74042 18 1.39 740162 16 1.19 740912 28 8.95 74048 18 1.95 740163 16 1.19 740915 18 1.19 74073 14 79 740164 14 1.49 740915 28 8.95
745114 14 .55 745242 14 2.49 745911 20 2.49 04- CA3010H 99 CA—LINEAR CA3089N 18 1.69 0C3	153H Hood for DA.15 Sarins Commentars 1.29 UGBS/U BNC Plug 15H Hood for DB25 Series Commentars 1.25 UGB9/U BNC Jack 17H Hood for DC37 Series Commentars 1.39 UG306/U BNC Angle Adapter	74G74 14 .69 74G173 16 .79 74G922 18 4.49 15 74G92 74G92 74 4.95 16 74G92 74 74G92 74 74G92 75 75 75 75 75 75 75 75 75 75 75 75 75
CA3023H 3.25 CA3080E 8 89 CA3130E 8 1.49 0204 CA3035H 5.95 CA3081N 16 1.49 CA3140E 8 99 CA3039H 1.35 CA3082N 16 1.49 CA3160H 1.95	M18-2 2 screws for mtg. connectors to a panel 79 UG1094/U BNC Bulkhead Receptacle	74539 14 1.19 746193 16 1.99 60095 16 39 74633 14 1.19 746195 16 1.39 60097 16 39 30001 1983 Nat. CMOS Book (628 pg.) \$6.95
CA3059N 14 .89 CA3083N 15 1.49 CA3401N 14 .59 CA3059N 14 3.25 CA3086N 14 .69 CA360N 14 .59 CA3086N 14 .69 CA3086N 14 .50 CA308N 14 .	IC SOCKETS For Socket Required, See Column After The IC Part No.	TLO71CP 8 79 LINEAR NESTON 16 3.95 TLO72CP 8 1.39 LM340K-15 1.35 LM733CN 8 1.19 TL081CP 8 59 LM340K-15 1.35 LM731CN 14 49 TL081CP 8 59 LM340T-5 79 LM710N 14 69
C04000 14 29 C04000 16 79 C04507 14 39 C04000 14 29 C04001 14 79 C04507 14 39 C04000 14 79 C04507 14 39 C04000 14 79 C04507 14 39 C04000 14 79 C04500 14 39 C04000 14 79 C04500 14 39 C04000 14 79 C04500 14 39 C04500 14 79 C04500 14 39 C04500 14 79 C0450	OW PROFILE (TIN) SOCKETS WIRE WRAP (GOLD) SO LEVEL #3 1-9 10-99 1	CKETS TLOBGOR 8 1.19 LM3407-12 79 LM71N 14 79 LM72N 14 55 LM3407-15 79 LM72N 14 55 LM3407-15 79 LM73N 14 55 LM34DN 14 99 LM73N 14 100 LM35DN 8 35 LM34DN 14 99 LM73N 14 100 LM35DN 8 35 LM34DN 14 99 LM73N 14 100 LM35DN 14 99 LM73N
C040007 14 29 C14042 16 69 C04510 16 89 8 C04510 14 29 C14043 16 79 C04511 15 89 16 C04009 18 .38 C04044 16 .79 C04512 18 89 16 C04010 16 .39 C04046 16 .89 C04512 18 89 16	pin LP 16 14 13 8 pin WW 49 .45 pin LP 17 15 14 10 pin WW 65 65 62 pin LP 19 17 15 14 10 pin WW .65 62 2 pin LP 25 .24 .23 16 pin WW .69 .65	42 LM302H 1.95 LM350K 4.95 LM739N 14 1.95 599 LM304H 1.95 LF355K 8 1.10 LM74TON 8 35 599 LM305H 99 LF356H 8 1.10 LM74TN 14 69 591 LM307CN 8 45 LM370N 14 4.49 LM74RN 8 50
CD4011 14 29 CD4047 14 89 CD4515 24 1.79 20 CD4013 14 39 CD4049 16 39 CD4516 16 99 24 CD4013 14 39 CD4049 16 39 CD4516 16 99 24	pin LP	.79 LM306CN 8 69 LM373N 14 3.95 LM1310N 14 1.49 .99 LM309K 1.25 LM377N 14 1.95 LM1456CN 8 59 LM310CN 8 1.75 LM30N 14 89 LM148N 14 69
CD4015 16 .39 CD4050 16 .39 CD4519 16 39 28 CD4015 16 .79 CD4520 16 .79 CD4520 16 .79 CD4520 15 .79 CD4520 15 .79 CD4520 15 .19 40 CD4017 16 .75 CD4053 16 .79 CD4526 15 .19 40	pin LP .40 .37 .35 .24 pin WW .1.29 .1.23 .25 .25 pin LP .46 .42 .39 .28 pin WW .1.59 .1.50 .26 pin LP .45 .45 .43 .35 pin WW .1.85 .1.75 .26 .26 pin WW .1.85 .1.75 .26 .26 pin WW .1.89 .1.89 .26 .26 .26 .26 .26 .26 .26 .26 .26 .26	1.18 LM31CN 8 -69 LM351N 14 1.79 LM1689N 14 69 14 69 14.55 LM312H 1-39 LM169N 14 1.95 LM169N 14 1.95 LM317T 1.19 LM354N 14 1.79 LM1600N 16 1.49 LM317K 3.95 LM356N-3 8 9 LM168N 18 1.95
CD4018 16 79 CD4056 16 2.95 CD4529 16 1.19 \$1 CD4019 16 39 CD4059 24 7.95 CD4543 16 1.19 \$1	10.00 Minimum Order — U.S. Funds Only Spec Sheets — 30¢ each Salifornia Residents Add 61/4 % Sales Tax Send \$1.00 Postage for you	LM3190N 8 1.95 TL494CN 16 2.95 LM1980N 14 2.95 LM319N 14 1.95 TL496CP 8 1.91 LM2027 1.49 LM320K-5 1.35 M510N 14 4.95 LM3180N 16 1.99
CD4023 14 29 CD4060 14 39 CD4583 16 2.49 Se	Send S.A.S.E. for Monthly Sales Flyer! Prices Subject to Change	ALOG LM320K-15 1.35 NESSIV 8 2.95 LM3900N 8 1.19
C04025 14 23 C04071 14 29 C04724 18 1.19 C04026 18 2.49 C04072 14 29 MC14409 16 13.95 C04072 14 29 MC14410 16 13.95 C04078 16 69 C04073 14 29 MC14410 16 13.95 C04028 16 69 C04078 14 29 MC14410 16 13.95 C04028 16 69 C04078 14 29 MC14410 16 13.95 C04028 16 69 C04078 14 29 MC14410 16 13.95 C04028 16 69 C04078 14 29 MC14410 16 13.95 C04028 16 69 C04078 14 29 MC14410 16 13.95 C04028 16 69 C04078 14 29 MC14410 16 13.95 C04028 16 69 C04078 14 29 MC14410 16 13.95 C04028 16 69 C04078 14 29 MC14410 16 13.95 C04028 16 69 C04078 16 70 MC14410 16 13.95 C04028 16 69 C04078 16 70 MC14410 16 13.95 C04078 16 70 MC14410 16 13 MC14410 16 13 MC14410 16 MC14410 16 MC14410 16 MC14410 16 MC14410 16 MC14410 16	Call for Sameco Stellar Men	LM3207-15 89 NE544N 14 2.95 LM3915N 18 3.49 LM323K 5.95 NE550A 14 1.95 LM3916N 18 3.49 LM324N 14 59 NE555V 8 35 RC4136N 14 1.25 R049 LM337T 1.95 LM356N 14 69 RC4151NB 8 1.95
	THINNE ELECTRONICS THUN	1.M338K 6.95 NE564N 16 2.95 ICL80388 14 3.95 LM398N 14 69 LM565N 14 1.19 LM3080N 8 1.19 LM340K-5 1.35 LM566CN 8 1.49 LM3300N 18 1.19
CD4035 16 .89 CD4082 14 .29 MC14538 16 1 10	1355 SHOREWAY ROAD, BELMONT, CA 94002 BB PHONE ORDERS WELCOME — (415) 592-8097 Telex:	CHISTON IS CONTROL OF MORE AVAILABLE

Portable Speakers For "Walkman" Style Stereos



Portable Stereo Speakers with Carrying Case

After skating, skiing, jogging or any other outside activity, just plug these portable stereo speakers into your stereo and you and your stereo provide stereo speakers into your stereo and you and your speakers. Great for moteir comes, the beach, or in your car. They weigh just 3 lbs. and measure 5% 14 x 4% 14 x 2% 10. This unit uses 3 x 5 short speakers with a 3 or, magnet. Speaker oystem includes x 5 short speakers with a 3 or, magnet. Speaker oystem includes and signal connector cable, itself the speaker of the compatible with most mini-portable stereos shown below, and is compatible with most mini-portable stereo casettes and FM stereo units.

Part No. TSU-012 \$29.95

Part No. TSU-012\$29.95 AM3-8 8 AA Alkaline Batteries 8 for \$7.90

Stereo Cassette Player with FM Stereo Tuner Pack

- Lightweight Headphones Cr02/Metal/Normal
- Tape Selector







CREDIT CARD AM/FM RADIO **World's Thinnest**

Stereo Hi-Fi

This is a pocketable AM/FM stereo radio with a folding stereo head-phone. It weighs just 5 oz. and measures 4½ "L x 2½" W x ½"Thk. Comes complete with radio, headphones and headphone case. Uses two AAA batteries (not included).

Part No. TCR-809\$29.95 each



E SAN	JS-5K	5K Linear Taper Pots \$5.25
A P	JS-100K	100K Linear Taper Pots\$4,95
	JS-150K	150K Linear Taper Pots \$4.75
ured)	JVC-40	40K (2) Video Con- troller in Case \$4.95
Knob	for JS5K,	100K,150K \$.99 ea.

JOYSTICKS

JVC KNOB Knob for JVC-40\$.99 ea. ameco Digital Thermometer Kit



	BOOKS
	NATIONAL SEMICONDUCTOR - INTERSIL - INTEL
30001	National CMOS Data Book (1981)
30002	National Interface Data Book (1980)
30003	National Linear Data Book (1982)
30004	National Series 80 — Board Level Computer (1980) \$4.95 (224 pages)
30005	National TTL Logic Data Book (1981)
3000	6 Above (3) 30001,3,5 as set \$24.95
30008	National Memory Data Book (1980)
30009	Intersil Data Book (1983)
30010	National Audio/Radio Handbook (1980)
30011	National Linear Application Handbook (1980)\$15.95 (736 pages) Application Notes, Linear Briefs, etc.
30012	National PAL Data Book (1982) \$5.95 (176 pages) Data Sheet, PAL Design
30013	Zilog Data Book (1983)
010400	Intel Component Data Book (1982)
205610	Intel Peripheral Design Handbook (1981)

Computer Keyboard Enclosures Universal

DTE-8 Panel Width 7.5". DTE-11 Panel Width 10.13" \$27.95 DTF-14 Panel Width 13.5 DTE-20 Panel Width 19.25"

KEYBOARDS — POWER SUPPLIES



MICRO SWITCH 69-KEY KEYBOARD

Data Entry Keybeard, Encoded Output: 3-bit Parallel EBC DIC, Switching: Hall Effect, 24-pin Edge
Card Connection. Complete w/Pin Connection. Can easily be modified to ASCII code.

Part No. KB69SD12-2 (Fits Into DTE-20 Enclosure). \$19.95 each

MICRO SWITCH 85-KEY KEYBOARD

Word Precessing Keyboard, 28 Pie Edge Card Connection, Supply Voltage + SVDC, Main Keyboard is OWENTY. Additional Key Pads for Cursor and word processing functions.

Part No. 85SD18-1. .\$29,95 each HI-TEK 58-KEY KEYBOARD

SPST switching, mechanical, monolithic housing, charcoal grey keycaps. Keyboard is not mounted on circuit board (each key is individually accessible). 11%"L x 3%"W x 1%"H Part No. K-58 (Fits DTE-14 Enclosure)

HI-TEK 14-KEY NUMERIC KEYPAD

SPST switching, Charcool grey keycape, matches HI-TEK K-S8 Keyboard (above). Mounted on printed circuit board. Part No. K-14... 3"L x 3"W x 1% "H

9%"L x 4%"W x 1%"F

Part No. K-14. \$9.95 each

ALPS 29-KEY CALCULATOR KEYBOARD

Features one 3-position decimal select switch, see 3-position switch, and two 2-position switches, mechanical SYST switching, 72-pin edge cord cennection. Pin-on included.

Part No. KB297P60 (Pin Det 1 Enclosure)

S4.95 each

POWER SUPPLY - 5VDC @ 1 AMP REGULATED

Transaction Technologists - 5VDC edge 3 AMP REGULATED

Transaction Technologists - 5VDC edge 3 AMP REGULATED

Deltron

Deltron

Deltron

AND ATT NO. PSS 51194

Technologists - 5VDC edge 3 AMP REGULATED

Deltron

Deltron

Deltron

No. 1195-72-74-40401. Johgst. 1 SVDC edge 3 Amp. 8VDC edge 2.5 amp. Adjustable content time. Ripple & Notice 1 MY Ins. 5MV p- 2 mounting surfaces. UL recognized. 5tzs: 4" W x AV" L x 2-VT6" "". wt. 2 Ins. 2 attention to the content time. Transaction Technologists - 5VDC edge 3 Amp. 8VDC edge 1.5 AMP SWITCHING

Input: ISVAC. 50-6001c g-3 amp. 7200VAC. 5001c g-1.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 18VDC edge 1.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33 N 'D x 3N 'H. W. 0 Box. SWIC edge 3.6 amp. 8 In. bit. pow. cond. 11VI vi. 33

Part No. PS94VO

POWER SUPPLY 4-Channel Switching Power Supply Microprocessor, mini-computer, terminal, medical squipment and process centrel applications. In-put: 90-1309/AC 47-440Hz. Output: +9VOC @ 5A. -5VOC @ 1A. +:12VOC @ 1A. -12VOC @ 1A. Line noc.: = 0.2 **, Ripplet: 20MP **, Load reg.: = 17. **. Overcurrent protection. Ac; SY mainty put = 10%. 6-2/EV L. +7-4/W W. 4-15/16-74. Wil. 19: bs.

JE224A Assem 84-Key Keyboard

CA153A.....\$69.95

95-Key Keyboard

CONTROL DATA Data Entry Keyboards

Parallel Output FTZ Shielded Base SPST Switching ASCII OUTPUT 30" Interface Cable



80-Key Keyboard

Attractive Case CA154A\$79.95 CA150C \$89.95 Color; keycaps: black, blue, red - cover: black w/beige base. 21 1/2 "x9" x31/2 ". 6 lbs.

Color; keycaps: black, blue, red - cover: bt Stores 65 spin or 30 14 or 15-pin DIPs - 8ug rugs not one control of the color of the colo

Part No.J Color Code BGC-001-()2 Cages (6 loc. ea.) ..\$11.95/pkg.

BUG TRATYM — Stores in Bug Cape - Moided plastic - Three styles: Open (1 compartment 3.05 'x 46 'x .67; 'x critical (5 compartments .5" x 46 'x .5 and Horizontal (8 compartments .5" x 46 'x .5 and Horizontal (8 compartments .5" x 46 'x .5 and Horizontal (8 compartments .5" x 46 'x .5" x 46ad for tools, hardware, corponents, 4c. - "ray PART NO. DESCRIPTION PRICE BITH-001 Horizontal Bug Tray 1.95 BTV-001 Vertical Bug Tray 1.95 BTV-001 Vertical Bug Tray 1.95 BTV-003 1 of each Bug Tray 4.98

BUG RUGTM — Static discharge protection for CMOS and MOSFET devices * Procut to dimensions of BUG BOX (1* x 35*) Price BRC-030 30 fearn rectangles for Bug Box 5:1.98 BR-035 6 foam rec. for LSI Big Bug Box 1.98 Description Price 30 foam rectangles for Bug Box \$1.98 6 foam rec. for LSI Big Bug Box 1.98
 CAGE
 KEEPERTM
 — Pins column of price

 Boxes in Bug Cage
 Price

 CKP-005
 5 inch
 \$4.98/pkg.

 CKP-010
 10 inch
 6.98/pka.

BUG BOX™ STORAGE SYSTEMS



LSI BIG BUG BOXTM — Designed to store large IC's, Resistors, Capacitors and Diodes • Divided into three compartments measuring 1" x 4.15" x 5" deep • Three vertical and three horizontal dividers included • Bug Rugs not included • Box size 4.9 v 3.3" x .6 • Weight: 1.75 oz.

LSI BIG BUG BOXTM

PART NOJO	COLOR CODE	QTY	PRICE
BLX-001-(1	. 1	\$ 3.29
BLX-010-()	10	28.79
	ANTI-STATIC		
BLX-001-()AS	1	\$ 4.29
BLX-010-()AS	10	37.89

BACK PACK M — Self-adhesive labels for the back of Ics - Shows exact internal logic in relation to the self-adhesive labels of the self-adhesi

• Microprocessor package contains Part No. Description BPT-012 TTL CMOS BPM-012 CMOS BPM-012 CMOS BPM-012 Microprocessor BPU-012 Micropr

BUG TAGSTM — Self-adhesive, easy-to-read labels for marking Bug Box and LSI Big Bug Box • Most popular components


PART NO.	DESCRIPTION	QTY.	PRIC
BTT-200	TTL	200	\$4.1
BTC-200	CMOS	200	4.5
BTK-200	LS Schottky	200	4.5
BTS-200	Special	200	4.5
BTM-800	Mixer	800	13.5
M	ORE BUG TAGS AVA	ILABLE!	

* * * BUG BOX SYSTEMS INTRODUCTORY SPECIAL * * * choice: regular ar amit-static. Includes 2-Bug Capes (12 locations) 8-Bug Bezes; 3-LSI Big Bug Bezes; 1-horizontal Bug Tray; on Bug Tary; 1-vertical Bug Tray; 1 postage Bug Reg for regular Bug Bezes; 1 postage Bug Rug fee LSI Big Bug Bezes at gag Miker Labial (000 sech). Color: bug Bezes and Capes: Blue, Bug Tray: - Black. SP-BUG Regular (Retail value \$59.45). Sale Price \$49.95
SP-BUG-AS Anti-Static (Retail value \$57.45) Sale Price \$59.95



1355 SHOREWAY ROAD, BELMONT, CA 94002 4/83 PHONE ORDERS WELCOME — (415) 592-8097 Telex: 176043

8K, 16K, 32K, 64K EPROM Programmer



2708 2716 2732 & 2764 FPROM Programm JE664 EPROM PROGRAMMER

8K TO 64K EPROMS — 24 AND 28 PIN PACKAGES Self-Contained — Requires No Additional Systems for Operation

* Programs, validates and checks for properly erased EPROMs - Emulates PROMs in the Company of the Program Recting - Loads data into RAM by keyboard - Changes data in Recting Program Recting - Loads data into RAM by keyboard - Changes data in Recting Program Recting - Loads data into RAM by keyboard - Changes data in Recting Program Recting - Loads Company - Changes - Check - Changes - Check - Program - Changes - Check - Program - Changes - Check - Check - Changes - Check - Changes - Check - Program - Changes - Cha

JE664-A EPROM Programmer

Assembled & Tested (Includes JM16A Module)

JE665 — RS232C INTERFACE OPTION — The JE665 RS232C Interface Option implements computer access to the JE664 s RAM Sample software written in BASIC provided to TRS-80[®] Model: Level i Computer Base rate 9800. Word Light. 8 bits - odd parity. Stop bits: 2. Option may be adapted to other computers.

EPROM J UMPER MODULES. The state of the process of

No.	EPROM	EPROM MANUFACTURER	PRICE
JM08A	2708	AMD, Motorota, National, Intel. TI	\$14.95
JM16A	2716,TMS2516	intel, Motorola, National, NEC, TI	\$14.95
JM16B	TMS2716	Motorola, TI (+5,-12, +12)	\$14.95
JM32A	TMS2532	Motorola TI	\$14.95
JM32B	2732	AMD, Fujitsu NEC, Hitachi, Intel	\$14.95
JM64A	MCM68764. MCM68L764	Motorola	\$14.95
JM64B	2764	Intel	
JM64C	TMS2564	TI	

siemens 8" Floppy Disk Drive



- Shugart 801R compatible
 Single-Sided
 77 Tracks
 400/800K Bytes Capacity
 Industry Standard

The FDD100-3 8" Floppy Disk Drive (Industry Standard) features single or double density. Recording mode: FM single, MFM double density. The FDD100-5 is designed to work with the aingle-sided soft sectored IBM Diskette I, or eq. disk carridge. Power ISWAC g5-65-601-x, 24VDC g-1.7 amps max., 45VDC g-1.2 amps max., 45VDC g-1.2 amps max. 45VDC g-1.2 amps

 FDD100-8
 Buy 1 for
 \$269.95 each

 FDD100-8
 Buy 2 for
 \$259.95 each

 FDD100-8
 Buy 10 for
 \$249.95 each

51/4" Mini-Floppy Disk Drive

574 MIIII-TIOPPY DISK DIVE FOR TRS-80 MODEL I (Industry Standard) Features single or double density. Recording node: FM single, MFM double density. Power. +12VDC (=0.89) 1.84 max., +5VDC (=0.259) 0.84 max. Unit as pic. at left (does not incl. case, power supply, cables).30-pg data book incl. VII. 391 bs. 5/2se: 544 V x 8*0 V x 3* V H. Limited Quantity! Part No.

FD200\$179.95 Single-sided, 40 tracks, 250K bytes capacity FD250 \$199.95 Double-sided, 35 tracks, 438K bytes capacity



EXPAND YOUR MEMORY

TRS-80 to 16K, 32K, or 48K

"*Model 1 = From 4K to 16K Requires (1) One Kit
Model 3 = From 4K to 48K Requires (3) Three Kits
Color = From 4K to 16K Requires (1) One Kit

"Model 1 equipped with Expansion Beard up to 48K Twe Kits Required
One Kit Required for each 16K of Expansion —

TRS-16K3 *200ns for Color & Model III\$12.95

TRS-80 Color 32K or 64K Conversion Kit

Kit comes complete with 8 each 4184-2 (200ns) 64K dynamic RAMs and conversion documentation. Converts TRS-80 color computers with D and E circuit boards, and all new color computers to 32K. Minor modifications of 32K memory will allow the use of all 64K of the drawing forms.

TRS-64K2\$54.95



Sprite-style Fan

36cfm free air delivery
 3.125" sq. x 1.665" depth
 10 yrs. cont. duty at 20 °C
 Frame
 115V 50/60Hz



Muffin-style Fan 105cfm free air delivery
 4.68" sq. x 1.50" depth,
 10 yrs. cont. duty at 20 °C
 Impedance protected, ambieni
 115V 50/60Hz 14W Wt. 17 oz. mbients to 70°C



Mostek DC/DC Converter +5 VOLTS TO -9 VOLTS
Input: +5V. Output: -9V (regulated) @ 30m
Printed circuit mounting. Specifications incl. DC10 \$2.95 ea. or 2/\$4.95

SANVO AFFORDABLE, HIGH PERFORMANCE COMPUTER



COMPUTER MBC 1000
Special Software Package Included CP/M
 S BASIC
 WORDSTAR
 CALCSTAR
 MAILMERGE
 SPELLSTAR
 INFOSTAR

Special Software P

2-80 CPU

64 KB RAM

328 KB FLOPPY

12" GREEN

SCREEN (80x25)

CENTRONICS/
EPSON PORT

RS 232C PORT

SPECIAL \$1,995

PRINTERS

EPSON MX-80+ III w/Graftrax ... \$579 EPSON MX-80FT+ III w/Graftrax \$629 EPSON MX-100+w/Graftrax ... \$849 EPSON MA-HOTWIGHTER
OKIDATA dual mode printer (near letter quality) #92A \$625
OKIDATA #82A (8½°) \$419
OKIDATA#83A (15°) \$699
OKIDATA#84P \$1,039 CENTRONICS 122 Parallel \$869 CENTRONICS 352 S/P 200CPS \$1.699

Signalman Mark I Modem-\$99

Direct connect modem/RS-232C; Built in interface cable and connector; Light, compact, Bell 103 compatible Data/voice switch

BMC-12A, 12" Green Phosphor Monitor \$99

PERIPHERAL DRIVER IC's
UHP 400, 401, 402, 403, 407, 408 & 432
Applications: driving stepping motors, relays, incandescent lamps, solenoids and
other interface devices with Up to 1 AMP output current per package.
75¢ each 10/\$5.00

Have Some Fun...Fun!..Fun! PROGRAMMABLE MESSAGES IN SPACE, with SPACE WRITER Kit \$39.50

MICRO-CONTROLLER BOARD (Kit/\$99.50)

- · Controls lights, relays, switches,

- Controls lights, relays, switches, appliances
 Built in basic interpreter
 Supports 20KB RAM
 Provides 4K to 16K EPROM
 (2716 & 2764)
 Supports Real Time Clock (option)
 RS232 Serial Port
 24 lines I/O
 Parallel printer port
 Built in EPROM programmer
 (2716 & 2764)
 SV operation (supply not incl.)
 PC Board, Components, Instructions

REAL-TIME CALENDAR CLOCK MODULE-Kit/\$39.50

- Turn equipment & lights on/off under computer control
 Monitor times of events & equip, usage
 Date & time-stamp files & print-outs
 Provide time: year, month, day and day-of-week
 Automatically adjusts for number days in month/leap year
 Register-oriented for direct microprocessor interface
 CMOS design for low power consumption and battery backup
 Internal pullups to safeguard data
 Feedback signal if data changes during read
 Fast 500ns access time & compact plug

- Fast 500ns access time & compact plug in design

Heart Rate Monitor KIT-\$39.95

UHF-TV PREAMP (As featured in Radio Electronics March/ May articles, 1982)

hay atticles, 1962)
This inexpensive antenna mounted preamp can add more than 25 dB of gain to
your system. Lots of satisfied customers
and repeat orders for this high quality kit,
which includes all component parts, PC
BD, Case, Power Supply and Balun \$34.50
Assembled Version. \$57.50

Terms: MICRO-MART accepts Visa, MC and telephone COD's. Minimum order \$10.00. Shipping—U.S. orders, \$2.00. Canada and other countries \$3.50 (includes ins.). Shipping rate adjusted where applicable. NJ residents add 5% sales tax.

MICRO-MART ● 508 CENTRAL AVE., WESTFIELD, NJ 07090 ● (201) 654-6008

CIRCLE 90 ON FREE INFORMATION CARD

DON'T **FORGET**



USE YOUR READER SERVICE CARD

PHASOR PAIN FIELD - Patented and recently developed in our labs is being tested by Gov't for riot control. Soon to come under weapons restrictions as an internal machine. Easily hand-held. Hazardous IF NOT USED WITH DISCRETION.

PHASO INVISIBLE PAIN FIELD GENERATOR — Produces a di rectional field of moderately intense pain to back of head up to 50'. Clgarette pack size enclosure is easily hidden. 196-3 PG-3 PLANS ... \$7.00 PG-3 K IT & PLANS ... \$44.50 PG-30 (assembled for animal control) ... \$59.50

PHASOR STUN/BURNING WAND — Produces sufficient electrical energy capable of burning flesh. Intended as a personal defense device.
PSW-3 PLANS \$8.00 PSW-3K KIT & PLANS \$59.50

RUBY LASER RAY PISTOL - Intense visible red, burns.

RUBY PLANS (includes all part sources). \$15.00
CARBON DIOXIDE LASER — Generates 20-40 watts of A S continuous power capable of burning, cutting, hazardous, (vall part sources)

Continuous power capacie of our iming, cutting, inazarous, (who all part sources).

LASER RIFLE — Produces 200-3000 pulses of 30 watt optical energy. Portable and easily hand-held.

LRG-3 PLANS \$10.00

LRG-3K KIT PLANS (minus diode) \$129-50

POCKET LASER — For the beginner, visible red "optical version" non-hazardous.

LHC-2 \$5.00 LHC-2K KIT & PLANS \$24-50

HIGH POWERED PORTABLE ENERGY SOURCE

FOR LASERS AND MAGNETIC WEAPONS — Exploding wires, shockwave, etc. Miniature size.

HPS-1 PLANS \$8.00 HPS-1K KIT & PLANS \$49-50

PARTICI E BRAM WEAPON — PLANS \$15.00 RS

PARTICLE BEAM WEAPON - PLANS .

SEE IN DARK — Long range, total darkness.

LONG RANGE WIRELESS MIKE — Crystal clear quality — miniature.
FBT-7 PLANS ... \$7.00 FBT-7K PLANS & KIT. ... \$34.50
WIRELESS TELEPHONE TRANSMITTER — Long

Send for FREE catalog description of above plus hundreds more plans, kits and completed items. We accept MC or Visa or when ordering, send check or money order. We pay shipping charges on orders over \$50.00, otherwise include 10% with remittance.

SEND TO: SCIENTIFIC SYSTEMS DEPT. R8, BOX 716, AMHERST, N.H. 03031

DISCOUNT TEST EQUIPME

LOWEST PRICES AND IMMEDIATE DELIVERY FOR OVER 40 YEARS

KEITHLEY

132C



Temp. Gauge -20 °C To 1370 °C • 1 °C Resolution • DCV • TRMS AC Volts • DC Amps • Restance And Diode Test •

Drop Proof • Low Batt. In-

Temp Gauge 0 °F To 2000 °F

132F

• 1°F Resolution • All Features Of 132C

\$185.70

TRIPLETT

3500

3550



\$177

autorange DMM auto or manual range select Range annunciator



6 Functions • 32 Ranges 200 ua AC/DC · Hi/Lo Ons · Diode Check All Ranges

\$121

\$73.50

COMPLETE LINE OF INSTRUMENTATION AT THE MOST COMPETITIVE PRICES

including **AMPROBE** A. W. SPERRY

BBC B&K BECKMAN EICO FLUKE GLOBAL

HICKOCK LEADER MURA SIMPSON SOAR TRIPLETT

CALL TOLL FREE FOR SAME DAY SHIPMENT SAME DAY SAVINGS

HICKOCK



LX-306

31/2 Digit • New VARI-PITCH Full Function, Variable Audible Tone •0.25% Accuracy • AC/DC Volts • AC/DC Current . Resistance And Diode Test . Low Battery Indicator

\$139

LEADER


LBO 522

LBO 524L



New Model • 20 MHz Dual Trace • 0.5 mV Sensitivity . More

\$690



New Model • 35 MHz Dual Trace • 0.5 mV Sensitivity . More

\$915

WM. B. ALLEN SUPPLY

1601 Basin Street, New Orleans, LA 70116



Over 70,000 electronic items in stock for immediate delivery.



CALL TOLL FREE 800 535-9593 **LOUISIANA TOLL FREE 800 462-9520**

MICROPROCESSORS

16K Apple™ Ramcard



LIST 195 ACP

\$5995

 Full 1 year warranty Top quality — gold fingers

- Expand Apple II 48K to 64K Compatible with Z-80 Softcard
- Allows system to run with CP/M™, PASCAL, DOS 3.3, COBAL, Visicalc, etc.
- Supplied with extra 16K RAM & has (2) LED's

32K STATIC RAM



Expandable Uses 2114L's

16K 4 MHz Kit \$159.95 16K 4 MHz A&T \$129.95 269.05 32K 4 MHz Kit \$339.00 39.95 Bare Bdw/all parts less mem.

REPEAT OF SELL-OUT 58 Key Unencoded Keyboard



This is a new 58 key terminal Keyb manufactured by a major manufact It is uncoded with SPST keys

Unencoded **Key Pad**

Daly \$995 ...



UV "EPROM" ERASER



Model S-52T

at a time. \$325.00 16K Memory **Expansion Kits** for Apple/TRS-80

200/250nS Specify computer \$12.95 CALL FOR VOLUME PRICING

CORCOM FILTER



Popular CORCOM Filter \$495

6 amps 4 patible Line Cord Add ... \$3.50



B/W P/N 1082 Channel 3 or 4 \$6.95

AMD MODEM IC

1200Baud 5 Volts Special ACP Price \$9900

RAMCARD Compatible Uses Low Power 6116 IC's \$29900 5Volt Single Supply

INTEL 4K STATIC

Super Fast! Super Low Power!

Assm and Tested

Part No. 2147 ...\$1.95 ea.

STEPPER MOTOR



Operates by applying 12VDC in one direction and then reversing polarity (or square wave). Uses 12VDC, Clock Wise Rotation, Rated 3 RPM at 4 P.P.S. with a 5 degree stepping angle.

ACP \$395 ea.

10 for \$34.95

RS232 SIGNAL TESTER

COEX RS232 Line Tester (7) LED Indicate

Other Styles Also Available INTEL CODEC IC

P/N 2910A For Digital Voice

didition. \$95 ea. For Filter P/N 2912A ... \$4.95 ea



SURGE SUPPRESSOR

"Surgeonics" Power Sentry 15 Amps 250 Volts ransient suppression transie... ACP Low Price \$3995

CONNECTORS



DB25P (RS232)	\$3.25
DB25S Female	3.75
Hood	1.25
Set with Hood, Sale	7.50
22/44 S/T, KIM	2.95
43/86 S/T, MOT	6.50
50/100 S-100 Connector W/W	4.95
50/100 S-100 Connector S/T	2.04

PARALLEL ALPHA NUMERIC

19 Column Printer prints 16 numerical columns plus 3 columns which have math, alpha and other notations. Each wheel has 12 positions with position 12 blank. Position 11 on numerical columns have decimal point or #. Utilize 2.75" wide adding machine tape and a dual color ink ribbon. Input data parallel with four bit BCD comparator circuit (schematic provided). Print rate, 3 lines per second. Operating voltage 22-28VDC with typical cycle time of 340mS. Size 6½"W x 3½"H x 5½"Dp. New. \$9.95 ea. 3/\$27

					-
28001	\$99.00	8008-1	\$14.95	6802P	14.95
28002	69.00	2901	9.90	8035	14.95
280	9.95	2901A	14.95	8039	12.95
AOS	11.95	9900.K	49.95	8073N	34.95
8 (3850	16.95	6502	9.95	8755	49.95
650	16.95	6502A	16.95	8748	49.95
802	9.75	IM6100	29.95	6800	30.00
A080	4.75	6800	11.75	8086	49.95
085	14.95	6800B	19.95	68000	129.95
	Adventor of	-	-		-0

RAMS CALL FOR OTY PRICING

2147 \$5.99 411 5.99 414 4.68 1101 99 1103 99 4027 4.69 4050 4.69 4050 4.69 4060 4.69 4060 4.69 4060 4.69 4060 4.99 5280 4.60 5290 \$1,99 5298 1,49 6508 4,50 6518 6,79 6561 3,79 6116/2016 \$7.95 8264-64K 5.95 4116-2 4116-2 6508 4.50 6518 6.79 6561 3.79 6604 3.99 6605 7.99 9130 8.99 9140 8.99 93415 6.99 93425 6.99 8/12.95 2101 2102 21L02-2 21L02-4 2111 2112 2114 .79 1.49 1.29 3.49 3.49 1.99 3.25 2.29 6.99 2114L-2 2114L-4 2125 84X only \$5.95

SUPPORT

8155 \$	9.95	8259	\$8.95	68047	\$22.95
8156	9.95	8275	19.95	68488	19.95
8202 2	9.95	8279	9.50	46505	22.95
8205	2.69	6810	4.75	6520	6.95
8212	2.75	6820	6.50	6522	9.95
8214	4.95	6821	6.50	6530-X	24.95
8216	2.75	6828	10.50	6532	17.95
8224	2.95	6834	16.95	6551	19.95
8226	2.95	6845	22.95	Z80-PIO	6.50
8228	3.95	6847	27.95	Z80A-PIO	9.50
8243	9.50	6850	5.25	Z80-CTC	6.50
8250 1	4.95	6852	5.25	Z80A-CTC	9.50
8251	6.50	6860	10.95	Z80-DMA	19.95
8253 1	1.95	6862	10.95	Z80A-DMA	27.95
8255	4.50	6875	5.95	Z80-SIO	24.95
narre.	0.00	2000	0.40	TOOA CIO	DO OF

MOS PROMS

NAME AND ADDRESS OF THE PERSON	1000		
2764 (8Kx8) TS	\$69.95	2708 (450nS)	\$5.7
2732 (4Kx8) TS	12.95	2708 (650nS)	5.2
2716/2516: 5V		1702A	5.7
(2Kx8) TS	7.95	MM5203AQ	14.5
TMS2716, 5V, 12V	17.95	MM5204Q	9.9
2758, 5V, (450nS)	3.50		

HI-TECH

CONTRACTOR OF THE PARTY OF THE		THE REAL PROPERTY.	
2513-001 (5V) Upper	\$9.50	DACOS	\$9.95
2513-005 (5V) Lower	10.95	DAC100	9.95
2513-ADM3 (5V) Lower	14.95	8038 Function Generator	4.50
MCM66710 ASCII Shifte	d12.95	MC4024 VC0	2.95
MCM66740 Math Symbo	13.95	LM566 VCO	1.95
MCM66750 Alpha Contri	N 13.45	XR2206 Function General	tor 5.25
1771-01 8" & Miniflopp	y 24.95	TR16028 (5V, 12V)	3.95
1781 Dual Floppy	29.95	AY51013 (5V, 12V)	4.95
1791-01 Dual Floppy	36.95	AY51014A/1612 (5-14V)	6.95
1791-02 Dual Floppy	44.95	AY51015A/1863 (5V)	6.95
1793 DD, DS Floppy	44.95	IM6402	7.95
1797 DD, DS Floppy	54.95	IM6403	8.95
1691 Data Separator	18.95	2350 USRT	9.95
2143 Clock Generator	18.95	1671B Astros	24.95
8700 8 bit Binary	13.50	MC14411	11.95
8701 10 bit Binary	22.00	4702	14.95
8703 8 bit TS	13.50	WD1941	9.95
9408 Voit to Freq Conv.	7.25	COM5016	16.95
8750 31/2 Digit BCD	13.95	INS8250	15.95
1408L6 6 bit	3.95	AY5-2376	13.75
1408L8 8 bit	5.95	AY5-3600	13.75
DAC01 D to A	5.95	MM5740AAC -	8.95
ALIBRATA AND TO THE STATE OF TH			

SOCKETS

LOW PROFILE SOCKETS (TIN)

1.4.1.1.1.1.1.1					
	1-24	25-49	50-10		
8 pin LP	.16	.15	.14		
14 pin LP	.20	.19	.18		
16 pin LP	.22	.21	20		
18 pin LP	.29	.28	.27		
20 pin LP	.34	.32	.30		
22 pin LP	.29	.27	.24		
24 pin LP	.38	.37	.36		
28 pin LP	.45	.44	.43		

3L WIREWRAP

28 pin WW 40 pin WW

SUCKET	1111111		
	1-24	25-49	50-100
8 pin WW	.55	.54	.49
10 pin WW (Tin)	.65	.63	.58
14 pin WW	.75	.73	.67
16 pin WW	.80	.77	.70
18 pin WW	.95	.90	.81
20 pin WW	1.15	1.08	.99
22 pin WW	1.45	1,35	1.23
0.4 min 14844	1 25	1 26	114

1.60

1.53

SWITCHES





\$1.39 1.49 1.65 1.69 1.29 1.35

LINEAR

\$5.955 1.494 1.255

IM1496N IM1496N IM1496N IM1496N IM14850N IM1850N IM1850N IM1850N IM1485N IM1491N IM1491N IM1490N IM1491N IM1490N IM149

TL494CN TL496CP

74S244 \$2.99 74S251 1.35 74S253 1.35 74S257 1.29

1.29 .75 2.79 2.99 2.55 3.10

74S244 74S251 74S253 74S257 74S258 74S260 74S287 74S287 74S288

748373 748374

74S387 74S471 74S472 74S473 74S474

748475

74S475 74S570 74S571 74S572 74S573 74S940 74S941

74500

3.69 .54 .66 1.15 1.89 1.29 .73 1.29 1.29 1.29 1.49 1.49 2.69

74S124 74S133

74S134 74S135 74S138 74S138 74S139 74S140 74S151 74S153 74S157 74S158 74S160 74S174 74S175 74S188

74S188 2.69 74S194 1.89 74S195 1.89 74S196 1.89 74S240 2.75 74S241 2.75 74S242 2.99 74S243 2.99

1.500 955 955 955 955 955 955 955 955 2.199 3.499 1.299 2.759 1.299 3.499 1.29

LM1414N LM1458CI MC1488N MC1489N

78H05K 78M06 78M.G. LM108AH

LM300H LM301CN LM304H LM305H LM306H LM307CN LM308CN

LM30BCN LM310CN LM311D/CN LM3111D/CN LM3111D/CN LM319TT LM31BCN LM319N/H LM320K-XX* LM320T-XX* LM320T-XX* LM320T-XX* LM323K LM323K LM323K LM337K LM338K LM339N

LM339N

LM339N LM340K-XX* LM340T-XX* LM340H-XX* LM348N LM350K LM350K LM350K LM350N LM372N LM372N LM377N LM377N LM378N LM378N LM378N LM378N LM381N LM381N LM3881 LM380N

LM386N LM387N LM390N NE531V/T NE555V NE556N NE561T NE565N/H

NE565N/H NE566H/V NE567V/H NE592N LM702H LM709N/H LM710N/H LM711N/H LM715N

LM715N LM723N/H LM723N/H LM739N LM741CN/H LM741CN-H LM747N/H LM748N/H LM760CN LM1310N MC1330 MC1358

4S00 \$ 39

MUFFIN® FAN



8080A CPU 2102 RAM

The dependable, low cost, largest selling fan for commercial cooling

 105cfm free air deliver 4.68" sq. x 1.50" deep Weight - 17 oz.

SPECIAL PURCHASE NEW \$9.50 ea.

5027 CRT

542 W. Trimble, San Jose, CA 95131 (408) 946-7010

OSEOUT SPECIALS SUPER IC CL

	THE PARTY	TOIL	EREE	-1000	Mail Order P.O.	Box 173	20 In
l	LM323K	3.95	6502 CPU	5.95	2114	8/14.50	870
ı	LM733CN	3/1.99	6522	6.95	2708 EPROM	8/29.95	104
ı	6561 RAM	2.95	Z80A CPU	4.95	UPD411	2.98	EMI
ı	8259	6,95	1802	8.95	UPD410	2.98	913
ı	74LS241	2/1.99	2758 EPROM	2.95	2732	6.95	MM
ı	74LS377	2/1.99	8253	6.95	4060 RAM	1.40	803
ı	74LS668	3/1.99	SIG 2652	3.95	2102 RAM	.75	290
ı	14411	\$7.95	6571A	\$6.95	8080A CPU	\$2.95	502

1.38

910-595-1565

vine, CA 92713 Edinger, Santa Ana CA 92705 (714) 558-8813

whichever is greater. Add US Parcel Post Include Tel Prices subject to change v

7.400 \$ 19 7.401 \$22 7.402 \$22 7.402 \$22 7.403 \$22 7.404 \$22 7.405 \$23 7.406 \$23 7.407 \$35 7.407 \$35 7.408 \$26 7.408 \$26 7.411 \$29 7.411 \$29 7.411 \$29 7.411 \$29 7.411 \$29 7.412 \$29 7.412 \$29 7.413 \$39 7.414 \$29 7.414 \$29 7.415 \$29 7.416 \$29 7.416 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.421 \$29 7.422 \$29 7.423 \$29 7.424 \$29 7.425 \$29 7.426 \$29 7.427 \$29 7.437 \$29 7.43 \$24 7.44 \$29 7.44 \$

7400

		74LS	00		
74LS00\$		74LS113		74LS245	
	28	74LS114		74LS247	
74LS02	.28			74LS248	
74LS03	28	74LS123		74LS249	1.19
74LS04	.35	74LS124		74LS251	1.40
		74LS125	.89	74LS253	1.40
74LS08	.28	74LS126	,52	74LS257	.85
	35 28	74LS132 74LS136	.79	74LS258	.98
74LS10 74LS11	39		.49 .85	74LS259	
74LS11	.33			74LS260	.65
	.47	74LS139		74LS261	2.49
74LS13	.95	741 04 40	4 40	74LS266	
	.33	74LS148 74LS151 74LS153	.79	74LS273 74LS275	1.75
74LS20	26	74LS153	.79	74LS279	59
74LS21	.33			74LS283	
	33	74LS155	1.19	74LS290	.99
74LS26	.33	74LS156	.99	74LS290	
74LS27	33	74LS157	06	74LS295	
74LS28	33	74LS158	.85	74LS298	
	26	74LS160	1.05		1.75
74LS32	33	74LS161			1.95
	55		1.05	74LS348	1.95
74LS37	45	74LS163	1.05	74LS352	1.19
74LS38	39		1.19	74LS353	1.19
74LS40	26	74LS165	.89	74LS363	
74LS42	.79		2.48	74LS365	
74LS47	.79	74LS168			.69
74LS48	.95	74LS169	1.15	74LS367	.69
	.26	74LS170	1.99	74LS368	.69
	29		.89	74LS373	
74LS55	29	74LS174	00	74LS374	
	45			74LS375	.69
	42		2.20	74LS377	
	.59			74LS385	1.95
	.45		1.15	74LS386	.65
	.45			74LS390	
74LS83A	.79		.98		1.95
74LS85	1.19	74LS194	1.15	74LS395	1.70
	.45	74LS195		74LS399	2.35
74LS90	.57	74LS198	.89	74LS424	2.95
74LS92	.75	74LS197	.89	74LS668	1.75
74LS93	.75	74LS221	1.15	74LS670	2.29
74LS95	.88	74LS240	1.69		1.69
74LS96	.98	74LS242	1.69	81LS96	1.69
		74LS243		81LS97	1.69
	.45		1.49	81LS98	1.69
74LS112	.43		VO	LUME PRI	CING
		CIVIO	26	CALL	1

74LS192 74LS193 74LS194 74LS195 74LS196 74LS197 74LS221 74LS240 74LS242 74LS243 74LS244

037	\$1.95	4089	\$2.95
040	1.29	4093	.99
041	1.25	4094	2.95
042	.95	4098	2.29
043	.85	4099	2.25
044	.85	14408	12.95
046	1.75	14409	12.95
047	1.25	14410	12.95
048	.99	14412	12.95
049	.45	14415	8.95
050	.69	14419	4.95
051	1.10	4501	.39
052	1.10	4502	1.65
053	1.10	4503	.69
055	3.95	4505	8.95
056	2.95	4506	.75

4027 4028 4029 4030 4031 4032 4034 4035 3.95 3.95 5.99 1.99 4.95 45320 31 RAM 4M4402 415 0 A/D 2/16.95


.35 .35 .35 1.05 4000 S

ㅂ

330 470 470 OMTA On an OMTA 000 TO THE PERSON OF TELETRONIC HARDWARE KIT TENERS OF THE PROPERTY OF THE 100 to 4 and 100 to 100 567Es NEMI KIL 90/V NAMES NIC POLYESTER CAPACITORS High tented expensive and Easth end in constitution of the constit | Section | Sect NISSEN NI 443 (U 98888 HIIIII | Section | Column | William Control #1 11 ## 2 \$P P #0 C \$P P #0 1 #1 1 #1 1 #1 1 #0 1 #0 1 5675s NEMI KIL | FM | KU | CVV | CU | CVV | C 11 100 11790 01191 60991 60991 90991 90991 90991 90991 90991 NU SESSI NA PERENTA NA SE SELL LE COLL SE SELL SE SEL 8000 000 000 000 000 000 000 000 000 NOSON NASON NOSON NASON 52 962 52 500 10 7 sobLs NEM! KIL MATIONAL SERVICES C. AMERICALS - AND TEXT - Name brand products from nationally recognized manufacturers. Chemicals - And the products of the most of the products of the prod NSIA

-972-008

DIGI-KEY 800-346-5144

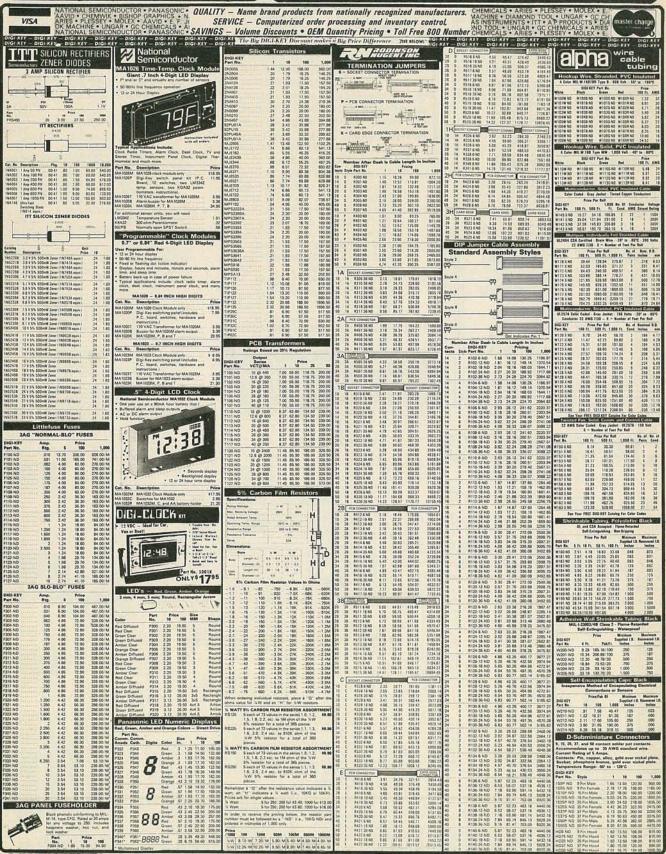

the Digit Key volume discount and hondling changes are simple in apply. Must items sold by Digit Key may be combined for a volume discount. Items that are not discountable are identified by the Indianal Property of the In

BUY QUALITY ELECTRONIC & INDUSTRIAL COMPONENTS From the Source!

THIS MONTH'S SPECIALS!



POWER SUPPLY MODULE WIDE RANGE INPUT 3-TERMINAL SWITCHING REGULATOR

BOSCHERT 3T12AP

Input DC voltage +10V to 60V. Output DC voltage adjustment range +4.5V to 30V. Output current 0-12A. Dimensions: 5"L 4"W × 11/6"H. 1595 EACH

DC Series Requiator POWER 1B5-6

POWER 185-0
Input DC voltage 40V,
output DC voltage 44,5V
to +6,5V, Input-output
min. diff. 4,1VDC,
Dimensions 2\%" \times 2\%" \times 1\%"H. 1350 EACH

DC Power Sunniu POWER-ONE HN5-9/0VP

Input: 115/230 VAC 47-440 Hz Output: +5 VDC at 9A, Dimen-sions 5"W × 7"L × 3\4"H.

1995 EACH

AUDIO OUTPUT

TRANSFORMERS

TRANSFORMERS

Dual PRI-115/230

MUFFIN FANS 115 Vac 50/60 Hz IMPEDANCE PROTECTED

HOWARD	4%" Sq. × 11/2"1"	15 CFM Like I	New 8.95 ea.
IMC	4%" Sq. × 11/2"1"	15 CFM New.	10.95 ea.
ETRI	3%" Sq. × 1" 2	21 CFM New.	8.95 ea.

220/240 Vac 50/60 Hz-IMPEDANCE PROTECTED 4%" Sq. × 1½"115 CFM New. 9.95 ea. 10" O.D. × 3½"230 CFM New. 19.95 ea. IMC

1982 GTE SYLVANINA COLOR TV PARTS

Remote Control Amplifier W/Infrared Pre Amp 9.95/Set OHMS P.C. leads .29¢ ea. MECHANICAL TV TUNER

Channels 2-83, Sylvania part No. 54-43617 10.95 ea. Sec-6V-3A 18 VCT-3A... 3.75

WGE- WHITE GLASS EPOXY ALL DIMENSIONS ARE IN INCHES

DESC.

WGE WGE BGE BGE BGE P WGE BGE

Boards

Circuit

Printed

JAVAN ORDER #

PCB-1001 PCB-1002 PCB-1003 PCB-1003 PCB-1005 PCB-1005 PCB-1007 PCB-1009 PCB-1010 PCB-1011 PCB-1011 PCB-1011 PCB-1014 PCB-1016 PCB-1016 PCB-1016 PCB-1017 PCB-1018 PCB-1018 PCB-1019 PCB-1020 PCB-1020 PCB-1020

RELAY CD #1077

SPST/23 MADC Coil-P.C leads 11/4

LYMOUTH ELECTRONICS CO.

300 Adams Blvd., Farmingdale, N.Y. 11735 516/694-4100 • Toll Free 800/645-9060

CIRCLE 97 ON FREE INFORMATION CARD



Power Line Spikes and Hash often cause memory loss or erratic operation. Often floppies, printer & processor interact!

OUR patented ISOLATORS eliminate equipment interaction AND curb damaging Power Line Spikes, Surges and Hash.

Filtered 3-prong sockets and integral Spike Suppression. 125 VAC, 15 Amp, 1875 W Total - 1 KW per socket.

ISO-1 ISOLATOR. 3 Filtered Sockets; 1000 Amp 8/20 usec Spike Suppressor \$76.95

ISO-4 ISOLATOR. 6 Filtered Sockets; 1000 Amp 8/20 usec Spike Sup-\$128.95 pressor

ISO-3 SUPER-ISOLATOR. 3 DUAL filtered Sockets; 2000 Amp 8/20 usec Spike Suppressor \$115.95

ISO-7 SUPER-ISOLATOR. 5 DUAL filtered Sockets; 2000 Amp 8/20 usec Spike Suppresor \$186.95

Master-Charge, Visa, American Express
TOLL FREE ORDER DESK 1-800-225-4876 (except AK, HI, MA, PR & Canada)

Electronic Specialists, Inc.

171 South Main Street, Natick, MA 01760 Technical & Non-800: 1-617-655-1532

CIRCLE 92 ON FREE INFORMATION CARD

ELECTRONIC KITS

FROM HAL-TRONIX

2304 MHZ DOWN CONVERTERS. TUNES IN ON CHANNELS 2 TO 7 ON YOUR OWN HOME T.V. HAS FREQUENCY RANGE FROM 2000 MHZ TO 2500 MHZ. EASY TO CONSTRUCT AND COMES COMPLETE WITH ALL PARTS INCLUDING A DIE-CAST ALUM CASE AND COAX FITTINGS, REQUIRE A VARIABLE POWER SUPLY AND ANTENNA (Antenna can be a dish type or coffee can type depending on the signal strength in your grea.)

2304 MOD 1 (Basic Kit) 2304 MOD 2 (Basic Pre-amp) \$29.95

2304 MOD 3 (Hi-Gain Pre-amp) \$39.95

(Includes case & littings)
POWER SUPPLY FOR EITHER MODEL ABOVE IS
AVAILABLE COMES COMPLETE WITH ALL PARTS,
CASE, TRANSFORMER, ANTENNA SWITCH AND
CONNECTORS
(Kit) \$24.95 Assembled. \$34.95

Slotted Microwave Antenna For Above Downverters ... \$39.95

PREAMPLIFIERS

HAL PA-19—1.5 mhz to 150 mhz. 19db gain operates on 8 to 18 volts at 10ma. Complete unit \$8.95. HAL PA-1.4—3 mhz to 1.4 ghz. 10 to 12 db gain operates on 8 to 18 volts at 10 ma. Complete unit \$12.95.

(The above units are ideal for receivers, counters, etc.)

6 LINE TOUCH TONE DECODE KIT WITH P.C. BOARD AND PARTS.

12 LINE TOUCH TONE DECODER KIT WITH P.C. BOARD AND PARTS \$39.95 \$39.95

16 LINE ENCODER KIT, COMPLETE WITH CASE, PAD AND COMPONENTS......\$39.95 12 LINE ENCODER KIT, COMPLETE WITH CASE,

PAD AND COMPONENTS.....\$29.95

Complete Sets of P.C. Boards Available For: Unicorn Robot Project and Heart-A-Matic Project. MANY, MANY OTHER KITS AVAILABLE Send 20 cents stamp or S.A.S.E. for information and flyer on other HAL-TRONIX products. To order by phone: 1.313-285-1782.



HAL-TRONIX P.O. Box 1101 Southgate, MI 48195

ORDERS OVER \$25.00 WILL BE SHIPPED POSTPAID EXCEPTIONS
ON ITEMS WHERE ADDITIONAL CHARGES ARE REQUESTED
ON ORDERS LESS THAN \$25.00 PLEASE INCLUDE ADDITION
ALL \$25.00 FOR HANDLUNG AND MAILING CHARGES

CIRCLE 95 ON FREE INFORMATION CARD

150 2ND AVE SOUTH, NASHVILLE TENN. 37201

1-800-251-5555 TOLL FREE ORDER LINE TENNESSEE RESIDENTS 1-615-244-4444 \$15.00; minimum order

SLIPPING CHARGES 52.75 TOTAL REGARDLES OF WEIGHT AND SIZE OF ORDER.
COD.5 \$4.75 TOTAL SHIPPING: QUANTITY ORDERS NECOTIATED F.O.8 SHIPPER
PRINTED CIRCUIT BOARD PRINTED CIRCUIT BOARD PRINTED CIRCUIT BOARD SINGLE SIDED SINGLE SIDED SINGLE SIDED.

BGE-BLUE GLASS EPOXY P-PHENOLIC

DIMENSIONS
12 x 18
36\hat{1} x 2\hat{2}
12 3/8 x 4 5/8
3 7/8 x 17\hat{2}
24\hat{1} x 3/8
6 x 24\hat{2}
20 x 9
4 x 7 3/16
16\hat{2} x 6 3/16
18\hat{2} x 3
13 x 18
20 x 2\hat{2}
18 x 4 7/8
2 5/8 x 18 5/16
2 5/8 x 9

x 36t

18t x 4 2 5/8 x 2 5/8 x 12 x 5 9 x 10t 2t x 12 12 x 12 4 1/16 x 7t x 24 18 x 24

DIMENSIONS

PARTS SUPERMARKET

VISIT OUR

ORDER LINE 800-251-5555

ECK-200 CAPACITOR KIT

200 LYTICS

ECK-200 \$8.50

MICK-180 \$32.50
TRIMMER POTENTIOMETERS
(10) EA. 18 TYPES
miniature controls, both
vert and horiz mounts
(OUR NEWEST ASSORTMENT) TRIMMER CONTE

MICK-180

MCKR-90 MYLAR CAPACITOR KIT SIT MCKR-90 MYLAR CAPACITOR KIT 90 radial printed circuit bypass and coupling mylat type capacitors mave have some polyester etc. ALL GOOD FOR EVERY DAY PROJECTS. 11EXACT FOR THE POCKETBOOK! packed in a plastic clear tray with hinged lid. 18 TYFFS (5) FACH



18 TYPES (5) EACH

EP-1001 315.70
AN AUTOMATIC PROCEAMHER DESIGNED FOR HEATIAC SYSTEMS
IT OVERS HIVES THE THEMHOSTAT DON HE WITE HES
TO SAVE SOFF YOOR
WINTER THEE SILL, COMES
WITH HESTRUCTIONS
EP-1001 FUEL SAVES



DCK-270 PC LEAD CERANIC DISCS \$12.75 270 ceramic disc capacitors printed circuit leads

printed circuit leads.
GOOD USEABLE VALUES, price
includes, 18 section clear
plastic box with hinged
top.reuseable for many
items.

(18) TYPES of 15 PCS.

CATALOG \$2.00

FH-1FUSE HOLDER (3) for \$2.00 OVERALL LENGTH, INC. HOLDER 60 INCHES. DUAL WIRES. 3 AMPERE FUSE IS IN THE INLINE FUSE HOLDER.

40 PG. CATALOG CRAMMED w/GOODIES



TR-54 S6:50 (3) FOR \$15:00

THIS VERSATILE TRANSPORMER CAM PRODUCE 6V,12V,18V,24V
30V,36V,42V,JUST BY COMBINING THE WINDINGS YOU CAM
MAKE JUST ABOUT ANY TRANSISTOR POWER SUPPLY YOU WANT
TO FIGURE THE D.C. OUTPUT UNDER LOAD, USING A BRIDGE
RECTIFIER, MULTIPLY AC VOLTAGE BY 1.1 LESS ABOUT 11

VOLTS FOR RECTIFIER DROP

ECKA-72 MINI-AXIAL KIT S6.89 72 axial lytics, price includes 18 section cont-ainer, with hinged lid and reuseable for many things lilan axial MUST!!! ELECTROLYTIC CAPACITORS

TAX RES 5% . 1

FCKR-72 MINI-LYTIC KIT \$6.85 72 radial electrolytics. price includes handy re-useable 18 section cont-ainer with hinged lid. 4 ea. 18 types. NO LIMIT PER ORDER WHILE THEY LAST.(BUY SFYERAL)

题, 理

(FREE W/ORDER)

SLS-K72 SLIDE SWITCH KIT \$18.75 72 SLIDE SWITCHES price includes handy re-useable 18 section divided, hinged top tray 3 switches ea. of 18 types.

LSK-72 SLIDE SWITCH KIT \$18.75

SLSK-72 SLIDE SWITCH KIT \$18.75
22 slide switches, price
includes , handy reuseable
cop, divided partitions for
answarcess to any switch
substitute of A TYPE IN
M 18 SECT. DIVIDED TRAY.

(10) ASSORTED
CONTROLS WITH SLITCH
SINCLE
A MULTIPLE POTS
(10) CONTROLS \$2.45 120 PCS.EA.(18)val-ues LEADS CUT AND READY FOR INSERTION

B. Corner

\$4.00 \$1.40 \$9.90 \$1.00 \$1.40 \$2.80 \$.80 \$3.50 \$1.90 \$

RADIO-ELECTRONICS

the first name in Counters! 9 DIGITS 600 MHz



CT-90 wired, I year warranty \$129.95 CT-90 Kit, 90 day parts war-

The CT-90 is the most versatile, feature packed counter available for less than \$300.00! Advanced design features include, three selectable gate times, nine digits, gate indicator and a unique display hold function which holds the displayed count after the input signal is removed! Also, a 10mHz TCXO time base is used which enables easy zero beat calibration checks against WWV. Optionally; an internal nicad battery pack, external time base input and Micropower high stability crystal oven time base are available. The CT-90, performance you can count on!

SPECIFICATIONS:

Time base:

Range: 20 Hz to 600 MHz Sensitivity:

Less than 10 MV to 150 MHz Less than 50 MV to 500 MHz Resolution: 0.1 Hz (10 MHz range)

1.0 Hz (60 MHz range) 10.0 Hz (600 MHz range) 9 digits 0.4" LED

Standard-10.000 mHz, 1.0 ppm 20-40°C. Optional Micro-power oven-0.1 ppm 20-40°C

8-15 VAC @ 250 ma

DIGITS 525 MHz



20 Hz to 525 MHz Less than 50 MV to 150 MHz Sensitivity: Less than 150 MV to 500 MHz

1.0 Hz (5 MHz range) Resolution 10.0 Hz (50 MHz range) 100.0 Hz (500 MHz range) 7 digits 0.4" LED

Display: 1.0 ppm TCXO 20-40°C Time base: 12 VAC @ 250 ma

The CT-70 breaks the price barrier on lab quality frequency counters. Deluxe features such as, three frequency ranges - each with pre-amplification, dual selectable gate times, and gate activity indication make measurements a snap. The wide frequency range enables you to accurately measure signals from audio thru UHF with 1.0 ppm accuracy - that's .0001%! The CT-70 is the answer to all your measurement needs, in the field, lab or ham shack,



WIRED

PRICES:

CT-70 wired, I year warranty \$99.95 CT-70 Kit, 90 day parts war-

AC-1 AC adapter 3.95 BP-1 Nicad pack + AC adapter/charger 12.95



DIGITS 500 MHz \$7995 WIRED

MINI-100 wired, 1 year \$79.95 AC-Z Ac adapter for MINI-

BP-Z Nicad pack and AC adapter/charger

3.95

12.95

Here's a handy, general purpose counter that provides most counter functions at an unbelievable price. The MINI-100 doesn't have the full frequency range or input impedance qualities found in higher price units, but for basic RF signal measurements, it can't be beat' Accurate measurements can be made from 1 MHz all the way up to 500 MHz with excellent sensitivity throughout the range, and the two gate times let you select the resolution desired. Add the nicad pack option and the MINI-100 makes an ideal addition to your tool box for "in-the-field" frequency checks and repairs.

SPECIFICATIONS:

MHz to 500 MHz Range: Sensitivity: Less than 25 MV 100 Hz (slow gate) Resolution 1.0 KHz (fast gate) Display: 7 digits, 0.4" LED Time base: 2.0 ppm 20-40°C

5 VDC @ 200 ma

8 DIGITS 600 MHz \$159 % WIRED



SPECIFICATIONS:

Resolution

20 Hz to 600 MHz Sensitivity:

1.0 Hz (60 MHz range) 10.0 Hz (600 MHz range)

Display: 8 digits 0.4" LED 2.0 ppm 20-40°C 110 VAC or 12 VDC

The CT-50 is a versatile lab bench counter that will measure up to 600 MHz Less than 25 mv to 150 MHz with 8 digit precision. And, one of its best features is the Receive Frequency Less than 150 mv to 600 MHz Adapter, which turns the CT-50 into a digital readout for any receiver. The adapter is easily programmed for any receiver and a simple connection to the receiver's VFO is all that is required for use. Adding the receiver adapter in no way limits the operation of the CT-50, the adapter can be conveniently switched on or off. The CT-50, a counter that can work double-duty!



CT-50 wired, 1 year warranty CT-50 Kit, 90 day parts warranty

RA-1, receiver adapter kit RA-1 wired and pre-programmed (send copy of receiver

\$159.95

14.95



DIGITAL MULTIMETER \$99

PRICES:

DM-700 wired, 1 year warranty \$99.95 DM-700 Kit, 90 day parts 79.95 warranty AC-1, AC adaptor 3.95 BP-3, Nicad pack +AC

19.95 adapter/charger MP-1. Probe kit

The DM-700 offers professional quality performance at a hobbyist price. Features include; 26 different ranges and 5 functions, all arranged in a convenient, easy to use format. Measurements are displayed on a large 31/2 digit, 1/2 inch LED readout with automatic decimal placement, automatic polarity, overrange indication and overload protection up to 1250 volts on all ranges, making it virtually goof-proof! The DM-700 looks great, a handsome, jet black, rugged ABS case with convenient retractable tilt bail makes it an ideal addition to any shop.

SPECIFICATIONS:

DC/AC volts: 100 uV to 1 KV, 5 ranges

DC/AC current Resistance

0.1 uA to 2.0 Amps, 5 ranges 0.1 ohms to 20 Megohms, 6 ranges

Input impedance: Accuracy.

10 Megohms, DC/AC volts 0.1% basic DC volts

4 'C' cells

AUDIO SCALER

For high resolution audio measurements, multiplies

- · Great for PL tones
- Multiplies by 10 or 100 · 0.01 Hz resolution!
- \$29.95 Kit \$39.95 Wired

ACCESSORIES

elescopic whip antenna - BNC plug..... Direct probe, general purpose usage
Tilt bail, for CT 70, 90, MINI-100 12.95 3.95 Color burst calibration unit, calibrates counter against color TV signal.

COUNTER PREAMP

For measuring extremely weak signals from 10 to 1,000 MHz. Small size, powered by plug transformer-included.

- Flat 25 db gain BNC Connectors
- Great for sniffing RF with pick-up loop \$34.95 Kit \$44.95 Wired

ramset electronics, inc. 2575 BAIRD RD. • PENFIELD, NY 14526





Satisfaction guaranteed, examine for 10 days if not pleased return in ariginal form for returnd. Add 5% for shipping insurance to a maximum of \$10. Overseas add 15% COD add \$2. Orders under \$10. add \$1.50. NY residents add 7% tox.

MP Systems MP Systems MP Systems MP Systems

Fast, Reliable Service is Our

WILL IMPROVE YOUR MEMORY ...

8 pcs 4116 200 ns

16K EXPANSION KIT 64K EXPANSION KIT 9 pcs 4164 200 ns

\$11.95

\$74.25

AND DRIVE YOU

IMI's" Industry Standard 5 1 4" Winchester	Disk
Drive	
6 mB	\$865 00
Siemens* 8 Floppy Disk Drive	
FDD 100-8	\$300 00

FRANKLIN ACE 1000 \$1350.00

APPLE CLOCKCHIP MM58167AN \$ 15.00

12/		
	EPROMS	

5 65 27 16 9 00 2532 5.50 2708 12 00

DB CONNECTOR

DB25P (RS232)	\$2 95
DB25S (Female)	4.25
Hood	1.80
DB9P	2 50
DB9S	3.37
Cover	1 10
DB15P	3 77
	4.21
Cover	1 25
	. 00

6500 FAMILY

R6502P	\$ 6.95
R6511P	34 55
R6520P	4 00
R6522P	6.20
R6532P	8 55
R6545P	17.65
R6551P	. 8 75

LPS II

High resolution, high speed light pen for Apple II* computers Compatible with Franklin Ace 1000

ASK FOR FREE FLYER **ASK FOR QUANTITY PRICING**

\$100.00 minimum order Terms C.O.D. Prepaid or credit to rated firms. F.O.B.: Laguna Hills, CA. Shipping charges will be added. All pricing subject to change without notice. Call for quantity pricing.

Bank cards accepted: MasterCard, Visa



MORE GAIN THAN A VARACTOR UHF TUNER



SATISFACTION GUARANTEED \$15.00

Freq. Range UHF470-889MHz Channels 14-83 Output Channel 3. Available on request: Ch 2 or 4.

- Modified High Gain Tuner. \$15.00 The first thing we do is change the standard diode found in every tuner to a Hot Carrier
- 2. The tuners output is then measured and compared to our computer derived chart from which we determine the correct value coil to add across the IF output for maximum Pre-Peaked gain.
- The tuner is fed a standard 10db antenna input, and while monitoring the output on our Spectrum Analyzer, the tuner is tuned to the desired channel and its oscillator is offset for the desired output frequency as follows:

Ch. 2:58Mhz Ch. 3: 63Mhz Ch. 4: 68Mhz We call this step peaking because the tuners output looks like a peak on our spectrum analyzer and the highest point of that peak is actually adjusted for the desired output.

4. Finally, we measure the tuners output one more time which is again compared to our computer derived performance chart to ascertain the correct value of the second coil which is added to the tuners internal connections.

This procedure was developed by GILCO and its our computer derived performance charts that make our tuner better. That's because almost every tuner gets a different value coil before it's peaked and then a different value coil after it's peaked. The combinations are endless and the way we determine the values

PRINTED CIRCUIT BOARDS

Part No. B21 Printed Circuit Board. \$17.00

This Printed Circuit Board uses only one

jumper, others use 9. The component layout is screen printed on the Component side of the pre-drilled P/C

Board. The solder side of the P/C Board is covered with High Temperature Solder Resist for ease of assembly.

This P/C board was designed to take advantage of the Gilco High Gain Tuner which means its circuitry is simpler and more efficient than those circuits that require inferior Varactor Tuners

ELECTRONIC PARTS KITS

Part No. B22 Complete Parts Kit. . . . All resistors (30), Potentiometers (1-5K, 3-10K), Panel Mount Potentiometer (10K), Electrolytic Capacitors (6), Ceramic and Mylar Disc Capacitors (35), Variable Capacitors (4), All Intergrated Circuits (7), Voltage Regulator, Heat Sink, Diodes (4), IC Sockets (4-8 pin, 3-14 pin), Power Transformer (24V1/14), Coil Kit with No. 26 wire (4), Speaker (4"-3 0z.), Standoffs, Coaxial cable, All misc. Hardware, etc. All parts are individually neckspeed and beheld. packaged and labeled.

All components including the wire, Hardware, Coaxial Cable and heat sinks are included in the parts kit. This means your as-sembly time from start to finish is only 4 hours.

Order all 3, B20, B21, B22. Order 5 each, B20, B21, B22..... . 95.00/set

ACCESSORIES: AMPLIFIERS

Part No. New 2 Stage Low Kit \$18.00 A02 Noise 28db gain RF Amplifier Specially designed for kit builders A03 New 1 Stage Low Kit \$10.50 Noise 14db gain Amplifier A04 75-300 OHM matching \$1.00 Transformer. F59 Coaxial Connectors. .30 Mail order only. Send check or money order to:

GILCO INTERNATIONAL, INC.

P. O. Box 8817, Coral Gables, FL 33124
Tel. (305) 823-5891 For COD orders add 10% shipping and handling or for orders over \$50, add 5%

FL residents add 5% sales tax. Please write for more inf

FUJITECH AUDIO KITS

ATEST AUDIO TECHNOLOGY FROM JAPAN

Model A501 Power Amp
Pure Class A 25W + 25W
Switchable to Class AB 100W + 100W

Switchable to Class AB 100W + 100W
Switchable to Bridge Class A 100W mono
Switchable to Bridge Class AB 300W mono
Frequency Response 5-200KHz (-1dB)
Signal-to-Noise Ratio 120dB
Non-magnetic Chassis
"Out-board" comprehensive protection

circuitry
DC circuitry with limited use of NFB

High Efficiency Fluid Convection Cooling THD under 0.007%



Model A502 DC Stereo Control Center
Direct DC coupling from Input to Output
DC servo circuitry
Cascade FET Input in all stages
Separate Moving Coil RIAA amplifier
Distortion below 0.005% (3V)
Max Output 15V

Max Output 150
Frequency Response 20Hz-20KHz ±0.2 dB
Maximum Phono Input
MC = 16mv RMS (1KHz)
MM = 270mv RMS (1KHz)

Built-in Headphone amplifier Relay Output Muting

KIT ONLY



\$349.00

Model A1033 Integrated Tube Amplifier

* Latest Japanese Design

* Distortionless Output Transformer using special winding techniques

* Most circuitry on PCB for easy assembly and humfree performance

* Output 30W × 2 Ultra Linear

(Switchable to Triode)

15W × 2 Triode Output


(near class A performance)

* THD under 0.4%

' THD under 0.4%

* Frequency Response 30~30,000 Hz (-1dB)
* Separate Pre-Out and Main-In

KIT ONLY



\$499.00

Send \$5.00 for each assembly manual, refundable with order.

Monarchy Engineering, Inc. 380 Swift Avenue, Unit 21 South San Francisco, CA 94080

Visa or Mastercharge acceptable.

Parts Values for Builders and Fixers

In Stock! High Quality! Big Selection! Personal Service!

Two-for-One! Programming Books for Your TRS-80®





Reg. 7.95 Each

Both

B

A Home Computer Programs. Household hints let you use your Model III for home finance, meal planning, lawn and plant care, tutorial math problems, Christmas card mailings, even bingo and darts. 330 pages. 62-2069

B Introduction to TRS-80 Graphics. Explores the computer's ability to create appealing graphs, outlines and many more special effects using line printer character and pixel graphics. For BASIC 134 pages. 62-2073



Transistor Checker

Indicates "opens", "shorts" and current gain in smallsignal and power types, PNP and NPN. In or out of circuit. Requires "AA" battery. 22-025 . . . 14.95

Computer Connectors



Solder 25 D-Submini Peripheral Connectors. Use optional hood when less than 25 conductors are required.

1000 than Lo conductors	are require	U .
E Male. 276-1547		2.99
G Female. 276-1548 .		3.99
H Hood. 276-1549		2.19

Project Enclosures 31% Off





- 1		E
Pan	el Letteri	ng

chassis, vented steel top. C 21/2×51/16×45/16". Reg. 6.95. 270-228 Sale 4.77 D 31/4×71/2×57/8". Reg. 9.95. . . Sale 6.88

E Panel Transfers. 4 sheets. 270-201 2.59

Quality Microwave Devices



MRF-901. Low-noise NPN for smallsignal RF use to beyond 2 GHz. Manufacturer's prime. 300 mW. 276-2044 ... 2.99 KH-P 5082-2835. Schottky barrier diodes. Ideal for UHF and SHF mixers. 1pF max. 276-1124 Pkg. of 2/1.99

Capacitors

Mylar and ceramic discs Includes NPOs, Hi-Qs, N-750s Set of 100/1.98 272-801

12VDC Solenoid



'C" frame. For robotics, model trains, opening valves, more 31-ohm, 430 mA coil. 273-251 . . 3.99

399

Miniature 4PDT Relays For PC or Socket Mounts 499

12VDC. Switches up to 4 circuits. Rated 3A at 125 VAC. 75 mA, 160 ohm coil 275-214 . . 4.99 120VAC



4500-ohm coil. 275-212 . . 4.99 149 Each

Relay Socket. Rated 3A. For 275-221 1.49

Audio Connectors For Stereo Hookup







DIN Plugs. For speaker connection to car stereos, European hi-fi gear. Solder-type. 274-008

M DIN Inline Jacks. Solder-type. 274-009 N Stereo Playback Y-Adapter. Adapts phono plugs to 1/8" mike jack, 274-369

Crystal Mike Element



For projects that call for sound. High impedance. Perfect for re-270-088



Axial-Lead RF Chokes

Low As



For RF bypass, filtering and peaking, 10 μH. 1.5 amps. 1/4" dia. × 7/8" long. 100 μH. 2.0 amps. 5/16" dia. × 11/4" long. 273-102

Project LED Lamps

Cut Reg. 99¢ 69¢

TLG-107. Light it up with LEDs. High brightness. Mounts in 3/16" hole. 2V at 20 mA typ. Green. 276-034 . . Sale Pkg. 2/69¢

30-Gauge Kynar® Wire





Color	Cat. No.	Spool	
Red White	278-501 278-502	2.39	
Blue Yellow	278-503 278-504	2.39	

Solid Buss Wire





Makes ground wiring easy. For Perf-Board and PC projects. Pretinned 24-ga. copper. 278-1341 1.49

Micro SPDT **5VDC Relay**



Fast PIN Photodiode

8-Position DIP Switch



For digital or low-current use. Mounts in 16-pin DIP socket or on PC board. 275-1301,

Assorted Magnet Wire

3 Spools





40 ft. of 22-ga., 75 ft. of 26-ga., 200 ft. of 30 ga. Ideal for winding coils. 278-1345 3 Spools/Sale 3.99

Rainbow Wire Packs



24-ga. solid copper. For low-voltage hookups, intercoms.

2-Conductor. 35' 278-755 ... 2.39 4-Conductor. 25: 278-757

Save Reg. 50¢

TIL413. High linearity. PRV: 30. Diss: 150 mW. Perfect for IR communications, even music. 276-144 ... 99¢



A DIVISION OF TANDY CORPORATION • OVER 8700 LOCATIONS WORLDWIDE

Retail prices may vary at individual stores and dealers CIRCLE 67 ON FREE INFORMATION CARD

4164 64K DYNAMIC \$625

ALL MERCHANDISE 100% GUARANTEED!

TMM2016 2KX8 STATIC \$415

CALL US FOR VOLUME QUOTES

S	TAT	IC RAMS	
2101	256 x 4	(450ns)	1.95
5101	256 x 4	(450ns) (cmos)	3.95
2102-1	1024 x 1	(450ns)	.89
2102L-4	1024 x 1	(450ns) (LP)	1.29
2102L-2	1024 x 1	(250ns) (LP)	1.69
2111		(450ns)	2.99
2112	256 x 4	(450ns)	2.99
2114	1024 x 4	(450ns)	8/14.95
2114L-4	1024 x 4	(450ns) (LP)	8/15.25
2114L-3	1024 x 4	(300ns) (LP)	8/15.45
2114L-2		(200ns) (LP)	8/15.95
2147	4096 x 1		4.95
TMS4044-4	4096 x 1	(450ns)	3.49
TMS4044-3	4096 x 1	(300ns)	3.99
TMS4044-2	4096 x 1		4.49
MK4118	1024 x 8	(250ns)	9.95
TMM2016-200	2048 x 8	(200ns)	4.15
TMM2016-150	2048 x 8	(150ns)	4.95
TMM2016-100	2048 x 8	(100ns)	6.15
HM6116-4	2048 x 8	(200ns) (cmos)	4.95
HM6116-3	2048 x 8	(150ns) (cmos)	5.95
HM6116-2	2048 x 8	(120ns) (cmos)	8.95
HM6116LP-4	2048 x 8	(200ns) (cmos)(LP)	6.95
HM6116LP-3	2048 x 8	(150ns) (cmos)(LP)	8.95
HM6116LP-2		(120ns) (cmos)(LP)	10.95
Z-6132	4096 x 8	(300ns) (Qstat)	34.95

DYNAMIC RAMS

TMS4027	4096 x 1	(250ns)	1.99
UPD411	4096 x 1	(300ns)	3.00
MM5280	4096 x 1	(300ns)	3.00
MK4108	8192 x 1	(200ns)	1.95
MM5298	8192 x 1	(250ns)	1.85
4116-300	16384 x 1	(300ns)	8/11.75
4116-250	16384 x 1	(250ns)	8/11.95
4116-200	16384 x 1	(200ns)	8/13.95
4116-150	16384 x 1	(150ns)	8/15.95
4116-120	16384 x 1	(120ns)	8/29.95
2118	16384 x 1	(150ns) (5v)	4.95
4164-200	65536 x 1	(200ns) (5v)	6.25
4164-150	65536 x 1	(150ns) (5v)	7.25
		THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER.	

5V = single 5 volt supply

EPROMS

	The second secon		
1702	256 x 8	(1us)	4.50
2708	1024 x 8	(450ns)	3.95
2758	1024 x 8	(450ns)(5v)	5.95
2716	2048 x 8	(450ns)(5v)	3.95
2716-1	2048 x 8.	(350ns)(5v)	6.25
TMS2516	2048 x 8	(450ns)(5v)	5.50
TMS2716	2048 x 8	(450ns)	7.95
TMS2532	4096 x 8	(450ns)(5v)	7.95
2732	4096 x 8	(450ns)(5v)	4.95
2732-250	4096 x 8	(250ns)(5v)	12.95
2732-200	4096 x 8	(200ns)(5v)	16.95
2764	8192 x 8	(450ns)(5v)	16.95
2764-250	8192 x 8	(250ns)(5v)	18.95
2764-200	8192 x 8	(200ns)(5v)	24.95
TMS2564	8192 x 8	(450ns)(5v)	24.95
MC68764	8192 x 8	(450ns)(5v)(24 pin)	39.95

5v = Single 5 Volt Supply

EPROM ERASERS

	Timer	Capacity Chip	Intensity (uW/Cm²)	
PE-14		6	5,200	83.00
PE-14T	X	6	5,200	119.00
PE-24T	X	9	6,700	175.00
PL-265T	X	20	6,700	255.00
PR-125T	X	16	15,000	349.00
PR-320	X	32	15,000	595.00

DIS	C
CONTRO	LLERS
1771	16.95
1791	29.95
1793	38.95
1795	54.95
1797	54.95
6843	34,95
8272	39.95
UPD765	39.95
1691	18.95
2143	18.95
INTER	FACE
8T26	1.69
	344000

143	18.9
INTERFA	CE
T26	1.6
T28	2.4
T95	.9
T96	.9
T97	.9
T98	.9
M8131	2.9
P8304	2.2
S8835	1.9
S8836	.9
MISC.	
242	7.9
341	4.0

MISC.	5.5
3242	7.9
3341	4.9
MC3470	4.9
MC3480	9.0
11C90	13.9
95H90	7.9
2513-001 UP	9.9
2513-002 LOW	9.9
SOUND CH	IIPS
76477	3.9
76489	8.9
AY3-8910	12.9

	SOUND	HIPS
١	76477	3.95
	76489	8.95
	AY3-8910	12.95
	MC3340	1.49
	CRT	
	CONTROL	LERS
	6845	14.95
	68B45	35.95
	HD46505SP	15.95
	6847	12.25
	MC1372	6.95
	68047	24.95
	8275	29.95
	7220	99.95
	CRT5027	39.95
	CRT5037	49.95
	The state of the s	100000000000000000000000000000000000000

TMS9918A	39.95
DP8350	49.95
BIT-RA	TE
GENERA	TORS
MC14411	11.95
BR1941	11.95
4702	12.95
COM5016	16.95
COM8116	10.95
MM5307	10.95
HART	S

in intooor	10.55
UAR	TS
AY3-1014	6.95
AY5-1013	3.95
AY3-1015	6.95
PT1472	9.95
TR1602	3.95
2350	9.95
2651	8.95
TMS6011	5.95
IM6402	7.95
IM6403	8.95
INS8250	14.95
VEVDO	ADD

CHIPS	
AY5-2376	11.95
AY5-3600	11.95
CLOCK	

CIRCUITS	
4.95	
3.95	
4.95	
8.95	
11.95	
6.95	

Z-80 2.5 Mhz		
Z80-CTC	5.95	
Z80-DART	15.25	
Z80-DMA	17.50	
Z80-PIO	5.75	
Z80-SIO/0	18.50	
Z80-SIO/1	18.50	
Z80-SIO/2	18.50	
Z80-SIO/9	16.95	

200-310/3	10.33
4.0 M	hz
Z80A-CPU	6.00
Z80A-CTC	8.65
Z80A-DART	18.75
Z80A-DMA	27.50
Z80A-PIO	6.00
Z80A-SIO/0	22.50
Z80A-SIO/1	22.50
Z80A-SIO/2	22.50
780A-SIO/9	19 95

6.0 Mhz	
Z80B-CPU	17.9
Z80B-CTC	15.5
Z80B-PIO	15.50
ZILO	G

34.95

Z6132

Z8671	39.95
CRYST	ALS
32.768 khz	1.95
1.0 mhz	4.95
1.8432	4.95
2.0	3.95

1.0 mhz	4.95
1.8432	4.95
2.0	3.95
2.097152	3.95
2.4576	3.95
3.2768	3.95
3.579535	3.95
4.0	3.95
5.0	3.95
5.0688	3.95
5.185	3.95
5.7143	3.95
6.0	3.95
6.144	3.95
6.5536	3.95
8.0	3.95
10.738635	3.95
14.31818	3.95
15.0	3.95
16.0	3.95
17.430	3.95
18.0	3.95
18.432	3.95
20.0	3.95
22.1184	3.95
32.0	3.95

DATA	A
ACQUISI	TION
ADC0800	15.55
ADC0804	3.49
ADC0809	4.49
ADC0817	9.95
DAC0800	4.95
DAC0806	1.95
DAC0808	2.95
DAC1020	8.25
DAC1022	5.95
MC1408L6	1.95

800	0
8035	5.95
8039	6.95
INS-8060	17.95
INS-8073	24.95
8080	3.95
8085	5.95
8085A-2	11.95
8086	29.95
8087	CALL
8088	39.95
8089	89.95
8155	7.95
8156	8.95
8185	29.95
8185-2	39.95
8741	39.95
8748	29.95
8755	32.00

8200

29.95 39.95

8202

8203

8205	3.50
8212	1.80
8214	3.85
8216	1.75
8224	2.25
8226	1.80
8228	3.49
8237	19.95
8238	4.49
8243	4.45
8250	10.95
8251	4.49
8253	6.95
8253-5	7.95
8255	4.49
8255-5	5.25
8257	7.95
8257-5	8.95
8259	6.90
8259-5	7.50
8271	39.95
8272	39.95
8275	29.95
8279	8.95
8279-5	10.00
8282	8.50
8283	6.50
8284	5.50
8286	6.50
8287	6.50
8288	25.00
8289	49.95
William Bill	- STATE OF
FUNCT	HON

FUNCI	ION
GENERA	TORS
MC4024	3.95
LM566	1.49
XR2206	3.75
8038	3.95
CONTRACTOR OF	STEEL SE
-	12 To 10 To

SIL
9.50
9.95
12.95
2.95
3.95
5.59
15.95

001	JU
68000	59.95
6800	4.95
6802	7.95
6808	13.90
6809E	19.95
6809	12.95
6810	2,95
6820	4.95
6821	3.25
6828	14.95
6840	12.95
6843	34.95
6844	25.95
6845	14.95
6847	12.25
6850	3.45
6852	5.75
6860	9.95
6862	11.95
6875	6.95
6880	2.25
6883	24.95
68047	24.95
68488	19.95
6800 =	1MHZ
68B00	10.95
68B02	22.25
68B09E	29.95

68B09

68B10

68B21

68B50

29.95

7.95 12.95

35.95

12.95

6500 1 MHZ	
6502	5.95
6504	6.95
6505	8.95
6507	9.95
6520	4.35
6522	8.75
6532	11,25
6545	22.50
6551	11.85
2 MHZ	
6502A	9.95
6522A	11.70
6532A	12.40
6545A	28.50
6551A	12.95
3 MHZ	
6502B	14.95

68B00 = 2 MHZ

EXA	\R
XR 2206	3.75
XR 2207	3.85
XR 2208	3.90
XR 2211	5.25
XR 2240	3.25
	-

	9000 SI	ERIES
Ì	9316	1.00
ı	9334	2.50
ı	9368	3.95
ı	9401	9.95
ı	9601	.75
1	9602	1.50
ı	96502	1.95



JDR MICRODEVICES, INC.

1224 S. Bascom Avenue San Jose, CA 95128 800-538-5000 • 800-662-6279 (CA) (408) 995-5430 • Telex 171-110

6 1982 JDR MICRODEVICES, INC.

VISIT OUR RETAIL STORE — NEW HOURS — M-W-F, 9-5 T-Th., 9-9 Sat. 11-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING

TERMS: For shipping include \$2 for UPS Ground or \$3 for UPS Blue Label Air. Items over 5 pounds require additional shipping charges. Foreign orders, include sufficient amount for shipping. There is a 510 minimum order. Bay Area and Los Angeles Counties add 6% Sales Tax. Other California residents add 6% Sales Tax. We reserve the right to substitute manufacturer. Not responsible for typographical errors. Prices are subject to change without notice. We will match or beat any competitor's price provided it is not below our cost.

2716 16K EPROMS \$395 EACH

2732 32K EPROMS \$495 EACH CALL US FOR VOLUME QUOTES

ALL MERCHANDISE 100% GUARANTEED!

74LS00							
74LS00	.24	74LS86	.39	74LS169	1.75	74LS323	3.50
74LS01	.25	74LS90	.55	74LS170	1.49	74LS324	1.75
74LS02	.25	74LS91	.89	74LS173	.69	74LS352	1.29
74LS03	.25	74LS92	.55	74LS174	.55	74LS353	1.29
74LS04	.24	74LS93	.55	74LS175	.55	74LS363	1.35
74LS05	.25	74LS95	.75	74LS181	2.15	74LS364	1.95
74LS08	.28	74LS96	.89	74LS189	8.95	74LS365	.49
74LS09	.29	74LS107	.39	74LS190	.89	74LS366	.49
74LS10	.25	74LS109	.39	74LS191	.89	74LS367	.45
74LS11	.35	74LS112	.39	74LS192	.79	74LS368	.45
74LS12	.35	74LS113	.39	74LS193	.79	74LS373	.99
74LS13	.45	74LS114	.39	74LS194	.69	74LS374	.99
74LS14	.59	74LS122	.45	74LS195	.69	74LS377	1.39
74LS15	.35	74LS123	.79	74LS196	.79	74LS378	1.18
74LS20	.25	74LS124	2.90	74LS197	.79	74LS379	1.35
74LS21	.29	74LS125	.49	74LS221	.89	74LS385	1.90
74LS22	.25	74LS126	.49	74LS240	.95	74LS386	.45
74LS26	.29	74LS132	.59	74LS241	.99	74LS390	1.19
74LS27	.29	74LS133	.59	74LS242	.99	74LS393	1.19
74LS28	.35	74LS136	.39	74LS243	.99	74LS395	1.19
74LS30	.25	74LS137	.99	74LS244	.99	74LS399	1.49
74LS32	.29	74LS138	.55	74LS245	1.49	74LS424	2.95
74LS33	.55	74LS139	.55	74LS247	.75	74LS447	.37
74LS37	.35	74LS145	1.20	74LS248	.99	74LS490	1.95
74LS38	.35	74LS147	2.49	74LS249	.99	74LS624	3.99
74LS40	.25	74LS148	1.35	74LS251	.59	74LS668	1.69
74LS42	.49	74LS151	.55	74LS253	.59	74LS669	1.89
74LS47	.75	74LS153	.55	74LS257	.59	74LS670	1.49
74LS48	.75	74LS154	1.90	74LS258	.59	74LS674	9.65
74LS49	.75	74LS155	.69	74LS259	2.75	74LS682	3.20
74LS51	.25	74LS156	.69	74LS260	.59	74LS683	3.20
74LS54	.29	74LS157	.65	74LS266	.55	74LS684	3.20
74LS55	.29	74LS158	.59	74LS273	1.49	74LS685	3.20
74LS63	1.25	74LS160	.69	74LS275	3.35	74LS688	2.40
74LS73	.39	74LS161	.65	74LS279	.49	74LS689	3.20
74LS74	.35	74LS162	.69	74LS280	1.98	74LS783	24.95
74LS75	.39	74LS163	.65	74LS283	.69	81LS95	1.49
74LS76	.39	74LS164	.69	74LS290	.89	81LS96	1.49
74LS78	.49	74LS165	.95	74LS293	.89	81LS97	1.49
74LS83	.60	74LS166	1.95	74LS295	.99	81LS98	1.49
74LS85	.69	74LS168	1.75	74LS298	.89	25LS2521	2.80
				74LS299	1.75	25LS2569	4.25
The same	19 15 5	100	370-3-	THE RESERVE OF THE PARTY OF THE	100,000	A CONTRACTOR	

IC SO	CKE	TS
10 300	1-99	
8 pin ST	.13	
14 pin ST	.15	
16 pin ST	.17	.13
18 pin ST	.20	.18
20 pin ST	.29	.27
22 pin ST	.30	.27
24 pin ST	.30	.27
28 pin ST	.40	.32
40 pin ST	.49	.39
64 pin ST	4.25	call
ST = SOL	DERT	AIL
8 pin WW	.59	.49
14 pin WW	.69	.52
16 pin WW	.69	.58
18 pin WW	.99	.90
20 pin WW	1.09	.98
22 pin WW		
24 pin WW		
28 pin WW		1.49
40 pin WW		1.80
WW = WI		
16 pin ZIF	6.75	call
24 pin ZIF	9.95	
28 pin ZIF		
ZIF = TI		
(Zero Inser	rtion F	orce)

CONNECTO	RS
RS232 MALE	2.95
RS232 FEMALE	3.50
RS232 FEMALE	
RIGHT ANGLE	5.25
RS232 HOOD	1.25
S-100 ST	3.95
S-100 WW	4.95
The state of the s	17/12

DIP	
SWITCH	ES
4 POSITION	.85
5 POSITION	.90
6 POSITION	.90
7 POSITION	.95
8 POSITION	.95

Prices Slashed!

	143	500	
74500	.32	74S163	1.95
74502	.35	745168	3.95
74503	.35	74S169	3.95
74504	.35	745174	.95
74505	.35	748175	.95
74508	.35	745181	3.95
74509	.40	745182	2.95
74510	.35	74S188	1.95
74511	.35	74S189	6.95
74815	.35	745194	1.49
74S20	.35	74S195	1.49
74522	.35	745196	1.49
74530	.35	74S197	1.49
74532	.40	745201	6.95
74537	.88	748225	7.95
74538	.85	745240	2.20
74540	.35	745241	2.20
74\$51	.35	745244	2.20
74564	.40	748251	.95
74865	.40	74S253	.95
74574	.50	748257	.95
74\$85	1.99	74\$258	.95
74586	.50	745260	.79
745112	.50	745274	19.95
745113	.50	745275	19.95
745114	.55	745280	1.95
745124	2.75	745287	1.90
745132	1.24	745288	1.90
745133	.45	745289	6.89
745134	.50	745301	6.95
745135	.89	745373	2.45
745138	.85	745374	2.45
745139	.85	745381	7.95
745140	.55	745387	1.95
745151	.95	745412	2.98
74S153	.95	745471	4.95
745157	.95	745472	4.95

745474

745482

74S570 74S571 4.95

2.95 2.95

15.25

745158

745162





ORDER TOLL FREE 800-538-5000 800-662-6279 (CALIFORNIA RESIDENTS)

IF YOU CAN FIND A PRICE LOWER ELSEWHERE, LET US KNOW AND WE'LL MEET OR BEAT THEIR PRICE! (SEE TERMS BELOW)

- * Computer managed inventory virtually no back orders!
- * Very competitive prices!
- * Friendly staff!
- * Fast service most orders shipped within 24 hours!

LED DISPLAYS

HP 5082-7760	.6"	CC	1.23
MAN 72	.3"	CA	.99
MAN 74	.3"	CC	.99
FND-357 (359)	.375"	CC	1.25
FND-500 (503)	.5"	CC	1,49
FND-507 (510)	.5"	CA	1.49

LED LAMPS 1-99 100-up Jumbo Red 10 .09 Jumbo Green 18 .15 Jumbo Yellow 18 .15

	74	00				CM	os	
7400	.19		Van-		4000	.29	4527	1.95
7401	.19	74132 74136	.45		4001	.25	4528	1.19
7402	.19	74141	.65		4002	.25	4531	.95
7403	.19	74142	2.95		4006	.89	4532	1.95
7404	.19	74143	2.95		4007	.29	4538	1.95
7405	.25	74145	.60		4008 4009	.95	4539 4541	1.95
7406 7407	.29	74147	1.75		4010	.45	4543	1.19
7408	.24	74148	1.20		4011	.25	4553	5.79
7409	.19	74150 74151	1.35		4012	.25	4555	.95
7410	.19	74152	.65		4013	.38	4556	.95
7411	.25	74153	.55		4014	.79	4581	1.95
7412	.30	74154	1.25		4015	.39	4582	1.95
7413	.35	74155	.75		4016 4017	.39	4584 4585	.75
7414 7416	.49	74156	.65		4018	.79	4702	12.95
7417	.25	74157	.55		4019	.39	74C00	.35
7420	.19	74159 74160	1.65		4020	.75	74C02	.35
7421	.35	74161	.69		4021	.79	74C04	.35
7422	.35	74162	.85		4022	.79	74C08	.35
7423	.29	74163	.69		4023 4024	.29	74C10	.35
7425 7426	.29	74164	.85		4024	.65	74C14 74C20	.59
7425	.29	74165	.85		4026	1.65	74C30	.35
7428	.45	74166	1.00		4027	.45	74C32	.39
7430	.19	74167 74170	2.95 1.65		4028	.69	74C42	1.29
7432	.29	74172	5.95		4029	.79	74C48	1.99
7433	.45	74173	.75		4030	.39	74C73	.65
7437	.29	74174	.89		4034	1.95	74C74	.65
7438	.29	74175	.89		4035 4040	.85 .75	74C76 74C83	1.95
7440 7442	.19	74176	.89		4041	.75	74C85	1.95
7443	.65	74177	.75		4042	.69	74C86	.39
7444	.69	74178	1.15		4043	.85	74C89	4.50
7445	.69	74179 74180	1.75		4044	.79	74C90	1.19
7446	.69	74181	2.25		4046	.85	74C93	1.75
7447	.69	74182	.75		4047	.95	74C95	.99
7448	.69	74184	2.00		4049 4050	.35	74C107	.89
7450	.19	74185	2.00		4050	.35	74C150 74C151	5.75
7451 7453	.23	74186	18.50		4053	.79	74C154	3.25
7454	.23	74190	1.15		4060	.89	74C157	1.75
7460	.23	74191 74192	1.15		4066	.39	74C160	1.19
7470	.35	74193	.79		4068	.39	74C161	1.19
7472	.29	74194	.85	9	4069	.29	74C162	1.19
7473	.34	74195	.85		4070	.35	74C163	1.19
7474	.33	74196	.79	8	4071	.29	74C164 74C165	1.39
7475 7476	.45	74197	.75	163	4073	.29	74C173	.79
7480	.59	74198	1.35		4075	.29	74C174	1.19
7481	1.10	74199	1.35		4076	.79	74C175	1.19
7482	.95	74221 74246	1.35		4078	.29	74C192	1.49
7483	.50	74247	1.25		4081	.29	74C193	1.49
7485	.59	74248	1.85		4082	.29	74C195	1.39
7486	.35	74249	1.95		4085	.95 .95	74C200 74C221	5.75
7489 7490	2.15	74251	.75		4093	.49	74C221	1.75
7490	.40	74259	2.25		4098	2.49	74C374	2.45
7492	.50	74265 74273	1.35 1.95		4099	1.95	74C901	.39
7493	.35	74276	1.95		14409	12.95	74C902	.85
7494	.65	74279	.75	100	14410	12.95	74C903	.85
7495	.55	74283	2.00		14411	11.95	74C905	
7496	.70	74284	3.75		14412	12.95 7.95	74C906	1.00
7497	2.75	74285	3.75	3	14433	4.18	74C907 74C908	2.00
74100	1.75	74290	.95		4502	.95	74C909	2.75
74107	.45	74293	.75	8	4503	.65	74C911	8.95
74110	.45	74298 74351	.85 2.25		4508	1.95	74C912	8.95
74111	.55	74365	.65		4510	.85	74C914	1.95
74116	1.55	74366	.65		4511	.85	74C915	1.19
74120	1.20	74367	.65		4512	.85 1.25	74C918	2.75
74121	.29	74368	.65		4514 4515	1.25	74C920 74C921	17.95
74122 74123	.45	74376	2.20	10	4516	1.55	74C922	4.49
74123	.49	74390	1.75	1	4518	.89	74C923	4.95
74126	.45	74393	1.35		4519	.39	74C925	5.95
74128	.55	74425 74426	3.15	8	4520	.79	74C926	7.95
		74490	2.55		4522	1.25	74C928	7.95
-	_		2.00		4526	1.25	74C929	19.95

TRANSISTORS DIODES

PN2222	NPN SWITCH	TO-92	10/1.00	100/8.99
PN2907	PNP SWITCH	TO-92	10/1.25	100/10.99
2N2222	NPN SWITCH	TO-18	.25	50/10.99
2N2907	PNP SWITCH	TO-18	.25	50/10.99
2N3055	NPN POWER	TO-3	.79	10/6.99
3055T	NPN POWER	TO-220	.69	10/5.99
2N3904	NPN SWITCH	TO-92	10/1.00	100/8.99
2N3906	NPN SWITCH	TO-92	10/1.00	100/8.99
IN4148 (IN914)	SWITCHING		25/1.00	1000/35.00
IN4004	RECTIFIER		10/1.00	100/8.99

1982 JDR MICRODEVICES, INC.

		L	INI	EAR					RO	CA	
LM301	.34	LM348	.99	NE564	2.95	LM1496	.85	CA 3023	2.75	CA 3082	1.65
LM301H	.79	LM350K	4.95	LM565	.99	LM1558H	3.10	CA 3039	1.29	CA 3083	1.55
LM307	.45	LM350T	4.60	LM566	1.49	LM1800	2.37	CA 3046	1.25	CA 3086	.80
LM308	.69	LM358	.69	LM567	.89	LM1812	8.25	CA 3059	2.90	CA 3089	2.99
LM308H	1.15	LM359	1.79	NE570	3.95	LM1830	3.50	CA 3060	2.90	CA 3096	3.49
LM309H	1.95	LM376	3.75	NE571	2.95	LM1871	5.49	CA 3065	1.75	CA 3130	1.30
LM309K	1.25	LM377	1.95	NE592	2.75	LM1872	5.49	CA 3080	1.10	CA 3140	1.15
LM310	1.75	LM378	2.50	LM703	.89	LM1877	3.25	CA 3081	1.65	CA 3146	1.85
LM311	.64	LM379	4.50	LM709	.59	LM1889	1.95			CA 3160	1.19
LM311H	.89	LM380	.89	LM710	.75	LM1896	1.75				
LM312H	1.75	LM380N-8	1.10	LM711	.79	LM2877	2.05		-		
LM317K	3.95	LM381	1.60	LM723	.49	LM2878	2.25				
LM317T	1.19	LM382	1.60	LM723H	.55	LM2900	.85	TL494	4.20	75365	1.95
LM318	1.49	LM383	1.95	LM733	.98	LM2901	1.00	TL496	1.65	75450	.59
LM318H	1.59	LM384	1.95	LM741	.35	LM3900	.59	TL497	3.25	75451	.39
LM319H	1.90	LM386	.89	LM741N-14	.35	LM3905	1.25	75107	1.49	75452	.39
LM319	1.25	LM387	1.40	LM741H	.40	LM3909	.98	75110	1.95	75453	.39
LM320 (see		LM389	1.35	LM747	.69	LM3911	2.25	75150	1.95	75454	.39
LM322	1.65	LM390	1.95	LM748	.59	LM3914	3.95	75154	1.95	75491	.79
LM323K	4.95	LM392	.69	LM1014	1.19	LM3915	3.95	75188	1.25	75492	.79
LM324	.59	LM394H	4.60	LM1303	1.95	LM3916	3.95	75189	1.25	75493 75494	.89
LM329	.65	LM399H	5.00	LM1310	1.49	MC4024	3.95			75494	.89
LM331	3.95	NE531	2.95	MC1330	1.69	MC4044	4.50				
LM334	1.19	NE536	6.00	MC1349	1.89	RC4136	1.25				
LM335	1.40	NE555	.34	MC1350	1.19	RC4151	3.95				
LM336	1.75	NE556	.65	MC1358	1.69	LM4250	1.75		RII	FET	
LM337K	3.95	NE558	1.50	MC1372	6.95	LM4500	3.25	TI 074	.79	TL084	2.19
LM337T	1.95	NE555	.34	LM1414	1.59	LM13080	1.29	TL071 TL072	1.19	LF347	2.19
LM338K	6.95	NE556	.65	LM1458	.59	LM13600	1.49	TL074	2.19	LF351	.60
LM339	.99	NE558	1.50	LM1488	.69	LM13700	1.49	TL081	.79	LF353	1.00
LM340 (se		NE561	24.95	LM1489	.69			TL082	1.19	LF355	1.10
								TL083	1.19	LF356	1.10
	H = TO-	5 CAN	Т=	TO-220	K	C = TO-3		33700		LF357	1.40

RIBBON CABLE

	SINGLE	COLOR	COLOR CODE		
CONTACTS	1'	10'	1'	10'	
10	.50	4.40	.83	7.30	
20	.65	5.70	1.25	11.00	
26	.75	6.60	1.32	11.60	
34	.98	8.60	1.65	14.50	
40	1.32	11.60	1.92	16.80	
50	1.38	12.10	2.50	22.00	

WE HAVE THE COMPLETE LINE OF IDC AND **D-SUBMINIATURE** CONNECTORS

WIREWRAP CARDS

FR-4 Epoxy Glass Laminate With Gold Plated Contact Fingers

S-100 BUSS

P100-1	Bare - No Foil Pads	15.95
P100-2	Horizontal BUSS	22.95
P100-3	Vertical BUSS	22.95
P100-4	Single Foil Pads Per Hole	23.95
	APPLE	
P500-1	Bare - No Foil Pads	15.95
P500-3	Horizontal BUSS	22.95
P500-4	Single Foil Pads Per Hole	23.95
	IBM	
IBM-PR	BUSS Lines + Pads	55.00
G	ENERAL PURPOSE	
22/	44 PIN (.156" SPACING)	
D441-3	Vertical BUSS 45" v 6"	13 05

36/72 PIN (.1" SPACING)

Vertical BUSS, 4.5" x 9" 14.95

Vertical BUSS, 4.5" x 6" 13.95 Vertical BUSS, 4.5" x 9" 14.95

BEST SELLING BOOKS

OSBORNE/MC GRAW-HILL

	ople II User's Guide						
	RT Controller's Handboo 1000 Assembly Language				•		9.95
	Programming						16.99
C	BASIC User Guide						
	SYBE	(
Y	our Your First Computer	-					8.95
TI	ne CP/M Handbook						14.95
T	ne PASCAL Handbook .						
М	icroprocessor Interfacing Techniques		72				17.95
		_		-			

MICROCOMPUTER HARDWARE HANDBOOK

FROM ELCOMP - \$14.95 Over 800 pages of manufacturers data sheets on most commonly used IC's. Includes:

- * TTL 74/74LS and 74F
- * CMOS
- * Voltage Regulators
- * Memory RAM, ROM, EPROM * CPU's 6800, 6500, Z80, 8080,
- 8085, 8086/8 MPU support & interface 6800, 6500, Z80, 8200, etc.

VOLTAGE REGULATORS

A CONTRACTOR OF THE PARTY OF TH		A STATE OF THE PARTY OF THE PAR	or financial and
7805T	.89	7905T	.99
7808T	.89	7908T	.99
7812T	.89	7912T	.99
7815T	.89	7915T	.99
7824T	.89	7924T	.99
7805K	1.39	7905K	1.49
7812K	1.39	7912K	1.49
7815K	1.39	7915K	1.49
7824K	1.39	7924K	1.49
78L05	.69	79L05	.79
78L12	.69	79L12	.79
78L15	.69	79L15	.79
78H05K	9.95	LM323K	4.95
78H12K	9.95	UA78S40	1.95
	T = TO-220	K = TO-3	
	L = T	0-92	

DISK DRIVES

TANDON

TM100-1 514" (FOR IBM) SS/DD 229.00 TM100-2 54" (FOR IBM) DS/DD 295.00

SHUGART

SA 400L 54" (40 TRACK) SS/DD 199.95

SIEMENS

FD100-8 8" SS/DD (801 REPLACEMENT) 259.00 PERTEC FD-200 51/4" SS/DD 179.95 FN-250 514" DS/DD 199.95

CABINET FOR 51/4" **DISK DRIVE**

- * COLOR MATCHES APPLE
- * FITS SHUGART

SPECIAL — \$29.95

BYPASS CAPS

.01 UF DISC 100/6.00 .1 UF DISC 100/8.00 .1 UF MONOLITHIC 100/15.00

WE NOW STOCK A COMPLETE LINE OF DISC. ELECTROLYTIC. MONOLITHIC AND TANTALUM CAPACITORS

RESISTORS

1/4 WATT 5% CARBON FILM ALL STANDARD VALUES FROM 1 OHM TO 10 MEG OHM

50 PCS. SAME VALUE .025 EA. 100 PCS. SAME VALUE .02 EA. 1000 PCS. SAME VALUE .015 EA.



P442-3

P721-3

P722-3

JDR MICRODEVICES, INC.

1224 S. Bascom Avenue San Jose, CA 95128 800-538-5000 • 800-662-6279 (CA) (408) 995-5430 • Telex 171-110

© 1982 JDR MICRODEVICES, INC.

VISIT OUR RETAIL STORE

- NEW HOURS -M-W-F, 9-5 T-Th., 9-9 Sat. 11-3

PLEASE USE YOUR CUSTOMER NUMBER WHEN ORDERING

TERMS For shipping include \$2 for UPS Ground or \$3 for UPS Blue Label Air Items over 5 pounds require additional shipping charges. Foreign crders, include sufficient amount for shipping. There is a \$10 minimum order. Bay Area and Los Angeles Counties add 6½. Sales Tax. Other California residents add 6½. Sales Tax. We reserve the right to substitute manufacturer. Not responsible for typographical errors. Prices are subject to change without notice. We will match or beat any competitor's price provided it is not below our cost.

4116 16K DYNAMIC RAMS 250NS 8/\$1195 SET

ALL MERCHANDISE 100% GUARANTEED!

CALL US FOR VOLUME QUOTES

NEW VIEWMAX 80

A Full Function 80 column card for Apple II* — Compare these features with any other:

- ★ 7x9 dot matrix; Upper and lower case with true descenders
- * Soft Video switch
- * Inverse video characters
- * Shift key support
- Fully compatible with Apple* DOS, CP/M*, PASCAL, and most popular word processors
- * 2 YEAR WARRANTY

\$21995

JDR COOLING FAN

FOR YOUR APPLE II

- Easy installation no modification of Apple required
- Eliminates overheating problems
- * Switch on front controls fan, Apple, and extra outlet
- Rotron whisper fan is the quietest, most reliable on the market

\$6995

DISK DRIVE

- * Fully Apple* compatible
- * 35 Track Will read half tracks!
- * Use with our controller (call for price) or with your Apple controller
- * Price includes case and cable ready to plug in
- ★ Attractive cabinet matches Apple drive
- * 90-Day Warranty

\$29995

ORDER TOLL FREE 800-538-5000 800-662-6279 (CALIFORNIA RESIDENTS)

IF YOU CAN FIND A PRICE LOWER ELSEWHERE, LET US KNOW AND WE'LL MEET OR BEAT THEIR PRICE! (SEE TERMS BELOW)

- * Computer managed inventory virtually no back orders!
- * Very competitive prices!
- * Friendly staff!
- * Fast service most orders shipped within 24 hours!

JDR 16K RAMCARD

For Apple II*

- ★ Expand your 48K Apple to 64K
- * Fully compatible with Apple Language System — Use in place of Apple Language card
- ★ Provides extra memory for Visicalc™
- * Run PASCAL, FORTRAN, Integer Basic with appropriate software
- Highest quality card features: gold edge connector, sockets for all IC's

NOW WITH 2 YEAR WARRANTY

ASSEMBLED & TESTED WITH WARRANTY	\$4495
KIT — INCLUDES ALL PARTS & INSTRUCTIONS	\$4095
BARE PC CARD WITH INSTRUCTIONS	\$1495





MONITORS

GREEN PHOSPHOR

NEC JB1201M \$16900

ZENITH ZVM-121 \$11900

COLOR

AMDEK COLOR 1 \$33500

OKIDATA PRINTERS

- * 120 cps, 9x9 Dot Matrix
- * 50% faster than EPSON
- * Parallel and Serial interfaces are standard

ML-82A \$479⁵⁰ ML-83A \$699⁹⁵

ML-84 PARALLEL . . . \$105900
CALL FOR PRICES ON 82A TRACTOR OPTION
AND 82A, 83A GRAPHICS OPTION. CABLES
AND INTERFACE CARDS AVAILABLE

51/4" DISKETTES

ATHANA SS SD SOFT ... 24.95
MEMOREX SS SD SOFT 26.95
VERBATIM SS DD SOFT 29.95
VERBATIM 10 SECT. HARD 29.95

NASHUA

TOP QUALITY - LOW PRICE!

Single Sided, Single Density Soft Sectored with Hub Ring

\$19.95 BOX OF 10

NEWPORT PROSTICK

- ★ Professional Quality Atari-Type Joystick
- * Extremely Rugged Actual Arcade game Joystick
- * All parts are replaceable
- * 6 Month Warranty

\$3100 EA \$5995 PR



POWER SUPPLY \$3995

MOUNTED ON PC BOARD MANUFACTURED BY CONVER +5 VOLT 4 AMP ±12 VOLT 1 AMP SPECIAL THANKS TO MARC AND AL FOR THEIR HARD WORK AND DEDICATION

*APPLE IS A TRADEMARK OF APPLE COMPUTER. INC.

@ 1982 JDR MICRODEVICES, INC.

Discounts

without notice COD 2.00 Extra "Add"I. shipping for monitors

(516)

499-9500

Min Order \$25.00 International shipping Add'l Prices subject to change



ADVERTISING INDEX

RADIO-ELECTRONICS does not assume any responsibility for errors that may appear in the index below.

Free Info	rmation Number Page				
56	Abex				
3	Active Electronic Sales Corp 169				
72	Advance Electronics 42,148,149				
21	Advanced Computer Products177 Albia Electronics				
75	All Electronics Corp				
45	AMC Sales				
51 85	Anders Precision Instrument Co 159 Arizona Electronic Surplus				
13	Beckman Instruments, Inc Cover III				
71	Beta Electronics				
24 35	B&K Precision Dynascan Corp 11				
-	Cambridge Learning Inc. 89 C&D Electronics, Inc. 166				
96	Chaney Electronics Inc				
37	Chemtronics				
-	CIE, Cleveland Institute of Electronics, Inc				
38	Command Productions				
14	Communications Electronics 2				
78 99	Components Express Inc				
77	Computer Products & Peripherals Unlimited				
79	Concord Computer Products 72				
4	Cooper Tools Cover II				
100	CRT Factory (Lakeside)				
87	Digitron Electronic				
41	Direct Video Sales				
70 60,61	Dokay Computer Products, Inc 173				
_	DX Tele-Labs				
28	Electronic Rainbow Inc				
92	Electronic Specialists, Inc				
40	Electronic Technology Today 78 Enterprise Development Corp 156				
94	Etco Electronics				
39 43	Etronix				
9	Fordham Radio				
69	Formula International Inc 168				
111	Gilco International, Inc				
	Gladstone 84				
20	Global Specialties Corp				
_	Grantham College of Engineering 160 Graymark				
95	Hal-tronix				
5,6 23	Heath Company				
48	Hickok Electrical Instrument Co 27 Illinois Audio				
_	Information Unlimited116				
53	International Test Instrument Corp				
64	Jameco Electronics				
47	Jan Crystals				
113	Javanco				
15	Jim-pak Electronics Components 15				
54	Kalglo Electronics Co., Inc				
86 36	Knapp				
8	Leading Edge Products Cover IV				
55	McGraw Hill Book Clubs 138-141				
-	Mean Electronics				
98	MFJ Enterprises, Inc 164				
90	Micro-Mart				
91	Mountain West				
81	MP Systems				
115 52	Multitech Electronics, Inc				
_	Nesda				
88	Network Sales Inc. 126				
-	Network Sales, Inc. 172 New Horizons 145				
-	NRI Schools 16-19				
59	NTS Schools				
10	OK Industries Inc5				
62 63	Omnitron Electronics				
62,63	OACS EXECUTORIES				

4	6	Paia Electronics, Inc
-	-3	Philips ECG
4	9	Philmetrics
9	7	Plymouth Electronics Co
1	2	Pomona Electronics
8	2	PPG Electronics Co., Inc
2	2	Protecto Enterprises106
7	6	Quest Electronics
-	-0.	Radio-Electronics Bookstore 157
1	7,67	Radio Shack
6	8	Ramsey Electronics, Inc
8	3	R.F. Electronics
4	4	Rhoades National Corporation 156
3	4	Robotics Age
7	,30	Sams Books
-	-	Scientific Systems
9	3	SCR Electronics Center 164
1	6,89	
-	_	Sencore 1 Simple Simon Electronic Kits, Inc 143
		Sinclair Research Ltd. 94,95
2	5	
-	12	Sintec Co
7		
3		Solid State Sales
8		
7	7	Spartan Electronics Inc
5		Stavis Electronics, Inc
3	U	Symmetric Sound Systems
5	0	Tektronix
3	-	Teltone Corp
2		Timex/Sinclair User Mag
5		Triton Marketing Corp
2		Ungar
- 55	3	Vaco
1	-	Vector Electronics Co
4		Viz Mfg
- 6	Forms.	Wersi 152
- 2	2,80	William B Alen Supply22,176



9-8

Mon Th Tu W F

to 75.00 76.00 to 250.00 251.00 to 500.00 501.00 to 750.00 751.00 to 1000.00

9-6


Over 1000.00

\$4.50 \$6.00 \$8.50

\$12 50

Sa

9:30-5

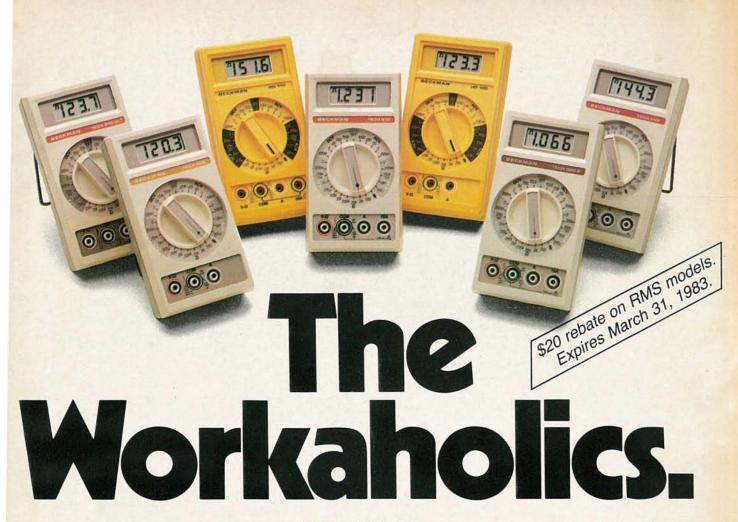

Beckman DMMs stay on the job when others call it quits. They're a hard-nosed breed of 3½ digit handheld multimeters you can always count on for outstanding performance.

Staying power

Beckman DMMs work up to 2000 hours on a common 9V battery. That's ten times longer than other DMMs. And to prevent burnout on

the job, Beckman DMMs can withstand 1500 Vdc loads and 6kV transients. Current ranges are protected with a 2A/250V fuse, and resistance ranges are protected up to 500 Vdc.

Easy to work with

No matter how hard they work, they're never hard to work with. Their single rotary switch makes function and range selection simple and sure. For your added convenience, most Beckman DMMs have built-in 10-Amp capability and Insta-ohms® continuity indication. That means you never have to carry an accessory shunt or wait for a continuity check.

SELECTION CHART

MODEL	SPECIAL FEATURES	BASIC DC ACCU- RACY	INSTA- OHMS*	10 AMPS	GESTEE RETAIL PRICE (U.S.)
Tech 300	Basic six functions	0.5%			\$120
Tech 310	Added features	0.25%	-	-	145
Tech 310UL	UL-listed	0.25%	-	-	155
Tech 320B	Audible continuity beeper	0.1%	-	-	189
Tech 330	High accuracy & true RMS (AC & DC)	0.1%	-	-	219
HD-100	Heavy duty (drop-proof, contamination-proof)	0.25%	-		169
HD-110	Heavy duty, plus 10 Amps	0.25%	-	-	189

And to make sure that the job is done right the first time, Beckman DMMs have superior RF shielding, and an impressive 22 Meg-ohm input impedance that reduces circuit loading to ensure accurate readings.


No matter how much the job demands, you can count on Beckman DMMs to see you through.

There's a Beckman DMM just right for every application. Use the selection chart to find the model best for you.

For a closer look at the workaholics, see your local Beckman distributor today. To locate the one nearest you, call or write Beckman Instruments, Inc., Instrumentation Operations, 210 S. Ranger Street, Brea, CA 92621. (714) 993-8803.

BECKMAN

BEWENDER

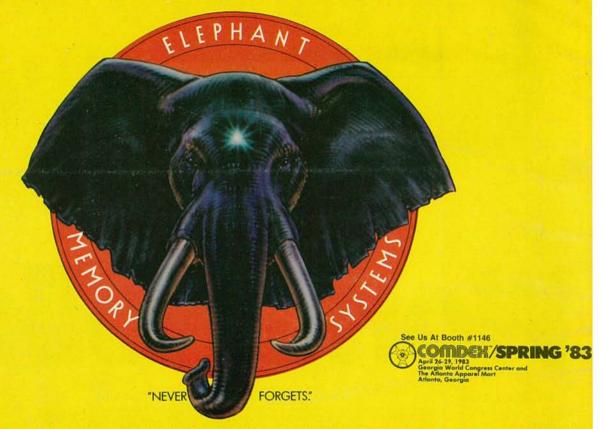

MORE THAN JUST ANOTHER PRETTY FACE.

Says who? Says ANSI.

Specifically, subcommittee X3B8 of the American National Standards Institute (ANSI) says so. The fact is all ElephantTM floppies meet or exceed the specs required to meet or exceed all their standards.

But just who is "subcommittee X3B8" to issue such pronouncements?

They're a group of people representing a large, well-balanced cross section of disciplines—from academia, government agencies, and the computer industry. People from places like IBM, Hewlett-Packard, 3M, Lawrence Livermore Labs, The U.S. Department of Defense, Honeywell and The Association of Computer Programmers and Analysts. In short, it's a bunch of high-caliber nitpickers whose mission, it seems, in order to make better disks for consumers, is also to

make life miserable for everyone in the disk-making business.

How? By gathering together periodically (often, one suspects, under the full moon) to concoct more and more rules to increase the quality of flexible disks. Their most recent rule book runs over 20 single-spaced pages—listing, and insisting upon—hundreds upon hundreds of standards a disk must meet in order to be blessed by ANSI. (And thereby be taken seriously by people who take disks seriously.)

In fact, if you'd like a copy of this formidable document, for free, just let us know and we'll send you one. Because once you know what it takes to make an Elephant for ANSI...

We think you'll want us to make some Elephants for you.

ELEPHANT." HEAVY DUTY DISKS.

For a free poster-size portrait of our powerful pachyderm, please write us.

Distributed Exclusively by Leading Edge Products, Inc., 225 Turnpike Street, Canton, Massachusetts 02021

Call: toll-free 1-800-343-6833; or in Massachusetts call collect (617) 828-8150. Telex 951-624.

CIRCLE 8 ON FREE INFORMATION CARD