

Electronics®

Build a Car Electric System Analyzer
How Accurate Are FM Tuning Methods?
Computer ROM Board Buying Directory

Home Projection TV – The Big Picture is Here!
HOW THEY WORK □ BUYING GUIDE TO 58 MODELS



10926 N1
10
[REDACTED]

Kelvin

ISSUE

1-Speed Cassette Deck
Integrated Amplifier & Tuner

Advent "Powered" Speaker System

FOR THOSE OF YOU WHO ARE HAVING SECOND THOUGHTS ABOUT YOUR FIRST CB.

Move up to the all-new Cobra 29GTL. It's the third generation of the trucker-proven Cobra 29. And like the 29 and the 29XLR before it, it advances the state of the art.

Transmitter circuitry has been refined and updated to improve performance.

Receiver circuits have been redesigned to include dual FET mixers, a monolithic crystal filter and a ceramic filter to reduce interference and improve reception.

By improving the transmitter circuitry the 29GTL keeps you punching through loud and clear. By incorporating new features for better reception everything you copy comes back loud and clear.

So if you're having second thoughts about your first CB, make your next CB the Cobra 29GTL.

We back it with a guaranteed warranty and a nationwide network of Authorized Service Centers where factory-trained technicians are available to help you with installation, service and advice.

But more important than that, we sell it at a price you won't have second thoughts about.



Punches through loud and clear.


Cobra Communications Products
DYNASCAN CORPORATION
6460 W. Cortland St., Chicago, Illinois 60635

Write for color brochure
EXPORTERS: Empire • Plainview, N.Y. • CANADA: Atlas Electronics • Ontario
CIRCLE NO. 11 ON FREE INFORMATION CARD





This \$20 pager can control 16 of either your appliances or your lights. There's no installation required and the complete story is explained below.



Space Pagers



Control your entire home from your pocket with the world's first micro electronic remote space pager.

You're in bed. It's late at night and you're watching TV. It's time to shut off your TV, so you reach for a remote control device, press a button, and off it goes.

That's not unusual. But what is about to invade the typical American home will be.

AMERICA WILL NEVER BE THE SAME

Scientists have developed the technology to individually page any light or electrical appliance in your home and command it to go on or off from a device that fits in your pocket.

Remote paging requires no special home installation since it utilizes your existing household wiring system and small inexpensive modules that plug into your wall outlets.

The system is also very inexpensive. It costs only \$13.95 per module to control any light, only \$14.95 for any appliance, and less than \$100 for a complete paging system.

WHAT IT WILL DO

Remote space paging will perform many useful functions that will pay for your modest investment.

Security From your bed, you can turn on all the interior lights, your exterior lights, and sound an alarm to warn your neighbors.

Savings You can turn on your air conditioning system or turn up your heat just before you arrive home. The savings in energy will practically pay for the system itself.

Convenience Wake up in the morning to a hot cup of coffee, the TV, and a car that's ready to go as you tie space paging in with a computerized timing system.

HERE'S HOW IT WORKS

Space paging is easy to understand. You hold a pager in your hand and press a number on a calculator-type keyboard. When you press that number, your keyboard sends out a digital signal that is picked up by the electrical wiring system in your home.

The digital signal pages only those wall modules set to the number you keyed. If you page a light, for example, you can also page it to turn on, off, or you can even dim it (just like the dimmer switch you have on your wall). You can page an appliance such as your coffee maker or toaster to turn either on or off. There are up to 16 different electrical devices you can control with your pager.

A PERSONAL SYSTEM

Because it is so easy to use and so inexpensive, you can start with just a few modules and expand later. There are modules that plug into your outlets, and modules that replace your present wall switches. The system can be set for hundreds of different codes, so even if your entire neighborhood has space pagers, you will be able to privately use yours without any

interference from your neighbors.

To make space paging work, you need a device to generate the digital code and another device to receive and transfer the signal to your household wiring. There are two systems available to do this - all adding a degree of versatility to the concept.

Direct-Controlled The direct system consists of a control unit at \$39.95. The control unit is plugged into the wall and placed by your bed or at any location you select. To open, close, or dim a light, you press the appropriate number and press the function you want to perform. You also have the option of using the system with a remote ultrasonic pager. You point the pager at the control unit and enter the command. The remote pager lets you move about a room or area and is an optional accessory of the direct system at only \$19.95.

Timer-Controlled The timer-controlled unit costs \$49.95 and consists of a digital clock and a memory. You can program the exact time you want each light or appliance to turn on or off. You also have a "dynamic living pattern" switch which controls the lights randomly and automatically to make it look like you are home while you are away or on vacation. You can now have your TV wake you up, your coffee started, and even your car warmed up in a set sequence every morning. It's like having your own invisible robot.

TRY THE SYSTEM NOW

We recommend that you purchase a series of modules, wall switches, and the direct system as these components are available right now. A good starter package consists of one plug-in module for a plug-in light at \$13.95 (Order Nr. 3011), two modules for appliances at \$14.95 each (Order Nr. 3012), one wall switch for \$14.95 (Order Nr. 3013), and the control unit for \$39.95 (Order Nr. 3010). The total cost for the package is \$98.75 complete. If you wish to order the remote pager, it costs \$19.95 (Order Nr. 3014). If you wish to order just the starter package, use Order Nr. 3015. Postage and handling will be \$2.50 for each order no matter how many modules or receiving control units you purchase.

When you receive the package, set the plug-in wall modules to specific numbers. Plug in a light. See how you can turn on and off or even dim the light. Connect your outdoor lights to the wall switch.

Then plug your TV and your coffee maker into one of the appliance modules. Plug your control unit into the outlet by your bed. When you're ready to go to sleep, turn off the outdoor and indoor lights, the TV, and go to sleep.

The next morning, turn on the lights, the TV, and the coffee maker from your bedside. Get

dressed, and when you arrive at the kitchen table, sit down to a hot cup of fresh coffee.

Let's say you're in the living room and the lights are plugged into the modules and the control unit is in the bedroom. No problem. You can override the system by turning the lights on or off manually at your lamp switch.

After you experience the convenience of space paging, think of how you can expand the system inexpensively, adding modules to more of your lights and to your wall switches so that you can control your remaining exterior and interior lights. Visualize the security that can be yours once you can control all your lighting and electrical appliances from one central location. Then order more wall switches and light and appliance modules. If you want to control your lighting from two locations, order another control unit or order the entire system you want with your first order.

Once you've turned your bedroom into a paging command center, there is one more expansion possibility: the timer-controlled system which will be available early in 1979. JS&A customers will be advised first of its availability.

JS&A is America's largest single source of space-age products. We back the system with a prompt service-by-mail facility, a one year limited warranty and a 30-day trial period. If you're not completely satisfied, simply return the system for a prompt and courteous refund.

Space paging will bring you freedom, security, convenience, and peace of mind. It will save you steps, time, and money. Finally, right from your bed, you can control your entire home's electronics - something that only a thousand dollar home computer could have done until the space pager was developed.

To order your space pagers, simply send your check for the correct amount (Illinois residents please add 5% sales tax) or credit card buyers may call our toll-free number below. Please also specify the order numbers.

Let space-age technology turn your house into a home of the future. Order your space pager system at no obligation, today.

JS&A NATIONAL SALES GROUP

Dept. PE One JS&A Plaza
Northbrook, Ill. 60062 (312) 564-7000
Call TOLL-FREE 800 323-6400
In Illinois Call (312) 564-7000

©JS&A Group, Inc., 1978

Color. VP-590 add-on Color Board allows program control of 8 brilliant colors for graphics, color games. Plus 4 selectable background colors. Includes sockets for 2 auxiliary keypads (VP-580). \$69*

Sound. VP-595 Simple Sound Board provides 256 tone frequencies. Great for supplementing graphics with sound effects or music. Set tone and duration with easy instructions. \$24*

Music. VP-550 Super Sound Board turns your VIP into a music synthesizer. 2 sound channels. Program control of frequency, time and amplitude envelope (voice) independently in each channel. Program directly from sheet music! Sync provision for controlling multiple VIPs, multitrack recording or other synthesizers. \$49*

Memory. VP-570 RAM Expansion Board adds 4K bytes of memory. Jumper locates RAM in any 4K block of up to 32K of memory. On-board memory protects switch. \$95*

EPROM Programmer. VP-565 EPROM Programmer Board comes complete with software to program, copy and verify 5-volt 2716 EPROMs—comparable to units costing much more than the VP-565 and VIP put together! Programming voltages generated on board. ZIF PROM socket included. \$99*

EPROM Interface. VP-560 EPROM Interface Board locates two 5-volt 2716 EPROMs (4K bytes total) anywhere in 32K of memory. VIP RAM can be re-allocated. \$34*

ASCII Keyboard.** Fully encoded, 128-character ASCII encoded alpha-numeric keyboard. 58 light touch keys including 2 user defined keys! Selectable upper and lower case. Handsomely styled. Under \$50*

Tiny BASIC** VP-700 Expanded Tiny BASIC Board puts this high-level language on your VIP. BASIC stored in 4K of ROM. Ready for immediate use—no loading necessary. This expanded BASIC includes the standard Tiny BASIC commands plus 12 additional—including color and sound control! Requires external ASCII encoded alpha-numeric keyboard. \$39*

Auxiliary Keypads. Program your VIP for 2-player inter-action games! 16-key keypad VP-580 with cable (\$15*) connects to sockets provided on VP-590 Color Board or VP 585 Keyboard Interface Card (\$10*)




COSMAC VIP lets you add computer power a board at a time.

With these new easy-to-buy options, the versatile RCA COSMAC VIP (CDP18S711) means even more excitement. More challenges in graphics, games and control functions. For everyone, from youngster to serious hobbyist. And the basic VIP computer system starts at just \$249* assembled and ready to operate.

Simple but powerful—not just a toy.

Built around an RCA COSMAC micro-processor, the VIP includes 2K of RAM. ROM monitor. Audio tone with a built-in speaker. Plus 8-bit input and 8-bit output port to interface relays, sensors or other peripherals. It's

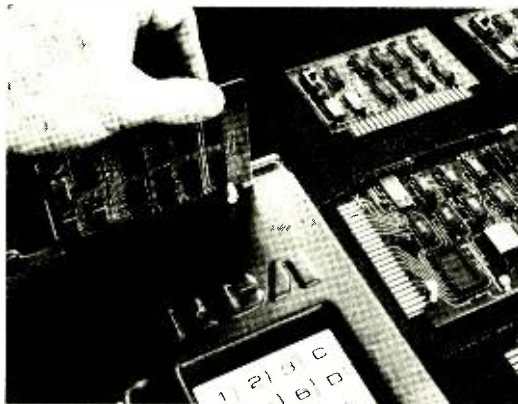

easy to program and operate. Powerful CHIP-8 interpretive language gets you into programming the first evening. Complete documentation provided.

Take the first step now.

Check your local computer store or electronics parts house. Or contact

RCA VIP Marketing, New Holland Avenue, Lancaster, PA 17604. Phone (717) 291-5848.

*Suggested retail price. CDP18S711 does not include video monitor or cassette recorder
**Available 1st Quarter, 1979.

The fun way
into computers.

CIRCLE NO. 46 ON FREE INFORMATION CARD

JANUARY 1979

VOLUME 15, NUMBER 1

Coming Next Month

- COMPARING AUDIO TIME-DELAY MODELS
- BUILD A 55-MPH CAR "CRUISEALERT"
- BUILD A MULTIPLE-CHOICE DMM
- AUDIO REPORTS:
Hitachi HMA-7500
Power Amplifier
Akai Pro-1000
Open-Reel Tape Deck

Cover Art by George Kelvin

POPULAR ELECTRONICS, January 1979, Volume 15, Number 1. Published monthly at One Park Avenue, New York, NY 10016. One year subscription rate for U.S. and Possessions \$13.00; Canada, \$16.00; all other countries, \$18.00 (cash orders only, payable in U.S. currency). Second Class postage paid at New York, NY and at additional mailing offices. Authorized as second class mail by the Post Office Department, Ottawa, Canada, and for payment of postage in cash.

POPULAR ELECTRONICS including ELECTRONICS WORLD, Trade Mark Registered. Indexed in the Reader's Guide to Periodical Literature.

COPYRIGHT © 1978 BY ZIFF-DAVIS PUBLISHING COMPANY. ALL RIGHTS RESERVED.

Ziff-Davis also publishes Boating, Car and Driver, Cycle, Flying, Popular Photography, Skiing, Stereo Review, Electronic Experimenter's Handbook, Tape Recording & Buying Guide, Stereo Directory & Buying Guide, and Communications Handbook.

Material in this publication may not be reproduced in any form without permission. Requests for permission should be directed to Jerry Schneider, Rights and Permissions, Ziff-Davis Publishing Co., One Park Ave., New York, NY 10016.

Editorial correspondence: POPULAR ELECTRONICS, 1 Park Ave., New York, NY 10016. Editorial contributions must be accompanied by return postage and will be handled with reasonable care; however, publisher assumes no responsibility for return or safety of manuscripts, art work, or models.

Forms 3579 and all subscription correspondence: POPULAR ELECTRONICS, Circulation Dept., P.O. Box 2774, Boulder, CO 80302. Please allow at least eight weeks for change of address. Include your old address, enclosing, if possible, an address label from a recent issue.

The publisher has no knowledge of any proprietary rights which will be violated by the making or using of any items disclosed in this issue.



Feature Articles

- 43 HOME PROJECTION COLOR TV—THE BIG PICTURE IS HERE / *Kris Jensen*
A buyer's guide to projection TV receiver systems.
- 50 HOW ACCURATE ARE FM TUNING METHODS? / *Daniel R. VonRecklinghausen*
A major cause of distortion in FM tuners and receivers is explored.
- 68 MICROCOMPUTER ROM BOARD BUYING DIRECTORY / *Staff*
- 70 A PERSONAL MICROWAVE COMMUNICATIONS SYSTEM
THE MINI-WAVE, PART 2 / *Robert B. Cooper, Jr. & S.K. Richey*

Construction Articles

- 58 BUILD A UNIVERSAL ELECTRONIC TIMER / *Michael S. Robbins*
Turn on or off an electrical device or a tone.
- 62 TROUBLESHOOTING ANALYZER FOR AUTOMOTIVE ELECTRIC SYSTEMS / *Tony Caristi*
Locates problems in battery or charging systems.
- 65 BUILD A REMOTE ANTENNA SELECTOR SWITCH / *Bud Weisberg*
Low-cost, reliable switch selects one of six antennas.

Columns

- 20 STEREO SCENE / *Ralph Hodges*
A New Tonearm.
- 76 HOBBY SCENE Q & A / *John McVeigh*
- 77 SOLID STATE / *Lou Garner*
Those Versatile Multis.
- 81 EXPERIMENTER'S CORNER / *Forrest M. Mims*
Analog Computer Circuits, Part 1.
- 85 DX LISTENING / *Glenn Hauser*
Fine Arts Shortwave Service.
- 87 COMPUTER BITS / *Hal Chamberlin*
Update on Graphics.

Julian Hirsch Audio Reports

- 24 ADVENT "POWERED ADVENT" SPEAKER SYSTEM
- 28 SAE TWO STEREO TUNER T3U AND INTEGRATED AMPLIFIER C3A
- 32 B.I.C. MODEL T-2 CASSETTE DECK

Departments

- 4 EDITORIAL / *Art Salsberg*
FCC Power and Challenges.
- 6 LETTERS
- 8 OUT OF TUNE
"An Infrared Intrusion Alarm, December 1978; "A Cassette Control System For Computers," November 1978; "Solid State," August 1978; "Experimenter's Corner," September 1978.
- 10 NEW PRODUCTS
- 15 NEW LITERATURE
- 94 SOFTWARE SOURCES
- 109 OPERATION ASSIST
- 110 ELECTRONICS LIBRARY
- 115 ADVERTISERS INDEX
- 116 PERSONAL ELECTRONICS NEWS

JOSEPH E. MESICS
Publisher

ARTHUR P. SALSBERG
Editorial Director

LESLIE SOLOMON
Technical Director

JOHN R. RIGGS
Managing Editor

IVAN BERGER
Senior Editor

ALEXANDER W. BURAWA
Features Editor

EDWARD I. BUxbaUM
Art Director

JOHN McVEIGH
Assistant Technical Editor

ANDRE DUZANT
Technical Illustrator

CARMEN VELAZQUEZ
Production Editor

RUTH POLSKY
Editorial Assistant

Contributing Editors
**Hal Chamberlin, Lou Garner, Glenn Hauser
Julian Hirsch, Ralph Hodges, Forrest Mims**

JEFF NEWMAN
Assistant to the Editor

LINDA BLUM
Advertising Service Manager

KATHERINE REINHARDSEN
Executive Assistant

EDGAR W. HOPPER
Publishing Director

ZIFF-DAVIS PUBLISHING COMPANY
Philip B. Korsant, President
Furman Hebb, Executive Vice President
John R. Emery, Sr. Vice President, Finance
Philip T. Heffernan, Sr. Vice President
Edward D. Muhlfeld, Sr. Vice President
Philip Sine, Sr. Vice President, Secretary
Lawrence Sporn, Sr. Vice President, Circulation and Marketing
Baird Davis, Vice President, Production
George Morrissey, Vice President
Sydney H. Rogers, Vice President
Sidney Holtz, Vice President
Albert S. Traina, Vice President
Paul H. Chook, Vice President
Edgar W. Hopper, Vice President
Robert N. Bavler, Jr., Vice President
Selwyn Taubman, Treasurer

W. Bradford Briggs, Vice Chairman

ZIFF CORPORATION
William Ziff, Chairman
I. Martin Pompadur, President
Hershel B. Sarbin, Executive Vice President

ZIFF-DAVIS PUBLISHING COMPANY
Editorial and Executive Offices
One Park Avenue, New York, New York 10016
212-725-3500
Joseph E. Mesics (725-3568)
John J. Corton (725-3578)
Bonnie B. Kaiser (725-3580)

Midwestern Office
Suite 1400, 180 N. Michigan Ave.,
Chicago, IL 60601 (312-346-2600)
Midwest Representative: Buzz Vincent

Western Office
9025 Wilshire Boulevard, Beverly Hills, CA 90211
213-273-8050; BRadshaw 2-1161
Western Advertising Manager: Bud Dean
Western Representative: Norm Schindler
Suite 205, 20121 Ventura Blvd.
Woodland Hills, CA 91364 (213-999-1414)
Japan: James Yagi, Oji Palace Aoyama,
6-25, Minami Aoyama, 6 Chome, Minato-Ku,
Tokyo, 407-1930/6821, 582-2851

Editorial

FCC POWER AND CHALLENGES

The pressures of new developments, the economy, and the legislative climate combine to determine what will likely change in some areas of the consumer electronics field. Among the "movers and shakers" is a handful of people that comprise the Federal Communications Commission. What will they do next?

For example, now that Canada established a "No-Code" Amateur Radio license at the end of '78, will the U.S. soon follow in its footsteps? I hope that the FCC will act on this quickly, maintaining the Canadian operating restrictions that promise to motivate such licensees to upgrade with a traditional code exam. Also, what ever happened to the reputed restrictions set by international agreement that Morse Code proficiency is a prerequisite to amateur radio operation on high-frequency bands? Simple. It was never true above 144 MHz!

In truth, the FCC has not been idle the past year. For starters, the agency re-wrote its CB rules in "plain English." One's first reaction could well be, "It's about time!" But as it happens, the FCC is the first Federal Government agency to rewrite its rules in this manner. (For a copy of the new rules, send a \$1.25 check or money order made out to the Superintendent of Documents to CB Handbook, Consumer Information Center, Department 109F, Pueblo, CO 81009.)

CB radio, which celebrated its 20th anniversary in '78, might eventually be the beneficiary of a recent FCC action—an order to draft a notice of inquiry on carving out additional frequencies for CB in the 900-MHz band. This, of course, will not be finalized for some time to come since public comments are invited which have to be weighed, proposals made, etc. Hams can rejoice, naturally, since the 220-MHz band has been left alone. Canada's new no-code license, in fact, permits "packet radio transmissions"—computer data bursts—on 220.1–220.5 MHz, which are shared with other modes of modulation.

The FCC is also a factor in congressional legislation that seeks to pass a radio frequency interference (RFI) bill that will authorize the FCC to establish minimum standards for reducing r-f interference to audio equipment. Such bills died in committee on adjournment of the 94th Congress. But continued efforts to pass an RFI bill are expected. The Institute of High Fidelity (IHF) expressed concern on this issue, observing that there are no simple solutions to solving the problem, legislators and/or administrators are not qualified to dictate design details unrelated to product performance, and that specific harm to proper functioning of high-fidelity equipment could occur by implementing "easy solutions" to RFI problems as suggested by legislators. (It'll increase the price of audio gear, too.)

On other fronts, the FCC was attacked by the Electronics Industries Association, which disputes its uhf conclusions that a 7-to-10-fold improvement is achievable in land mobile spectrum efficiency with current technology. The agency was on the offense in another arena. FCC Commissioner Tyrone Brown charged that the U.S. Court of Appeals is seeking to be a "super FCC" by making communications policy. He allowed, however, that this is being done by FCC default and by the FCC saying one thing and doing another. The upshot of the latter—inconsistent statements and actions—creates industry uncertainty among the public, Brown declared. All too true!!

The FCC was formed by the Communications Act of 1934, of course, replacing the Federal Radio Commission. Now it's expected that the Communications Act of 1978 will displace the FCC with a new Communication Regulatory Commission. A first draft of the new Act reduces the agency's functions and the number of Commissioners from seven to five members. It will be most interesting to see what impact this impending change will have on future audio and radio rules.

The Age of Affordable Personal Computing Has Finally Arrived.

Ohio Scientific has made a major breakthrough in small computer technology which dramatically reduces the cost of personal computers. By use of custom LSI micro circuits, we have managed to put a complete ultra high performance computer and all necessary interfaces, including the keyboard and power supply, on a single printed circuit board. This new computer actually has more features and higher performance than some home or personal computers that are selling today for up to \$2000. It is more powerful than computer systems which cost over \$20,000 in the early 1970's.


This new machine can entertain your whole family with spectacular video games and cartoons, made possible by its ultra high resolution graphics and super fast BASIC. It can help you with your personal finances and budget planning, made possible by its decimal arithmetic ability and cassette data storage capabilities. It can assist you in school or industry as an ultra powerful scientific calculator, made possible by its advanced scientific

math functions and built-in "immediate" mode which allows complex problem solving without programming! This computer can actually entertain your children while it educates them in topics ranging from naming the Presidents of the United States to tutoring trigonometry all possible by its fast extended BASIC, graphics and data storage ability.

The machine can be economically expanded to assist in your business, remotely control your home, communicate with other computers and perform many other tasks via the broadest line of expansion accessories in the microcomputer industry.

This machine is super easy to use because it communicates naturally in BASIC, an English-like programming language. So you can easily instruct it or program it to do whatever you want, *but you don't have to*. You don't because it comes with a complete software library on cassette including programs for each application stated above. Ohio Scientific also offers you hundreds of inexpensive programs on ready-to-run cassettes. Program it yourself or just enjoy it, the choice is yours.

Ohio Scientific offers you this remarkable new computer two ways.

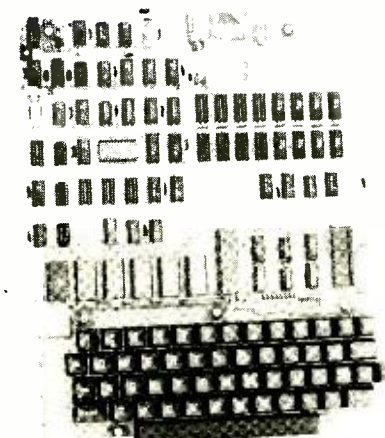

Superboard II \$279
For electronic buffs. Fully assembled and tested. Requires +5V. at 3 Amps and a video monitor or TV with RF converter to be up and running.

Challenger 1P \$349
Fully packaged with power supply. Just plug in a video monitor or TV through an RF converter to be up and running.



Standard Features

- Uses the ultra powerful 6502 microprocessor
- 8K Microsoft BASIC-in-ROM
Full feature BASIC runs faster than currently available personal computers and all 8080-based business computers.
- 4K static RAM on board expandable to 8K
- Full 53-key keyboard with upper/lower case and user programmability
- Kansas City standard audio cassette interface for high reliability
- Full machine code monitor and I/O utilities in ROM
- Direct access video display has 1K of dedicated memory (besides 4K user memory), features upper case, lower case, graphics and gaming characters for an effective screen resolution of up to 256 by 256 points. Normal TV's with overscan display about 24 rows of 24 characters; without overscan up to 30 X 30 characters.

Extras

- Available expander board features 24K static RAM (additional), dual mini-floppy interface, port adapter for printer and modem and an OSI 48 line expansion interface
- Assembler/editor and extended machine code monitor available

ORDER FORM

Order direct or from your local Ohio Scientific dealer.

- I'm interested. Send me information on your
- Personal Computers Business Systems
- Send me a Superboard II \$279 enclosed
- Send me a Challenger 1P \$349 enclosed
- Include 4 more K of RAM (8K Total) \$69 more enclosed

Name _____

Address _____

City _____ State _____ Zip _____

Payment by: BAC(VISA) _____ Master Charge _____ Money Order _____

Credit Card Account # _____

Expires _____ Interbank # (Master Charge) _____
Ohio Residents add 4% Sales Tax

TOTAL CHARGED OR ENCLOSED _____

All orders shipped insured UPS unless otherwise requested. FOB Aurora, OH

Interested in a bigger system? Ohio Scientific offers 15 other models of microcomputer systems ranging from single board units to 74 million byte hard disk systems.

OHIO SCIENTIFIC

America's Largest Full Line Microcomputer Company
1333 S. Chillicothe Road • Aurora, Ohio 44202 (216) 562-3101



Letters

MORE ON CAR SOUND

In "How to Get Hi-Fi Sound in Any Auto" (July 1978), it is stated that "Doors are not the very best choice [for mounting speakers] for mechanical and acoustic reasons." There is another reason—water leakage. Water running down the window glass into the interior of the door may drip onto the paper cone of the speaker and ruin it. Such water leakage is usual and is the reason why car manufacturers put drain holes into the bottom edges of doors. —*Sherman A. Baker, Arlington, VA.*

NO "FREEBIE"

An incorrect statement was made in the May 1978 Product Test Reports section for the Heathkit Model HW-2036 2-meter transceiver. A properly assembled transceiver kit is *not* aligned free of charge by one's local Heathkit service center. There is a nominal charge for this service. —*James Maher, Oregon, OH.*

Sorry. We checked with Heath in Benton Harbor, MI and had it confirmed that there is indeed a nominal charge for aligning the transceiver. —Ed.

IDEAS ON MUSIC MIXING

I enjoyed greatly "A Practical Guide to Multitrack Tape Recording" in the March 1978 issue. Here are some more ideas. Since it is difficult for one person to mix a previously recorded track with new material while supplying that new material (I only have two hands!) this technique might prove helpful. Record the first three instruments one at a time on tracks 1, 2, and 3. (Be sure they are synchronized!) When you are satisfied with these performances and recording levels, etc., mix them down onto track four. Repeat this mix until satisfied before reusing tracks one through three. Note track four is out of sync with the other tracks.

The next two sources are recorded on tracks one and two in synchronization with track four. Mix these down onto track three and re-record track four onto track one after this mix to keep things synchronized.

The next two sources are recorded on tracks two and four in sync with one and three. We now have seven performances recorded. However, three of them are third-generation recordings (copied twice), two are second generation and only two are first generation. But I believe that, if noise reduction were used throughout the procedure to mini-



CREATE!

You don't waste a second on "mechanics" with A P All-Circuit Evaluators.

You figure out the circuit you want, then plug it in for testing. You decide to improve your layout, and you make your moves as quickly as you think them up. There's just no faster or easier way to build and test circuits and circuit ideas.

But just because breadboarding is now such a cinch, don't get the idea that you don't have electronic integrity. Our solderless plug-in tie

points are made of a special non-corroding alloy. Use them as often as you like.

How many tie points do you need? Our smallest ACE has 728, our largest has 3,648. And all of them accept all DIP sizes.

Everything is quality all the way. You can even see the difference in our harder, shinier plastic matrix.

See for yourself. Phone (toll-free) 800-321-9668 for the address of your nearby A P Products dealer. And ask for our complete A P catalog, The Faster and Easier Book.



A P PRODUCTS INCORPORATED

Box 110 • 72 Corwin Drive
Painesville, Ohio 44077
Tel. 216/354-2101
TWX: 810-425-2250

Faster and Easier is what we're all about.

An Extraordinary Offer to introduce you to the benefits of Membership in

ELECTRONICS BOOK CLUB

take any **4** of these 22 unique electronics books **\$1.99** for **ALL FOUR** (values to \$67.80) for only

with a Trial Membership in the Book Club that guarantees to save you 25% to 75% on a wide selection of electronics books



Facts About Club Membership

- The 4 introductory books of your choice carry publisher's retail prices of up to \$67.80. They are yours for only \$1.99 for all 4 (plus postage/handling) with your Trial Membership.
- You will receive the Club News, describing the current Selection, Alternates, and other books, every 4 weeks (13x a year).
- If you want the Selection, do nothing, it will be sent to you automatically. If you do not wish to receive the Selection, or if you want to order one of the many Alternates offered, you simply give instructions on the reply form (and in the envelope) provided, and return it to us by the date specified. This date allows you at least 10 days in which to return the form. If, because of late mail delivery you do not have 10 days to make a decision and so receive an unwanted Selection, you may return it at Club expense.
- To complete your Trial Membership, you need buy only four additional monthly Selections or Alternates during the next 12 months. You may cancel your Membership any time after you purchase these four books.
- All books—including the Introductory Offer—are fully returnable after 10 days if you're not completely satisfied.
- All books are offered at low Member prices, plus a small postage and handling charge.
- **Continuing Bonus:** If you continue after this Trial Membership, you will earn a Dividend Certificate for every book you purchase. Three Certificates plus payment of the nominal sum of \$1.99 will entitle you to a valuable Book Dividend of your choice which you may choose from a list provided Members.

May we send you your choice of 4 of these practical time-and-money-saving books as part of an unusual offer of a Trial Membership in Electronics Book Club?

Here are quality hardbound volumes, each especially designed to help you increase your know-how, earning power, and enjoyment of electronics. Whatever your interest in electronics, you'll find Electronics Book Club offers practical, quality books that you can put to immediate use and benefit.

This extraordinary offer is intended to prove to you through your own experience, that these very real advantages can be yours...that it is possible to keep up with the literature published in your areas of interest, and to save substantially while so doing. As part of your Trial Membership, you need purchase as few as four books during the coming 12 months. You would probably buy at least this many anyway, without the substantial savings offered through Club Membership.

To start your Membership on these attractive terms, simply fill out and mail the coupon today. You will receive the 4 books of your choice for 10-day inspection. **YOU NEED SEND NO MONEY.** If you're not delighted, return the books within 10 days and your Trial Membership will be cancelled without cost or obligation.

ELECTRONICS BOOK CLUB, Blue Ridge Summit, Pa. 17214

ELECTRONICS BOOK CLUB

Blue Ridge Summit, Pa. 17214

Please open my Trial Membership in ELECTRONICS BOOK CLUB and send me the 4 books circled below. I understand the cost of the books I have selected is only \$1.99 for all 4, plus a small shipping charge. If not delighted, I may return the books within 10 days and owe nothing, and have my Trial Membership cancelled. I agree to purchase at least four additional books during the next 12 months after which I may cancel my membership at any time.

101 709 743 785 800 801 874 887
891 909 913 919 971 995 997
1012 1017 1035 1036 1085 1092 1101

Name _____ Phone _____

Address _____

City _____


State _____ Zip _____

(Valid for new Members only. Foreign and Canada add 10%.) PE-19



Revolutionary! Sound-shaping taping mike.

Never before — a single microphone that gives you the versatility of 16 microphones! Four tiny frequency filter switches built into the new Shure 516EQ E-Qualidyne Microphone let you tailor sound for studio effects in virtually any recording situation: flick a switch to add sizzle to vocals . . . flick another switch to highlight the sound of a bass drum. You can even compensate for the acoustic response of a room — *right from the microphone!* In all, the 516EQ creates 16 different response variations that can add a new, professional sound to every tape you make. Available singly or in pairs for stereo recording. Ask to hear a recorded demonstration at your participating Shure dealer.

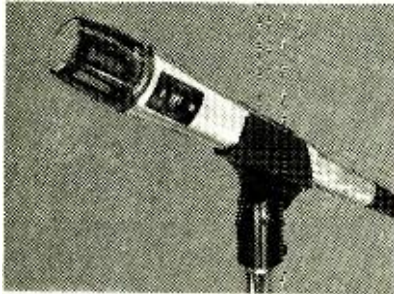

Shure Brothers Inc.
222 Hartrey Ave., Evanston, IL 60204
In Canada: A. C. Simmonds & Sons Limited




Manufacturers of high fidelity components, microphones, sound systems and related circuitry.
CIRCLE NO. 49 ON FREE INFORMATION CARD

mize degradation of sound by re-recording, the loss of quality is offset by the gain in concentration when mixing was done for the sake of a better balance of sound.

Using the above procedure, add a new source while mixing (loss of balance again). Then, when two tracks are all that remains, use the method of sound-with-sound as described in your article to get three vocals onto one track leaving the last for solo instrument or voice.—Bill Fox, Columbus, OH.

DATA PROCESSING QUIZ

The answer given for question three of Robert P. Balin's "Data Processing Quiz" (p. 70, September 1978) is incorrect. The question sets the conditions, "You can paint the walls blue or pink, but paint the ceiling white, even if you don't do the walls." However, the logic network given as the answer indicates the paint job is completed under the following conditions: an unpainted ceiling with walls painted pink; an unpainted ceiling with walls painted blue; painted ceiling with walls unpainted, painted blue, painted pink or painted

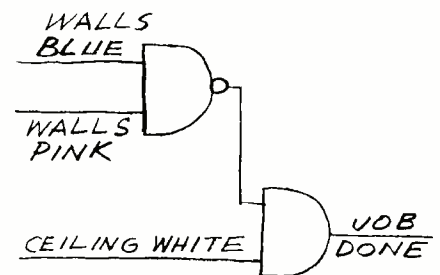

both blue and pink (stripes). A logic network that will indicate a completed paint job (output at logic 1) is shown here. —Tony Banks, Cambridge, MA

Out of Tune

In "A Cassette Control System for Computers" (November 1978): change the two lines numbered 240 and 330 in the Graphic Star Program to read as follows:

240 IF 20+X/B = 47 THEN 310

330 IF 20+(127-X)/B = 47 THEN 410

In "Solid State" (August 1978): Ranges E and F of the Capacitance Meter should have CK equal to 0.01 μ F (not 0.001 μ F).

In "An Infrared Intrusion System" (December, 1978), in Fig. 1 insert a 20-ohm resistor in series with LED1; in Fig. 2, make C2 .22 μ F and C5 a 50-V Mylar; in Fig. 3A, T1 center-tap should be yellow; in Fig. 3B the T1 primary should be B/Y instead of B/G; and in Fig. 4, D3 should be a 1N4002.

In the September "Experimenter's Corner," Fig. A of the Project of the Month, the value of current limiting resistor R3 should be 470 ohms, not 470,000 ohms.

the \$988 Surprise . . .

If you haven't looked carefully at the Level-II 16K TRS-80, you're in for a big surprise! Level-II BASIC gives TRS-80 advanced features like comprehensive string handling, multi-dimension arrays, multi-letter variable names, named cassette files, full editing, integer arithmetic, single (6-digit) and double (16-digit) precision arithmetic, formatted printing, memory-mapped video (print directly at any of 1024 screen positions), 128x48 video graphics (may be intermixed with text), error trapping, auto line numbering, TRACE, PEEK and POKE . . . to name just a few. Because Level-II is in ROM, TRS-80 powers-up ready to go with the full 16K RAM available for your use.

This means TRS-80's memory is equivalent to a 28K RAM-based system.

New for 1979—TRS-80's numeric (calculator) keypad included on every 16K computer, and available as an add-on for present owners.

TRS-80's modular design allows easy expansion. Add up to 48K RAM, Expansion Interface, printers, 1 to 4 Mini-Disks, RS232C, telephone acoustic couplers, Voice Synthesizer, dual cassette recorders, our System Desk and Printer Stand. Surprisingly, these are not promises of things to come, but real products being delivered right now. Software from games to General Ledger are available, with more cassette and disk software being added monthly.

Radio Shack's 58 years of consumer electronics leadership, our 50 regional repair centers (growing to 100 this year), our new Radio Shack computer centers, and our NYSE-listed billion-dollar parent, Tandy Corporation, insure that customer support is always available right where it should be—locally.

So if you haven't seriously looked at TRS-80 yet, ask your local Radio Shack for our new 20-page fact-filled catalog and be prepared for a \$988 surprise. Surprising power—features—price—support! Level-II 16K systems include everything pictured, plus the manual. Better to be surprised now . . . before you choose the wrong microcomputer system.



16K Available RAM
12K Level-II BASIC in ROM
Full-Size Typewriter Keyboard
U.L. Listed, Portable
Complete . . . Plug in and Use

NEW!
Numeric Calculator
Keypad

Radio Shack®
The biggest name in little computers™

A DIVISION OF TANDY CORPORATION, FORT WORTH, TEXAS 76102
OVER 7000 LOCATIONS IN NINE COUNTRIES



New Products

Additional information on new products covered in this section is available from the manufacturers. Either circle the item's code number on the Free Information Card or write to the manufacturer at the address given.

BSR Quanta Direct-Drive Turntable

The Quanta 800 is the top of a series of three new BSR single-play, two-speed turntables whose base cabinets utilize a special sandwich construction of dissimilar materials, plus energy-absorbing, resonance-tuned feet, to absorb noise reso-




nances. The 800 has a quartz-locked, direct-drive servomotor with illuminated digital speed display and digital speed selection and adjustment. The die-cast aluminum platter is covered with an anti-static mat. The semi-automatic turntable's tone arm is an S-shaped, tubular aluminum low-mass type with viscous-damped cueing and automatic return. \$230.00. Address: BSR (USA) Ltd., Route 303, Blauvelt, NY 10913.

CIRCLE NO. 92 ON READER SERVICE CARD

Vaco Wire Stripper

The No. 70358C is a new self-adjusting wire stripper from Vaco Products. The simple-to-use stripper automatically adjusts itself to the diameter of the wire being stripped. This eliminates the need to look for specific hole sizes. Its blades cut through the insulation but never touch the inner conductors. Spring action returns the

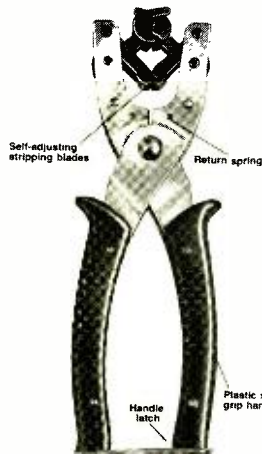

wire stripper to its ready-to-use position. A latch at the bottom of the handles keeps them together when the stripper is not being used. Address: Vaco Products Co., 1510 Skokie Blvd., Northbrook, IL 60062.


CIRCLE NO. 93 ON READER SERVICE CARD

Electronic Deadbolt Combination Lock

"Electrolock EL-S" is a combination-plus-key electronic deadbolt lock from Electronic Security Systems. Solid-state electronics control an electromechanically operated 1"-throw deadbolt. Before the lock can be opened using a key, the proper combination must be entered on a 12-key keypad. Up to three combinations of four to seven digits can be programmed. During a power failure only the key is required to retract the deadbolt. The lock is powered by 120 V ac. Available options include weatherproofing, custom-programmed combinations, three-level master keying, and timer-controlled locking. \$89.50. Address: Electronic Security Systems, Inc., Box 61403, Sunnyvale, CA 94088.

Xitan Z80 CPU Board

The ZPU-2, an S-100 board with a Z80 microprocessor and two unique options, has been announced by Xitan. The System Support option includes multi-tasking reg-

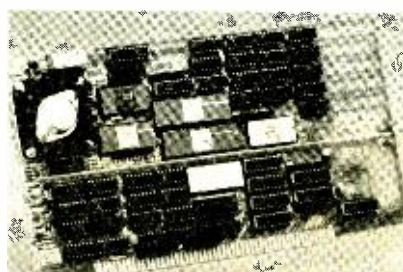


isters, allowing up to four tasks to run concurrently, plus memory-mapping for up to one megabyte of memory to be addressed. This option also provides four Direct Memory Access (DMA) channels, permitting data transfer rates between I/O devices at 2 megabytes per second, as well as three 1- μ sec to 1-sec intervals, and interrupt control for eight input lines. The Floating Point option provides mathematical processing capabilities at up to 10 times normal software speed while the main processor handles other tasks. The ZPU-2 will operate at either 2 or 4 MHz (switch-selectable); wait state generation is provided separately for memory, DMA and input/output operations. Address: Xitan, Inc., 1101-H State Road, Princeton, NJ 08540.

CIRCLE NO. 94 ON READER SERVICE CARD

Fisher Receiver with Equalizer

The RS2004 is the lead entry among four new Fisher AM/FM-stereo receivers in its RS2000 Studio Standard series. Incorporating five-band graphic equalizers with detented controls in place of the usual tone

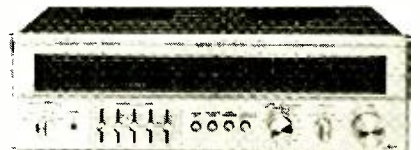

controls, it also features dual tuning meters, two speaker outputs, tape monitor switch, loudness contour, plus FM-muting and equalizer defeat. In addition, it has an illuminated function indicator, and a rear-panel 25-microsecond Dolby deemphasis switch. Power is rated at 45 watts continuous into 8 ohms from 20 to 20,000 Hz at 0.1% THD or less. Fm mono usable sensitivity is 10.3 dBf (1.9 μ V). \$450.00. Address: Fisher Corp., 21314 Lassen St., Chatsworth, CA 91311.


Sinclair Pocket DMM

Sinclair Radionics' Model PDM35 is a pocket-size digital multimeter designed for measuring ac and dc voltages, dc current, and resistance. LSI circuitry employs BI-FET technology rather than the more costly A/D converter to keep prices down. The DMM measures dc voltages in four ranges to 1000 volts and ac voltages to 500 volts at an accuracy of 1% full-scale. Resistance is measured in five ranges at an accuracy of 1.5%. The instrument features automat-

SAVE \$25.00

Model 8100 Frequency Counter Kit

- Range: 20Hz to 100MHz
- High Sensitivity
- Resolution to 0.1Hz

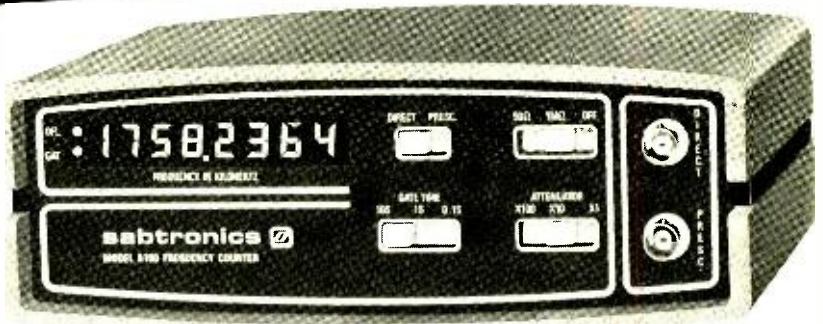


Now you can forget about price/performance trade-offs when you select a frequency counter. In Sabtronics' Model 8100 kit you get all the characteristics of superior performance at a low, affordable price.

This frequency counter, employing LSI technology, has the performance and input characteristics you demand: guaranteed frequency range of 20Hz to 100MHz (10 Hz to 120MHz typical); selectable hi/lo impedance; superior sensitivity; selectable resolution and selectable attenuation. Plus an accurate time base with excellent stability.

An 8-digit LED display features gate activity indicator, leading zero suppression and overflow indicator. You would expect to find all these features only on high-priced instruments — or from Sabtronics' advanced digital technology.

BRIEF SPECIFICATIONS:

- Frequency Range: 20Hz to 100MHz guaranteed. (10Hz to 120MHz typical)
- Sensitivity: 15mV RMS, 20Hz to 50MHz (10mV typical); 25mV RMS, 50MHz to 100MHz (20mV typical)
- Selectable Impedance: 1M Ω /25pF or 50 Ω
- Attenuation: X1, X10 or X100
- Accuracy: \pm 1Hz plus time base accuracy
- Aging Rate: \pm 5ppm/yr.
- Temperature Stability: \pm 10ppm, 0 $^{\circ}$ C to 40 $^{\circ}$ C
- Resolution: 0.1Hz, 1Hz, 10Hz selectable
- Display: 8-digit LED, overflow indicator, gate activity indicator
- Overload Protection
- Power Requirement: 9-15 VDC @ 330mA

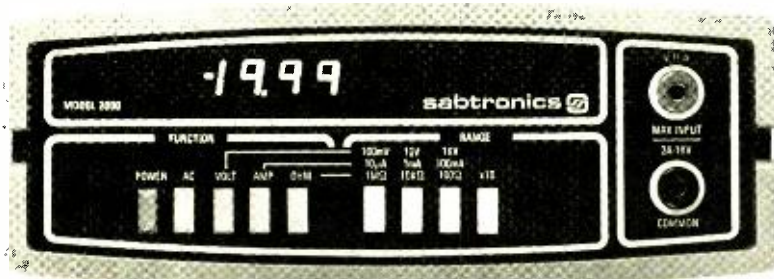

Model 2000, 3 1/2 Digit DMM Kit

- 5 Functions, 28 Ranges
- Basic DCV Accuracy: 0.1% \pm 1 Digit

The amazing Sabtronics 2000 is the choice of both professionals and hobbyists. It's the only portable/bench DMM that offers so much performance for such an astonishing low price.

You get basic DCV accuracy of 0.1% \pm 1 digit; 5 functions giving 28 ranges; readings to \pm 1999 with 100% overrange; overrange indication; input overload protection; automatic polarity; and automatic zeroing.

The all-solid-state Model 2000 incorporates a single LSI circuit and high-quality components. Our clear, step-by-step manual simplifies assembly. Complete kit includes a rugged high-impact case ideal for both test-bench and field use.

BRIEF SPECIFICATIONS:

- DC volts in 5 ranges: 100 μ V to 1kV
- AC volts in 5 ranges: 100 μ V to 1kV
- DC current in 6 ranges: 100 nA to 2A
- AC current in 6 ranges: 100 nA to 2A
- Resistance: 0.1 Ω to 20M Ω in 6 ranges
- AC frequency response: 40 Hz to 50kHz
- Display: 0.36" (9.1mm) 7-segment LED
- Input Impedance: 10M Ω
- Size: 8"W \times 6.5"D \times 3"H (203 \times 165 \times 76 mm)
- Power requirement: 4.5-6.5 VDC-4 "C" cells (not included).

Special Offer! Save \$25.00*

If you order both the frequency counter and DMM kits now, you pay only \$144.90 including shipping and handling. You save \$25.00 off the combined regular low price of \$169.90. Order both kits now. This special offer good for a limited time only.

*Special offer good in USA only.

Making performance affordable.

sabtronics

13426 Floyd Circle • Dallas, Texas 75243
Telephone 214/783-0994

Sabtronics International Inc. 13426 Floyd Circle Dallas Tx 75243			PE
<input type="checkbox"/> Yes, I want to take advantage of your special \$25.00-off offer.*			
Please send	Model 8100 and Model 2000 kit(s) for only \$144.90 total including shipping and handling		\$ _____
Please send	Model 8100 Frequency Counter kit(s)	@ \$89.95 ea	\$ _____
	Shipping and handling	\$ 5.00/unit*	\$ _____
Please send	Model 2000 DMM kit(s)	@ \$69.95 ea	\$ _____
	Shipping and handling	\$ 5.00/unit*	\$ _____
	Texas residents add sales tax		\$ _____
	Total enclosed		\$ _____
<input type="checkbox"/> Check	<input type="checkbox"/> Money Order	<input type="checkbox"/> Charge my Master Charge	<input type="checkbox"/> Visa _____ Exp. Dt. _____
	Acc. No. _____		
Name _____	_____	_____	_____
Address _____	_____	_____	_____
City _____	_____	State _____	Zip _____
*USA only. CANADA: \$6.50. FOREIGN: \$19.00 AIRMAIL.			



ic polarity indication and a magnified seven-segment LED display with a high-contrast-ratio filter. Optional accessories include a deluxe carrying case, ac adapter, and 30-kV probes. \$59.95, including test leads and vinyl slip case. Address: Sinclair Radionics, Inc., 115 E 57 St., New York, NY 10022.


CIRCLE NO. 95 ON READER SERVICE CARD

Amphenol Mini-Uhf Connectors

Miniature uhf plugs and jacks with five times greater frequency range (to 2.5 GHz) than standard-size connectors have been introduced by Amphenol. The new connectors feature instant-on FPC-type terminations and are designed to replace standard-size connectors used with RG-58/U coaxial cable. About half as large as their conventional counterparts, mini-uhf connectors can easily be used in miniaturized circuits and simplify installation of base-station and mobile Amateur radio and CB transceivers. The connectors are rated at a nominal 50 ohms impedance, 1.25:1 typical VSWR, and 350 volts maximum. Prices are \$1.10 for the plug and \$1.36 for the jack. Address: Bunker Ramo/Amphenol RF Operations, 33 E. Franklin St., Danbury, CT 06810.

Colt AM-SSB Base Station

The new 40-channel Colt "Excalibur SSB" model 1200 CB transceiver base station features single-sideband and AM operation, and digital LED channel display. Front-panel controls include r.f. gain, mic




gain, PA gain, and tone. Among control switch provisions are: high-frequency filter, r.f. noise blanker ANL, CB-PA, and SWR-calibrate. There are also two large meters for signal strength and SWR/r.f. indications, headphone jack, and mode lamps on the front panel. Other features include an external speaker jack, a.c.-d.c. operation, and an optional walnut-grain cabinet. The unit can also be mounted in any standard EIA 19" rack. Address: Colt Communications, 5424 W. Touhy Ave., Skokie, IL 60077.

CIRCLE NO. 96 ON READER SERVICE CARD

Panasonic Cordless Record Cleaner

The Panasonic BH-651E is a battery-operated, hand-held LP record cleaning device recently unveiled by Panasonic. A rotary brush with 0.05mm bristles made of

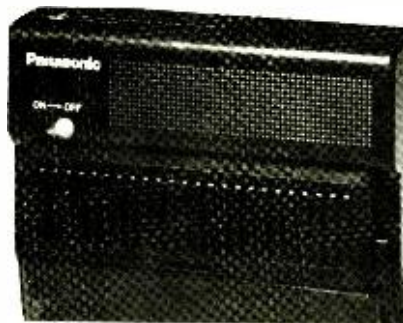

PVC collects dust from the record surface and deposits it in a built-in dust-box. The brush turns at 3000 rpm. The cleaner operates on two AA batteries (not included). Address: Panasonic, One Panasonic Way, Secaucus, NJ 07094.

CIRCLE NO. 97 ON READER SERVICE CARD

E&L Video Terminal

Used with a TV receiver or optional video monitor, E&L Instruments' Model VTE-1 video terminal electronics system provides a full ASCII keyboard, reprogrammable character generator, cursor, and flicker-free refresh. The one-piece molded cabinet is designed to support a CRT monitor at a comfortable viewing angle. Full duplex and local operation are possible with RS-232C and 20-mA current-loop interfaces operating at speeds up to 9600 baud. The standard character set contains 64 uppercase alphanumeric ASCII characters (lower-case optional), and the character generator is user-reprogrammable to provide any user-defined 5 x 7 dot matrix characters. The 128-character ASCII decoder supplied is also user-reprogrammable



ble to accommodate alternate character codes or code sets. The blinking cursor can be positioned anywhere on-screen or switched off. Other features include clear screen, bell code, and wrap-around. \$600 assembled, \$450 kit. Address: E&L Instruments, Inc., 61 First St., Derby, CT 06418.

CIRCLE NO. 98 ON READER SERVICE CARD

Fujitsu Ten In-dash AM-FM-Cassette with Dolby

The Fujitsu Ten GP-7881 in-dash car stereo combines AM and stereo FM reception plus an auto-reverse cassette player with Dolby noise reduction. The AM-FM section has preset push-button selection of five AM and five FM stations, interstation muting, and a built-in noise blanker. The stereo cassette section features locking re-



wind and fast-forward. The unit also has separate bass and treble controls, and a four-way fader control to adjust front/back and left/right sound distribution. Tape-section ratings are 0.3% wow and flutter; 48 dB S/N. Power output is rated at 5 watts for each of the four speaker outputs, or 20 watts total, into a 4-ohm load. Current drain is 1.6 amps max. \$239.95. Address: Fujitsu Ten, Dept. P, 1135 East Janis St., Carson, CA 90746.

CIRCLE NO. 99 ON READER SERVICE CARD

Yamaha "Disc Mode" Amplifier

Yamaha's Model A-1 integrated amplifier has a built-in head amplifier for moving-coil cartridges and is used in a "disc-mode ori-

Brand New. LCD Alarm Chronograph



You can't wear a more accurate watch ... With the split second precision of the finest Swiss stopwatch ... Plus a 24-hour alarm & personal reminder system.

This spring and summer, our LCD Alarm Chronograph was a runaway best seller. It's sold out in fact. For this reason, we've improved it. Made it even bolder and more exciting, with extra convenience features and for less money! How? By placing one of the largest watch orders in our history... and passing the quantity savings along to you.

Truly Extraordinary

This new LCD Alarm Chronograph is truly extraordinary. It does more and does it better than any other watch. With an impressive, dramatic appearance that reflects its uncommon ability.

Remarkable Value


The only thing about it that's not extravagant is its price. It's actually over \$200.00 less than the nationally advertised watch that comes close to its usefulness and accuracy.



Correct time is 6:53.44 on Tuesday

Quartz Crystal Time...The LCD Alarm Chronograph gives you accuracy to ± 60 seconds a year. Quartz crystal accuracy that would have been considered sensational per month in earlier micro-electronic watches. And is still not available in models selling for as much as \$500.00 to \$1000.00.

The Electronic Calendar...So you always have exactly the right time on display—the hours, minutes and running seconds, plus the day of the week. Then, at a touch, you can replace the time with the month and date. Of course, the electronic calendar adjusts automatically for the number of days in the month. Then, so you can see when it's dim or you're in the dark, the face lights up.



Correct date is August 8th

24 Hour Alarm

Of all the features available in digital watches today, an alarm system like this is the one that's most wanted. And no wonder. It will wake you; remind you of your appointments, phone calls and meetings (or break one up that's been going on too long). It's really important enough all by itself to warrant your getting a new watch.

You can set this alarm for any minute of any hour. Day or night. In all, 1440 positions are available—easily and instantly. Then, unless you change or deactivate it, the alarm will sound for a full minute at the same time every day. With an insistent, though pleasant, beep. When the alarm is set, an A appears on the face. To check the time it'll go off, just touch the alarm button.



Set to ring at 11:45 P.M.

The Chronograph System

As to the chronograph, or split-second timer, it's precision is so fine, it borders on the infinitesimal. Imagine, it enables you to time an event for up to an hour to one-hundredth of a second... and beyond that, for a full 24 hours, to the second! On top of which, you can time an event in memory, keeping the regular time of display until you need the chronograph readout. Then, as you'll see in the explanation to the far right, the chronograph measures or stops time, in an extraordinary variety of ways.

This exceptional versatility makes the LCD Alarm Chronograph with its highly sophisticated micro-computer chip the ideal instrument for doctors, pilots, motion picture directors and photographers, sound and efficiency engineers, sportsmen of course, and every executive who wants the ability to command time to stand still.

Only \$70

Right now, only the Seiko among nationally advertised brands has all these features. And it regularly sells for \$299.95. Well over two hundred dollars more—even though its chronograph is accurate to only a tenth of a second.

This incomparable value (proved after exhaustive quality control tests) is what really impressed us. And we're one of the oldest and largest mail merchandisers in America.

30 Day Trial

What is more, buying by mail, you can prove all this to your own satisfaction without risking one cent. You have thirty days to put the LCD Alarm Chronograph to the test—to confirm it won't gain or lose five seconds a month, prove the convenience of the alarm, satisfy yourself that the LCD Alarm Chronograph is as useful as it is easy to operate. More, to compare it with any watch at any price, and to send it back for a complete refund if the value is not as great as we say, if it doesn't arouse the admiration and fascination of your friends, win your own pleasure and satisfaction.

Silver-tone or gold plated

So order your LCD Alarm Chronograph today. The price, including shipping, handling, insurance and a handsome gift case is just \$70.00 with chrome case and stainless steel bracelet, or \$80.00 in gold plated case and

bracelet. Your watch comes with a full ONE YEAR Limited Warranty. Remember, too, the printed circuitry eliminates all moving parts and normal servicing, and assures you of years of trouble-free performance.

**800-325-6400
OPERATOR #19**

(Missouri residents call 800-342-6600)
In operation 7 days a week

To order by credit card, call the toll free number above. Send your check to Douglas Dunhill at the address below. (New York and Illinois residents add the appropriate sales tax.)

The Multi-Function Chronograph System

No other instrument, at any price, gives you greater precision than the 1/100th of a second accuracy of the new LCD Alarm Chronograph, or greater versatility and flexibility in timing an event from a fraction of a second to 24 hours. Only with the micro-electronic revolution could you have a multi-function chronograph, a chronograph that can be put in memory, in a sleek, thin, superbly styled timepiece like this.



Timed to 54 minutes and 14.85 seconds

#1 Add Time... is the stop watch mode. You'll use it to time everything from a phone call to the length of a meeting. How long your car's been at a parking meter, the time you've been jogging or exercising, even the time it takes a quarterback to set up and throw. With Add Time, you can stop when necessary, like a time out in basketball, and start again when the action begins. Try it the next time you prepare a speech.

#2 Split Time... is the mode you'll use to get the time of each contestant across the finish line, or to get the time for the 1/4 or the 1/2 or any interim. On Split Time the chronograph is actually stopped and running at the same time, so you can use it to figure the time of a pit stop, for example, and still get the over-all time of the race.

#3 Twin Timing... Most extraordinary of all, you can actually combine these functions, using your chronograph as both a stopwatch and split timer. For example, a television producer would start timing a show, he then stops and starts the chronograph to get the time of the commercial, writes down the figure, and starts the chronograph again, which jumps ahead to the total elapsed time. With an ordinary or analog stopwatch, you'd need two sets of hands to do this—and would probably have to pay more for just a stopwatch than for the LCD Alarm Chronograph.

You'll find the chronograph so easy to use, you'll master it in minutes, and in days find innumerable business and personal uses. Take 30 days to prove it to yourself.

Be sure to specify white or gold. You'll have the precise time, absolute control over time, plus ample warning when it's time to do anything. And the pride that comes with wearing a watch that's second to none.

© Douglas Dunhill Inc. 1978



Dept. 81-2321
4225 Frontage Road
Oak Forest, IL 60452

Considering a Microcomputer?

Be Sure to Check Out the Product Offerings of the World's Largest Full Line Microcomputer Company.

All Ohio Scientific machines come with microcomputing's fastest full feature BASIC-in-ROM or on-Disk for instant use.

Challenger I Series

Economical computer systems that talk in BASIC. Ideal for hobbyists, students, education and the home.

	Minimum Configuration	Base Price
Superboard II — World's first complete system on a board including keyboard, video display, audio cassette, BASIC-in-ROM and up to 8K RAM	4K RAM	\$ 279
Challenger IP — Fully packaged Superboard II with power supply	4K RAM	\$ 349
Challenger IP Disk — Complete mini-floppy system expandable to 32K RAM	16K RAM	\$1190

Challenger IIP Series

Ultra high performance BUS oriented microcomputers for personal, educational, research and small business use.

C2-4P — The professional portable	4K RAM	\$ 598
C2-8P — The world's most expandable personal machine for business or research applications	4K RAM	\$ 799
C2-4P Disk — The ultimate portable	16K RAM	\$1464
C2-8P Single Disk — Ideal for education, advanced personal users, etc.	16K RAM	\$1738
C2-8P Dual Disk — Most cost effective small business system	32K RAM	\$2597

Challenger II Serial Interface Series

Same great features as Challenger IIP Series for those who have serial terminals: small business, education, industry.

C2-0 — Great starter for users with a terminal	4K RAM	\$ 298
C2-1 — Great timeshare user accessory; cuts costs by running simple BASIC programs locally	4K RAM	\$ 498
C2-8S — Highly expandable serial machine, can add disks, etc.	4K RAM	\$ 545

Challenger III The Ultimate in Small Computers

The unique three processor system for demanding business, education, research and industrial development applications.

C3-S1 — World's most popular 8" floppy based microcomputer	32K RAM dual floppys	\$3590
C3-OEM — Single package high volume user version of C3-S1	32K RAM dual floppys	\$3590
C3-A — Rack mounted multi-user business system directly expandable to C3-B	48K RAM dual floppys	\$5090
C3-B — 74 million byte Winchester disk based system. World's most powerful microcomputer	48K RAM dual floppys	\$11,090

OHIO SCIENTIFIC also offers you the broadest line of expansion accessories and the largest selection of affordable software!

Compare the closest Ohio Scientific Model to any other unit you are considering. Compare the performance, real expansion ability, software and price, and you will see why we have become the world's largest full line microcomputer company.



The C2-4P
The Professional Portable by Ohio Scientific

Ohio Scientific now offers you the world's most powerful portable personal computer in both BASIC in ROM and mini-floppy configurations.

C2-4P Model Standard Features

Mini-floppy system with 48K RAM, 48K ROM, 16K video display, 16K audio cassette, 16K BASIC-in-ROM and up to 8K RAM. Includes keyboard, power supply, and 8" floppy disk drive. Expandable to 32K RAM.

The C2-4P is the most powerful portable personal computer available. It features a built-in keyboard, a 16K video display, a 16K audio cassette, and 16K BASIC-in-ROM. It is expandable to 32K RAM and includes a 16K video display, a 16K audio cassette, and 16K BASIC-in-ROM.

OHIO SCIENTIFIC
1333 S. Chillicothe Road • Aurora, Ohio 44202



The C2-8P
An exceptional value in personal computing


If you are interested in an ultra high performance personal computer which can be fully expanded to a mainframe class microcomputer system, consider the C2-8P.

The C2-8P is the most powerful personal computer available. It features a built-in keyboard, a 16K video display, a 16K audio cassette, and 16K BASIC-in-ROM. It is expandable to 32K RAM and includes a 16K video display, a 16K audio cassette, and 16K BASIC-in-ROM.

OHIO SCIENTIFIC
1333 S. Chillicothe Road • Aurora, Ohio 44202

The C3-B

The world's most powerful microcomputer system is far more affordable than you may think!

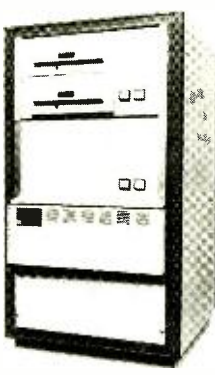

STANDARD FEATURES

48K RAM, 48K ROM, 16K video display, 16K audio cassette, 16K BASIC-in-ROM, and up to 8K RAM. Includes keyboard, power supply, and 8" floppy disk drive. Expandable to 32K RAM.

The C3-B is the most powerful microcomputer system available. It features a built-in keyboard, a 16K video display, a 16K audio cassette, and 16K BASIC-in-ROM. It is expandable to 32K RAM and includes a 16K video display, a 16K audio cassette, and 16K BASIC-in-ROM.

OHIO SCIENTIFIC
1333 S. Chillicothe Road • Aurora, Ohio 44202

I'm interested in OSI Computers. Send me information on:

Personal Computers Small Business Computers

Educational Systems Industrial Development Systems

I'm enclosing \$1.00 for your 64-page small computer buyer's guide.

Ohio residents add 4% tax.

Name _____

Address _____

City _____

State _____ Zip _____

Phone _____

OHIO SCIENTIFIC
1333 S. Chillicothe Road
Aurora, Ohio 44202
(216) 562-3101



ented" operation that couples the phono input almost directly to the output power amplifier. A unique DISC switch overrides all secondary controls and achieves a circuit configuration that is claimed as close to the straight wire with gain concept as is technologically possible. This amplifier also uses a direct-current equalizer to achieve significant improvement in transient response. The equalizer is direct-coupled to a high-gain (41.5 dB) power amplifier whose full-rated output power can be achieved with only a 200-mV output from the preamplifier. Specifications: 70 watts/channel into 8 ohms at 0.02% THD; 20 to 20,000 Hz +0/-0.2 dB frequency response; 230 mV rms moving-magnet, 6 mV rms moving-coil phono overload; more than 70 dB channel separation; 82 to 105 dB S/N. \$595. Address: Box 6600, Buena Park, CA 90620.

CIRCLE NO. 100 ON READER SERVICE CARD

Heathkit Computerized Weather Station

Heath's new ID-4001 weather station has digital readouts for indoor and outdoor temperatures, wind speed and direction, barometric pressure and time. As a result of a built-in microprocessor, it can also calculate and display average wind speed and wind chill factor. In addition, a built-in memory allows it to instantly recall the



dates and times of maximum and minimum temperatures, barometric pressure, wind gusts, barometric pressure's rate of change per hour, and whether pressure is rising or falling. Wind speed can be read in mph, kph or knots, temperature in Fahrenheit or Celsius, and barometric pressure in inches of mercury or millibars. \$369.95, kit; \$595.00, assembled. Address: Heath Company, Dept. 350-730, Benton Harbor, MI 49022.

CIRCLE NO. 90 ON READER SERVICE CARD



New Literature

STURDILITE "IDEA BOOKLET"

Sturdilite has announced availability of its "Idea Booklet" describing its line of modular lab and work stations for electronic, R&D, quality control, technical production and assembly applications. Over a dozen typical installations are shown, and the brochure demonstrates how the Sturdilite "building-block" design concept can simplify planning lab or work station areas. Address: Sturdilite Lab & Work Stations, Angle Steel Div., 323 Acorn St., Dept. 32, Plainwell, MI 49080.

PHILMORE CATALOG SUPPLEMENT

An eight-page catalog supplement (#771) is available from Philmore describing additions to their line of communications, hi-fi, consumer, and OEM products. Among the 47 new items listed are a four-way car speaker system, five-channel disco/broadcast mixer, and all-purpose portable PA amplifier. Address: Philmore Mfg. Co., Inc., 40 Inip Dr., Inwood, NY 11696.

COMPUTER SERVICES DIRECTORY

A new version of "Directory of Computer Based Services" is available from Telenet, listing organizations offering interactive computing and information retrieval services. These include data banks, commercial service bureaus, educational institutions, and other companies, all categorized by application specialty, programming language, and data base offerings. Also listed is information on financial and economic data bases, FCC tariffs for communications common carriers, school guidance, advertising media and market research, energy and pollution, and engineering. Cost is \$2.00. Address: Telenet Communications Corp., Publications Dept., 1050 17th St. NW, Washington, DC 20036.

HIGH-VOLTAGE TRANSIENT TIPS

Tech Tips 1-7 from Westinghouse describes an ac switch voltage transient protection circuit. The two-page bulletin includes a schematic of the circuit described. Address: Westinghouse Electric Corp., Semiconductor Div., Youngwood, PA 15697.

SWITCHCRAFT CONNECTOR BULLETIN

Switchcraft's New Product Bulletin No. 328 describes "Silent-Plug." This connector eliminates loudspeaker noises when amplifier cables are connected and disconnected from

amplified musical instruments. Also discussed are special features that protect cable and plug from damage associated with transporting and setting up equipment. Address: Switchcraft, Inc., Sales Dept., 5555 N. Elston Ave., Chicago, IL 60630.

NEWMAN COMPUTER CATALOG

Newman Computer Exchange has a new 72-page catalog listing its most popular new and used mini- and microcomputer products. Personal computers, books, accessories, and other computer-related items appear in the micro section of the catalog, while the mini section features mostly DEC and Data General products. Mailing list members receive catalogs twice each year plus supplements and special sale announcements. Address: Newman Computer Exchange, Dept. R48, Box 8610, Ann Arbor, MI 48107.

VIZ TEST INSTRUMENTS

The VIZ 1978 full-line catalog describes over 55 test instruments and accessories, many of them new. Full specifications and technical details are contained in its 44-page publication. Also available is an eight-page short-form catalog listing 36 popular VIZ instruments. Address: Robert Liska, VIZ Test Instruments Group, VIZ Mfg. Co., 335 E. Price St., Philadelphia, PA 19144.

NANMAC THERMOCOUPLE BOOKLET

"Temperature-EMF Tables for Thermocouples" (Booklet No. 9000) is a 20-page publication available free from Nanmac. It contains American National Standards Institute thermocouple calibration tables, designated ANSI MC96.1-1975. Information is presented in Celsius and Fahrenheit format. Also included is information on calibration graphs, wire codes, extension and compensating wire codes, and limits of error. Address: J. Nani-gian, Nanmac Corp., 9-11 Mayhew St., Framingham Centre, MA 01701.

REI RENTAL CATALOG

The 1978 catalog of electronic instrumentation and equipment available for short-term rental from Rental Electronics, Inc. describes almost 13,000 items, including products from companies such as Brush, Digitec, Fluke, Hewlett-Packard, Honeywell, Intel, Tektronix, etc. Product categories include: amplifiers, analyzers, calibrators, counters, function generators, signal sources, digital meters, oscilloscopes, power supplies, probes, chart recorders, etc. Address: Rental Electronics, Inc., 19347 Londelius St., Northridge, CA 91324.

NATIONAL BI-FET BROCHURE

A 16-page brochure on BI-FET™ and BI-FET II™ op amps, available from National Semiconductor, is a guide to circuits using these devices, including op amps, sample and holds, analog switches, MUXs and others. Data sheets and selection guides are included. Address: National Semiconductor, 2900 Semiconductor Dr., Santa Clara, CA 95051.

Learn to service Communications/CB with NRI's Complete

Learn design, installation and maintenance of commercial, amateur or CB communications equipment.

There are more than 25 million CB sets out there, millions more two-way radios, walkie-talkies, and other communications apparatus in use by business, industry, government, police and fire departments, and individuals. That means a lot of service and maintenance jobs... and NRI can train you at home to fill one of these openings. NRI's Complete Communications Course covers all types of two-way radio equipment... AM and FM transmission and reception, television broadcasting, microwave systems, radar principles, marine electronics, mobile communications, and aircraft electronics. And NRI guarantees you will pass the exam for the commercial FCC Radiotelephone License you need to perform most servicing work, or your tuition will be refunded in full. This money-back



Some designed-for-learning equipment you get.

agreement is good for six months after completion of your course.

Learn on your own 2-meter, digitally synthesized VHF transceiver.

You'll learn to service all types of communications equipment as you assemble your own VHF transceiver. NRI engineers have designed it, not only as a commercial-quality, high-performance unit, but as a unique "power-on" training tool to give you actual bench experience with the principles needed to service CB, commercial, and amateur equipment.

Then we help you get your FCC Amateur License so you can go on the air.

The complete course includes 48 lessons, 9 special reference texts, and 10 training kits. Included are your own electronics Discovery Lab,TM

antenna applications lab, CMOS digital frequency counter, and an optical transmission system. You'll learn at home, at your own convenience, earning your FCC license and the preparation you need for the communications field of your choice. Mail the postage-paid card today.
TMTrademark McGraw Hill.

CB specialist course also offered.

If you prefer, you can concentrate on the booming field of CB radio with NRI's special course in CB servicing. You get 37 lessons, 8 reference texts and plenty of hands-on training with your own 40-channel CB, AC power supply, and multi-meter. Also included are 14 coaching units to make it easy to get your commercial Radiotelephone FCC License...required for you to test and service communications equipment.

equipment at home... Communications Course.

Or get into TV and audio servicing

NRI can train you at home to service TV equipment and audio systems. Choose from five courses that go up to our 48-lesson Master Color TV/Audio Course. With it you get 14 kits for practical bench training and demonstrations, including NRI's exclusive, designed-for-learning, 25" diagonal solid state color TV, 4-channel audio system complete with speakers, and professional instruments you build and use for learning and earning. It's proven, effective training that's helped thousands of pros already. And it's the best value offered in the field. NRI's bite-size lessons speed learning, exclusive



"Power-On" training makes it real. Send card for free catalog.

NRI instructor/engineers

Each NRI student is assigned his own course instructor. He's there to help you over any rough spots, explain problems, and give you the advice you need as you progress toward your future. And he knows what he's talking about, because he was more than likely involved in the design of your course or some of the NRI equipment you use. NRI instructors are practical, experienced people who really know their field and do their best to pass their knowledge on to you.

You get more for your money from NRI.

NRI employs no salesman, pays no commissions. We pass the savings on to you in reduced tuition, top-quality professional equipment, and reliable testing instruments necessary for a successful career. You can pay hundreds of dollars more at other schools, but you can't get better training.

Free catalog... No salesman will call.


Get your free catalog and discover why NRI is the leader in home technical training with over a million students, over 60 years experience in helping people build new careers. Mail the card today and get started on your new future. If card has been removed, write to:

Learn computer electronics

NRI trains you at home on a real digital computer.

Qualified technicians are urgently needed for careers in the rapidly growing field of computer and digital electronics... and NRI trains you at home on the real thing.

As part of your training, you actually assemble a working digital computer with expanded memory, define and flow chart programs, code your program, store it along with data in the memory bank. It's just one of the 10 hands-on training kits you receive. You also build and use your own TVOM; experiment with NRI's exclusive electronics lab. It's the quickest and best way to learn and start a new career in trouble-shooting digital computers. Send the card today.

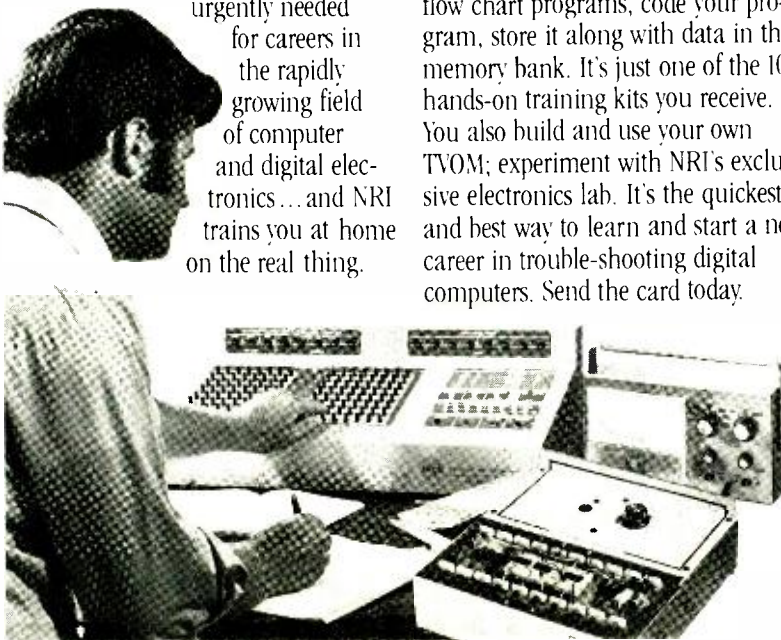

NRI
McGraw
Hill

NRI SCHOOLS

McGraw Hill Center
for Continuing Education
3939 Wisconsin Avenue
Washington, D.C. 20016



Stereo Scene

By Ralph Hodges

A NEW TONEARM

IN THE PAST, this column has been outspoken about the desirability of controlling—and reducing as much as possible—the tonearm/cartridge resonances that are an inevitable part of playing a record. The major such resonance, of course, results from the total effective mass of the arm and the compliance of the stylus suspension in the cartridge (compliances, actually, because many cartridges exhibit different static compliances for vertical and lateral stylus movements). There are secondary resonances as well. They generally result from nonrigidity of the tonearm structure (nobody knows how to make a perfectly rigid tonearm), so that it behaves as an assemblage of lesser masses rather than as a unitized whole. These resonances frequently turn up in the audio-frequency range, while the fundamental resonant frequency is well below 20 Hz with most tonearm/cartridge combinations.

I have always considered secondary resonances in the audio range to be the lesser of the two evils. When audible (and as a rule they are extremely subtle if the tonearm is at all decent), they introduce colorations that are usually of much less magnitude than similar-sounding colorations contributed by loudspeakers and listening rooms. Therefore, they are psychoacoustically masked out of the sonic picture. But the fundamental arm-cartridge resonance is often a high-amplitude affair that, while being too low in frequency to be audible as a coloration per se, brings about significant arm motion relative to the record surface. The cartridge cantilever is deflected, rapidly changing the effective length of the tonearm and introducing flutter effects in the reproduced sound. Strict tracking geometry is upset and becomes ever-varying. Tracking force os-

cillates, and mistracking is prone to occur. And the high-amplitude infrasonic frequencies, if passed by the amplification chain, have been demonstrated as capable of producing audible Doppler distortion in loudspeakers.

Tonearm Philosophies. As you might suspect, not everyone agrees with the way I order tonearm priorities. For example, I tend to favor a tonearm with suitably low effective mass, so that the fundamental resonance can be raised sufficiently above the frequency where most warps statistically occur (around 4 Hz, according to studies by Shure Brothers). Of course, secondary resonances are more likely to occur in an arm of very light structure. However, using a suitably inert arm material, keeping the arm shaft as homogenous as possible (for example, no removable head shells, alas), and exercising some care in the design and adjustment of pivots can do much to keep such resonances below the audible threshold.

Another school of thought, especially popular in Japan, espouses an exceptionally sturdy—and therefore rather massy—arm shaft to banish secondary resonances. Fundamental resonances are kept somewhat in check by various damping schemes or by admonitions not to expect the best results unless unwarping records are used. The Japanese have developed sophisticated means of detecting and measuring secondary resonances, and their concern about them has been aroused proportionately. But the unwarping record that works best with a relatively massy arm is still a hard item to find—at least outside of Japan.

The Servo-Assisted Arm. A few years ago, Finnegan and Klunis of 3M reported on experiments with a tonearm

having a built-in linear electric motor—not really much more than a loudspeaker drive assembly—that could be directed by a servomechanism to resist undue vertical “bobbing” of the tonearm caused by record warps. The results seemed promising, and it soon came to light that at least one other U.S. company was engaged in work on a similar design, with intent to introduce it as a consumer product. Very recently, however, Sony in Japan beat everyone to the punch by announcing the development of an “electronic” tonearm somewhat more complex than any of the other proposed designs. That there are no immediate plans for export of the arm makes any interest in it purely academic; but the test results achieved so far make the interest considerable.


According to Sony's Satoshi Kusaka, writing in the August, 1978 issue of the *Japan Electronics Industries* journal, the motion sensors and servo motors in the arm perform several functions. They lift and lower the arm and swing it to and from the record surface, thus providing the essential operation of an automatic turntable. They apply tracking force, skating compensation, and static balance. And through servo feedback they introduce electromechanical damping that greatly reduces the fundamental arm-cartridge resonance and other vibrations. With the fundamental arm resonance under control through electronic means, the arm structure can theoretically then be made rigid and massy enough to suppress secondary resonances with no detriment to overall performance.

The complexity of the Sony design takes it a step beyond other proposals of the same fundamental nature. Not only does it have a vertical sensor and motor, assigned the tasks of establishing zero balance, tracking force, and vertical damping. It also has a similar configuration for lateral movement, which applies anti-skating and keeps the arm in lateral balance. The automatic functions—tonearm lift and transit—are easily included side benefits. An optical system at the very base of the arm triggers the end-of-record cycle and also regulates the cueing of the tonearm so that it can accommodate various record diameters.


An obviously essential external unit contains the servo amplifiers and the controls for operating and adjusting the arm. Kasuka's paper gives virtually no details on the nature of the control systems, so it is necessary to speculate. Unlike some of the other electronic-ser-

Only the most sophisticated research and development in this industry could create

Two sources of perfection in stereo sound!

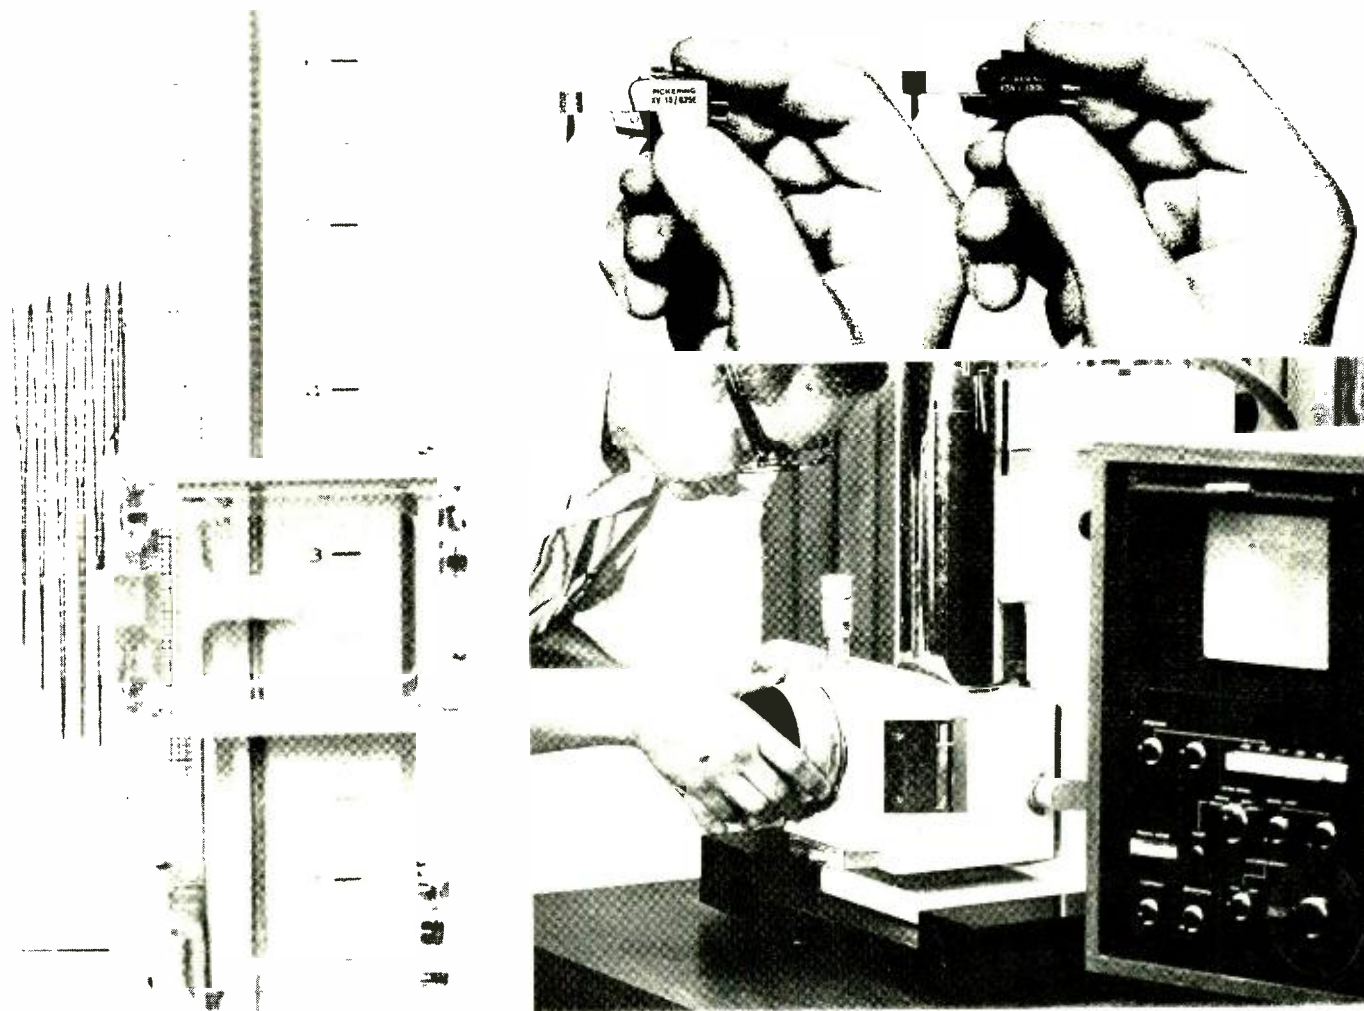

Pickering's patented Dustomatic Brush keeps records free of dust and damps low frequency tonearm resonance.

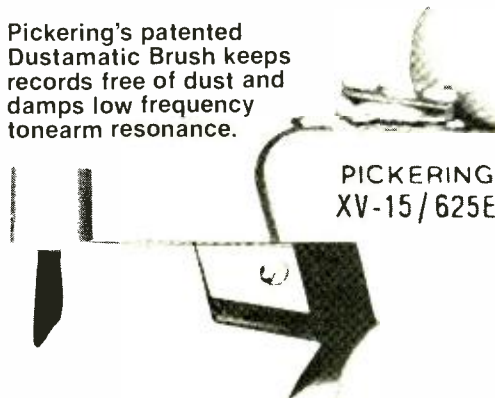

PICKERING XV-15/625E

It takes real effort and skill to become the acknowledged leader in the industry, and even more to stay ahead.

Pictured above are just a few of the advanced electronic devices that Pickering employs in product research and custom-designed development. At left above, the XY plotter on Pickering's Real Time Analyzer and, at the right above, Pickering's remarkable Scanning Electronic Beam Microscope capable of 160,000 times magnification.

Pickering's engineering department is responsible for creating these two outstanding cartridges that, as one reviewer stated: "The XV-15/625E offers performance per dollar: the XSV/3000 higher absolute performance level."

Both the XSV/3000 with its trademarked Stereohedron Stylus tip for the least record wear and the longest stylus life achievable so far... and the XV-15/625E... represent best buys at their price levels. Audition them today at your Pickering Dealer.

For further information write to Pickering & Co., Inc., Dept. PE, 101 Sunnyside Blvd., Plainview, N.Y. 11803

CIRCLE NO. 42 ON FREE INFORMATION CARD



PICKERING

"for those who can hear the difference"

JANUARY 1979

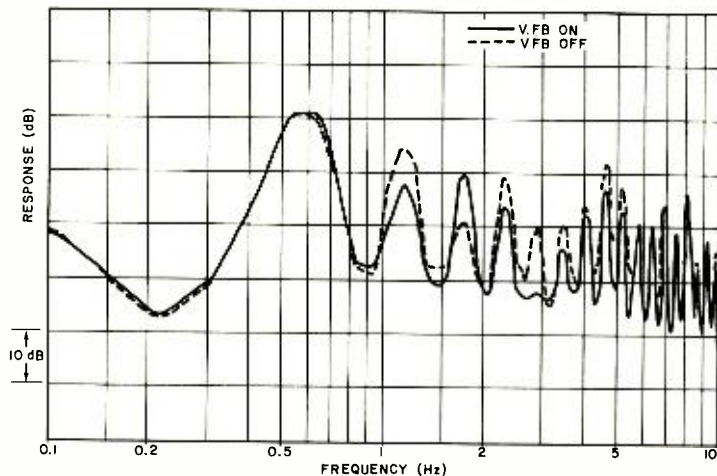


Fig. 1. Tests of the Sony arm with electronics "on" (solid line) and "off" (dotted line) demonstrate wow and flutter values up to 10Hz.

vo designs, which feed the control systems by means of signals derived from the cartridge through a low-pass (infrasonic) filter, the Sony arm evidently pays no attention to the cartridge output and instead relies on built-in motion sensors. Sony's curves, reproduced in Fig. 1, suggest that the motion-sensor outputs are processed by a high-pass filter that restricts their influence to frequencies above about 1 Hz, which is an octave away from the approximately 0.5-Hz rotational rate of an LP record. This makes perfect sense if we want (as we do) the arm to be able to follow the eccentricities of an off-center record freely. What the servo system is supposed to do when confronted with a 45- or 78-rpm record is not indicated.

Other Performance Characteristics.

The curves of Fig. 2 show the con-

siderable effectiveness of the Sony arm in reducing the amplitude of the fundamental arm-cartridge resonance. They also show a dramatic reduction in inter-channel crosstalk, which indicates the fallacy of some tonearm manufacturers in believing that arm resonances activated by record warps involve only vertical perturbations. Experience shows that there are significant lateral components of motion involved as well.

Fig. 1 shows measured values of wow and flutter for frequencies up to 10 Hz, with and without the servomechanisms in the arm engaged. You'll note how much more subject the arm is to frequency-modulation effects without the servo, particularly near the critical region of 4 Hz where record warps are concentrated. I suspect that this is where the greatest benefits of the arm are to be realized. In the region above 5 Hz, which

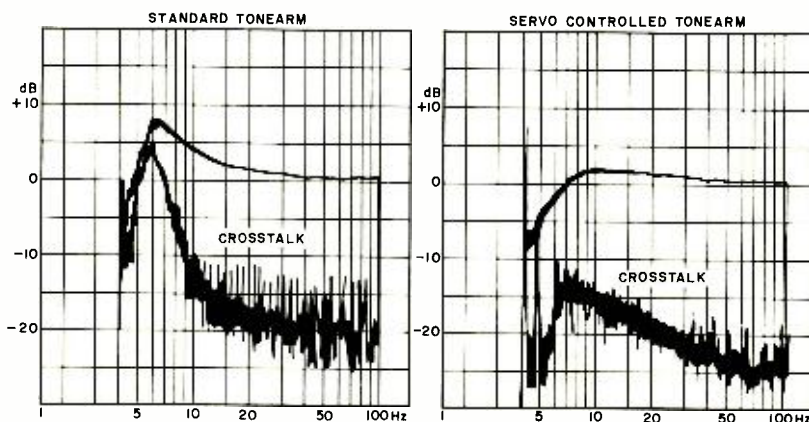


Fig. 2. Damping action of Sony servos significantly reduces amplitude of the fundamental arm-cartridge resonance and the crosstalk.

is where the curves of Fig. 1 show the fundamental arm-cartridge resonance to be located, the results are less clear-cut, but they certainly show no significant detriment to performance.

Fig. 3 shows the output of the cartridge with the arm playing an unmodulated record groove, without and with servo regulation. The "without" signal exhibits a sort of envelope suggesting low-frequency modulation of the record noise that serves to increase its peak values. The "with" signal is well controlled by comparison. In similar experiments, I have observed a sort of tonearm "shimmy" that can crop up even without any groove modulation; this shimmy can be audible as a sort of stylus "chatter."

Finally, Fig. 4, another "without" and "with" display, exhibits the damping provided by the servomechanism. In this case the tonearm has had a 0.5-gram object dropped on its head shell from a height of 10 centimeters. The interpretation of the results is obvious.

How Good an Idea? Evidently it will be some time before the U.S. consumer gets a chance to sample the performance of the Sony arm at first hand, and even then the price (I cannot even quote a projected figure in Japanese Yen) may get the better of his curiosity. The data, as supplied by Sony, definitely seem to be moving in the right direction, and they certainly reveal the possibilities for significant improvement in record-player performance. The conquest of the effective-mass problem seems quite decisive, and it is hard to see how any significant trouble could be encountered unless the fundamental arm-cartridge resonance fell low enough to approach 1 Hz, which is unlikely even with the most compliant of today's cartridges. In this sense the arm should be truly universal. It is also universal in requiring no complex readjustment when cartridges are changed. Zero-balance, tracking force, and anti-skating are established electronically through the servos. If the new cartridge requires a different tracking force and skating compensation, these are simply dialed in on the control module. The whole business becomes a simple plug-in and a few deft twists.

On the other hand, had Sony chosen to offer its own cartridge—a strain-gauge or photoelectric type, for example—as an option for the arm, new possibilities could have been opened up. These types of cartridge have an output down to dc when stylus deflection exists.

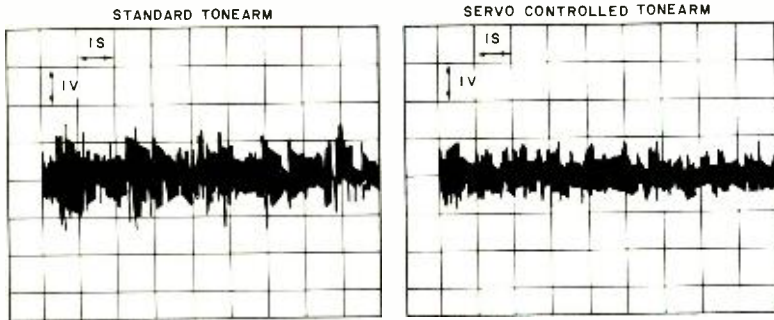


Fig. 3. A stable tonearm can markedly reduce noise output from a cartridge over a broad band of frequencies.

Monitoring that output would make possible dynamic anti-skating compensation that could to a degree adjust itself to the constantly changing drag exerted on the stylus by different record materials and modulation velocities. (At the time of his direct involvement with radial-tracking tone arms, inventor Jacob Rabinov became convinced that their elegant solution to the skating problem was a great contribution to their audible merit.) Tracking force could be referred directly to stylus-cantilever deflection, which might prove to be a bit more realistic approach than to assume that every sample of a particular cartridge model is identical to its brethren and requires exactly the same tracking force. But let us not quibble here. Sony has chosen to build a completely universal tonearm designed to work with any high-quality cartridge, and this attitude probably serves the interests of the market best.

Now, what I would like to do is pirate the whole assembly containing the vertical sensor mechanism and motor, mount it to a carriage that would enable it to transit along an overhead track, shorten the support shaft so that the lat-

eral sensor and motor could be brought right up underneath the carriage, convert the optical record-size/end sensor mechanism into a system that could control an advance motor, straighten the arm shaft, and. . . Well, you get the idea. Maybe next year.

The pity of it all is that a miniscule number of people ever gets to work with a record-playing system sophisticated enough to do credit to the disc medium, and therefore the *audible* improvements possible are just not realized by the majority of sound enthusiasts. Pursuing the ideal speaker is certainly no waste of time, and trying to get a line on the best-sounding amplifier and preamplifier is probably not complete folly. But the program sources available to the average consumer today are grossly imperfect, and although digital techniques suggest an answer, it is not an answer readily at hand. So I recommend you consider looking to improvements on your record-playing system. The improvements will not be easy to effect and in many cases they will not be cheap. But they can be a revelation.

We'll keep you posted. ◇

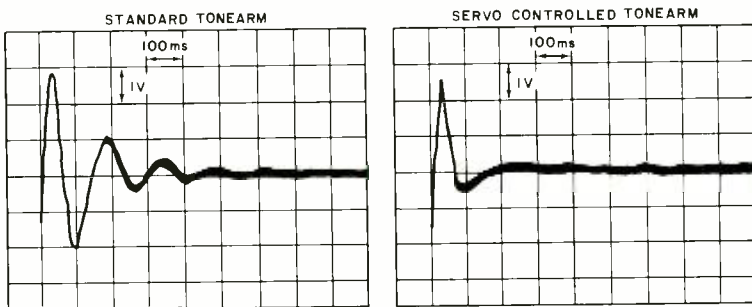


Fig. 4. In a shock-response test, the servo-controlled arm's superiority is immediately apparent from the quick damping of oscillation.

McIntosh

"A Technological Masterpiece . . ."



McIntosh C 32

"More Than a Preamplifier"

McIntosh has received peerless acclaim from prominent product testing laboratories and outstanding international recognition! You can learn why the "more than a preamplifier" C 32 has been selected for these unique honors.

Send us your name and address and we'll send you the complete product reviews and data on all McIntosh products, copies of the international awards, and a North American FM directory. You will understand why McIntosh product research and development always has the appearance and technological look to the future.

Keep up to date.
Send now - - -

McIntosh Laboratory Inc.
Box 96 East Side Station
Binghamton, NY 13904

Name _____

Address _____

City _____ State _____ Zip _____

If you are in a hurry for your catalog please send the coupon to McIntosh. For non-rush service send the Reader Service Card to the magazine.

CIRCLE NO 32 ON FREE INFORMATION CARD

Julian Hirsch Audio Reports

two amplifiers are in "Powered Advent" speaker system

separate amps for
woofer and tweeter
plus electronic
crossover network



Advent Corporation's "Powered Advent" is a bi-amplified speaker system that employs the same drivers developed for the company's "New Advent" system. The enclosures for the two systems are approximately the same size. The Powered Advent, however, contains built-in separate power amplifiers for its woofer and tweeter plus an electronic crossover network and elaborate safeguards to protect both amplifiers and drivers against damage.

The cabinet for the system is finished in oiled walnut veneer, with rounded solid walnut edge moldings. Except for a control panel at the top of each enclosure, these speaker systems appear conventionally designed. The system, including a black pedestal base that comes with it, measures 28 $\frac{3}{8}$ "H \times 14 $\frac{1}{8}$ "W \times 13"D (72.1 \times 35.9 \times 33 cm) and weighs 66.5 lb (30.2 kg). Each system is supplied with a 30' (9.1-m) cable fitted with phono plugs at both ends. Suggested retail price is \$499.50 per system.

General Description. The Powered Advent is a two-way system, as are all Advent speaker systems. Its 10" (25.4-cm) acoustic suspension woofer is driven by an amplifier rated to deliver 80 watts from 20 to 20,000 Hz (it operates up to only about 2000 Hz) with less than 0.1% distortion. Beyond the 1500-Hz crossover frequency, a 1 $\frac{3}{8}$ " (3.50-cm) dome tweeter takes over. It is driven by a separate identical amplifier which operates from about 1000 to 20,000 Hz. The power transistors for both amplifiers

are mounted on the enclosure's metal rear plate, which serves as a heat sink.

The speaker system's input is through a conventional phono jack on the rear panel. Near this jack is a small toggle switch that can be used to switch in and out an internal subsonic filter whose response is down 1 dB at 30 Hz and 24 dB at 5 Hz. A small panel on top of the enclosure contains a number of operating controls, including a pushbutton POWER switch, low- and high-frequency EQUALIZER CIRCUIT controls, and an INPUT SENSITIVITY control.

Equalization controls affect only the frequency extremes and are intended to compensate for room acoustics (and for some program material at high frequencies). The BELOW 100-Hz control provides up to 6 dB of boost at 30 Hz, and its action is confined to a frequency range of less than 100 Hz. The ABOVE 3000-Hz control affects only those frequencies beyond 3000 Hz and has a range of ± 4 dB at 10,000 Hz. The INPUT SENSITIVITY control can be adjusted from 0.3-volt maximum input for full speaker system output to fully off.

A green LED on the panel comes on when power is switched on, while a red LED flashes when one of the system's internal protective systems has been tripped. The system's input impedance of 100,000 ohms permits the Powered Advent to be driven from any line-level source, such as a preamplifier, tuner, or tape deck.

There are four separate protective circuits in the Powered Advent system. The tweeter is protected by an analog



circuit that integrates the energy in the tweeter's frequency range and shuts off the driver if thermal overload is imminent. It does not react to short bursts of high-frequency energy. Thus, it protects the tweeter against voice-coil burnout from lower-level signals of relatively long duration.

Another circuit protects against excessive excursion of the woofer's cone, which could be caused by a failure in the amplifier that places the dc supply voltage across the woofer's voice coil or by certain overload signals (such as dropping the phono pickup onto a record

two-way system has 10-inch woofer and 1 $\frac{3}{8}$ -inch dome tweeter

with the volume set high) with the subsonic filter bypassed.

A third circuit protects the amplifiers' output transistors. This circuit continu-

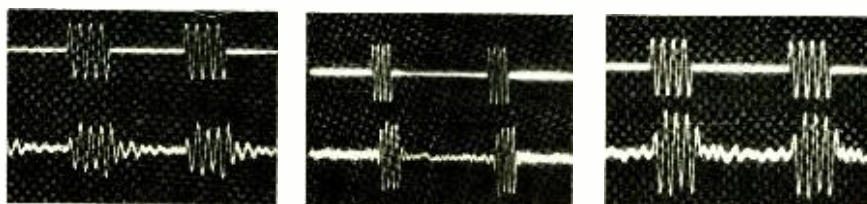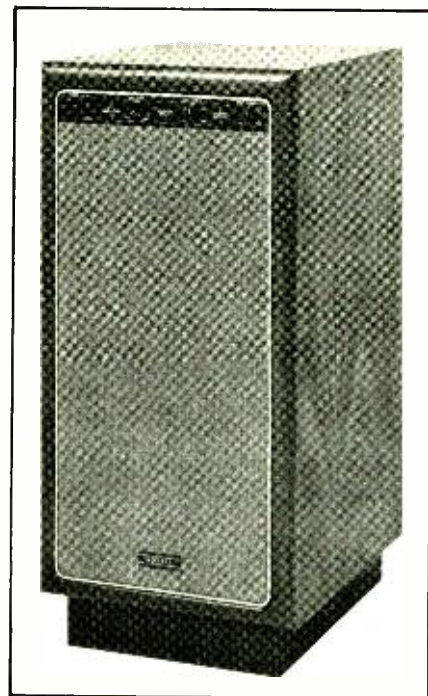

Toneburst responses for (left to right) 100, 1000, and 10,000 Hz.

Product Focus

The Powered Advent is one of the few self-powered biamplified speaker systems on the market today. Several advantages have been claimed for this design approach. Some are obvious, such as the elimination of bulky power amplifiers that can at times pose installation problems. Most, however, relate to the interface between amplifier and speaker-system drivers.

It has been claimed that the inductance (or capacitance or resistance or a combination of the three) of ordinary speaker cables leads to a subtle loss of definition or other degradation of sound quality, usually by virtue of its effect on the system's response in the ultrasonic range. Although the reality of these effects is debatable, there can be no argument that reducing the length of speaker cables or eliminating them entirely can be beneficial. Building the amplifier into the speaker enclosure represents the ultimate in elimination of cable effects.


The impedance of most speaker systems varies widely over the audio frequency range. Part of this is due to the drivers' mechanical resonances and part to the reactive crossover network components. As a result, the amplifier is almost

has the opportunity to compensate for them in the overall design of the amplifier and speaker system.

There can be no doubt that the crossover design has a considerable effect on the overall sound of a speaker system, and many people feel that eliminating the usual crossover (by going to a biamplified system) results in a clearer, better defined sound quality.

Anyone who has had the misfortune to blow out a speaker system or an amplifier by careless or over-enthusiastic use of the volume control, will appreciate the advantage of having foolproof protection in his music system. It is difficult to make an amplifier that is absolutely blowout-proof under any load and drive conditions, and it is impossible to make a speaker system that cannot be damaged by some amplifier. However, if the amplifier and speaker system are designed as an integrated unit, as in the Powered Advent system, their characteristics can be made complementary. In addition, the protective circuits can be integrated with the total design, making burn-outs almost impossible.

The above are some of the advantages of the integrated biamplified design

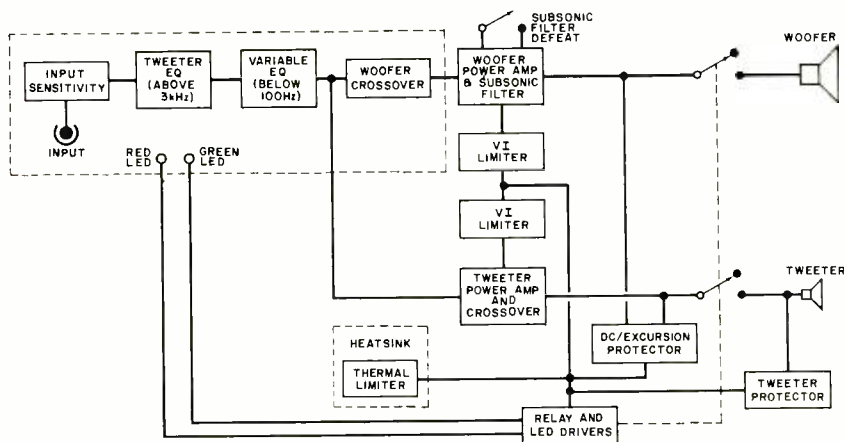

never terminated in a load that in any way resembles the ideal resistor load used for laboratory testing of amplifier performance. Some combinations of speaker systems and amplifiers are particularly unfortunate because they lead to distortion and instability. In a biamplified system, however, the crossover components are ahead of the amplifiers. Thus, each amplifier "sees" only the impedance variation of the drivers themselves. Even if these are substantial or unusual, the integrated speaker-system designer

used in the Powered Advent. There are certainly many more, but the ones enumerated here are, in our view, the principal "plusses" of this type of product. The most obvious minus in such a system is the cost, although when one compares it to the combined cost of a 200-watt/channel amplifier and a pair of conventional speaker systems of similar performance, such as the New Advents, with due allowance for the more effective protection in the powered version, the cost differential does not seem great.

ously monitors the output-transistor current and voltage. And overload from an excessive input level or from a short-circuited driver causes this circuit to immediately shut down the system.

Finally, there is thermal protection for the entire amplifier system. This circuit continuously monitors the temperature of the heat sink. Should the temperature increase to too great a degree, the thermal-protection system shuts down the amplifier.

Laboratory Measurements. As is our custom, we measured the semireverberant-field response of the Powered Advent system with its equalizer controls set to their nominally flat 0-dB set-

four circuits
protect tweeter,
woofer, output
transistors,
and amplifier system
from overload

tings. We then measured the frequency response with the high-frequency equalization control set to its limit of ± 4 dB.

The low-frequency response was measured separately with close microphone spacing and the bass equalizer control set first to 0 and then to +6 dB. When we spliced together the two curves, we obtained a frequency response that rose beyond 5000 Hz.

The lowest setting of the high-frequency equalizer control (-4 dB) produced an extremely flat response out to 13,000 Hz, after which the response fell off rapidly. The dispersion of the new tweeter used in the Powered Advent system was outstanding. Our on-axis and 30° off-axis measurements for the tweeter were essentially identical.

The woofer's response reached its maximum in the range between 60 and 100 Hz. It sloped down gradually at higher frequencies and at the expected 12-dB/octave rate at lower frequencies (in the 0-dB bass equalization condition). The equalizer had a 6-dB maximum effect at 30 Hz, as rated, and had essentially no effect on frequencies beyond 60 Hz. The spliced composite curve revealed a broad dip in the mid-range, amounting to about 5 dB between 600 and 1000 Hz. Using the

Manufacturer's Specifications

Specification	Rating
Power output (cont. both amps. driven, 6-ohm load)	
Woofer	80 W min., 20-20,000 Hz at less than 0.1% THD
Tweeter	80 W min., 20-20,000 Hz at less than 0.1% THD
Intermodulation distortion	60/7000 Hz, 4:1 Less than 0.1% at rated output
Input sensitivity	Adjustable from 0.3 V to infinity
Input impedance	100,000 ohms
Crossover frequency	1500 Hz
Subsonic filter	-1 dB at 30 Hz -24 dB at 5 Hz
Equalizer controls	Variable below 100 Hz from flat to +6 dB at 30 Hz. Variable above 3000 Hz ± 4 dB at 10,000 Hz.

equalization that yielded flattest overall response (-4 dB at high frequencies and +6 dB at low frequencies), we obtained a very good ± 3 -dB overall response variation from 26 to 15,000 Hz,

flattest setting of equalization controls yielded very good +3-dB overall response from 26 to 15,000 Hz

although it showed signs of rising again above 20,000 Hz. The Powered Advent had a uniformly good tone-burst response at any frequency in its operating range. Even in the crossover region, there were no serious modifications of the burst shape. Since an appreciable amount of tone-burst distortion arises in the conventional LC passive crossover networks of speaker systems, it is possible that the active networks used in this system are responsible in part for its tone-burst performance.

In measuring bass distortion of the speaker system, we could not follow our usual practice of driving the system with

a constant voltage corresponding to 1 watt into its rated impedance. Instead, we drove it to a sound pressure level (SPL) of 90 dB at a 1-meter distance with a 100-Hz sine wave and maintained that input level as we reduced the frequency. The output of the close-spaced microphone was connected directly to our Hewlett-Packard Model 3580A spectrum analyzer; the levels of all significant harmonics were combined to obtain a THD reading. The second harmonic was predominant, while the total distortion was 1% to 2% from 100 to 50 Hz. Notably, the distortion did not rise sharply at lower frequencies. It was only 5% at 30 Hz, as an example.

Although the sensitivity of the system also cannot be readily compared to that of any conventional speaker system, we discovered that an input of 0.3 volt of random noise in an octave centered at 1000 Hz, with the system's input control set to 0.3 volt (maximum), produced a very high 112-dB SPL at 1 meter from the grille. Since the sensitivity can be reduced to any lower value, and the 112-

the dispersion of the new tweeter is outstanding

dB SPL is exceptionally high for any home speaker system, it would appear that the Powered Advent can be driven adequately from any high-level or line-level signal source.

User Comment. The Powered Advent sounded distinctly "bright" when we used its 0-dB equalizer settings. We soon determined that other settings were preferable in our listening room: -4 dB for HF and +6 dB for LF settings. This also gave us the flattest measured response and illustrated what a creditable electronic tone-control system the speaker/amplifier has.

To our ears the speakers exhibited a clean, crisp, and very slightly bright character with program material that did not contain much bass. We confirmed that the speaker system can indeed be played at prodigious volume levels without equipment damage or obvious distortion. When pushed too far, the protective circuits momentarily silenced the speakers, accompanied by lighting of front panel red LEDs. The level required to cause this condition was unbearably high in our normal-size room.

From both our listening tests and measurements, the Powered Advent is clearly a very fine system. That is, a combined speaker and power amp system. We would recommend it highly for anyone with a top-quality separate preamp who does not intend to buy a separate power amp (remember, each of these systems contains 160 watts of high-quality amplification). One would therefore reduce space requirements, and gain the attributes of bi-amplification, virtually fail-safe equipment protective systems, and so on.

can be played at prodigious volume levels without equipment damage

The only drawback we could find was the minor one that requires plugging the systems into an ac line and switching them on and off separately at the beginning and end of each listening session. Since they draw considerable power (up to 450 watts per speaker/amplifier), Advent does not recommend plugging them into the switched outlets of a preamplifier unless they are rated to handle the 900-watt load.

(Reports continued on page 28)

How to buy a personal computer.

Suddenly everyone is talking about personal computers. Are you ready for one? The best way to find out is to read Apple Computer's "Consumer Guide to Personal Computing." It will answer your unanswered questions and show you how useful and how much fun personal computers can be. And it will help you choose a computer that meets your personal needs.

Who uses personal computers.

Thousands of people have already discovered the Apple computer — businessmen, students, hobbyists. They're using their Apples for financial management, complex problem solving — and just plain fun.

You can use your Apple to analyze the stock market, manage your personal finances, control your home environment, and to invent an unlimited number of sound and action video games. That's just the beginning.

What to look for.

Once you've unlocked the power of the personal computer, you'll be


using your Apple in ways you never dreamed of. That's when the capabilities of the computer you buy will really count. You don't want to be limited by the availability of pre-programmed cartridges. You'll want a computer, like Apple, that you can also program yourself. You don't want to settle for a black and white display. You'll want a computer, like Apple, that can turn any color TV into a dazzling array of color graphics.* The more you learn about computers, the more your imagination will demand. So you'll want a computer that can grow with you as your skill and experience with computers grows. Apple's the one.

How to get one.

The quickest way is to get a free copy of the Consumer Guide to Personal Computing. Get yours by calling 800/538-9696. Or by writing us. Then visit your local Apple dealer. We'll give you his name and address when you call.


*Apple II plugs into any standard TV using an inexpensive modulator (not included).



 **apple computer** ^{T.M.}

In California call 408) 996-1010

CIRCLE NO. 7 ON FREE INFORMATION CARD

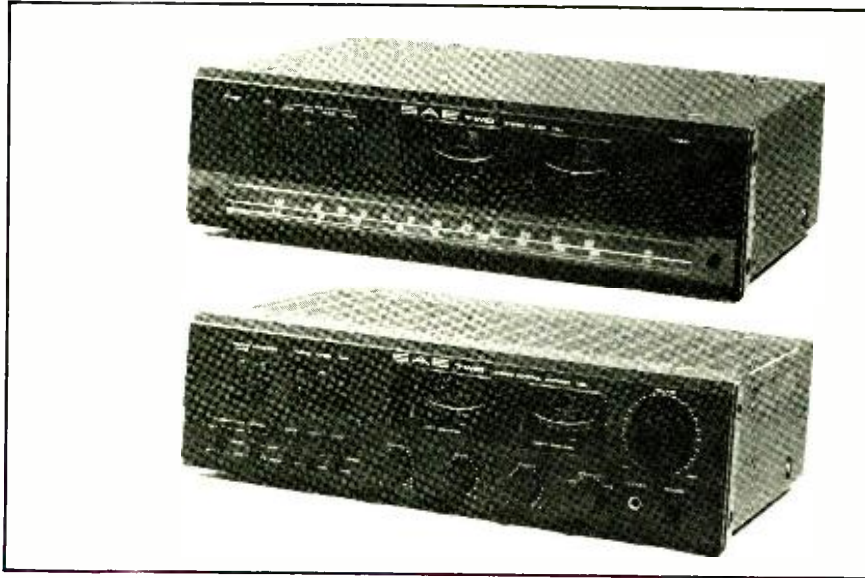

popularly priced components from a "high-end" manufacturer: the SAE TWO stereo tuner and integrated amplifier

new audio
line is
introduced



Scientific Audio Electronics' new "SAE TWO" product line brings the company's products

into a more popular price range than its typical "high end" models. Initially, the SAE TWO line consists of an AM/FM-stereo tuner, an integrated amplifier, a receiver, and cassette deck. All are built in Japan to SAE designs and specifications.

We tested the SAE TWO Models T3U tuner and C3A integrated amplifier, which together form the nucleus of a modestly priced audio system of outstanding quality. Both units are identical in size and style. They're finished in black throughout, with accents of white panel legends and red LED status indicators. The cabinet tops are dimpled to accept feet on the bottom of each unit, allowing them to be stacked if desired.

The SAE TWO units measure 17¼" W × 12¾" D × 5" H (43.8 × 31.4 × 12.7

cm), excluding the knobs and rear connectors. The amplifier weighs 19 pounds (8.6 kg) and the tuner weighs 12½ pounds (4.9 kg). The suggested retail prices are \$325 for the amplifier and \$275 for the tuner.

General Description. The Model T3U tuner has a long dial scale that occupies most of the width of the bottom half of the front panel. The dial is calibrated only at 2-MHz intervals. Above the dial are two large meters that indicate relative signal strength and FM center-channel tuning. To the right of the meter is a large TUNING knob, the only knob control on the tuner.

To the left of the meters is a group of control pushbuttons, with red status LEDs above them. They include BLEND (mixing of two channels at high frequencies to reduce hiss on weak stereo signals) and MUTING. On the rear is a hinged ferrite-rod AM antenna.

The FM "front end" has a conventional dual-gate MOSFET r-f amplifier. Bipolar transistors are used in the mixer and local oscillator; active circuits of the AM tuner are contained in a single IC, which provides all the functions from r-f input to the audio output. The FM i-f output goes

through two pairs of ceramic filters that are separated by a single transistor stage and then to a multipurpose IC that provides gain, limiting, quadrature detection, and FM interstation muting. Audio output, including multiplexed stereo information, goes to a phase-locked loop multiplex IC, whose outputs are the two stereo channels. After filtering to remove ultrasonic pilot carrier components, the audio goes through discrete component low-level audio amplifiers and through relay contacts to the output jacks. The relay disconnects the tuner's audio outputs the moment any of the selector buttons is pressed and restores the audio about a second after the button is released. This prevents any switching transients from reaching the amplifier and speakers.

The front panel of the amplifier has its two output meters in the same position occupied by the tuner's tuning meters, giving the two units a highly unified appearance when they are stacked. Meter scales are calibrated approximately logarithmically from 1 to 50 watts. Like the tuner's meters, their white pointers and legends contrast well with the black meter face and panel, resulting in excellent readability.

To the right of the meters is a large VOLUME knob matching the tuner's TUNING knob in size and placement. One side of the VOLUME knob is flattened and has an engraved index line, and the control is lightly detented in about 40 steps. The other knobs on the amplifier, though smaller than that on the VOLUME control, are similar in shape. To the left of the meters are pushbutton switches that are identical in appearance to those on the tuner. Three are for selecting inputs,

provide uniform
appearance
when stacked


while the others are for switching in and out the LOUDNESS compensation and audio MUTING. (The latter provides a nominal 20-dB volume reduction.)

Along the bottom of the panel are a number of other controls. Two three-position toggle switches are assigned to tape-monitoring and dubbing functions for two tape decks that can be connected to the amplifier. The other two-position switches are for stereo/mono MODE switching, FILTER (a low-cut filter, although this is not so indicated on the panel), and TONE DEFEAT. The BASS and

TREBLE controls are continuous types, detented at their center settings. The SPEAKERS switch connects either or both of two pairs of speaker systems to the amplifier's outputs or silences the speaker systems for headphone listening through a jack near the switch.

On the rear apron are the various input and output phono jacks, plus three ac outlets, one of which is unswitched. The speaker connectors are insulated and spring loaded, with a hole into which the speaker wire is inserted.

The amplifier uses IC op amps for its tone-control amplifiers and phono preamplifier stages. The power amplifier section uses discrete transistors and components. The output stages use plastic cased complementary-symmetry transistors that are clamped to a finned heat sink that occupies the center of the amplifier below the ventilating grille on its top cover. A relay, operated by elec-

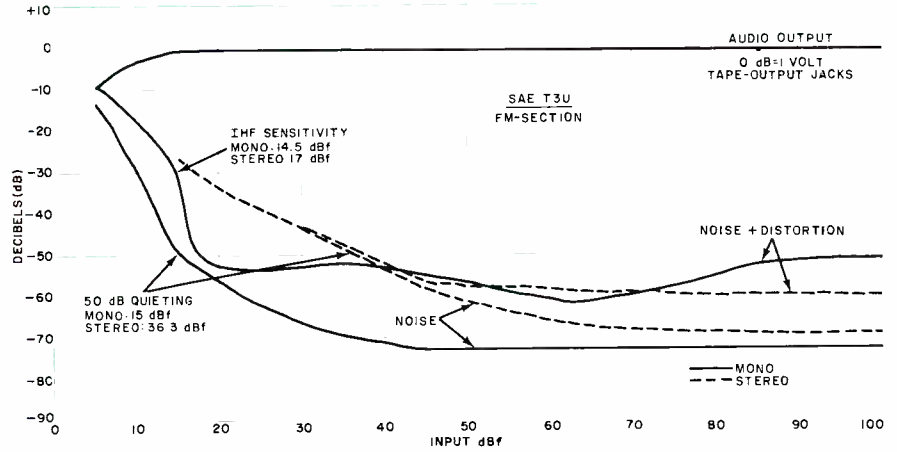

Noise and sensitivity curves for FM section of tuner.

tronic sensing circuits, disconnects the speakers instantly in the event of a severe overload, short-circuited output, or other malfunction. It also provides a few seconds of turn-on delay.

Laboratory Measurements. The SAE T3U tuner had an IHF sensitivity of 14.5 dBf in mono and 17 dBf in stereo. For 50-dB quieting sensitivity—which is the truly important tuner sensitivity rating—was a very good 15 dBf in mono at 2.6% THD. In stereo, the figures were 36.3 dBf at 0.4%. Stereo and muting thresholds were identical at 14.8 dBf. Distortion at a 65-dBf input measured 0.083% in mono and 0.115% in stereo. In mono, distortion reached its minimum at 65 dBf and rose slightly higher at higher inputs. It was typically 0.2% to 0.25% at most signal levels. Stereo dis-


Performance Specifications

Specification	Rating	Measured
Model C3A Amplifier:		
Power (8 ohms 20-20,000 Hz)	50 watts/channel	65 watts/channel (1000 Hz)
Total harmonic distortion	0.05%	0.01% (1000 Hz)
IM distortion	0.05%	0.015% (1-65 watts)
S/N ratio		
Phono (A wtd., 100-mV reference)	85 dB	70-75 dB (A wtd., 1-watt out.)
Aux (A wtd.)	97 dB	70-75 dB (A wtd., 1-watt out.)
Phono overload	150 mV	160 mV at 1000 Hz
Sensitivity		
Phono	2.5 mV	0.31 mV (1-watt output)
Aux	150 mV	22 mV (1-watt output)
Frequency response (20-20,000 Hz)	±0.25 dB	Verified
RIAA equalization accuracy	N/A	20-20,000 Hz ±0.5 dB
Model T3U Tuner:		
FM section:		
50-dB quieting		
Mono	14.7 dBf (3 μV)	15 dBf
Stereo	27.3 dBf (40 μV)	36.3 dBf
Frequency response	N/A	30-15,000 Hz +0.2/-0.8 dB
THD		
Mono	0.1%	0.083%
Stereo	0.2%	0.115%
Capture ratio	N/A	0.95 dB at 65 dBf
Separation		
40 dB (1000 Hz)		40-46 dB (120-15,000 Hz)
35 dB (10,000 Hz)		30 dB (30 Hz)
S/N ratio	N/A	76.5 dB (mono) 70.5 dB (stereo)
Alternate-channel rejection	N/A	50.6 dB
Image rejection	N/A	85.6 dB
AM rejection	N/A	55 dB at 65 dBf
AM Section:		
Frequency response	N/A	-6 dB at 33 and 2900 Hz


capture ratio was exceptionally good at 1.12 dB

tortion, on the other hand, decreased steadily with increasing signal level, reaching a minimum of only 0.1% above 85 dBf. The ultimate S/N, at a 65-dBf input, was a very good 76.5 dB in mono and 70.5 dB in stereo.


The tuner's stereo distortion with L-R modulation, at a 65-dBf input, was 0.45% at 100 Hz, 0.12% at 1000 Hz, and 0.16% at 6000 Hz. The audio output lev-

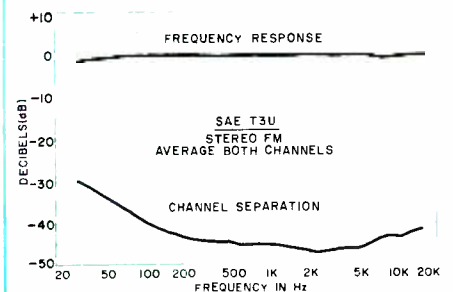

Averaged response and crosstalk.

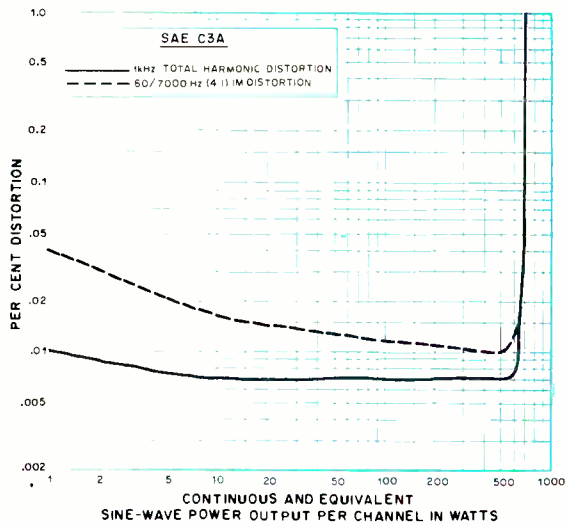

THD and IM distortion at 8 ohms.

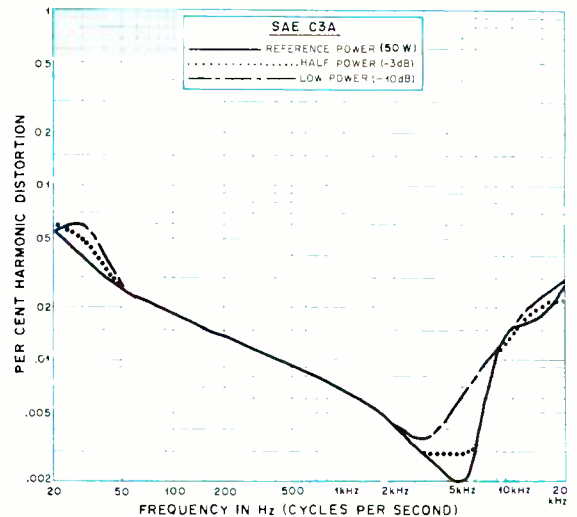

Percent harmonic distortion.

el, which is fixed, was 0.86 volt at 100% modulation. Frequency response was $+0.2/-0.8$ dB from 30 to 15,000 Hz. Channel separation differed in the two channels, but was uniform with frequency. The average of the two readings was between 40 and 46 dB from 120 to 15,000 Hz and a good 30 dB at 30 Hz.

The capture ratio was exceptionally good at 1.12 dB at 45 dBf and 0.95 dB at 65 dBf. AM rejection was average, measuring 55 dB at 65 dBf and 65 dB at 45 dBf. (It is unusual for the AM rejection to decrease with increasing signal strength.) Image rejection of 85.6 dB represents good performance. The i-f bandpass of the tuner was highly asymmetrical, however, which made measurement of its alternate-channel selectivity rather difficult. The best average reading we could get of this characteristic was 50.6 dB, an acceptable but not distinguished rating. Adjacent-channel selectivity was 5.5 dB.

Although the tuner's high-frequency response showed no signs of a drop-off from the low-pass filter (it was actually up at 15,000 Hz), the filter was highly effective. The 19-kHz pilot carrier signal in the audio output was -73 dB, referred to 100% modulation. No sign of the 38-kHz component could be detected. There was a small amount of power-line hum in the tuner's output, measuring -62 dB at 60 Hz. The AM-tuner section had a restricted frequency response, down 6 dB at 33 and 2900 Hz.

The SAE C3A amplifier became only moderately warm during its one-hour preconditioning period at one-third rated power, after which its outputs clipped at 68 watts/channel when both channels were driven at 1000 Hz into 8-ohm

loads. This corresponds to an IHF clipping headroom rating of 1.33 dB. The IHF dynamic headroom, a measure of the amplifier's short term power capability, was 1.85 dB.

Harmonic distortion at 1000 Hz was 0.007% at most power levels. It rose to 0.01% at 0.1 watt and 65-watts output. Thus, its 65-watts/channel at 0.01% distortion performance was substantially better than its rating of 50 watts/channel with 0.5% distortion. IM distortion was less than 0.015% at most power outputs from 1 to 65 watts, although it rose appreciably at very low powers in the milliwatt range. In contrast, harmonic distortion was nearly constant with power at outputs from rated power to -10 dB. Beginning at a maximum of less than 0.06% at 20 Hz (which includes the approximately 0.02% residual of our signal generator), distortion decreased smoothly to a minimum of 0.002% to 0.004% at about 5000 Hz. It then rose to about 0.025% at 20,000 Hz. To drive the amplifier to a reference power of 1 watt, an aux input of 22 mV or a PHONO input of 0.31 mV was needed. The A-weighted S/N was roughly the same through both inputs under IHF standard test conditions, measuring 70 to 70.5 dB referred to 1 watt. The phono input overloaded at 160 mV. Phono input impedance was 50,000 ohms in parallel with 50 pF of capacitance.

The tone controls had conventional curves, with a sliding bass turnover frequency and treble curves hinged at about 1500 Hz. The LOUDNESS compensation boosted both low and high frequencies as volume was reduced. The response of the FILTER was down 3 dB at 45 Hz. We could not determine its ulti-

mate slope, which was below our 20-Hz lower measurement limit. The RIAA equalization accuracy was well within ± 0.5 dB from 20 to 20,000 Hz and was hardly affected by cartridge inductance. (The output at 20,000 Hz rose less than 0.5 dB when measured through the coil of a cartridge).

User Comment. Our initial impression of the SAE TWO components was highly favorable. They are, to our eyes, quite attractive. The measurements speak for themselves. These compo-

FM tuner was positive and noise free

nents are excellent performers, though not quite up to the stellar standards set by SAE's costlier regular line.

We did not find any operating "bugs" in the SAE TWO tuner and amplifier, and they were as quiet and free from thumps and switching noises as any tuner and amplifier we have used. FM tuning was positive and noise-free. Furthermore, the momentary muting action when an input button was pressed was totally effective in eliminating noise.

There were a few minor criticisms, though. Lack of separate preamplifier outputs and power amplifier inputs in the amplifier would have been a nicety in an otherwise very up-to-date design. Their inclusion would certainly simplify connecting certain signal-processing accessories, including some made by SAE, into the system without sacrificing a tape recorder circuit.

step up to antenna specialists quality...



© "Stripes of Quality"

25th anniversary

our Silver Sale! makes it easy!



New "customized" look!
Model M-500 sidebody mount,
top loaded fiber glass whip
with super performance.

For over a quarter century, buying the very best CB antenna has meant buying Antenna Specialists. From superior materials, like resilient 17-7 PH stainless steel whips – to superior engineering, like the cool running coil in the famous "Big Momma" – these are the finest antennas money can buy. Only now you can buy them for less! Because your Antenna Specialists dealer is offering big 25th Anniversary savings on over a dozen of our newest and most popular models. It's a silver opportunity to move up to the stripes of quality... so see your dealer today!



© "Stripes of Quality"

the antenna specialists co.

a member of The Allen Group Inc.
12435 Euclid Ave. Cleveland, Ohio 44106
Export: 2200 Shames Drive, Westbury, L.I., New York 11590
Canada: A. C. Simmonds & Sons Ltd.
CIRCLE NO. 6 ON FREE INFORMATION CARD

The calibration marks on the FM tuning dial are much too limited to permit unambiguous station identification. They appear to be reasonably accurate (though interpolating to 200 kHz accuracy between markings spaced at 2-MHz intervals calls for a combination of skill and luck).

Aside from the foregoing, we must say that the SAE TWO components performed very well. Also, we appreciated

that the FM tuner was noncritical in its setting for minimum distortion and maximum channel separation. At most signal levels, the center-channel tuning meter really did show the optimum tuning point for lowest distortion.

Although the Model C3A is not by any means a "super-power" amplifier, it has more than enough power for most installations. We operated the tuner and amplifier stacked, with the tuner on top, and

CIRCLE NO. 102 ON READER SERVICE CARD

the amplifier hardly became warm, let alone hot. This is a positive benefit of a design that does not seek to cram every possible watt into a small package. The versatility in installation afforded by this combination, plus their strikingly handsome appearance and excellent sound, combine with a surprisingly modest price to make the Models C3A and T3U a fine SAE entry into the medium-cost component market. ◇



two operating speeds are available in the new B. I. C. Model T-2 cassette deck

single-motor,
two-head deck runs
at 1 7/8 or 3 3/4 ips



In the more than ten years since Philips introduced the "Compact Cassette," it has

been exclusively a 1 7/8-ips tape format for audio recording and playback. Philips licensing agreements have, until now, prevented any manufacturer from entering the consumer market with cassette machines operating at other than 1 7/8 ips. Philips' purpose has been to maintain full compatibility between all cassette recorders and tapes. Now, however, the situation has changed with the introduction of three new cassette decks from B.I.C. In addition to the usual 1 7/8-ips speed,

the "T" series decks can be operated at 3 3/4 ips. Just as with open-reel tape, doubling the tape speed makes possible a substantial improvement in frequency as well as dynamic ranges as well as flutter.

The B.I.C. Model T-2 examined here is a single-motor, two-head, two-speed cassette deck with distinctive styling and unique operating features. Its black panel, with clearly legible white markings, contrasts with a rose-wood-finished wooden cabinet. The overall dimensions are 16 3/4"W x 6"H x 9 1/4"D (42.6 x 15.2 x 23.5 cm), while its weight is 12.8 lb (5.8 kg). Suggested retail price is \$329.95.

General Description. At first glance, the Model T-2 appears to be quite conventional, though unusually handsome. The front-loading tape transport, with its bottom-hinged door, is at the left of the front panel. Piano-

key controls are below it and include a combined STOP/EJECT key. (Initial operation of this key stops the tape motion, and the second opens the cassette compartment.) The tape must be at a stop before the PLAY, FAST FORWARD, or REWIND controls can be operated. The cassette compartment's window is retained by two thumb-screws and can be removed easily for cleaning, demagnetizing, and adjusting the heads.

Just to the right of the cassette compartment is an index counter with a MEMORY button that can be set to stop the tape in REWIND when the counter registers 000. Two large, well-lit meters have black faces with backlit white scale markings and white pointers that are exceptionally easy to read. Above 0 dB, the markings are in red. The meter scales are logarithmic and cover a range from -40 to +5 dB, with the Dolby level calibration (corresponds to a 200 nW/m flux level) at 0 dB.

Below the meters are two large concentric knobs for setting recording levels for the two channels. A single indicator between the meters glows green when the deck is recording and instantly changes to red if the peak level exceeds 0 dB. A small OUTPUT LEVEL knob is located to the right of the meters, while below it is a separate PHONES LEVEL control that affects only headphone outputs.

doubling tape speed improves frequency and dynamic range

The remaining controls form a single row across the bottom of the panel, including a switch for selecting either 1 7/8- or 3 3/4-ips tape speed. The dc motor that drives the transport features tachometer feedback for speed


(Continued on page 38)



Someday all terminals will be smart.....


- ◆ 128 Functions—software controlled
- ◆ 7 x 12 matrix, upper/lower case letters
- ◆ 50 to 38,400 baud—selectable
- ◆ 82 x 16 or 92 x 22 format—plus graphics
- ◆ Printer output port
- ◆ "CHERRY" keyboard

CT-82 Intelligent Terminal, assembled and tested. \$795.00 ppd in Cont. U.S.

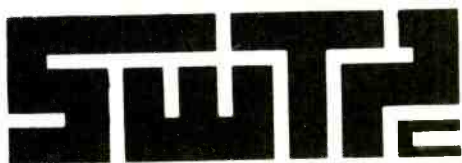

SOUTHWEST TECHNICAL PRODUCTS CORPORATION
 219 W. RHAPSODY
 SAN ANTONIO, TEXAS 78216

You gotta shop around.

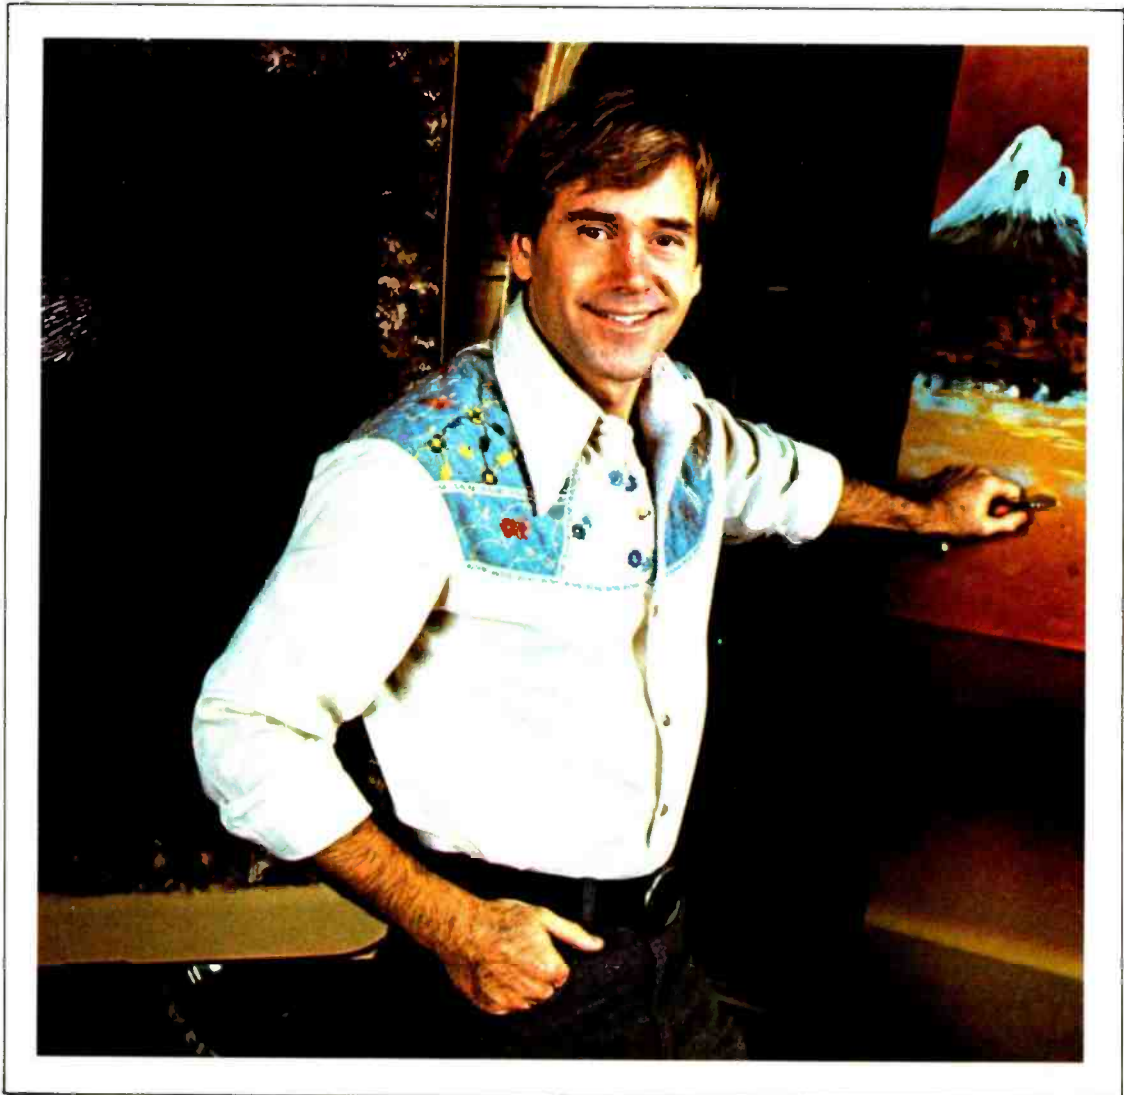

**When you do, you'll probably pick CIE.
You can't afford to settle for
less when it comes to something like
electronics training that could
affect your whole life.**

When you shop around for tires, you look for a bargain. After all, if it's the same brand, better price — why not save money?

Education's different. There's no such thing as "same brand." No two schools are alike. And, once you've made your choice, the training you get stays with you for the rest of your life.

So, shop around for your training. Not for the bargain. For the best. Thorough, professional training to help give you pride and confidence.

* * *

If you talked to some of our graduates, chances are you'd find a lot of them shopped around for their training. They pretty much knew what was available. And they picked CIE as number one.

Why you should shop around yourself.

We hope you'll shop around. Because, frankly, CIE isn't for everyone.

There are other options for the hobbyist. If you're the ambitious type — with serious career goals in electronics — take a close look at what we've planned for you at CIE.

What you should look for first.

Part of what makes electronics so interesting is it's based on scientific discoveries — on ideas! So the first thing to look for is a program that starts with ideas and builds on them!

That's what happens with CIE's Auto-Programmed® Lessons. Each lesson takes one or two principles and helps you master them — before you start using them!

How practical is the training?

This is the next big important question. After all, your career will be built on what you can do — and on how well you do it.

Here are ways some of CIE's troubleshooting programs help you get your "hands-on" training...

With CIE's Experimental Electronics Laboratory...




you learn and review the basics — perform dozens of experiments. Plus, you use a 3-in-1 precision Multimeter to learn testing, checking, analyzing!



When you build your own 5 MHz Triggered-Sweep, Solid-State Oscilloscope you take your first real professional step. You use it as a doctor uses an X-ray machine — to "read" waveform patterns... lock them in... study, understand and interpret them!

When you get your Zenith 19-inch Diagonal Solid-State Color TV you

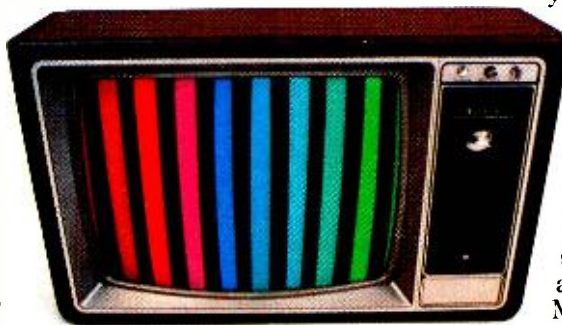

Pattern simulated.

apply your new skills to some real on-the-job-type troubleshooting! You learn to trace signal flow... locate malfunctions... restore perfect operating standards — just as with any sophisticated electronics equipment!



When you work with a completely Solid-State Color Bar Generator — actually a TV signal transmitter — you study up to ten different patterns on your TV screen... explore digital logic circuits... observe the action of a crystal-controlled oscillator!

Of course, CIE offers a more advanced training program, too. But the main point is

simply this:

All this training takes effort. But you'll enjoy it. And it's a real plus for a troubleshooting career!

Do you prepare for your FCC License?

Avoid regrets later. Check this out before you enroll in any program.

For some troubleshooting jobs, you must have your FCC License. For others, employers often consider it a mark in your favor. Either way, it's government-certified proof of specific knowledge and skills!

More than half of CIE's courses prepare you for the government-administered FCC License exam. In continuing surveys, nearly 4 out of 5 CIE graduates who take the exam get their Licenses!

Shop around... but send for CIE's free school catalog first!

Mail the card. If it's gone, cut out and mail the coupon. If you prefer to write, mention the name and date of this magazine. We'll send you a copy of CIE's FREE school catalog — plus a complete package of independent home study information! For your convenience, we'll try to have a representative contact you to answer your questions. Mail the card or coupon — or write: CIE, 1776 East 17th St., Cleveland, OH 44114.

CIE Cleveland Institute of Electronics, Inc.

1776 East 17th Street, Cleveland, Ohio 44114
Accredited Member National Home Study Council

YES... I'm shopping around for the **right** kind of career training in electronics troubleshooting — and CIE sounds well worth looking into. Please send me my FREE CIE school catalog — including details about troubleshooting courses — plus my FREE package of home study information! PE-81

Print Name _____

Address _____ Apt. _____

City _____

State _____ Zip _____

Age _____ Phone _____ (area code)

Check box for G.I. Bill information:
 Veteran Active Duty

Mail today!

(Continued from page 32)

regulation. A RECORD SAFETY switch has three positions, labelled SAFE, READY, and MUTE. This switch operates in addition to the mechanical RECORD switch associated with the transport keys and the recording safety tabs on the cassette, which prevent the RECORD key from being engaged when they are removed. In the SAFE position, the deck will not record or erase, no matter how the other controls are set. In READY, the recorder operates in a conventional manner, under the control of its RECORD and PLAY keys. MUTE is spring-loaded and can be used to blank out unwanted material (such as commercial announcements) while making a recording. Holding it down allows the deck to continuously erase the tape, with no signal being recorded. Releasing it restores normal recording. A DOLBY/MPX switch is also provided. In its bottom position, the Dolby system is off. Setting it to the center position, turns on the Dolby system and a green LED above the switch. In the top position, a multiplex (MPX) filter is inserted in the signal path to prevent an FM tuner's pilot carrier leakage from influencing the operation of the Dolby system.

Separate switches control bias and equalization. The three BIAS positions are labelled HI, NORM, and LO, while the EQ settings are marked in terms of their time constants (70 and 120 μ s). In general, HI bias is for chromium-dioxide or equivalent tapes, while good ferric-oxide tapes will require NORM bias. LO bias is presumably for relatively inexpensive, low-performance tapes.

To the right of the recording level knobs is a pushbutton switch that permits selection of either the LINE or the MIC inputs for recording. (The two cannot be mixed.) Next in line to the right is the PHONES jack.

Laboratory Measurements. The recorder had been factory adjusted for TDK AD and SA tapes (NORM BIAS and 120- μ s EQ; HI BIAS and 70 μ s EQ). Hence, we used these tapes for all our tests. Insofar as possible, all measurements were made at both tape speeds. Following the information supplied with the recorder, we used HI bias for both tapes at 3 $\frac{3}{4}$ ips, although the EQ time constants were the same at both speeds.

The line inputs at the rear apron required only 31 mV at 1000 Hz for a 0-dB meter indication. The corre-

sponding maximum playback level was about 1.8 volts. MIC sensitivity was 0.165 mV, and the microphone preamplifier overloaded with a 21-mV input. This indicates the need for caution when recording from microphones, any of which can deliver over 21 mV at reasonably high sound levels. The maximum headphone output was 1.5 volts into 200 ohms, which gave a very comfortable listening level with medium-impedance phones.

red indicator is most informative display for overload seen

The 1000-Hz playback distortion with a 0-dB recording signal level was well below the specified limits with SA tape and extremely low (0.25% to 0.5%) with AD tape. The reference recording level for AD tape, corresponding to 3% playback distortion, was +5 dB at 1 $\frac{7}{8}$ ips and +7 dB (well above the meter scales) at 3 $\frac{3}{4}$ ips. As ex-


pected, the SA 70- μ s tape saturated at a lower level, +3 dB at 1 $\frac{7}{8}$ ips and +4 dB at 3 $\frac{3}{4}$ ips. The red OVERLOAD indicator came on at +1 dB, well before the onset of significant distortion with either tape.

The unweighted S/N, referred to the 3% distortion signal level, was about 48 dB at the lower speed and 51 dB at the higher speed with both tapes. With A weighting, it was 57 to 57.5 dB at 1 $\frac{7}{8}$ ips. At 3 $\frac{3}{4}$ ips, the difference between the two tapes was revealed, with AD measuring 61.2 dB and SA 62.4 dB. When we used the Dolby system with CCIR/ARM noise weighting, the S/N performance was very good. It was 64.2 dB with AD tape and 63.6 dB with SA tape, both at 1 $\frac{7}{8}$ ips. At 3 $\frac{3}{4}$ ips, S/N was 66.8 dB for AD and 69 dB for SA tape.

The 120- μ s playback equalization was measured with a TDK AC-337 test tape. It was flat within ± 0.5 dB from 90 to 4000 Hz, and rose to +3.4 dB at 40 Hz and +2.2 dB at 12,500 Hz. The 70- μ s response from a Teac 116SP tape was within ± 0.5 dB from

Performance Specifications

Specification	Rating	Measured
Speeds	1 $\frac{7}{8}$ ips (4.75 cm/s) 3 $\frac{3}{4}$ ips (9.5 cm/s)	
Frequency Response		
70 μ s: 1 $\frac{7}{8}$:	30-18,000 Hz ± 3 dB	20-15,500 Hz ± 2 dB
3 $\frac{3}{4}$:	30-21,000 Hz ± 3 dB	20-25,000 Hz ± 3.5 dB
120 μ s: 1 $\frac{7}{8}$:	NA	20-15,000 Hz ± 1.5 dB
3 $\frac{3}{4}$:	NA	20-24,400 Hz ± 3.5 dB
S/N (A weighted, ref. 3% THD, 70 μ s)		
1 $\frac{7}{8}$:	54 dB	57.5 dB
3 $\frac{3}{4}$:	57 dB	62.4 dB
1 $\frac{7}{8}$ (Dolby):	62 dB	63.6 dB (CCIR)
3 $\frac{3}{4}$ (Dolby):	66 dB	69.0 dB (CCIR)
Wow and Flutter		
1 $\frac{7}{8}$ (wrms):	0.06%	0.06% avg.
3 $\frac{3}{4}$ (wrms):	0.04%	0.04% (R/P)
1 $\frac{7}{8}$ (wpk/DIN):	0.12%	0.10%
3 $\frac{3}{4}$ (wpk/DIN):	0.10%	0.06% (R/P)
THD (0 dB, 70 μ s): 1 $\frac{7}{8}$:	1.9%	1.1%
3 $\frac{3}{4}$:	1.6%	0.8%
(0 dB, 120 μ s): 1 $\frac{7}{8}$:	NA	0.56%
3 $\frac{3}{4}$:		0.25%
Fast Forward/Rewind	Approx. 48 seconds	51 seconds
Meter Type	Peak indicating	Confirmed
Meter Range	-40 to +5 dB	Confirmed
Output (line)	2.0 V rms into 10,000 ohms	1.8 V
Input (line)	200 mV for 0-dB indication	31 mV line 0.165 mV mic.
Microphone Overload	NA	21 mV

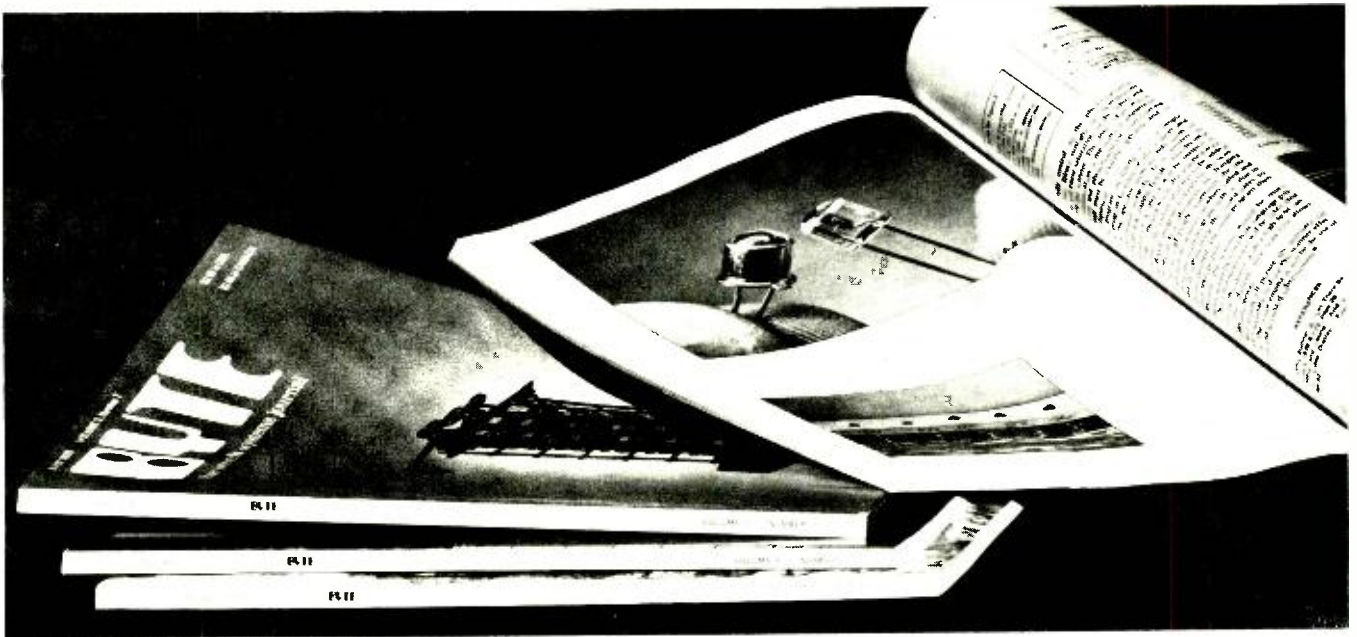

Get the inside story..

on software, hardware, simulations, computer games, robotics, computers and calculators, languages and compilers, custom systems design and scores of applications.

Read **BYTE**®

BYTE, the leading magazine in the personal computer field, will keep you aware of fast-paced changes in the ever growing world of micro-processors. You'll find **BYTE** tutorials invaluable, reports on home computer applications instructive, and the reviews of computer products stimulating.

Tutorial information in **BYTE** is of interest to both the beginner and

experienced computer user. **BYTE**'s editorial content explores the fun of using and applying computers for personal satisfaction in activities from electronic music to electronic mail, from games to pragmatic personal business. In **BYTE** is found authoritative yet easily read coverage of principles of computer hardware and software design, approaches to novel applications,

and essentials of proven interest to personal computer enthusiasts.

Each month serious computer users read **BYTE**. They're rewarded with timely articles by professionals, computer scientists and competent amateurs. Isn't it time you got the inside story? Subscribe now to **BYTE**, the Small Systems Journal.

Fill in and mail the coupon today. Read your first copy of **BYTE**. If it is everything you expected, honor our invoice. If it isn't, just write "Cancel" on the invoice and mail it back. You won't be billed and the first issue is yours at no charge.

Allow 6 to 8 weeks for processing. If you have any questions, dial toll free 800-258-5485. This is the number of the **BYTE** Subscription Department.

BYTE and **BYTE** logo are trademarks of **BYTE** Publications, Inc.

© **BYTE** Publications, Inc. 1978

BYTE Subscription Dept. P.O. Box 590 Martinsville, NJ 08836
Please enter my subscription for

- One year \$15 (12 issues) Two years \$27 Three years \$39
 Send group rate information
 Check enclosed entitles me to 13 issues for price of 12 (North America only)
 Bill Visa Bill Master Charge Bill me (North America only)

Card Number _____ Expiration Date _____

Signature _____ Name (please print) _____

Address _____

City _____ State/Province/Country _____ Code _____


Foreign Rates (To expedite service, please remit in U.S. Funds)

Canada or Mexico One year \$17.50 Two years \$32 Three years \$46.50


Europe, one year (air delivered) \$25

All other countries, one year (surface delivered) \$25. Air delivery available on request.


7319

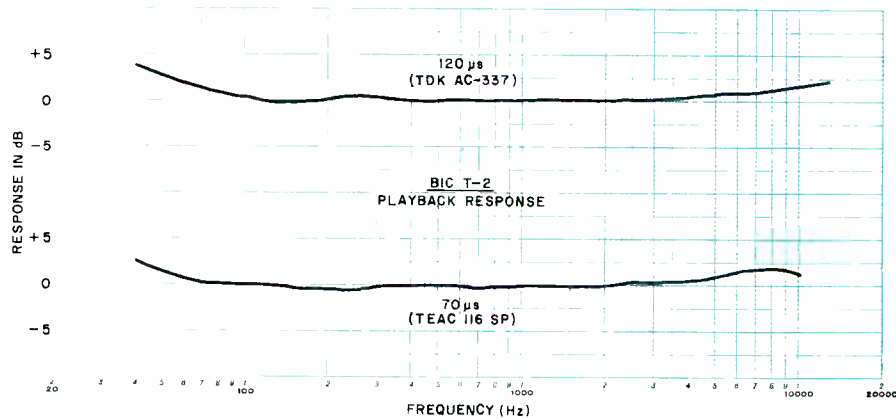

Playback response on test tapes with 120 and 70 microsecond equalization.

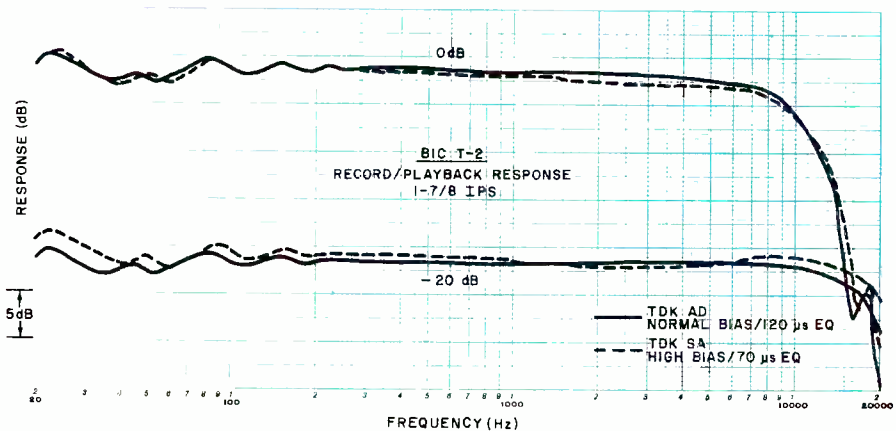

Record/playback response for TDK AD and SA tapes at 1 $\frac{7}{8}$ ips.

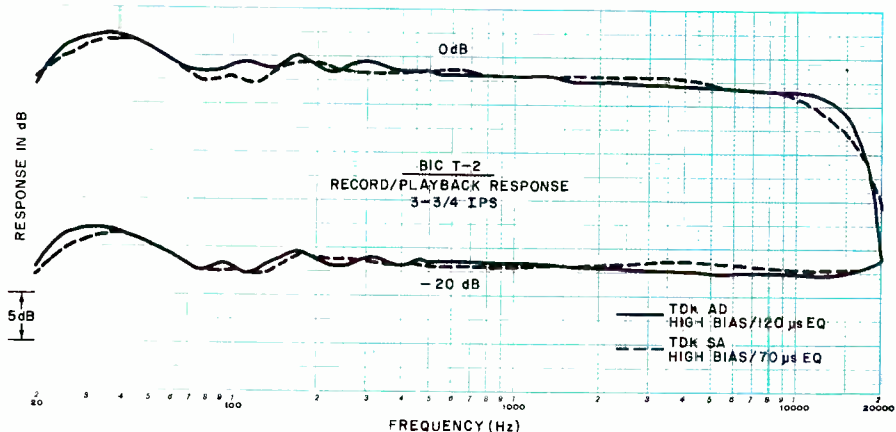

Record/playback response for TDK AD and SA tapes at 3 $\frac{3}{4}$ ips.

63 to 4000 Hz and rose to +2.4 dB at 40 Hz and +1.7 dB at 10,000 Hz.

Record/playback frequency response with TDK AD tape at 1 $\frac{7}{8}$ ips (measured at a -20-dB level) was ± 1.5 dB from 20 to 15,000 Hz. The response "ripples" at low frequencies, though present, were much less noticeable than on most cassette recorders. B.I.C.'s T-2 was unusual in main-

taining its full performance down to 20 Hz. High frequencies rolled off fairly gently above 15,000 Hz, to -7.5 dB at 20,000 Hz. At a 0-dB recording level, the effects of tape saturation were hardly detectable below about 7000 Hz, and the 0-dB response curve intersected the -20-dB curve at 15,000 Hz. (This intersection usually occurs around 11,000 to 12,000 Hz.)

Performance with TDK SA tape was generally similar, although there was a slight response rise at 10,000 Hz and slightly better output at the highest frequencies. The overall response was ± 3 dB from 20 to 19,000 Hz. The 0-dB curve intersected the -20-dB curve at 15,500 Hz.

When we measured the record/playback response at 3 $\frac{3}{4}$ ips with AD tape, we found a substantial improvement. (Although it was predictable and expected, it was nonetheless highly impressive.) The response was within ± 3.5 dB from 20 to 24,400 Hz at -20 dB, and the 0-dB curve was virtually flat up to 13,000 or 14,000 Hz, intersecting the -20-dB curve at 20,000 Hz. With SA tape, the response was fairly similar, and was within ± 3.5 dB from 20 to 25,000 Hz at -20 dB. The 0-dB response saturated earlier than that of the AD tape. The curve began to drop at 10,000 Hz, but it intersected the -20-dB curve somewhere above 20,000 Hz.

Dolby tracking was unusually close. The change in frequency response, when the Dolby system was switched in and out, was less than 1 dB up to about 12,000 Hz and less than 2 dB at 15,000 Hz, at recording levels of -20 and -40 dB. The meters indicated exactly 0 dB (the Dolby level) when we played a standard Dolby level calibration cassette. Unlike many low-priced recorders, the meter calibrations here were exceptionally accurate (an input change of "X" dB produced a closely corresponding change in the meter indications). With 0.3-second tone bursts used to check VU-meter ballistics, the Model T-2's meters indicated the same as with a steady-state signal. On program input, we could see that the meters had a fast rise time, followed by a much slower decay, so that they tended to follow the peak program level.

The 1 $\frac{7}{8}$ -ips speed drifted slightly, from 0.5% fast at one end of a cassette to 0.15% fast at the other end. (We made no speed measurements at 3 $\frac{3}{4}$ ips.) Using a TDK AC-342 flutter test tape, we measured the CCIR (weighted peak) flutter at a very good $\pm 0.1\%$. The JIS (weighted rms) flutter varied from 0.05% to 0.07% at the two ends of the cassette. In a combined record/playback flutter measurement, the CCIR and JIS flutter readings were respectively $\pm 0.12\%$ and 0.09% at 1 $\frac{7}{8}$ ips. At 3 $\frac{3}{4}$ ips, they measured $\pm 0.06\%$ and 0.04% . These figures

would do justice to a good open-reel recorder! In fast forward and rewind modes, the transport moved a C-60 cassette from end to end in 51 seconds, which is considerably above average for a cassette deck.

User Comment. The B.I.C. Model T-2 demonstrated superb performance at 3¼ ips. But we were equally impressed by what it did at 1½ ips! After all, the limitations of the cassette medium begin to decrease rapidly when the speed is doubled. Hence, we were not so surprised by what we measured at 3¼ ips (although the prospect of frequency response, S/N, and flutter levels approaching or matching those of a costly three-head cassette deck is certainly attractive).

Considering the T-2 solely as a conventional 1½-ips cassette deck, it is one of the better values we have seen in some time. In many ways, it is a "no frills" machine, with a single motor, combination record/playback head, completely mechanical transport controls, and no input mixing capability. On the other hand, it has superb meters, whose dynamic range and response characteristics give the user a much clearer idea of what the program is doing than run-of-the-mill recorder meters. The manner in which the green RECORD indicator instantaneously changes to red at a +1-dB level might seem to be a rather minor "gimmick," but we found it to be by far the most visible and informative overload indicator we have seen on a tape deck. It simply cannot be ignored or confused with any other indication. Perhaps its only weakness is that it flashes far below the true overload level of AD tape, but it is nearly ideal for use with SA tape.

When we recorded interstation FM tuner hiss at -20 dB on AD tape, the playback was almost indistinguishable from the input signal. (There were minute differences, but one must listen very closely to detect them.) By increasing the speed to 3¼ ips, we could record at meter readings of -2 dB, with the red overload indicator flashing regularly, and hear only about the same small amount of degradation in the high-frequency response. At -10 dB, the reproduction was perfect. In our experience, this is uniquely fine performance for a two-head cassette deck. In practical terms, this means that the Model T-2 is much less likely to compress the high-level

peaks and produce a dull or "mushy" sound, especially when recording from a live source, than almost any other comparably priced cassette recorder.

Unfortunately, one must also consider the limitations of a cassette operating at 3¼ ips. Operating times are halved, so that even a C-90 cassette plays only about 23 minutes on a side. One would think that a C-120 would be an ideal solution to this problem, since it would be the equivalent in recording time of a C-60 operating at 1½ ips. However, B.I.C. specifically and categorically states that the Model T-2 should *not* be used with C-120 tapes, both because of their magnetic and physical properties and because the high-speed rewind and fast forward of the transport could damage very thin tapes.

Even if one finds C-90 tapes satisfactory, there is the question of compatibility. At this time, B.I.C. is the only company making a 3¼-ips cassette recorder. This means that tapes made on a B.I.C. machine at 3¼ ips can be played only on a B.I.C. machine, at least for the immediate future. Furthermore, even if other companies go to the higher speed, there is no assurance that they will adhere to the equalization standards chosen by B.I.C. Finally, there is the imminent commercial introduction of metal particle tapes and recorders capable of using them. Although they are expensive—at least for the present—these tapes have the potential of giving much of the performance at 1½ ips that B.I.C. achieves at 3¼ ips, without sacrificing any playback compatibility with existing cassette decks.

Thus, we prefer to consider the B.I.C. Model T-2 as an especially good cassette recorder, with performance well above the normal for its price range. It also has a higher speed operating mode that may well give it the best cassette performance capability at this moment in time.

CIRCLE NO. 103 ON READER SERVICE CARD

Correction: In the report on the Signet Model TK7E stereo phono cartridge, in the November issue, the channel separation at 1 kHz should be 30 dB, as shown in the graph, rather than 20 dB, as given in the Performance Specification chart.

J&R **BLANK TAPES & ACCESSORIES**
AT WHOLESALE PRICES!

BLANK TAPES
CASSETTE TAPES

Amplex Grand Master I C-60	\$2.14	TDK D C-60	\$1.20
Amplex Grand Master I C-90	\$2.79	TDK D C-90	\$1.80
BASF Studio C-90	\$2.69	TDK C-120	\$2.40
BASF Professional		TDK D C-180	\$2.40
I or III C-90	\$2.40	TDK AD C-60	\$1.70
I or III C-90	\$1.95	TDK AD C-90	\$2.20
Maxell UD C-60	\$2.34	TDK SA C-60	\$3.12
Maxell UD C-90	\$2.47		
Maxell UDXL I or II C-60	\$2.47		
Maxell UDXL I or II C-90	\$3.47		
Scotch low noise			
C-90 / 3 pk	\$4.99 for 3		
Scotch Master I C-90	\$2.84		
Scotch Master II or III C-90	\$3.29		
Sony Ferrichrome C-90	\$3.58		

Minimum Order 12 Tapes — 100% Guaranteed

REEL TO REEL

Maxell UD 35-90 1800 ft.	\$56.99
Maxell UDXL 35 90B 1800 ft.	\$66.62
Maxell UD 35-180 3600 ft.	\$114.00
Scotch 212 1800 ft.	\$4.95
Scotch 207 1800 ft.	\$5.75
TDK L 1800 1800 ft.	\$5.32

CARTRIDGES
audio-technica

AT 20 SLA	\$119.00
AT 15 SA	\$22.50
AT 14 SA	\$46.50
AT 12 SA	\$34.90
AT 10	\$12.00

STANTON

881S	72.50
681EE S	55.00
681EE	47.50
680EE	20.80
500EE	14.40

EMPIRE

2000Z	\$59.80
2000T	\$31.50
2000III	\$19.50
4000DI	\$29.90

SHURE

V15 TYPE IV	\$89.90
V15 TYPE III	\$63.50
M95D	\$21.00
M24H (QUAD)	\$36.50
M70E	\$9.90

PICKERING

XUV/45000 (QUAD)	\$66.00
XSV/3000	\$45.95
XV15/750	\$30.00
XV15/625E	\$20.98
XV15/400E	\$17.95

HEADPHONES

PIONEER

SE-205	\$19.85
SE-105	\$46.70
SE-4	\$33.50
SE-100	\$39.95
SE-700	\$59.95

SENNHEISER

HD-400	\$24.99
HD-414	\$39.97
HD-424	\$59.95

KOSS

PRO 4 AA	\$37.05
PRO 4 AAA	\$45.00
HV11	\$26.97
HV/11C	\$35.97
PHASE 7+2	\$83.00
TECHNICIAN/VFR	\$48.00
K/6A	\$14.97

PICKERING

OA 7	\$41.90
------	---------

HOW TO ORDER: For shipment within 48 hours, send money order or certified check. Two weeks delay on personal checks. Please add \$3.50 per order for shipping & handling. (\$5.50 for orders outside U.S.). N.Y.S. residents add tax. No C.O.D.'s. All merchandise 100% guaranteed, brand new & factory fresh.

J&R MUSIC WORLD
33 Park Row, Dept. PE, N.Y.C. 10038 (212)732-8600

WRITE FOR FREE CATALOG
CIRCLE NO. 30 ON FREE INFORMATION CARD

Put Professional Knowledge and a
COLLEGE DEGREE
in your Electronics Career through

HOME STUDY



Earn Your DEGREE

by correspondence, while continuing your present job. No commuting to class. Study at your own pace. Learn from complete and explicit lesson materials, with additional assistance from our home-study instructors. Advance as fast as you wish, but take all the time you need to master each topic. Profit from, and enjoy, the advantages of directed but self-paced home study.

The Grantham electronics degree program begins with basics, leads first to the A.S.E.T. degree, and then to the B.S.E.T. degree. Our free bulletin gives complete details of the program itself, the degrees awarded, the requirements for each degree, and how to enroll. Write for *Bulletin E-80*.

Grantham College of Engineering
2000 Stoner Avenue
P. O. Box 25992
Los Angeles, CA 90025

Worldwide Career Training thru Home Study
CIRCLE NO. 23 ON FREE INFORMATION CARD

IF YOU'RE NOT DESIGNING WITH A CSC PROTO-BOARD®, LOOK AT ALL YOU'RE MISSING.

Utility—Models are available with or without built-in regulated power supplies (fixed or adjustable).

Economy—Eliminate heat and mechanical damage to expensive parts. Save money by re-using components.

Versatility—Use with virtually all types of parts, including resistors, capacitors, transistors, DIP's, TO-5's, LED's, transformers, relays, pots, etc. Most plug in directly, in seconds.

Durability—All Proto-Board models are carefully constructed of premium materials, designed and tested for long, trouble-free service.

Expandability—Proto-Board units can be instantly inter-connected for greater capacity.

Visibility—All parts are instantly and easily visible, for quick circuit analysis and diagramming.

Speed—Assemble, test and modify circuits as fast as you can push in or pull out a lead. Save hours on every project.

Adaptability—Use in design, packaging, inspection, QC, etc. Works with most types of circuits, in many, many applications.

Flexibility—Use independently, or in conjunction with other accessories, such as scopes, counters, CSC Proto-Clip™ connectors, Design Mate™ test equipment, etc. One Proto-Board unit can serve a thousand applications.

Accessibility—All parts are instantly and easily accessible, for quick signal tracing, circuit modifications, etc.

Variety—A wide variety of models are available with capacities ranging from 630 to 3060 solderless tie-points (6 to 32 14-pin DIP's), to fit every technical and budget requirement.



Whatever type of electronic circuits you work with, you can do more in less time with CSC's solderless Proto-Board systems. As fast and easy as pushing in or pulling out a lead, you can design, test and modify circuits at will. Components plug into rugged 5-point terminals, and jumpers, where needed, are lengths of #22 AWG solid wire. In the same time you took to read this ad, you could be well on your way to assembling a new circuit.

Order today. Call 203-624-3103 (East Coast) or 415-421-8872 (West Coast): 9 a.m.-5 p.m. local time. Major credit cards accepted. Or see your CSC dealer. Prices slightly higher outside USA.

CONTINENTAL SPECIALTIES CORPORATION



70 Fulton Terrace, Box 1942, New Haven, CT 06509
203-624-3103 TWX 710-465-1227

WEST COAST: 351 California St., San Francisco, CA 94104,
415-421-8872 TWX 910-372-7992

GREAT BRITAIN: CSC UK LTD, Spur Road, North Feltham Trading Estate,
Feltham, Middlesex, England. 01-890-0782 Int'l Telex: 851-881-3669

CSC PROTO-BOARD SOLDERLESS BREADBOARDS

MODEL NUMBER	NO. OF SOLDERLESS TIE-POINTS	IC CAPACITY (14-PIN DIP'S)	MANUFAC. SUGG. LIST	OTHER FEATURES
PB-6	630	6	\$15.95	Kit—10-minute assembly
PB-100	760	10	19.95	Kit—with larger capacity
PB-101	940	10	22.95	8 distribution buses, higher capacity
PB-102	1240	12	26.95	Large capacity, moderate price
PB-103	2250	24	44.95	Even larger capacity; only 2.7¢ per tie-point
PB-104	3060	32	54.95	Largest capacity; lowest price per tie-point
PB-203	2250	24	75.00	Built-in 1% regulated 5V, 1A low-ripple power supply
PB-203A	2250	24	124.95	As above plus separate ½-amp +15V and -15V internally adjustable regulated power supplies

© 1978 Continental Specialties Corp.
Prices and specifications subject to change without notice.

CIRCLE NO 14 ON FREE INFORMATION CARD

By KRIS JENSEN

A buyer's guide to
projection TV
receiver systems

The BIG television picture is bigger than ever now as a result of technological advances in video projection systems. Projection TV is not new, of course. In the late Forties, when TV picture tubes were still rather small, all-in-one TV projection systems were introduced in the hope of displacing direct-view receivers. Low brightness and the development of larger TV CRTs, however, dampened the projection concept for home use.

Two decades later, the Advent Corporation resurrected the projection-TV concept with a newly developed very-large-screen system that dwarfed present-day TV picture tube viewing areas without noticeable loss of brightness or resolution. Local bars and well-to-do people were among the first buyers in 1973 of the large-screen (7' diagonal), two-piece, Model 1000 color projection

Home Projection Color TV

The Big Picture is Here!



Home Projection TV *continued*

TV system. A smaller, lower-cost, 5' diagonal screen model is now also being marketed by Advent, competing with some 50 other manufacturers of home projection-TV systems. These companies—including GE, Panasonic, and Quasar—produce a variety of projection-TV models at prices ranging from \$400 to more than \$3000. Clearly, giant-size color TV for the home has arrived!

Projection-TV systems receive standard off-the-air TV signals, but they differ enormously from the standard 25" (63.5-cm) console receiver. The fundamental difference is that the video image you see is not produced directly on a conventional picture tube. Instead, the image is magnified, projected onto a giant 45" to 120" (diagonal measurement) viewing screen. This projection scheme gives you a movie-house effect right in your living room.

Just how the picture is produced by each of the many projection-TV systems available varies. Physically, these new home-entertainment devices can range

from two-piece systems in which the projector hangs from the ceiling to all-in-one compacts that close up into a wall unit when not in use. The optical techniques employed give picture qualities that range from fair to excellent.

In spite of the differences in system design, there are only three main categories in projection-TV schemes: refraction, Schmidt, and light-valve. Each renders a projected image with its own particular tradeoffs.

Refraction Systems. If you hold a magnifying glass up to the face of your TV receiver, you can focus the magnified image on a nearby wall. In doing so, you create a basic refraction, or all-lens, projection-TV system. Light from the picture tube passes through the lens and is bent (refracted) outward to provide the magnification. This is the simplest and most commonly employed technique for projection. There are, however, two types of refraction projectors. The first is the single-tube-system, which uses an "almost" conventional TV receiver as the image source and a separate magnifying lens.


In some single-tube projection systems, the lens is merely bolted directly to the face of the receiver. For others, some type of enclosure is used to house

the TV receiver and support the lens. In any event, the results are the same. Light from the image on the TV screen is gathered at the back of the lens, refracted, and sent out the front of the lens. This light is then focused on a reflective screen for viewing some 5' to 8' (1.5 to 2.4 m) away.

Light passing through the lens from the TV receiver is inverted in the refraction process. To correct for this inversion, a minor modification must be made to the TV receiver. Wires on the receiver's yoke are transposed to invert the original picture on the face of the tube. (The yoke is a coil of wire on the neck of the picture tube that causes the electron beam to scan across the face of the tube.) A switch is usually provided to flip the picture back for normal viewing. Once the inverted image in the projection mode passes through the lens, it is inverted so that it appears right-side up for normal viewing on the screen.

Brightness deficiency is a major consideration for many refraction-lens systems. As a result, you must watch the screen in virtual darkness in order to obtain a good picture.

There are two major reasons for the lower light level in refraction systems. The first is the optics themselves. Lenses are nowhere near perfect in efficiency. Not all the light that enters them passes out again. Some of the light is scattered into useless heat energy with-

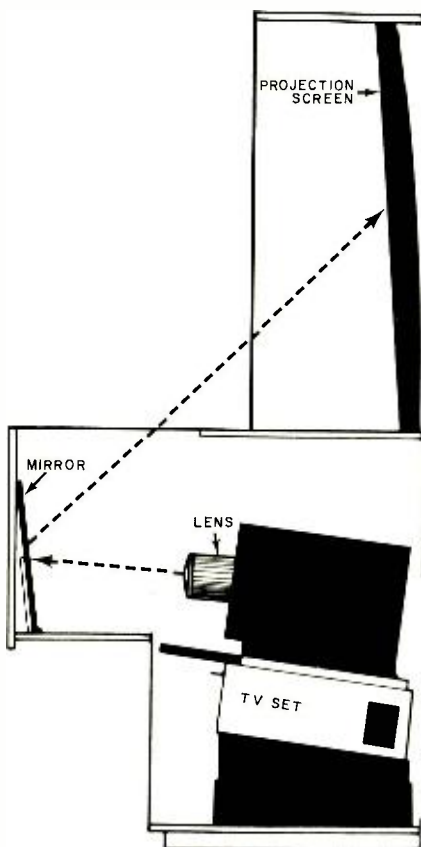

Self-contained type of projection TV, such as the Sony Corp. model above right, uses mirror to reflect enlarged TV image to face of viewing screen.

in the lens. Too, a part of the light spectrum may never get through the lens. Also, the light-gathering efficiency of a lens is determined by the lens' F rating. Like the F-stops of a camera, the lower the F number of a projection-TV lens, the more light that passes through. The type of lens used in a single-tube projector often accounts for price. Typically, the lower the cost, the higher the F number (and the lower the light level available for imaging on the viewing screen).

The second and by far the greater problem is the TV receiver itself. For each degree of magnification you gain, you pay a price in light loss. If you project a magnified picture twice its normal size, for instance, you may require 10 times the amount of light coming from the picture-tube source to compensate for the loss of brightness on the screen.

Some manufacturers increase drive voltage on the picture tube of a conventional TV receiver in an attempt to achieve a brighter picture. Although this can certainly be done, it can have detrimental effects on picture quality. Since the total picture is brightened, blacks become shades of grey, causing a loss in contrast and, depending on the receiver, image blooming that can render the picture out of focus.

Naturally, there are exceptions to the foregoing. Some projection-TV receivers are specifically designed for projection use. A good example of this is the 13" (33-cm) in-line picture tube in GE's 45" diagonal Widescreen 1000, which is driven by 32,000 volts.

To combat the problems inherent in single-tube systems, some manufacturers have gone to multiple-tube designs and better optics. The idea here is to substantially increase the available light

level without degrading picture quality. These systems employ three projection CRTs (cathode-ray tubes), each of which consists of an electron gun that scans a small phosphor-coated screen. The image produced on the screen is then magnified by a front lens and projected onto the viewing screen. While it is easy to see why three tubes give off more light than one, the reason for a much brighter picture goes far beyond simple light multiplication.

In a normal color picture tube, the *total* color picture is produced on the face of the screen. To accomplish this, triads of red, green, and blue phosphors must be kept close together to form a particular color. To prevent one gun from exciting all three colors simultaneously, a shadow mask is used. The mask allows only the correct color-generating gun to strike the appropriate phosphor. Though the mask serves its purpose for conventional viewing, it poses a problem for projection-TV applications. It cuts down the energy from the electron guns by as much as 80%. Only 20% of the available energy is converted into usable light.

In a three-tube projection system, each tube produces just one color. The "mixing" occurs on the screen so that no shadow mask is required in the tubes. The result is a picture with four or five times the brightness obtainable from most conventional single-tube systems.

In addition to increased brightness, picture quality is usually enhanced in three-tube systems. Convergence, where the three color dots are exactly mixed to form the desired color, is also less of a problem. In contrast, any mis-convergence in a single-tube system is exaggerated by magnifying the total picture. Sharp, clear outlines of images be-

come lost, and in extreme cases multiple different color images can appear superimposed on but slightly offset from each other.


With respect to selling prices, single-tube systems are by far the least expensive. If you choose a three-tube system, though, you can expect to pay two to three times the cost of a single-tube system. Sony, however, is attempting to capitalize on both worlds. The newest Sony system is a three-tube, two-lens design. Three 9" (22.9-cm) CRTs produce the picture, but the red and blue images are combined in a diacrylic mirror that transmits all but one color, to be projected through a single lens. This eliminates one-third of the optics required in a multiple-lens system.

Schmidt System. Although the refractive concept appears an obvious beginning for home projection TV, it did not come along until after development of Advent's "LightGuide" tube. It employed Schmidt optics for a brighter picture. (One of the first demonstrations of a Schmidt projection-TV system was done by RCA in 1939.)

The Schmidt system used consisted of multiple tubes for projection of a video image. Three tubes produce separate red, green, and blue images, which are then converged on the viewing screen. The image is produced by an electron gun that scans the face of a phosphor-coated target screen. The target is specially designed for high illumination levels. Its 5" (12.7-cm) average screen size, operating at 25 to 30 kV, is heavily heat sinked and heat-conductive to prevent burnout. The key to the system, however, is in the optical technique employed.



Two-piece, single-refraction-lens models, such as Projection Electronics' here, are least costly types

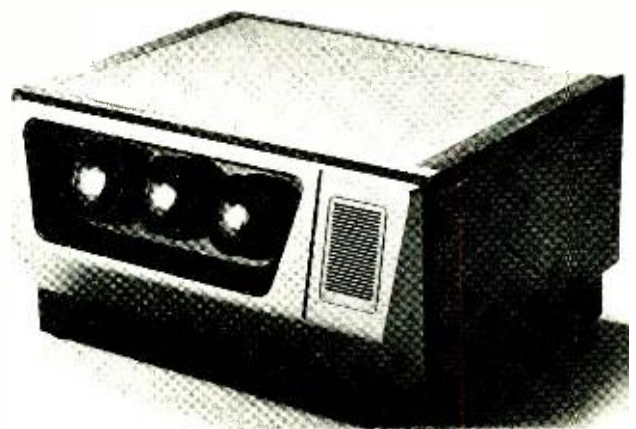

Front view of Advent projection TV, shown on opening page, uses three refractive lenses.

Home Projection TV *continued*

A spherical mirror magnifies an image with very good efficiency, but the reflected image is distorted along the edges due to the mirror's shape. A round spot appears comet-shaped when projected onto a screen. The solution to this problem has been used in Schmidt telescopes for years. A corrector lens located in front of the mirror compensates for the optical error to assure a normally magnified image. This combination of reflective and refractive techniques is known as Schmidt optics.

The image produced on the target is reflected from a rear-mounted spherical mirror. It then passes back beyond the target, out of the focal point, through a corrector lens, and onto the remote screen. The result is a picture with a brightness two to three times greater than that obtained with a multiple-tube refraction system.

Because of the \$3000 to \$6000 price of the Schmidt systems, original home systems were sold mostly to well-to-do customers. As other companies entered the field, the market became more industrially oriented. Since the newest Schmidt systems, from Quasar, Matsushita, and Panasonic, appear to be designed for the home, this picture may be changing again.

Light-Valve System. If money is no

object and a big screen TV is what you really want, a light-valve system may be your best choice. In the light-valve system, a high-intensity light source is directed through a thin layer of oil. If the oil is smooth, no picture information exists and the light is diverted away from the projection lens. Above the oil is an electron gun. As the electron beam scans in a conventional manner, it deposits a charge that creates a groove in the oil that is proportional to the video information. The light passing through the oil is then refracted to the projection lens and onto the screen.

The light-valve system is not dependent on the amount of light available from a phosphor screen. Any light source will work, though a xenon lamp is the type usually used. In GE's latest light-valve system, three grooves are created simultaneously, one for each color. With this system, a 20' (6.1-m) wide color picture can be created from as far away as 120' (36.6m).

Given these facts, it is obvious that light-valve projection systems were not designed for the home. Not only are they much too large, but their selling prices start at \$50,000.


Screens and Brightness. It is only natural to concentrate on the light-producing aspect of a projection-TV sys-

tem. In reality, however, the screen on which the picture is imaged plays an equally important role. The total brightness of the picture you see depends on three important factors—brightness of the original source, size of the projected picture, and *gain* of the viewing screen.

Conventional matte screens have a gain of one, which is simply used as a base by which other screens are compared. Light directed onto a matte screen is partially absorbed, as well as reflected in all directions. In comparison, beaded and lenticular screens are designed to reflect more light and even concentrate light rays for a brighter picture. While a standard beaded screen has a gain factor of two or three, others, such as Kodak's Ektalite screen, have gains of 10 to 16. The Ektalite screen reportedly returns 10 times more light than a matte-surface screen.

Many projection-TV screens have uniform surface particles that act like tiny lenses. Each "lens" receives and redirects the light toward the center of the viewing area. Often, the screen is bent at the sides to direct more light to the center, toward the viewer.

The higher the gain factor of a screen, the greater the concentration of light and thus the brighter the picture. Unfortunately, a price must be paid for the increased brightness: the viewing angle narrows as brightness increases. Ac-

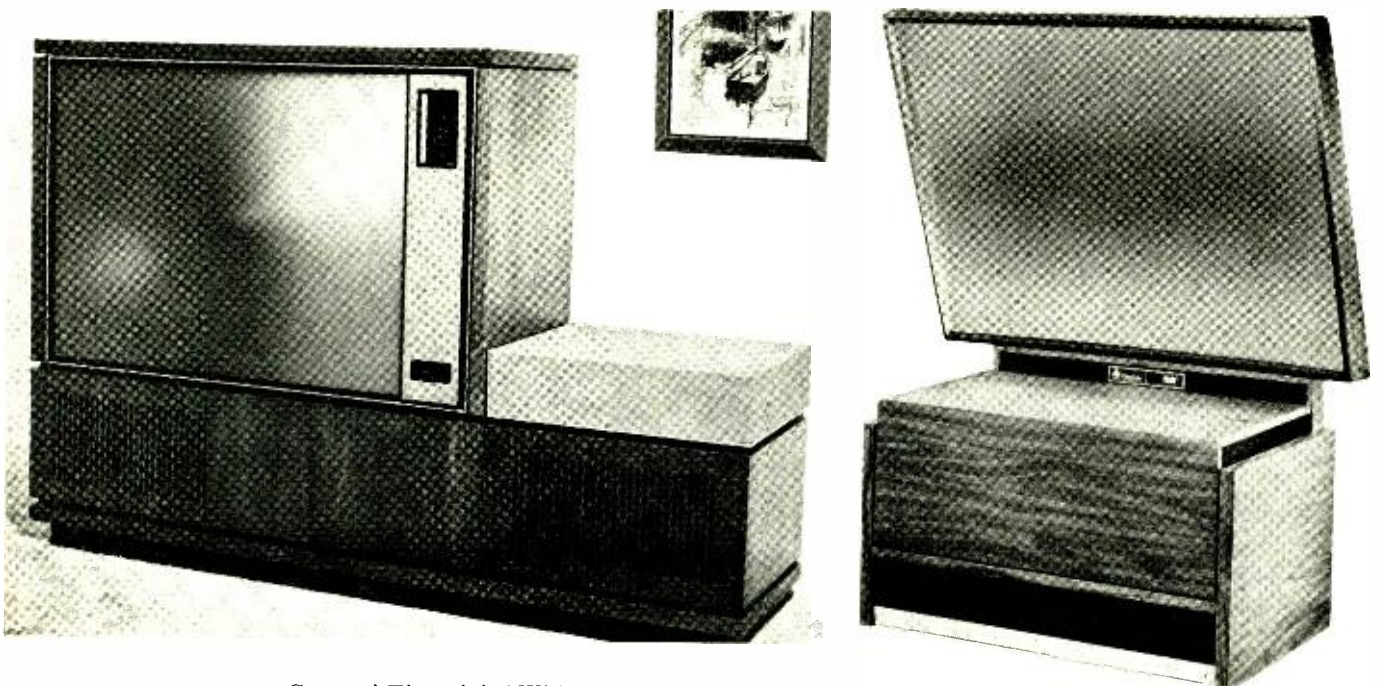

General Electric's "Widescreen 1000," Quasar's Model PR6800QW, and Panasonic's Model 4000 (next page) projection color TV systems are one piece types.

cordingly, if you move 20° to 30° left or right from center-screen, you may no longer see a picture. The same holds true in the vertical plane. Most projection-TV systems are designed to direct the light to a seated audience. If you stand up, the picture's brightness is significantly diminished.

Matching the proper screen to a particular projector is already done for you by the manufacturer of the projection-TV system you choose. If done properly, the screen supplied with a projection-TV system generally offers the best ratio of brightness and viewing angle for that particular system. However, because of all the variables involved, brightness measurements that are often used to rate the system can be very misleading.

Many specifications sheets state brightness as lumens of projected light. This specification may refer to an average "TV" level, or it might be a maximum level without regard to the quality of the projected image. If the latter, it may refer to a picture that exhibits "blooming," which produces a brighter picture than normal.

Another question is what the specified lumens means in terms of actual picture brightness once the image is reflected from the screen. The reflected brightness may or may not be listed in the specifications. If not, you can convert into foot lamberts of reflected light by di-

viding the lumens by the screen's area in square feet and multiplying the result by the screen's gain. This gives you the amount of light coming from the screen when viewed head-on. (Of course, the picture will be less bright if you view from a position slightly off-center.) Too, there may be "hot spots" in the picture, where a portion of the screen may be brighter than the rest of the screen.

The light levels given in specifications sheets should be used merely as a rough guide. Typically, a single-tube re-refraction system produces 4 to 10 foot lamberts, while multiple-tube systems yield 20 to 30 foot lamberts and Schmidt systems can range from 40 to 60 foot lamberts of light at the screen. As a point of reference, the projector in a typical movie theater usually generates about 16 foot lamberts of light on the screen with no picture projected. A typical movie averages a tenth of this figure, or 1.6 foot lamberts.

If you are considering buying a projection-TV system, get a demonstration of the system you plan to buy. Better yet, A-B test two or more systems of compa-


table price against each other. Bear in mind, of course, that the final picture quality will depend on the picture source, the optics, and the type of screen used in the system.

In Your Home. From the outset, projection-TV systems offered good potential for home use. Systems could be built to easily trade off picture quality against cost to meet almost any budget. Naturally, early versions had some physical drawbacks in most home viewing areas. Typical systems consisted of two pieces: a cumbersome TV receiver/projector box and a separate screen. The projector box usually occupied valuable space in the center of the viewing room. As the market developed, however, manufacturers found various means by which to overcome this problem.

The separate two-piece configuration still exists, but the companies that produce them generally put the projector box on casters so that it can be rolled out of the way when the system is not in use. Moreover, the "box" is smaller than earlier versions. Other companies make



Side view of Panasonic model open for use.

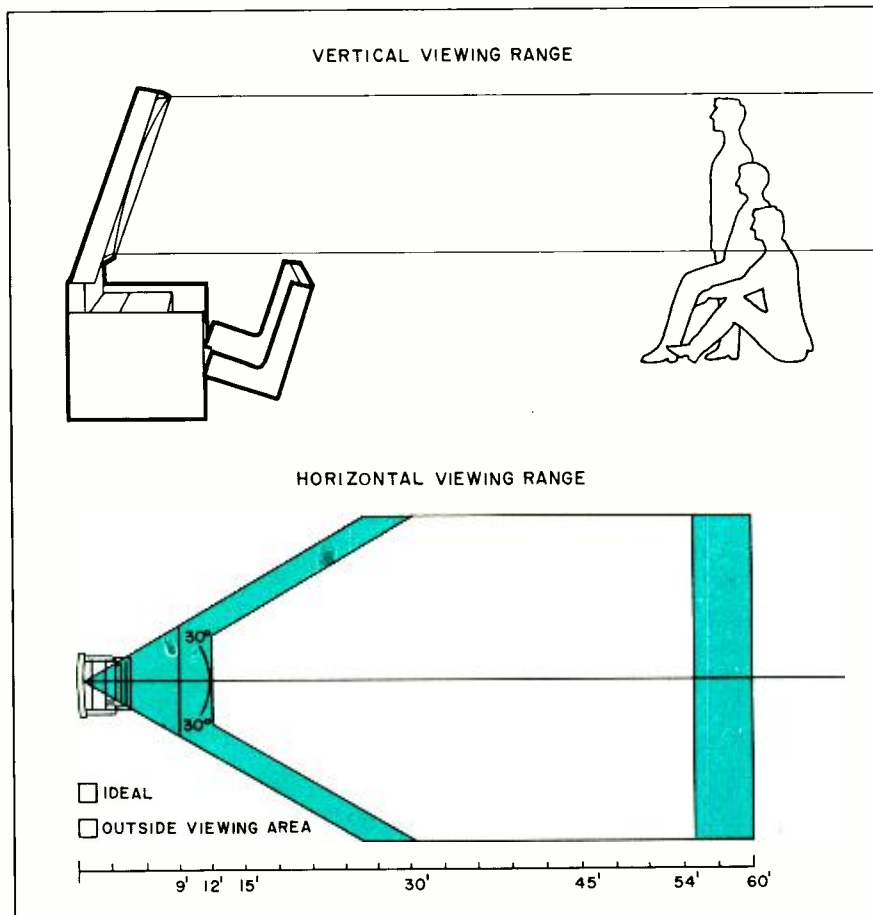

To enjoy bright video, seating arrangements for viewing projection TV screen must be in the proper vertical and horizontal area.

Home Projection TV *continued*

ceiling mounts for the projector and screen, which permit the two to be permanently hung overhead and operated by remote control. (Needless to say, be sure your ceiling is 10' or higher when shopping for one of these systems.) A third approach was to simply let the projector blend in with the room and its furnishings. Here, the projector is disguised as an end or coffee table.

With few exceptions, most of the newest systems are built into a single stand-alone cabinet that contains both projector and screen. In a single-tube system, the receiver lies on its back at the bottom of the cabinet. The picture image passes through a lens/prism box, where it is focused onto a mirror and reflected onto the top-mounted screen. The mirror is generally mounted on a movable "drawer" that opens out 3' to 4' (0.9 to 1.2 m) in use and closes into the cabinet when not in use.

The newer multiple-tube and Schmidt systems employ a similar technique to that used in single-tube systems. A variation on this arrangement is used in GE's "Widescreen" projection system. Here, the originating image comes from projection tubes just below the screen, however. The projected picture is sent to the side of the cabinet in which the system is housed and imaged on a rear-projection screen that makes up much of the front of the cabinet. This keeps the height to a minimum (4' as opposed to the nearly 6' for other systems), making the system appear like an oversized conventional TV receiver with a 50" viewing screen.

The Quality Is There. Many projection-TV systems are deluxe items in the manufacturers' lineups. They have top-of-the-line features throughout. For example, many feature video input jacks; some even include a place to mount a video cassette or disc system in or on the cabinet. Remote control is often standard. Automatic color and brightness circuits adjust the picture for you, and VIR (vertical interval reference) is now being used in some models.

Because of the high-fidelity sound capability of the new video cassette decks and the advancements made in TV broadcast network sound, many manufacturers have improved the audio section of their systems. Some systems have separate hi-fi quality speakers built in or as external systems. Other models

"project" the sound toward the screen, where it is reflected back to make it appear as though the screen itself is the originating source. This latter approach visually and audibly supports the "moving-picture theater" effect.

The video portion of some TV receivers

used in projection systems has high sensitivity and selectivity, and very good resolution and contrast ratio. (Panasonic, as an example, claims 320 lines of resolution off the air, 450 lines through the video input, and a 60:1 contrast ratio.)

The cost of operating projection TV systems is very reasonable. Power consumption is typically 130 to 170 watts, which is about average for a conventional console color TV receiver.

Projection TV Buying Directory

Manufacturer	Price \$	Screen Diag. (in.)	Type	Pieces	Remarks
Advent Corp.	4495-up 2595-2995	84 60-72	Schmidt 3-ref	2 2	Conv. & coffee tbl. mod.
American Video	1794-1949	50-80	1-ref	2	Screens opt. \$146 to \$396
Amtron Video	1995	51	1-ref	2	Ceiling mt. avail.
Automazing Corp.	1695-2195	53-80	1-ref	2	Ceiling/floor cabinets
Avanti Corp.	1495-1995	48	1-ref	2	72" & 96" opt. screens avail.
Belmont Proj. Sys.	2195-2795	66-84	1-ref	2	
Century Proj. Sys.	2495 2995-2800	60 72-84	1-ref 1-ref	2 2	Rear projection Conv. & overhead
Cinema IV	1995-2195 995-1300 2195	50-65 60-65 45	1-ref 1-ref 1-ref	2 2 1	Overhead projector Floor models Floor model
Cooper Video	2895-3295	68-84	1-ref	2	Ceiling mounted
Cygnus Video Sys.	1399-1899	50-63	1-ref	2	
Electrohome Ltd.	3495	84-120	3-ref	2	Canadian Advent version
Electronic Sys.	2495	84	1-ref	2	Coffee table design
Extron	995 1199	50 50	1-ref 1-ref	2 1	Excl. TV Excl. TV
Future-Vision	1995 1395-2250	60 60-96	1-ref 1-ref	1 2	
Futurevision	1695-1895	54-66	1-ref	2	
Gemini Sys.	1595	52	1-ref	1	
General Equip.	1995-2895 995-1595	48-72 48-72	1-ref 1-ref	2 2	Ceiling system Floor models
General Electric	2800	45	1-ref	1	Rear projection
Giant Screen TV	1495-1795	50	1-ref	2	13" or 15" TV
Global Video Ind.	1995-2295	50	1-ref	1	
Holophonics	895	72	1-ref	2	Proj/TV mode
Kalart Video	4820	var	Schmidt	2	B/W only
Keyser Video Inc.	1495-1595	51-67	1-ref	2	Ceiling or console
Lin-Video	1095	50	1-ref	2	
Magnavision	1695-2195	53-80	1-ref	2	Ceiling or floor
Magna-Vu	499	52	1-ref	2	Kit: screen, lens, cab.
Miami Flock	425	84	1-ref	2	Kit, excl. TV
Mitsubishi	3400-4000	72-84	Schmidt	1	

Selecting a System. Projection-TV systems are not appliances you just "pick up," plug in, and turn on. You must plan your system and make provisions for its installation to take full advantage of its capabilities.

The thing you must keep foremost in mind is that a projection-TV system demands lots of space. Separate two-piece systems require 6' to 8' minimum of clear floor space between projector

and screen. Then you must figure another 2' to 3' for the projector and some space behind the projector for viewers. All-in-one systems require about the same amount of space, except that the area required is proportioned differently. You need approximately 20 to 25 square feet of floor space, depending on the system. As a general rule, the closest seating for a viewer should be no nearer than two times the screen's width.

Another very important consideration is room lighting. Since the screen that accompanies a projection-TV system is specifically designed to reflect any and all light, standard room lighting can easily wash out an otherwise good TV picture if it is not placed properly. Indirect or recessed lighting fixtures usually work well. Table and floor lamps, however, must be carefully placed. It is also a good idea to replace your wall switches with dimmer controls because even the more elaborate systems are best viewed in dimly lighted rooms.

When making a performance buying judgement, be sure to be seated and in the center of the screen viewing area. You'll lose considerable picture brightness if you are standing or located at an angle outside the width of the screen. Moreover, the room should be dimly lighted for best viewing results.

After viewing the projected TV picture in this optimum situation, do your viewing under worst-case conditions— increase room light, move to the side of the screen, etc.

You'll doubtlessly find that the difference between the best optics and just plain good optics isn't really that noticeable under the best viewing conditions unless one is simultaneously comparing the systems. What separates the men from the boys is when conditions aren't optimum. Thus it will be your decision as to whether you wish to save a lot of money as a tradeoff for compelling you and your family to watch projection TV under very good conditions only.


Also, most viewing screens used today are washable. But some earlier projection TV viewing screens were not.

There's also a choice to be made between one and two-piece systems. Bear in mind that one-piece systems take up a lot of room; cabinets are huge. Two-piece systems have their drawbacks, too. Unless ceiling mounted, a "box" has to be moved into the proper projection location. Furthermore, the picture will be obliterated if someone walks in front of the projector.

Interestingly there are some "kit" manufacturers that offer a projection lens and plans for fabricating a cabinet that you can build around a home TV receiver for a few hundred dollars. (Edmund Scientific Co., Barrington, NJ, as an example, offers a 5" f/2.6 projection lens and focusing mount for \$267.50.)

Projection TV's future appears to be excellent, given the size limitations of CRT's and the dramatic effect proffered by a large picture. ◇

M&M Video	700-800	52	1-ref	1	
Muntz	995-1895 1395-2195	50 50-67	1-ref 1-ref	2 1	Ceiling or console
New Products	1595-2295	53-72	1-ref	2	Ceiling or floor
Panasonic	4000	60	Schmidt	1	
Pro Audio/Video	1695-1995	50-84	1-ref	2	
Projectapix Ltd.	1495-2790	48	1-ref	2	
Projecta-Vision	1495-2495	53-68	1-ref	1	No mirror used
Projection Elec. Corp.	795-1695 1296-1495	50-65 50-65	1-ref 1-ref	2 1	Lens variations
Projection Elec. Inc.	1495	52	1-ref	2	
Projection Sys.	5000-6500 6000	90-120 120	Schmidt Schmidt	2 1	Floor/ceiling, mt. fr./r. proj.
Projection TV	1300	52	1-ref	2	
Quasar	4500	60	Schmidt	1	
Sega Entr.	995-2295 1595-2595	44-66 44-50	1-ref 1-ref	2 1	
Sony Corp.	2295 3500-4000	40 50-72	1-ref 3/2-ref	1 1	See Text
Spectra VU	2860-4950	50-100	1-ref	2	Ceiling or console
Steck Mfg.	895-1031	52-72	1-ref	2	
Sunyet Co.	2349	54	1-ref	1-2	Model variations
Super Screen TV	1195-3395	52-90	1-ref	2	Ceiling mount avail.
Tandom Ent.	1395-1895	53-68	1-ref	2	Variety of lenses
Tape Head Co.	600-1100	56	1-ref	2	Kit versions
Titan	1645	48	1-ref	2	
Theatre Vision	995-up	50	1-ref	1	
Tradivision	1795-2495	53-100	1-ref		
Unique Pro. Sys.	399-499	50-67	1-ref	2	Kit, excl. TV
Video Connection	1395-2995	60	1-ref	2	Floor, ceiling, table versions
Video Industries	1595-1995 1995	52-68 83	1-ref 1-ref	1 2	
Videorama	995-1200 1295-2500	48-72 48-72	1-ref 1-ref	2 1	Fr./r. proj. avail. Custom cabinets
Viewpoint Inc.	599-949	52	1-ref	2	With or without TV
Voorhjes Entr.	999-1599	52-68	1-ref	2	Hex table model
Worldwide Entr.	1195-2695 1995	52-68 52	1-ref 1-ref	2 1	

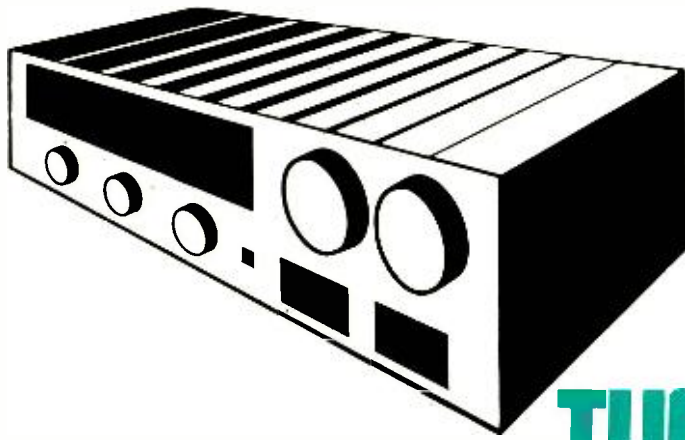

HOW ACCURATE ARE FM TUNING METHODS?

A major cause of distortion in FM tuners and receivers is explored

Modern FM tuners and receivers often have distortion specifications much lower than 1%. Yet when listening to them, high distortion may be apparent. Of the many possible causes for this—faulty program material, multipath signals, interference, or even faulty receiving equipment—the most probable one is that the receiver has not been precisely tuned to the signal. Usually, slight retuning will eliminate the problem.

The IHF/IEEE standard on testing of FM broadcast receivers specifies that it is accurately tuned when minimum distortion is measured with a weak signal. After tuning, all other measurements are performed. No such tuning verification is possible, however, when listening to broadcasts. It is difficult to attenuate a local signal sufficiently to make it “weak,” and it is practically impossible to measure distortion of music.

In the Early Days. “Tuning by ear” has been used to tune more or less accurately ever since FM stations first began to broadcast. The early FM receivers of all-vacuum-tube design required considerable frequency retuning. Unsophisticated listeners thought that the dial pointer was physically slipping.

Many manufacturers tried to combat the drift with a reactance tube circuit (Fig. 1) in which the capacitance of a small grid-plate feedback capacitor caused the plate capacitance to change as the grid voltage was changed by the filtered output of the FM detector. Automatic variation of the plate capacitance then retuned the tuner’s local oscillator. This is automatic frequency control (afc), of course. This was an excellent idea when it worked properly. But in practice, a number of faults remained.

The early FM receivers had a warm-up drift of more than 100 kHz, which was almost doubled when a reactance tube was connected. Consequently, the afc pull-in range had to be at least as large as the drift to allow the same local station to be heard day after day. (See Fig. 2.) As a result, the tuners could have only moderate-to-poor selectivity in order to provide sufficient detector output while off-tune.

To permit tuning to another signal, the afc circuit must not hold the oscillator frequency constant regardless of tuning setting. There must be a hold-in range to permit tuning to at least the next local station, or 800 kHz or more away from the station previously tuned. This was accomplished by only providing partial tuning correction.

In the early FM receivers with afc, drift correction was the same as the ratio of hold-in range to pull-in range, or about 3 to 1. The effective drift was reduced only to about half that of an uncompensated receiver. Many functions, features, and construction details of these tuner sections are found today in low-cost FM radios. They all include afc, though using a tuning diode. The tuning “feel” is “rubbery.” What’s more, fairly high distortion is evident owing to difficulty in consistently and reliably aligning a detector for simultaneous zero dc output voltage and minimum distortion with varying signal strengths. Fading of a weak signal can cause such a tuner to tune itself to the nearest local station.

In the mid 1950s the first “high fidelity” FM tuners and receivers became available. Here, good-quality tuners were designed to operate without afc, using temperature compensation of the local oscillator to keep warmup drift to as

low as 20 kHz (or 0.02%). This is still a state-of-the-art figure for an FM oscillator without afc!

Additionally, these tuners had meters to permit more accurate tuning than is possible by ear alone. With more careful design, the tuners would, indeed, produce low-distortion audio signals when correctly tuned with a zero-center tuning meter. Such tuners are still produced today. Unfortunately, they are the ones that may distort when not accurately tuned to the exact channel center with the tuning meter. The meter itself contributes to this problem.

Its sensitivity is often designed so that when the tuner is grossly mistuned to a local station, maximum meter indication will be near full-scale or about ± 250 kHz. Furthermore, the meter center often has a “good” tuning bandwidth of ± 25 kHz to ± 35 kHz.

The width of this band is such that tuner distortion can be as much as twice the rated distortion when tuned “accurately” by eye. Accordingly, the local oscillator may drift during warmup without the meter displaying an obvious off-center indication. If initial mistuning and local oscillator drift combine in the same direction, the meter’s pointer will naturally move outside the “good” area.

Modern Tuner. Circuits in the latest class of tuners and receivers are designed to correct the foregoing mistuning problems. One of the solutions is afc. Today’s top-quality FM tuners and receiver tuner sections have some form of control logic to ensure accurate tuning. With the exception of a few tuners, the actual tuning of the local oscillator is accomplished with the aid of a Varactor diode that is coupled to the tuning capa-

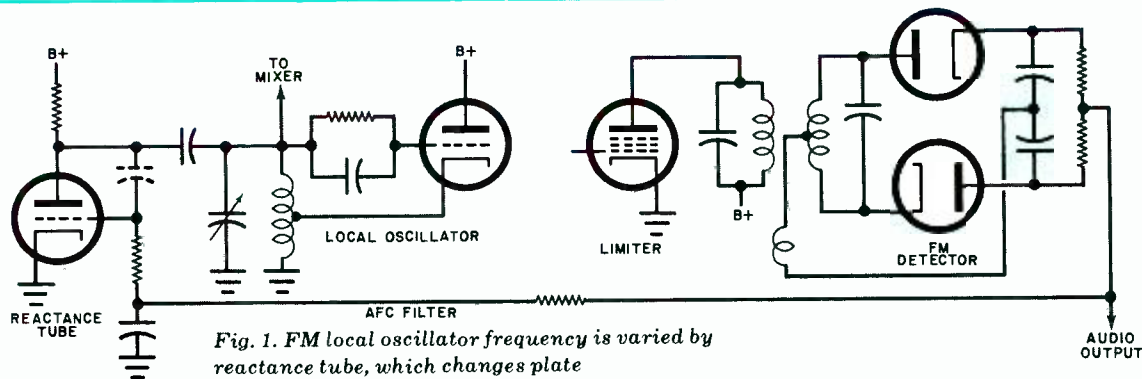


Fig. 1. FM local oscillator frequency is varied by reactance tube, which changes plate capacitance. Afc filter removes audio signals that would frequency modulate oscillator.

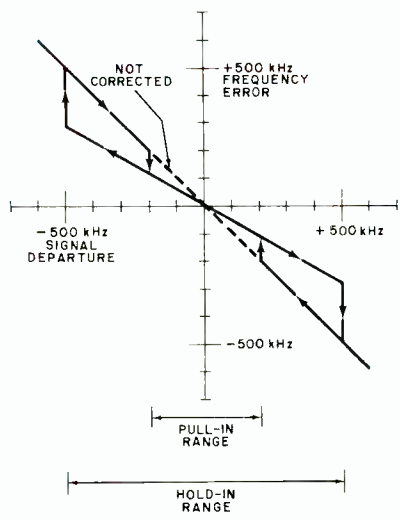


Fig. 2. Characteristics of FM pull-in versus hold-in ranges.

with diode limiters. And to prevent detected audio frequencies and hum from varying the local oscillator's frequency, the control voltage is filtered with a low-pass filter that has a cutoff frequency of about 0.2 Hz. A higher cutoff frequency would introduce a low-frequency audio phase shift that could degrade low-frequency stereo separation; a lower cutoff frequency would cause slower, more sluggish frequency correction.

One manufacturer, Nakamichi, uses an alternative method to achieve accurate tuning. The company uses a tuning capacitor with a small dc servo motor in its Model 730 to drive the tuning capacitor. However, since such a motor can be positioned only in discrete steps, rather than continuously, a Varactor diode in a low-gain circuit is used to "fill in" between these steps.

Each tuner that has afc circuits must have a way to measure frequency. The resultant dc output from this system is amplified and may be inhibited by control logic before becoming the frequency control voltage. High amplification ensures that the resultant tuned frequency

remains as accurate as the measurement of frequency. These are the areas where the designs reveal considerable variation, each of which has its own advantages and disadvantages.

The simplest frequency measuring circuit is the ratio detector (discriminator) that has a nominal 0-volt output at its center frequency. Coincidence detectors, used in such integrated circuits as the ULN 2111 or CA3089 families, also produce a 0-volt output with respect to a reference voltage. This output is then used as reference for the control voltage amplifier. The majority of the new tuners employ this type of measuring circuit in their designs.

The tuning stability of such a tuner with afc is now as stable as the tuning of the detector circuit, ± 5 to ± 10 kHz, or better by four to one than a well-designed local oscillator in a tuner. The actual improvement in reception is even more since inaccurate manual tuning is also corrected.

FM detectors typically operate at an intermediate frequency (i-f) of 10.7 MHz, which is the beat frequency between the

(Continued on page 56)

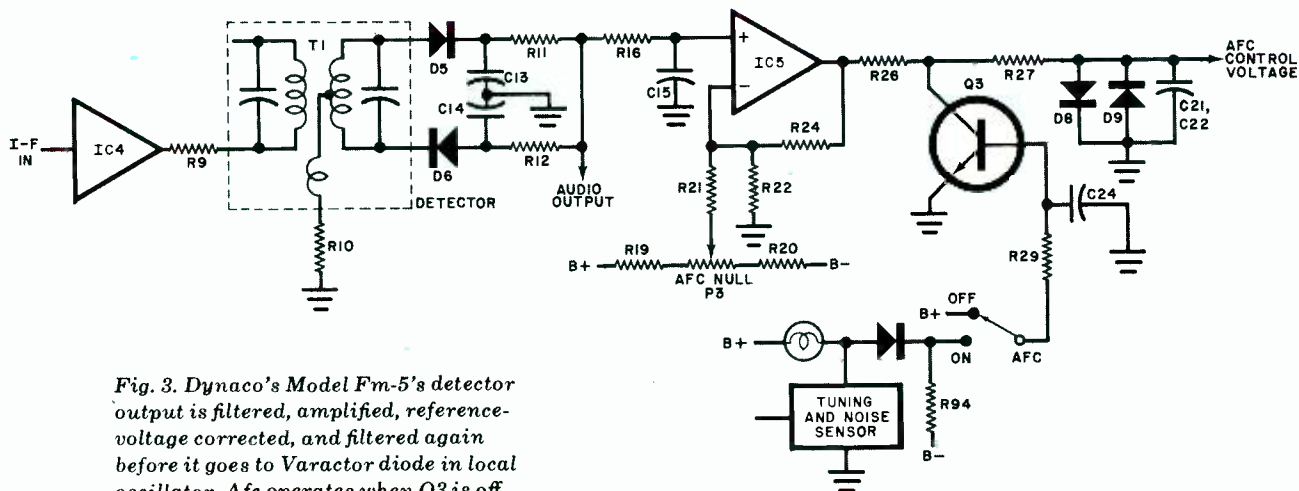


Fig. 3. Dynaco's Model Fm-5's detector output is filtered, amplified, reference-voltage corrected, and filtered again before it goes to Varactor diode in local oscillator. Afc operates when Q3 is off.

ANNOUNCING ... A New CREI Program: Minicomputer & Microprocessor Technology Including A Microprocessor Laboratory

Now you can learn at home
the new technology that is
revolutionizing electronics

The microprocessor has ushered in the age of microtechnology and electronics will never again be the same. The microprocessor has made possible the placing of an entire computer on a silicon chip one quarter inch square. The microprocessor "miracle chip" is in the process of changing the world. Soon all technical personnel in electronics will have to understand and work with the microprocessor. It is invading virtually every area of electronics. And it is profoundly affecting your electronics career.

Brand New Program

CREI has a brand new program to help you learn how to work effectively with this revolutionary electronics development. CREI's new program in Minicomputer and Microprocessor Technology is designed to prepare you for this field by giving you the education and practical experience you need.

The program provides solid preparation in electronics engineering technology with a specialization in minicomputers and microprocessors. In addition, it includes a microprocessor laboratory which features a fully programmable microcomputer which utilizes the Motorola 6802 microprocessor chip. This is an extremely important element of your program.

Programming Essential

As you may well know, you must learn how to *program* the microprocessor in order to design, service or troubleshoot microprocessor electronic systems. There is only one effective way to learn this all-important skill of programming, and that is by actually *doing it*. CREI's new program gives you this opportunity as you work with the exciting microprocessor laboratory.

Programming Is Easy

With CREI's new program, learning the skill of programming is simple. Within a few hours you'll be programming the microprocessor and in a short time you'll learn how to program it in three languages: BASIC, assembly and machine languages. In addition, you will learn how to interface the microprocessor with other systems and to test and debug specialized programs.

Preparation at Home

Wide Choice of Programs

Please note, however, that CREI's new program is only one of 16 state-of-the-art programs in advanced electronic technology offered by CREI. So even if you choose not to specialize in microprocessor technology, CREI has an advanced electronics program to meet your needs.

With CREI, you may choose from any of the following areas of specialization in advanced electronics:

- Microprocessor Technology
- Computer Engineering
- Communications Engineering
- Digital Communications
- Electronic Systems
- Automatic Controls
- Industrial Electronics
- Television Engineering
- Microwave Engineering
- Cable Television
- Radar and Sonar
- Nuclear Instrumentation
- Satellite Communications
- Aeronautical and Navigational
- Solid State Theory
- Nuclear Engineering

Unique Lab Program

An exclusive option available with CREI programs in electronic engineering technology is CREI's unique Electronic Design Laboratory program. It gives you actual experience in designing practical electronic circuits. It also helps you to understand the theories of advanced electronics and gives you extensive experience in such areas as tests and measurements, breadboarding, prototype construction, circuit operation and behavior, characteristics of electronics components and how to apply integrated circuits. Only CREI offers this unique Lab Program.

Practical Engineering

CREI programs give you a practical engineering knowledge of electronics. That is, each part of your training is planned for your "use on the job." By using your training, you reinforce the learning process. And by demonstrating your increased knowledge to your employer, you may qualify for faster career advancement.

Free Book

There isn't room here to give you all of the facts about career opportunities in advanced electronics and how CREI prepares you for them. So we invite you to send for our free catalog. This fully illustrated, 56 page book describes in detail the programs, equipment and services of CREI.

Qualifications

You may be eligible to take a CREI college-level program in electronics if you are a high school graduate (or the true equivalent) and have previous training or experience in electronics. Program arrangements are available depending upon whether you have extensive or minimum experience in electronics.



Mail card or write describing qualifications to

CREI **CAPITOL
RADIO
ENGINEERING
INSTITUTE**

McGraw-Hill Continuing Education Center
3939 Wisconsin Avenue Northwest
Washington, D.C. 20016

Accredited Member National Home Study Council

GI Bill

CREI programs are approved for training of veterans and servicemen under the G.I. Bill.



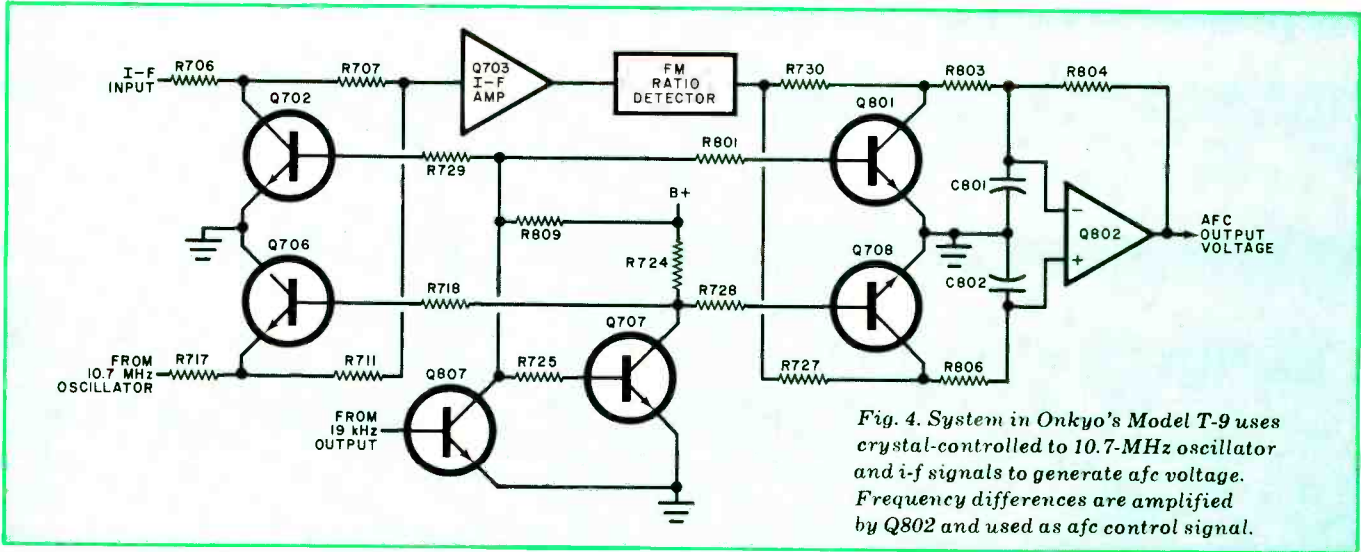


Fig. 4. System in Onkyo's Model T-9 uses crystal-controlled to 10.7-MHz oscillator and i-f signals to generate afc voltage. Frequency differences are amplified by Q802 and used as afc control signal.

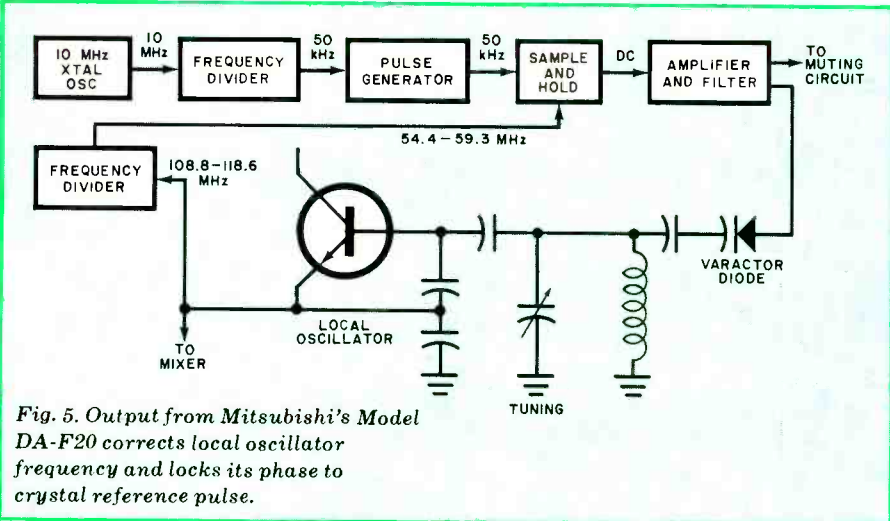


Fig. 5. Output from Mitsubishi's Model DA-F20 corrects local oscillator frequency and locks its phase to crystal reference pulse.

occurring in 200-kHz steps on odd channels between 88.1 and 107.9 MHz. The customary use of a local oscillator tuned 10.7 MHz higher results in frequency steps starting at 108.8 MHz. (In Europe, 300-kHz channel separation and differing frequency assignments require that a receiver be capable of being tuned in multiples of 100 kHz.) This is precisely the concept used in the most sophisticated tuners.

Design differences exist here, too. A simple method is to sample the local oscillator voltage every 10 μs and to use the resultant voltage to correct local oscillator tuning. If the sampling period is accurately derived as a reference frequency from a crystal, the local oscillator will lock in frequency and phase to the nearest harmonic of the reference frequency. Then the receiver will tune in steps equal to the reference frequency. The Mitsubishi Model DA-F20 (Fig.5) operates in such a fashion, deriving its reference frequency by division from a 10-MHz crystal oscillator, which is also used as a reference frequency for the digital frequency counter that indicates the tuned frequency. This ensures accurate tuning that's independent of the received frequency.

(Continued from page 51)
local oscillator and the received signal. As long as the received signal originates from a broadcast station, its frequency is quite accurate. (No error greater than ±2 kHz is allowed by law in the U.S.) However, a signal that has faded out or is obscured by broad-band interference, such as severe ignition noise, has only the average tuned frequency of the receiver without any correction. Such a condition may cause severe mistuning. Consequently, the control logic circuits prevent use of automatic frequency control with poor signals.

switching voltage, derived from the stereo multiplex decoder, drives a synchronous switch between the crystal frequency and the i-f signal to become the reference voltage for the control-signal amplifier and the error voltage, respectively. The corrected i-f signal remains locked to the crystal frequency when afc is enabled.

FM broadcast stations in North America are assigned to the band between 88 and 108 MHz, with the channel carriers

Quartz Tuning. Quartz-crystal control has been used for many years to ensure accurate frequencies and accurate tuning. The simplest crystal-controlled receivers capable of receiving all FM channels, such as Onkyo's Models T-9 (Fig. 4) and TX-4500, employ an FM detector to alternately measure the actual i-f (near 10.7 MHz) using the normal received signal and then the frequency of a 10.7-MHz crystal oscillator. A 19-kHz

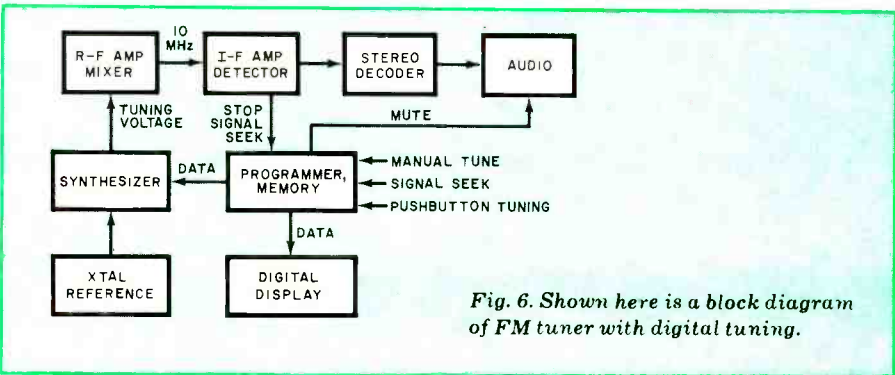


Fig. 6. Shown here is a block diagram of FM tuner with digital tuning.

More complex is the method by which the local oscillator frequency is divided by a programmable frequency divider. The resultant output is detected by an electronic switch that opens and closes at a frequency determined by a quartz-crystal reference oscillator. Only one local-oscillator frequency will cause a dc tuning voltage to lock the phase and frequency of the oscillator to the programmed harmonic of the reference frequency. This is the principle of a frequency synthesizer. Instead of using the traditional pointer dial to indicate the tuned frequency, these new tuners display the frequency with a direct-read numeric display. Digital circuits control the offset frequency and division ratio, remember the last station tuned, and control the number displayed.

Frequency synthesizers have been used for several years, as exemplified by the H.H. Scott Model 433 and the later Heath Model AR-15 tuners. (See Fig. 6.) Synthesizer tuner designs are possible today with substantially reduced circuit complexity. Digital frequency displays are standard with all synthesizer-type tuners, of course.

Essential to the success of all forms of automatic frequency control is the use of control logic. The early FM tuners had no control logic; the afc was active all the time. This caused marginal performance at times.

Afc in Modern Tuners. New tuners that have afc circuits employ large amounts of feedback to correct tuning-error signals. All these tuners also have logic circuits that control tuner operation.

All tuners with frequency synthesizer circuits or digital tuning mute the audio output until the tuning system has locked onto the tuned frequency. Only then are the other tuner circuits allowed to function, such as detecting the presence of a mono or stereo signal or the absence of noise. After this, the tuner unmutes and functions normally unless it is programmed to examine the next tuned frequency step.

All other tuners and receivers with afc circuits operate during manual tuning with the afc circuit disabled. To enable the afc circuit, the control logic circuit must detect the presence of a signal that is strong enough to cause unmuting if the muting switch were turned on. Also, the control logic circuit must detect if the signal is tuned sufficiently well (say, ± 50 kHz or better) so that only minor frequency correction is needed.

If these conditions are satisfied for a

second or so, the afc control voltage is generally applied to a Varactor diode. This logic system permits tuning to a signal with as much finger-tip feel as tuning a receiver without afc. An indicator usually tells when the afc circuit operates.

Manually tuning off-signal while the afc circuit attempts to hold onto the signal was the major cause for the old complaint of "rubbery" tuning. The new breed of tuners and receivers has overcome this problem as well.

Though afc control voltage is applied slowly, it's removed relatively fast (in about 0.02 second) when the tuning error exceeds ± 50 kHz or less by discharging all afc filter capacitors. Since the afc control has a long time constant of about one second and manual detuning to the 50-kHz limit usually takes much less time, the automatic frequency control can be temporarily disabled by just retuning the tuner.

To further simplify tuning, some tuners, such as Dynaco's Model FM-5, permit switching off the afc. Other tuners, such as those made by Onkyo, detect whenever the tuning knob is touched by measuring hum pickup or the change in oscillation voltage of a medium-frequency oscillator connected to the tuning knob. Here, afc is disabled whenever the tuning knob is touched.

Have afc and the new logic circuits solved all the tuning problems and are frequency synthesizers the ultimate answer? No. There are tuning problems still remaining. One is how to solve the tuning problem automatically when there is strong interference adjacent to the desired signal. Here the manual solution is to mistune for minimum audible annoyance. Another problem is how to stay tuned to a weak signal that might fade out, while a strong local signal is near in frequency.

A third problem is how to make Varactor tuners (used in synthesizers) as high in selectivity, overload handling capability, noise figure, and residual noise as other tuners that utilize conventional components.

Perhaps more important is the need to make the new tuner designs less complex so that if trouble does occur, it can be easily determined and corrected.

The new afc circuits used to help the listener tune accurately to a signal have their counterpart in multiplex demodulator circuits, since FM-stereo reception requires locking the 38-kHz stereo demodulator in frequency and phase to the 19-kHz pilot signal broadcast by the radio station. ◇

TAPE DISCOUNTS

Minimum order 10 tapes



CASSETTES

TDK DC-45	1.19
TDK DC-60	1.32
TDK DC-90	1.79
TDK DC-180	3.29
TDK SAC-60	2.19
TDK SAC-90	3.19
TDK ADC-60	1.79
TDK ADC-90	2.49

B-TRACK

TDK 45 D 2pk	1.89
TDK 90 D 2pk	2.29
TDK-45 AD 8pk	2.39
TDK 90 AD 8pk	3.19

OPEN REEL

TDK-L 1800	5.49
TDK-S 1800	4.49



maxell

CASSETTES

UDXL I OR II C-60	2.99
UDXL I OR II C-90	3.99
UDC-45	1.99
UDC-60	2.49
UDC-90	2.99
LNC-45	1.29
LNC-60	1.49
LNC-90	2.39
LNC-120	3.29

SPECIAL

Soundguard Record Preservation Kit	5.59 ea
Soundguard Record Preservation Refill	3.59 ea

Lifetime Product Guarantee! Order Now!
Orders shipped within 1-3 days. Please add \$2.00
for shipping & handling per order. N.Y.S. residents
add sales tax. NO COD'S. FREE CATALOG!

CONSUMERS CO

P.O. Box 550 Dept. PO-1

Mt Vernon N.Y. 10551 Phone: (914) 664-2909

CIRCLE NO. 12 ON FREE INFORMATION CARD

SEE YOUR DEALER TODAY

'Firestik'[®]

CB — AMATEUR — MARINE
FIBERGLASS ANTENNAS
DON'T TAKE NO
FOR AN ANSWER



Our 16th Year Serving
the CB and
Communications Market



FRANK "BAGGY" SACKS
PRESIDENT

DEALER & DISTRIBUTOR
INQUIRIES INVITED



LOOK FOR THIS LOGO

SEND FOR FREE CATALOG


2614 E. ADAMS • PHOENIX, ARIZONA 85034

NAME _____
STREET _____
CITY _____
STATE _____ ZIP _____

CIRCLE NO. 40 ON FREE INFORMATION CARD

BUILD A UNIVERSAL ELECTRONIC TIMER

By Michael S. Robbins

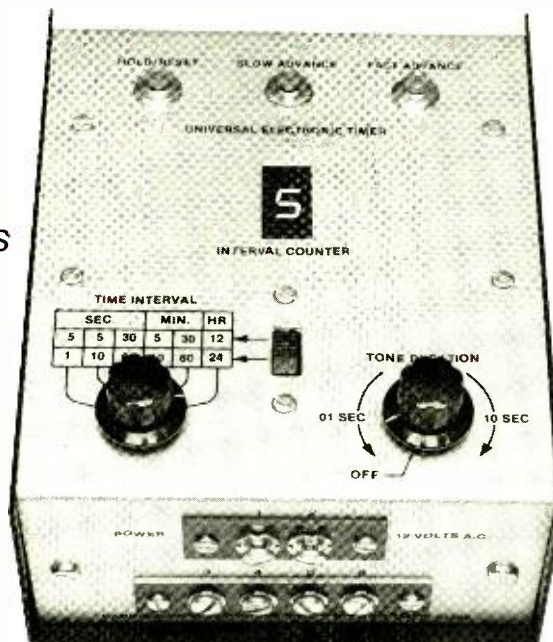

Time any event occurring in a 24 hour period in seconds, minutes or hours. Includes audible alert and automatic on/off.

Timing is becoming increasingly more important around the home, in the workshop, and in the lab. For example, we routinely time such diverse things as cooking, watering the lawn, long-distance telephone calls, photographic film processing, etc. Hence, there is an increasing need for an accurate timer to help us. The "Universal Electronic Timer" described here was designed to fill virtually any timing need.

The basic function of the Universal Electronic Timer is to turn on and off an electrical or electrically operated device or to generate a tone for a predetermined period of time at regular programmed intervals. An interval-selection switch gives you a choice of 0.5, 1, 5, 10, 30, or 60 seconds; 5, 10, 30, or 60 minutes; or 12 or 24 hours. The "on" time can be adjusted over a 10-ms to 10-second range and can be expanded to more than 30 minutes by a simple change in component values. The "thing" that gets turned on or off can be external to the timer (as mentioned above) or it can be the self-contained tone generator. The latter is a gated

1000-Hz oscillator driving a speaker. If the gate control is short enough, the output will be a sharp "tick." By setting the interval switch to 1 second and the period control to 0.01 second, one tick per second will be generated. A one-second beep every 10 minutes, with the indicator displaying the minutes, can be obtained with an interval setting of 10 minutes and a period control of 1 second.

This timer project is built around a 5309 six-digit clock chip that features both seven-segment and BCD outputs. The feature that distinguishes the 5309 from the 5311 through 5314 chips is a reset function that sets all digits to zero. (The 5315 will work, but it has a different pin configuration.)

The seven-segment and BCD outputs of the 5309 IC are multiplexed. Digit-enable outputs indicate which digit is present at the outputs at any instant. By sensing the desired digit-enable output, the internal multiplex oscillator can be stopped while the desired digit is present. Hence, the IC can be made to output only one of its six digits.

The 5309 IC can directly drive a com-

mon-cathode LED display to indicate the state of the seven-segment outputs.

About the Circuit. Transistor *Q1* in Fig. 1 controls clock chip *IC1*'s multiplex oscillator. Switch *S1B* is used to select the digit at which the oscillator stops.

Since a zero will appear in the units-seconds digit only once every 10 seconds and in the tens-seconds digit only once every minute, the circuit must be speeded up. By connecting the slow-set input of the 5309 to ground through *S1A*, the clock chip operates 60 times its normal speed. Thus, instead of the tens-seconds zero appearing once a minute, it now appears once a second.

The zero is detected by testing the states of segments *f* and *g* in the display. The only digit for which the *f* segment is on and the *g* segment is off is the zero. Hence, each time the zero occurs, the voltage at the collector of *Q2* drops. This generates a negative-going pulse that toggles one-shot multivibrator *IC2*, which generates a signal whose duration is determined by the values chosen for *C5*, *R3*, and *R5*. The values specified

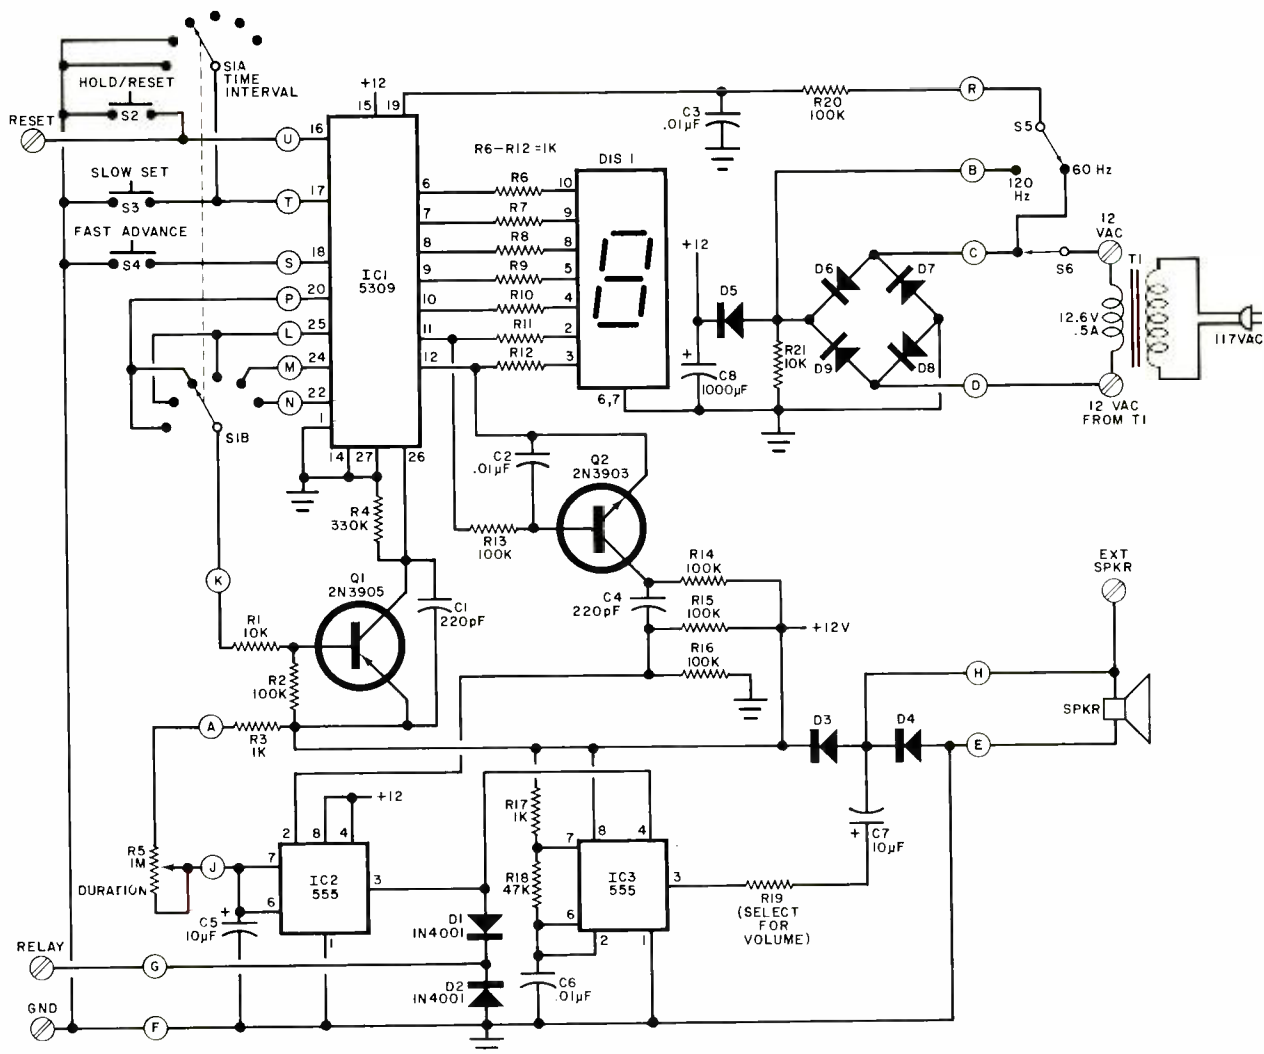


Fig. 1. A conventional digital clock chip forms a 0.5-s to 24-h timer. Gated tone generator creates desired "beep." Timer also activates relay for external control.

PARTS LIST

C1, C4—220-pF disc capacitor
 C2, C3, C6—0.01-µF, 16-volt disc capacitor
 C5—10-µF, 10-volt electrolytic capacitor
 C7—10-µF, 16-volt electrolytic capacitor
 C8—1000-µF, 25-volt electrolytic capacitor
 D1 thru D9—1N4001 rectifier diode
 DIS1—Seven-segment display (common-cathode) TIL313 or HP5082-7740
 IC1—MM5309 clock IC (National)
 IC2, IC3—555 timer IC
 Q1—2N3905 or 2N3906 transistor
 Q2—2N3903 or 2N3904 transistor
 All resistors ¼ watt, 10% tolerance:
 R1, R21—10,000 ohms
 R2, R13, R14, R15, R16, R20—100,000 ohms

R3, R6 thru R12, R17—1000 ohms
 R4—330,000 ohms
 R18—47,000 ohms
 R19—10 ohms minimum (select for desired volume)
 R5—1-megohm audio-taper potentiometer with switch
 S1—Two-pole, six-position nonshorting rotary switch
 S2, S3, S4—Normally-open spst pushbutton switch
 S5—Spdt slide switch
 S6—Spst switch (part of R5)
 SPKR—45-ohm loudspeaker
 T1—12.6-volt, 500-mA power transformer

Misc.—Two-screw terminal strip or barrier block; four-screw terminal strip or barrier block; Molex Soldercons[®] (for DIS1); sockets for ICs (or substitute Soldercons); suitable enclosure; 1" (2.54-cm) threaded spacers (4); red acrylic filter; control knobs (2); dry-transfer lettering kit; machine hardware; hookup wire; solder; etc.

Note: The following items are available from Caringella Electronics, Inc., P.O. Box 727, Upland, CA 91786: Complete kit of parts, including cabinet, No. UET-1K, for \$34.95 plus \$2.00 shipping and handling; etched and drilled pc board No. UET-1PC for \$6.95 postpaid in USA. California residents, please add 6% sales tax.

in the schematic diagram and Parts List will produce a range of from approximately 10 ms to 10 seconds. If you require a longer period, you can increase the value of C5. For example, a 100-µF capacitor will yield a range from 100 ms to 100 seconds. If a 10-M potentiometer is used for R5, the range becomes 100

ms to 18 minutes. If a 10-megohm resistor is connected in series with the 10-megohm potentiometer, the range will be from 18 to 36 minutes.

The output of IC2 is used to drive an external relay and tone generator IC3. Any 12-volt dc relay whose coil resistance is at least 120 ohms can be

used. If a visual output is desired, connect a LED in series with a 240-ohm resistor to this point.

To increase the frequency of the 1000-Hz audio tone generated by IC3, decrease the value of R18. You can decrease the frequency by increasing the value of R18.

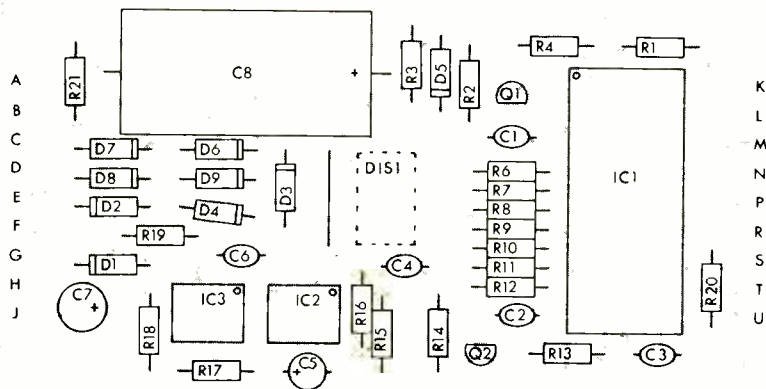
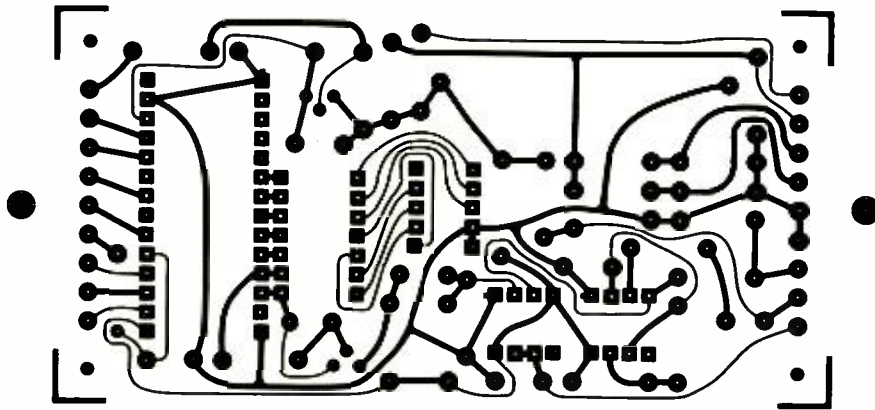


Fig. 2. Actual-size etching and drilling guide for printed circuit board is shown at top. Component placement diagram is directly above.

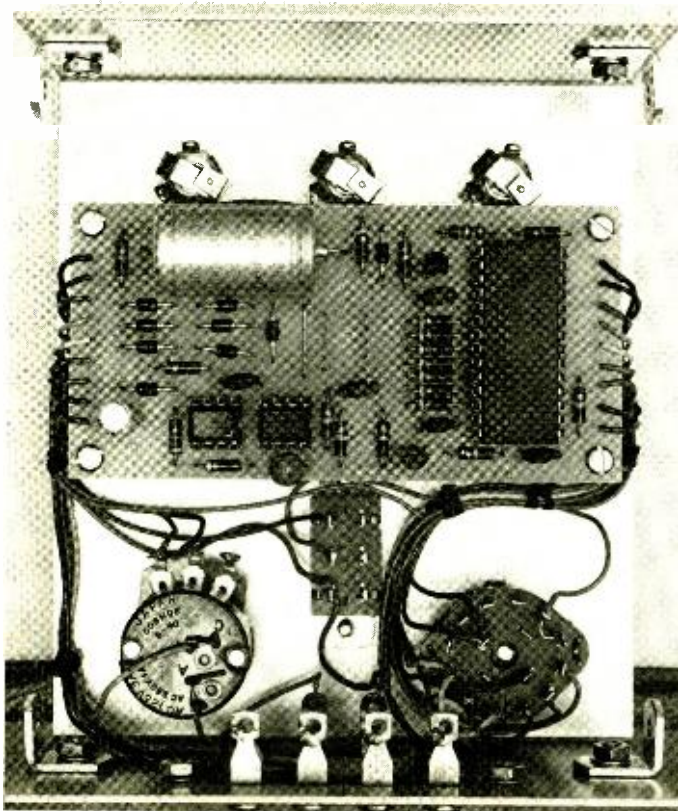


Fig. 3. Photo shows interior construction details of author's prototype.

Construction. The timer circuit is best assembled on a printed-circuit board. The actual-size etching-and-drilling guide and separate components-placement diagram for the pc board are shown in Fig. 2.

Before you proceed to wire the pc board, place it *foil* side up on a hard, flat surface. Slip a strip of five Molex Soldercons[®] onto the pins on each side of DIS1. (Do *not* remove the connecting strips of metal on the Soldercons until directed to do so.) Lower the display onto the pc board, guiding the pins of the Soldercons into the appropriate holes on the board. Because of the hard surface under the board, the pins will not go in as far as they might otherwise. Do not try to push them in all the way. Simply solder them to their respective traces on the board, using only as much heat and solder as necessary to assure a good electrical and mechanical connection in each case. Leave the display in place and cover its top surface with a piece of masking tape.

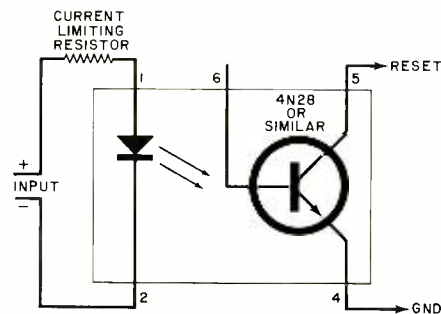


Fig. 4. An optoisolator can be used to interconnect two timers for extremely long timing durations.

Flip over the pc board and install the resistors, capacitors, diodes, and transistors. Refer to the components-placement diagram in Fig. 2 for proper component location and orientation. Install sockets in the locations for the integrated circuits. Then install IC2 and IC3 in their sockets. Do *not* install IC1 until last and, when you do so, be sure to practice safe handling procedures for MOS devices. (This clock chip is a PMOS device that can be damaged by static fields if it is not handled properly.) Flip over the board assembly and carefully flex the connecting strips on the display's Soldercons until they break away. Three or four flexes will generally do the trick. Temporarily set the board assembly aside.

Next, referring to Fig. 3 and the lead

photo, machine the top half of the enclosure in which the project is to be housed. (If you plan to build the power supply into the project, select a large enough enclosure to accommodate it without interference to the other elements in the circuit.) Drill the holes for the various switches, control, and circuit board standoffs; cut a window for the display; and make a pair of slots (or drill 1/2" holes) for the screw-type terminal strips or barrier blocks. Use a dry-transfer lettering kit to label the various switches, control, and terminal strip points, as shown in the lead photo. Then mount each item, except the circuit board assembly, in its respective location.

Solder an 8" (20.3-cm) length of hook-up wire to pads A through U on the circuit board assembly. Flip over the board and peel away the tape from the display. Then mount the circuit board assembly, with DIS1 centered in the window in the top half of the box, with threaded spacers and machine hardware. If you wish to protect the display and enhance its contrast for easier reading, cement a piece of red acrylic plastic over the window on the inside of the box before mounting the circuit board assembly on its spacers.

Drill a series of 1/4" holes in the bottom half of the enclosure to perforate it for the loudspeaker. Then mount the speaker, with a protective screen between it and the enclosure wall. Refer back to Fig. 1 and interconnect the circuit board assembly with the control, switches, terminal strips, and speaker, using the wires connected to holes A through U on the board. Trim the wires as necessary as you connect them. Finally, arrange the wires neatly and lace them together and assemble the case.

Using the Timer. RESET pushbutton switch S2 or the RESET input on the four-lug terminal strip returns the interval timer and display to zero. The display remains at zero as long as the RESET switch is closed or the RESET input is grounded. Releasing either initiates the timing cycle. If you desire remote operation of the reset feature, you can use the optoisolator circuit shown in Fig. 4.

The SLOW SET and FAST SET pushbuttons are used to preset the interval timer. The SLOW SET button is not operational in the two shortest interval positions of S1 (1 second and 10 seconds).

The divide-by-two switch (S5 in Fig. 1 but not labelled in Fig. 3) effectively cuts all of the timing intervals that are selected by S1 in half. ◇

X and K Band 2-Band Radar Detector

Extra Long Range

Effective on all Stationary and Moving Scans

Sight and Sound Dual Alert System:
Extra Loud Buzzer Alarm and Signal Light

Test Position:
Adjusts Sensitivity for City and Highway

On/Off Switch:
Makes Operation Easy



- For Autos and Trucks
- Long Range Sensitivity Alerts You In Time To React
- Increases Your Driving Awareness
- Encourages Safer, More Alert Road Skills
- Guaranteed

\$44⁸⁸

Until now, you would have paid \$80, \$100, and more for some of the important features that are built into our exceptionally sensitive radar receiver. Thanks to miniature, solid state technology, it is the most advanced X and K band system available...at an incredibly low price.

We have tested many of the more expensive brands on the market today. Some were large and bulky, some were of such short range that by the time they picked up radar there was no time to react. Others had no ON/OFF switch. Maybe that's a small thing, but plugging and unplugging those units eventually loosened solder joints.

YOU DRIVE SAFER. MORE CONFIDENT

The unit has a convenient ON/OFF switch. It also has a Test Position that let's you know the unit is operational. Reduces false alarms. And enables you to adjust sensitivity for city and highway driving. Dual Alert System picks up both X and K band radar. You hear its Extra Loud Buzzer and see its Signal Lamp when radar is being used. Long Range Sensitivity gives you ample time to react, before entering a sudden reduced speed zone. Without question, the system is the most full-featured, most reliable and best value radar detector we have ever tested!

EASY TO INSTALL

Unit plugs into auto or truck lighter. For 18-wheelers, it has an easy reverse to positive ground. It also features Visor Clip and Dash Mount installation.

CREDIT CARD ORDERS Illinois: 312-595-0461
CALL TOLL FREE 800-323-2272 Telex Orders: 25-5268

DRIVE WITH IT FOR 10 DAYS AT OUR EXPENSE

If you are not entirely satisfied with your unit, after 10 days, return it for a prompt refund. The unit is backed by the manufacturer's 90 day parts and labor guarantee.

Please send me Radar Detectors at \$44.88 ea. (Item 0068). Add \$2.50 per detector for shipping and handling. Illinois Residents add 5% sales tax.

Check or M.O. Enclosed

Please Charge My Credit Card:

American Express Mastercard Carte Blanche

Bank Amer./Visa Diners Club

Credit Card No. _____

Mastercharge Bank No. _____ Exp. Date _____

Name _____

Address _____

City _____

State _____ Zip _____

Signature _____

PEMC-001 ©CMI1978162R

790 Maple Lane Bensenville, IL 60106

Contemporary Marketing Inc.

CIRCLE NO 13 ON FREE INFORMATION CARD



You can build a better organ than you can buy!

A magnificent Schober Electronic Organ

What a marvelous way to put your special talents to work! With our Schober Electronic Organ Kits and your skill, you can build yourself some very special satisfaction, and a lifetime of great music!

Schober Organs are literally far superior to comparably-priced "ready-made" units. You could actually pay twice as much and get no better organ...and miss the fun of assembling it yourself. A PC board at a time, component by component, you'll assemble your own "king of instruments." And when you're done, you'll wish there was more to do. And there is! For then, Schober will help you learn to play, even if you've never played a note before!

Schober Organ Kits range from \$650 to \$2850, and you can purchase in sections to spread costs out...or have two-year time payments. Combine the incomparable quality of Schober components with your talent...and produce a far better organ than you can buy!

Thousands of others have, ever since 1955.

You can have all the details, without cost or obligation. Just send the coupon for the fascinating Schober color catalog (or enclose \$1 for a record that lets you hear as well as see Schober quality.) Why not clip it right now, before you forget?

The Schober Organ Corp., Dept. PE-81
43 West 61st Street, New York, N.Y. 10023

Please send me Schober Organ Catalog.

Enclosed please find \$1.00 for 12-inch L.P. record of Schober Organ music

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

CIRCLE NO 47 ON FREE INFORMATION CARD

BY TONY CARISTI

*Electronic diagnostic
instrument for locating
and identifying
problems in
battery or
charging
systems*

THE AUTOMOTIVE industry has taken advantage of the latest techniques in modern electronics technology. As a result, many of the components in late-model automobiles have become more difficult to diagnose when trouble occurs. An example of this is in the automotive battery and charging system, where the old-style battery, dc generator, and electro-mechanical voltage regulator have given way to the sealed battery, alternator, and solid-state voltage regulator. These new components are superior to the ones they replaced, but they also require more sophisticated test procedures to analyze and isolate faults.

It seems only natural that electronics technology should provide the means to check these components. The automotive battery and charging system monitor described in this article, provides such a check. It can be constructed at low cost, yet gives the accuracy and dependability suitable for a professional as well as an amateur. The monitor uses four LED's to provide an indication if a fault arises and also indicates possible sources of trouble. This feature will eliminate unnecessary replacement of properly operating components.

Circuit Operation. The analysis of an automotive battery and charging system can be accomplished by monitoring the battery voltage under several operational conditions, then comparing the measured value to a known standard.

TROUBLE- SHOOTING ANALYZER

FOR AUTOMOTIVE ELECTRIC SYSTEMS



PARTS LIST

C1, C2 — 10- μ F, 15-volt electrolytic
 D1 — 1N2069 or similar
 D2 — 1N4148 or similar
 IC1 — μ A 78GU adjustable regulator (Fairchild)
 IC2 — LM339 quad comparator
 LED1 through LED4 — Red LED
 R1, R2, R4 — 1000-ohm, 1% resistor
 R3 — 1000-ohm potentiometer, pc mount
 R5 — 39,200-ohm, 1% resistor
 R6, R11, R14, R18 — 100,000-ohm, 1% resistor

R7, R9, R15, R19 — 10,000-ohm, 10% resistor
 R8, R12, R16, R20 — 1000-ohm, 10% resistor
 R10 — 5900-ohm, 1% resistor
 R13 — 25,500-ohm, 1% resistor
 R17 — 19,600-ohm, 1% resistor

Misc. — Suitable enclosure, interconnecting leads, optional spst switch, mounting hardware, etc

Note: The following are available from: A Caristi, 69 White Pond Rd., Waldwick, NJ 07463: etched and drilled pc board at \$2.50; a set of 11 precision resistors at \$2.50.

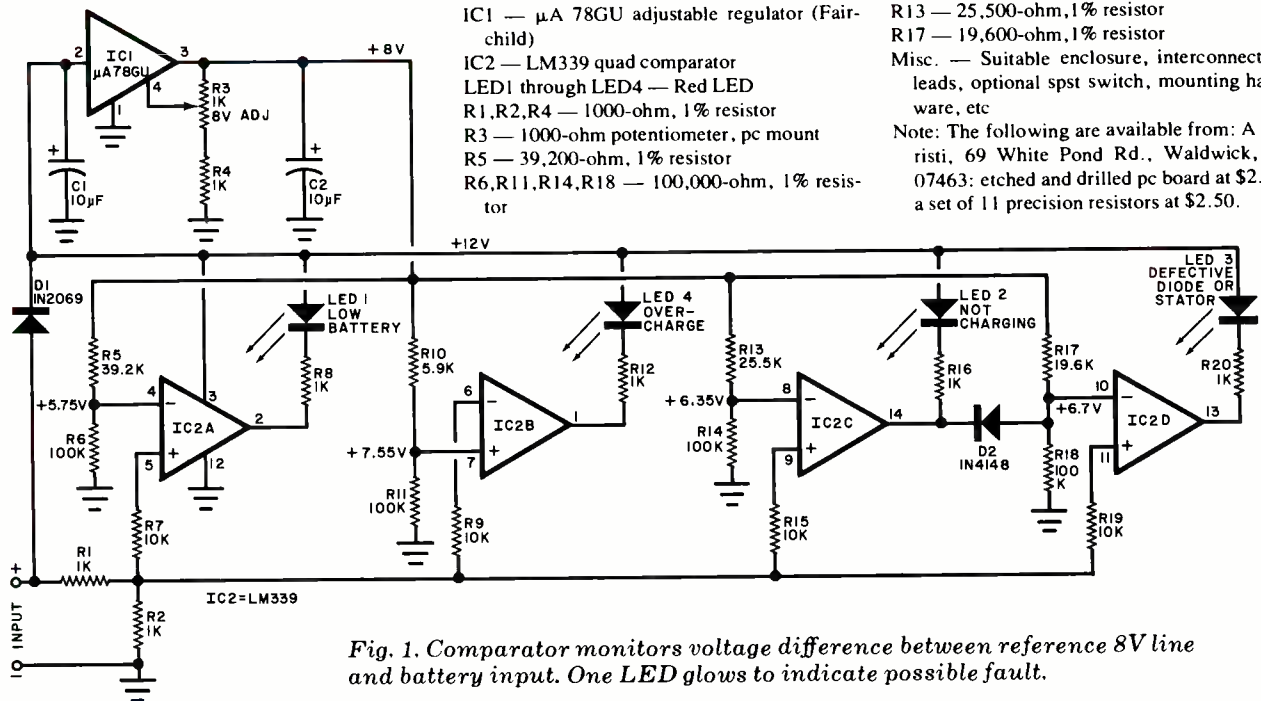


Fig. 1. Comparator monitors voltage difference between reference 8V line and battery input. One LED glows to indicate possible fault.

A properly operating battery and charging system will have a battery terminal voltage of about 12.6 volts when the engine has been turned off for some time, and between 13.5 and 15.0 volts when the engine is running and the battery is being charged.

If the battery voltage is below 11.5 volts with the engine not running, the battery is either in a very low state of charge or has a damaged cell. If the battery voltage is less than 12.7 volts with the engine running, the charging system is inoperative. If the voltage is less than 13.4 volts, then there is insufficient charging; if there is more than 15.1 volts across the battery terminals, overcharging is occurring.

The circuit shown in Fig. 1 constantly monitors the battery voltage, while LED displays indicate any improper electrical condition. The basic reference voltage for the monitor is formed by IC1 which is an adjustable voltage regulator that is set to a precise 8-volt output.

This voltage reference is fed to four precision voltage-divider networks (R5/R6, R10/R11, R13/R14 and R17/R18) that provide levels of 5.75, 7.55, 6.35 and 6.7 volts respectively), to individual sections of IC2. By feeding half the battery voltage to the noninverting input, the corresponding voltages then become 11.5, 15.1, 12.7 and 13.4 volts.

In IC2A, C and D, the precision reference voltage is fed to the inverting input (-) of the comparator, while half the system's battery voltage (via divider R1, R2) is coupled to the noninverting (+) input. As long as the voltage at the noninverting input is greater than the voltage applied to the inverting input, the output of the comparator is high. The associated LED is thus extinguished, indicating that the system is normal for that particular voltage level.

Should the battery voltage drop below the reference level, the comparator output drops to zero, causing the associated LED to indicate a malfunction.

Note that IC2B has its input terminals reversed; that is, the reference voltage is applied to the noninverting input while the battery voltage is applied to the inverting input. This causes its associated LED to glow if the battery voltage exceeds the reference level. This condition is also caused by a fault in the charging system. Diode D2 is connected between the output of IC2C and the inverting input of IC2D to prevent LED3 from lighting if LED2 is glowing. This not only prevents the two indicators from lighting at the same time, but also provides a positive indication of a particular type of fault in the charging system.

Diode D1 is connected in series with the positive input lead to protect the cir-

cuit against damage caused by an accidental reversal of the input leads.

Construction. The circuit can be assembled on a small pc board such as that shown in Fig. 2. Observe the polarities of the two diodes and two polarized capacitors. A 14-pin socket can be used for IC2. Pin 1 of IC2 can be identified by a small dot or mark on the plastic case.

The four LEDs can be mounted where they are easily observed, and then connected to their respective pads on the pc board. Each LED must be clearly identified as to indicated fault.

A long length of insulated wire can be connected between the monitor positive input and the battery positive terminal. The monitor's negative input may be connected to a chassis ground.

Test and adjustment. A 0- to 16-volt dc power supply and an accurate dc voltmeter are used to test the monitor.

Observing the correct polarity, connect the two monitor input leads to the power supply, and set the power supply for a 12-volt output.

Connect the voltmeter positive lead to IC1 pin 3, and the negative lead to ground. Adjust R3 until the voltmeter indicates precisely 8 volts.

Connect the voltmeter across the

power supply, then reduce the supply down to 11 volts. Both *LED1* (Low Battery) and *LED2* (Not Charging) indicators should be glowing. The other two *LED*'s should be dark.

Slowly increase the power supply voltage until *LED1* is extinguished. This should occur between 11.4 and 11.6 volts. As the power supply output is increased, note that *LED2* should extinguish between 12.6 and 12.8 volts, and *LED3* (Defective Diode or Stator) should light when *LED2* goes out.

As the power supply output is further increased, *LED3* should go out when the voltage is between 13.3 and 13.5 volts. *LED4* (Overcharge) should glow when the supply voltage exceeds 15.1 volts. *Do not raise the power supply output above 16 volts!*

If any of the *LED*s do not operate properly, check the 8-volt line, then make sure that the correct precision resistors are used at the proper comparator inputs.

Using the Monitor. The following steps should be performed in sequence when checking an automotive battery and charging system. Connect the monitor to the vehicle's battery terminals, being sure to observe correct polarity for each terminal.

An spst switch can be connected between the monitor positive input lead and the battery so that the monitor can be disabled when not in use. Make sure that the alternator drive belt has the proper tension.

Before the engine is started, the Not Charging (*LED2*) or Defective Diode or Stator (*LED3*) will be lighted since the battery is not yet being charged. If the Low Battery (*LED1*) glows, the battery

voltage is less than 11.5 volts. This can be caused by a state of deep discharge or a faulty cell. If this *LED* is glowing, investigate the battery before proceeding.

When the engine is started and everything is normal, all the *LED*s should be dark. If there is an electrical malfunction, then one of the *LED*s will glow.

If the Not Charging *LED* glows, the terminal voltage of the battery is less

than 12.7. Thus, the alternator is not delivering any current to the battery. This can be caused by an open regulator circuit or open alternator field.

If the Defective Diode or Stator *LED* glows, the terminal voltage of the battery is less than 13.4 volts. This can be caused by a shorted diode or stator in the alternator, or an improperly adjusted regulator.

If the Overcharging *LED* glows, the terminal voltage of the battery is greater than 15.1 volts. This can be caused by a shorted or misadjusted regulator.

If no *LED*s glow with the engine running, load the alternator by turning on the headlights' high beams, the air conditioner, the high-speed blower, the high-speed windshield wipers and the radio. Then moderately race the engine. All *LED*s should be extinguished.

If the Defective Diode or Stator *LED* is now lighted, but was extinguished with no load on the alternator, the most likely cause of the problem is an open diode in the alternator.

This low-cost, easy-to-use automotive instrument can save the builder many dollars of repair costs, making it a worthwhile investment in parts and labor. ◇

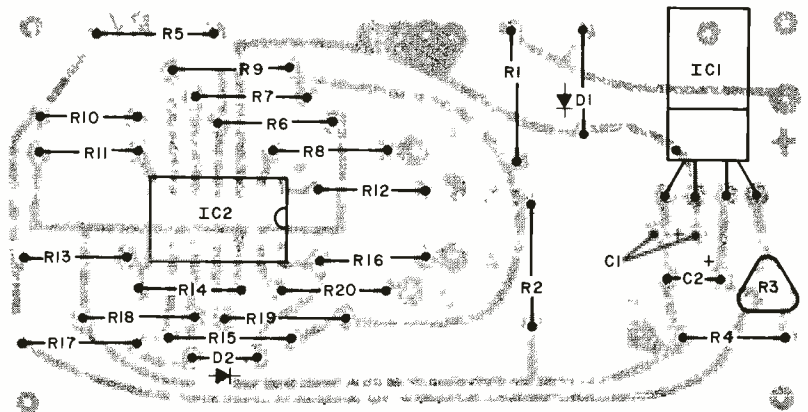
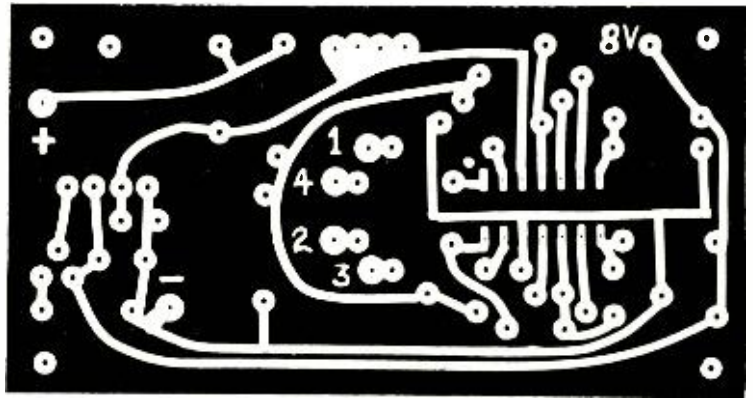


Fig. 2. Actual size etching and drilling guide for pc board is at top; component layout diagram below.

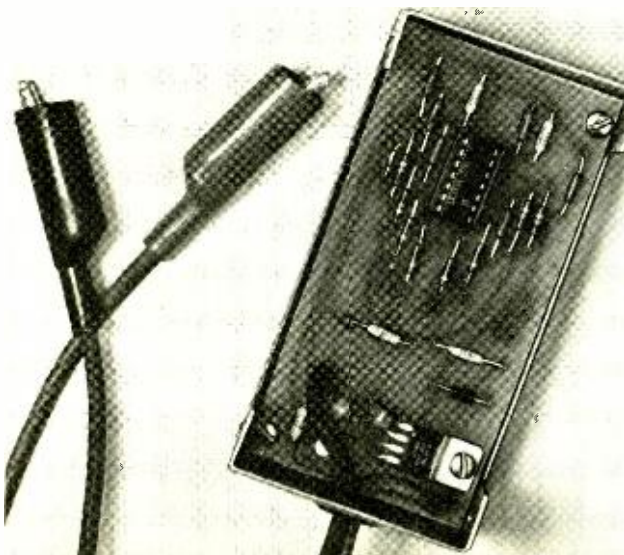


Photo of interior of author's prototype shows components mounted on printed circuit board and connections to enclosure.

BY BUD WEISBERG, K2YOF

BUILD A REMOTE ANTENNA SELECTOR SWITCH

*Low-cost, reliable switch permits selecting
from among six antennas*

Erecting multiple antenna systems offers the communications buff increased operating flexibility and frequency coverage. Unfortunately, it can also add appreciably to station cost and complexity—especially when the anten-

nas require separate feedlines. Presented here is an alternative to a large investment in coaxial cable—a low-cost, remotely controlled coaxial switch.

The Remote Antenna Selector Switch enables the user to quickly select one of

six antennas. Equally important, it provides a silent, reliable indication of the selection without any need for relay-holding current or the imposition of dc or a-f control signals on the feedline. The project can be assembled from inexpen-

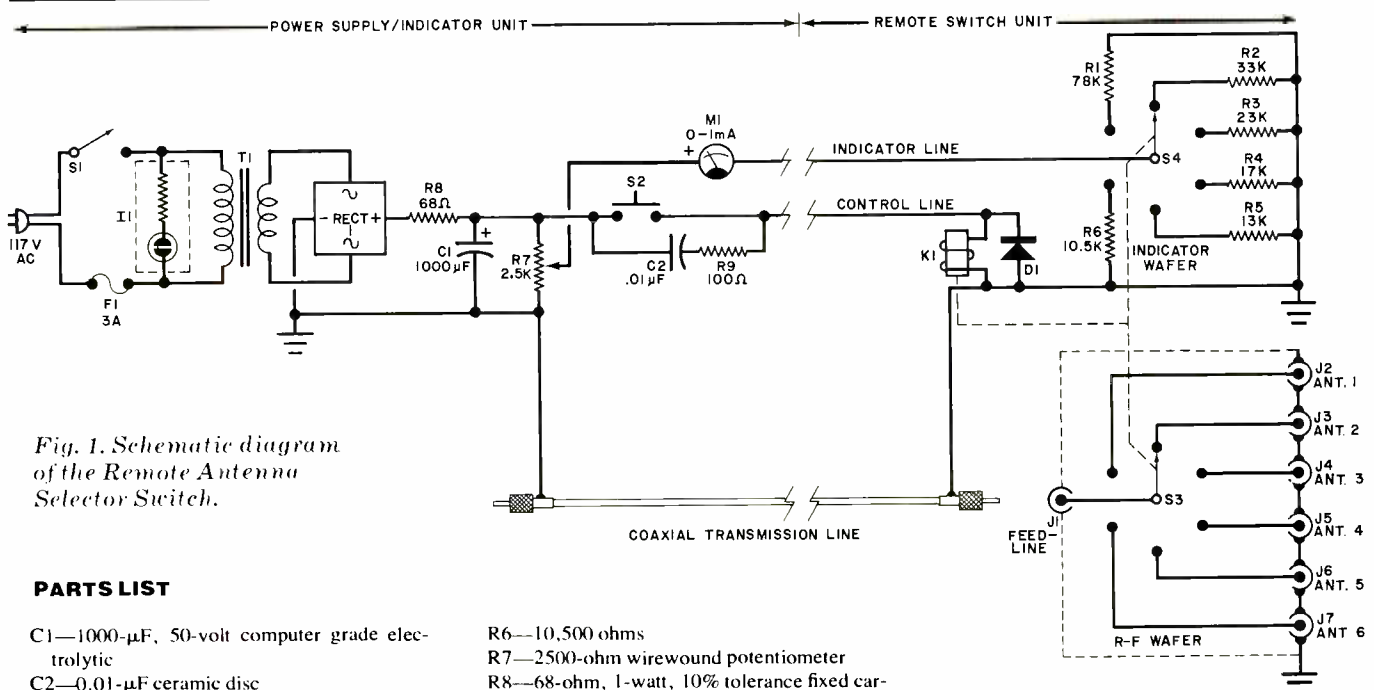


Fig. 1. Schematic diagram of the Remote Antenna Selector Switch.

PARTS LIST

- C1—1000- μ F, 50-volt computer grade electrolytic
- C2—0.01- μ F ceramic disc
- D1—1N4003 rectifier
- F1—3-ampere fast-blow fuse
- I1—110-volt neon pilot light assembly
- J1 through J7—SO-239 coaxial connector
- K1—12-position rotary stepping solenoid with 24-to-28-volt dc coil (Ledex Series 5 or equivalent)
- M1—0-to-1mA meter movement
- The following are 1/2-watt, 5% tolerance carbon composition fixed resistors:
- R1—78,000 ohms
- R2—33,000 ohms
- R3—23,000 ohms
- R4—17,000 ohms
- R5—13,000 ohms

- R6—10,500 ohms
- R7—2500-ohm wirewound potentiometer
- R8—68-ohm, 1-watt, 10% tolerance fixed carbon composition resistor
- R9—100-ohm, 1/2-watt, 10% tolerance fixed carbon composition resistor
- RECT1—100-PIV, 4-ampere modular bridge rectifier
- S1—5-ampere spst switch
- S2—5-ampere, normally-open, momentary contact pushbutton switch
- S3—11-position, 1-pole ceramic switch (Centralab No. 2503 or equivalent)
- S4—11-position, 1-pole phenolic switch wafer (Centralab No. JD or wafer from No. 1403 switch)
- T1—24-to-28-volt ac, 2-ampere transformer (Radio Shack No. 273-1512 or equivalent)

Misc.—Suitable enclosures, 4" \times 4" \times 2" (10.2 \times 10.2 \times 5.1 cm) aluminum utility box, coaxial cable and PL-259 connectors, 1/4" (6.4-mm) flexible shaft coupling, 2- or 3-conductor cable, machine and self-tapping hardware, silicone cement, PVC tape, No. 14 copper wire, solder, etc.

Note—Suitable surplus stepping solenoids are available from several sources, including Poly Paks, Box 942, South Lynnfield, MA 01940 (Cat. No. 92CU3493) and Fair Radio Sales, 1016 East Eureka, Lima, OH 45802 (Cat. No. MX167869G1).

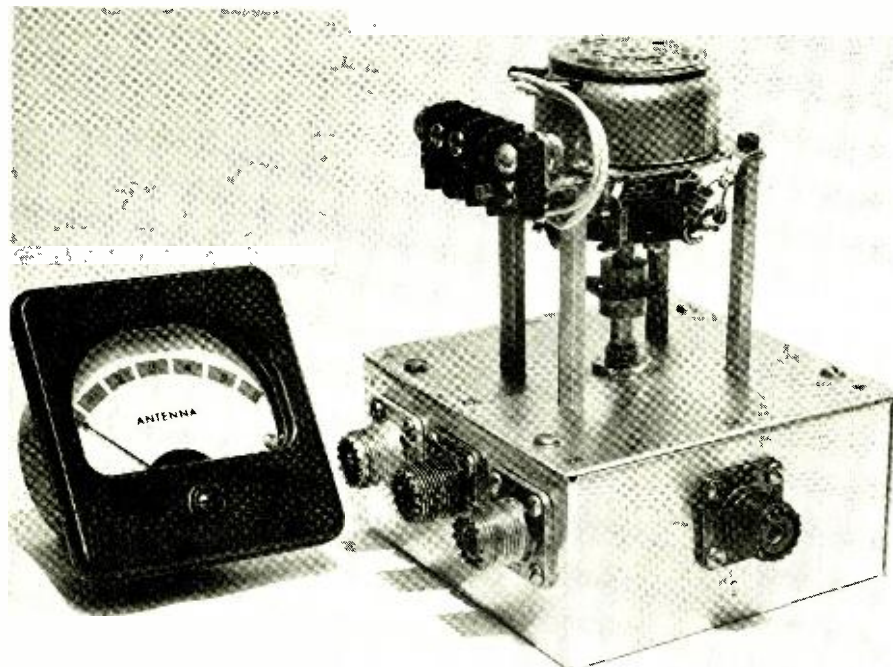


Fig. 2. Photo of the remote switch unit and antenna selection indicator.

sive surplus and junk-box parts and gives a level of performance rivalling that of commercial products costing much more.

About the Circuit. A schematic diagram of the Remote Antenna Selector Switch appears in Fig. 1. Upon the application of line power, electrolytic capacitor *C1* draws charge from stepdown transformer *T1* through bridge rectifier *RECT1* and resistor *R1*. When momentary pushbutton *S2* is depressed, *C1* discharges via the coil of *K1*, a 12-position rotary stepping solenoid. Eleven-position rotary switches *S3* and *S4* are driven by the shaft of *K1*, so the switches advance one position when the solenoid is energized.

In this project, only alternate switch contacts are employed. The solenoid must therefore be stepped *twice* to advance the switches to the next position. Wafer *S3* performs the antenna switching function. The other wafer, *S4*, is part of the indicator circuit, as are fixed resistors *R1* through *R6*, potentiometer *R7*, and milliammeter *M1*. As *K1* rotates the switch shafts, the effective series resistance between the negative side of *M1* and ground varies. This causes the meter movement to deflect and indicate the antenna selection on a modified meter scale. If the solenoid is stepped only once, the meter will read OFF, indicating that *S2* must be closed once more to advance the mechanism to the next antenna position.

Construction. The Remote Antenna Selector Switch comprises two units, the switch proper, shown in Fig. 2, and the power supply which appears in Fig. 3. Also shown in Fig. 2 is the position indicating meter, which can be built into an enclosure with the power supply or mounted on a separate panel.

The power supply is relatively simple and is most easily constructed using point-to-point wiring techniques. A barrier terminal strip such as that mounted on the prototype power supply's chassis will facilitate interconnections with the power line, switches and solenoid. Due to the amount of charge it must hold, capacitor *C1* must be a high-grade component such as a computer-grade electrolytic. Similarly, the pushbutton switch employed as *S2* must be able to handle the substantial current flowing when *C1* discharges through *K1*.

The meter scale will have to be relabelled. The zero line should be labelled the OFF position, the full-scale mark labelled position 6, and the remaining five numerals spaced equally between these two extremes. A more or less sensitive meter movement can be used, but in the former case larger values will be required for *R1* through *R6* and in the latter case smaller values. Non-standard resistor values can be obtained by combining standard ones in series or parallel.

The remote unit shown in Fig. 2 consists of a solenoid driving two rotary switches. In the author's prototype, the solenoid is a Ledex Series 5 type with a 1-7/8-inch (4.8-cm) diameter case. It is available from most industrial suppliers. Surplus solenoids can be obtained from several sources, two of which are given

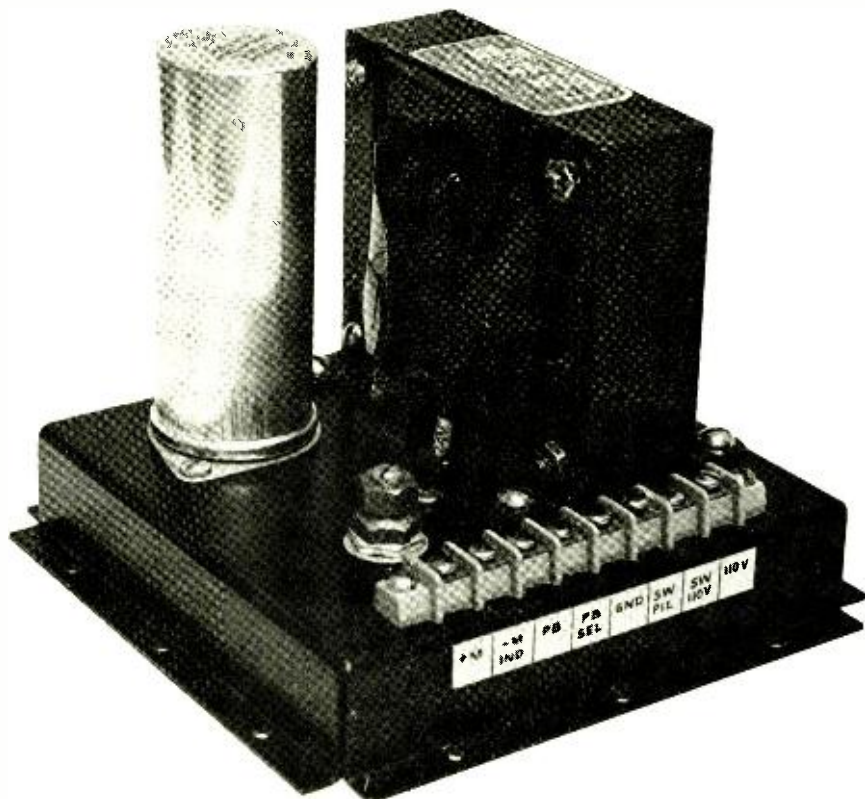


Fig. 3. Photo of the power supply unit.

at the end of the parts list of Fig. 1.

Solenoid *K1* and phenolic switch wafer *S4* are mounted in the center of the utility box's top cover using four 2¼-inch (5.7-cm) tapped metal standoffs, as shown in Fig. 2. Ceramic wafer switch *S3* is mounted inside the utility box and its shaft is coupled to that of the solenoid by an all-metal flexible coupling with dual setscrews on each hub. (These are required to withstand the high torque generated by the solenoid.)

Because the solenoid provides positive indexing, the detent and stop on *S3* must be carefully broken off to reduce drag and allow continuous rotation. Also, alternate contacts on the switch's ceramic wafer should be removed by *very gentle* prying or filing to leave six contacts plus the wiper contact.

The wiring of this switch is shown in Fig. 4. To minimize impedance mismatch, two low-inductance rings are mounted on opposite sides of the ceramic wafer. Form two 2½" (6.4-cm) inner diameter rings from 8" (30.3-cm) lengths of soft-drawn copper wire and hammer the rings flat. Again adjust the inner diameter to 2½", and trim away the excess at the overlap. Butt-join and solder the rings closed.

Partially hidden in Fig. 4, the front ring is soldered to the lug of *S3*'s wiper and to a short length of tinned No. 14 copper wire. The other end of this wire should be soldered to the inner conductor pin of *J1*, the FEEDLINE SO-239 coaxial jack. The rear copper ring is soldered to lugs held in place by the switch assembly screws. A ¼-inch (6.4-mm) insulated spacer should be placed under each of these solder lugs to position the two rings about 7/16 inch (11.1 mm) apart. This might require the substitution of longer screws for those used by the switch manufacturer.

The inner conductor pins of the remaining SO-239 jacks (*J2* through *J7*) can now be connected to the appropriate contact lugs of *S3* via short lengths of tinned No. 14 copper wire. Install a solder lug at each jack location, securing it to the aluminum utility box with one of the four pairs of screws and nuts holding each jack in place. Next, connect one end of a short length of tinned No. 14 copper wire to the solder lug at *J1*. Solder the other end of the wire to the rear copper ring. Repeat this procedure for the remaining jacks (*J2* through *J7*).

Note that the switch shown in Fig. 4 has a metallic ring which shorts out all unselected switch contacts. The author's original intention was to utilize this

ring to ground all unselected antennas. This idea was discarded, however, because of the possibility of flashover during transmissions at medium amateur power levels (several hundred watts). In CB, QRP amateur, and SWL applications, however, there is no danger of flashover. Accordingly, those readers whose use of the antenna switch falls into one of the three categories mentioned might want to incorporate this feature for lightning protection. Those who want to do so should not procure the switch type specified in the parts list because it lacks a shorting ring. Rather, they should obtain a switch having such a ring.

Before tightening the shaft coupling's setscrews, make sure that the wiper of *S3* is properly aligned with that of *S4*. Each wiper should be touching the corresponding contact on each switch wafer. A drop of Loctite or nail polish on each screw head and nut will keep the mechanical assembly of the Remote Antenna Selector Switch secure.

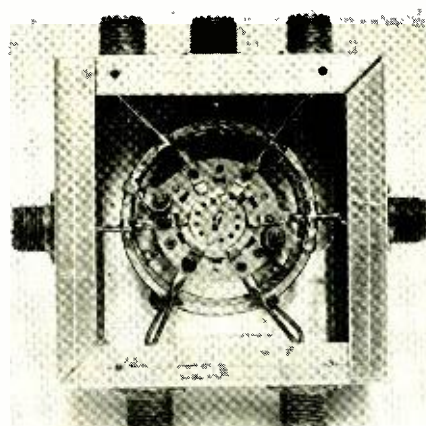


Fig. 4. Photo of the r-f wafer switch shows how two copper rings are used to minimize impedance mismatch.

Adjustment. Interconnect the power supply and switch units with a length of two- or three-conductor cable. The cable should have the same length as that required to run from the remote switch unit to the power supply in the finished installation. It can, in fact, be the same cable. Note that the circuit shown in Fig. 1 employs the braid of the coaxial feedline as a return path for the solenoid and position indicator circuits. This allows the use of a two-conductor control cable. If a separate return path is preferred, a three-conductor control cable must be used. For cable lengths up to 50 feet, No. 20 conductors can be used. Longer control cable lengths necessitate the

use of No. 18 or 16 conductors.

Close power switch *S1* and wait a few seconds so that *C1* can acquire a full charge. Then momentarily close *S2*. The solenoid should step and advance one position. Note, however, that *S2* must be closed again to advance the switch to the next antenna position. With the component values specified in the schematic and parts list, you should be able to step *K1* once every two seconds or so. If a faster stepping rate is desired, reduce the value of *R8*.

Adjust potentiometer *R7* so that 10 volts appears between its wiper and ground. The meter will then correctly indicate the position of the antenna position switch. If *K1* is stepped only once, the meter will read OFF, indicating that the switch is between antenna positions.

Installation and Use. The location of the remote switch unit depends on the particular application. If directly exposed to the elements, the remote unit should be housed in a plastic enclosure of a suitable size. All joints, holes and screw heads should be treated with silicone cement to weatherproof the assembly. Coaxial connectors soldered to the antenna and main download cables should be thoroughly taped with PVC tape and/or liberally treated with silicone cement because these PL-259 plugs are not weatherproof. Failure to do this will result in premature deterioration of the coaxial feedlines.

As mentioned earlier, the Remote Antenna Selector Switch does not ground unselected antennas. Therefore, it is advisable to insert lightning arrestors in the main feedline and the switch-to-antenna feedlines of any antennas which are not by virtue of their construction at dc ground.

This project was designed to provide reliable remote antenna selection without introducing a significant impedance "bump" and consequent standing wave ratio on the coaxial line running to the radio shack. If switch *S3* and the coaxial jacks have been wired as suggested in this article, the switch can be used through vhf with good results. Remember that the solenoid must be stepped twice to advance the switch to the next antenna position. (Even if you forget, the meter will remind you by displaying an OFF indication.) During idle periods (the bulk of the time), the supply unit can be used to power other intermittent control projects formed around inexpensive surplus or industrial 24-volt relays and stepping solenoids. ◇

Microcomputer ROM Board Buying Directory

Make & Model		Power required (mA) ¹			PROM cap.	PROM type	Can Program	Firmware	Remarks
		+5V	+16V	-16V					
FOR S-100 BUS:									
Advanced Computer Prods.									
A-8KK	24 (b) 60 (k) 90 (w)	X	X	X	8K	2708	no		Power-on jump, reset jump, user breadboard area.
Byte									
4K PROM	100	X		X	4K	1702A			Powers only ROM being accessed.
PROM Boot	120	X		X	8K	2708			Auto-start option, 2704 option
CGRS Microtech									
16K ROM	60 (k) 100 (w)				16K	2708	no	opt	Tiny BASIC, various operating systems, disassembler/trace/editor firmware optional.
Computerware, Inc.									
EPROM Board	125 (w)				16K 32K	2708 2716	no	no	
Cromemco									
Bytesaver	145 (k) 245 (w)	500			8K	2708	yes	programmer	
16PR	145 (k)	400	800	500	16K	2708	no		Bank select; "address anticipation."
32KBS	195 (k) 295 (w)	2.1A			32K	2716	yes		RAM can overlay ROM address space; bank select, DMA compatible.
D.C. Hayes									
80-708	163 (w)				8K	2708	no		
Ibex									
16KPB	85 (k) 110 (w)				16K	2708	no		Blocks can be disabled to save power and allow RAM to overlay address space
IMSAI									
PROM 4-512	165 (k) 247 (w)				4K	1702A			Includes 512-byte EPROM.
PROM 4-4	399 (k) 579 (w)				4K	1702A			Includes 4K EPROMs.
Ithaca Audio									
EP16K	25 (b)	320	750	500	16K 32K	2708 2716	no	no	Enables ROMs individually, allowing overlay by RAM.
EPPRO6	85					3*	yes	yes	*One 2708, one 2716, one 2732, up to 4 wait states if desired.
Jade Computer									
MR8	100 (k) 121 (w)	1A			8K	2708	no	S90 mon.	Can alternate RAM and ROM, external RAM disable.
MR16T	100 (k) 121 (w)	1A			16K	2716	no	S90 mon.	As above.
JG RNR	105 (k) 168 (w)	1A			4 to 32K*	*	no	no	*Can use 1702, 2704, 2708, 2716, 5204, 6834.
JG 8/16	30 (b) 60 (k)	1A			8 or 16K	2708, 2716	no	no	Unused locations free for RAM.
PROM SETTER	210 (k) 375 (w)	1A			0	*	yes	no	*Programmer only for 1702, 2704, 2708, 2716, 5204, 6834. With software listing.
Mountain Hardware									
ProROM	164 (k) 214 (w)	500			7.5K	AM1- 6834	yes	monitor	Can program 1 byte at a time; includes 512 bytes RAM.
Objective Design									
Databank	200 (k)				16K	2716/ 2708	yes	yes	
Piiceon									
PS-K-0K	167 (k)	X	X	X	8K	2708	yes	mon.	Reset-jump capability.
PS-W-0K	220 (w)	X	X	X	8K	2708	yes	mon.	Same, wired.
PS-W-4K	257 (w)	X	X	X	8K	2708	yes	mon.	Same, w. 4 EPROMs.
PS-W-8K	296 (w)	X	X	X	8K	2708	yes	mon	Same, w. 8 EPROMs.
Processor Tech.									
GPM	149 (k) 189 (w)				8K	2708	no	2K CUTER	1K RAM, ALS-8 firmware optional.

Make & Model	Price ¹ (\$)	Power required (mA) ²			PROM cap.	PROM type	Can Program	Firmware	Remarks
		+8V	+16V	-15V					
GPM SOL	99 (k) 129 (w)				10K	2708	no	none	Same, less RAM and firmware.
2KRO	65 (k)	600		350	2K	1702			
Solid State Music									
MB 3	65 (k)	250		40	4K	1702	no		Switch-selectable address and wait (0-4) cycles. Similar, but 0-8 wait states, power-on vector jump, allows disabling any 1K block for RAM address overlay. Can intermix RAM or PROM in 256-byte increments, jump on reset or power-up.
MB-8A	95 (k)	160	10	10	16K	2708	no		
MB 9	80 (k)	X			4K		no		
Szerlip									
RNR	117 (k) 168 (w)				64K	any 24-pin	no		For any 24-pin PROM; also has 1K RAM, parallel I/O. Similar, but can program.
PROM writer	210 (k) 375 (w)	700	200	200	64K	same	yes	yes	
Teletek									
System Central Interface	385 (w)	X	X	X	3-12	27*	yes	2K mon.	*For 2708, 2716, 2732; has 256 bytes RAM, I/O, reset-jump
Vector Graphics									
PR1	129 (w)				2K	1702A	no	\$75*	*Includes 1K RAM; 1K monitor extra, jump-on-reset; MWRITE.
PR2	175 (w)				12K	2708	no	\$75*	*As above, but addressable in two 8K blocks; 3K unused space allows RAM overlay.
Wameco									
EPM 1	30 (b) 200 (k) 230 (w)				4K	1702	no	no	Phantom disable.
EPM 2	30 (b) 455 (w) 1225 (w)				16K 32K	2708 2716	no no	no no	Phantom disable & bank sel. 2708 version. 2716 version.
Western Data Systems									
PRO EX 1	296 (k)	2A	125	125	8K	2716	no	yes*	*MICROBUG OS; also contains Video RAM, on-board r-f modulator.
Xybek									
Primmer I	259 (w)				2K	1702	yes	opt.*	*1.8K EPROM, 256 bytes RAM, programming firmware \$32, external program socket \$17.
Primmer III	370 (w)				31K	2708 12716 PD458	yes	opt.*	*Similar, but firmware \$32, zero-insertion-force ext. socket \$19. 1K RAM, 30K PROM.

Make & Model	Price ¹ (\$)	Power required (mA) ²			PROM cap.	PROM type	Can Program	Firmware	Remarks
		+8V	+12V	-12V					
FOR SS-50 BUS:									
Gimix									
8K P	90 (w)	X			8K	2708	no		PROMs can be inserted & removed from programming sockets with power on, can program 4 at once.
4KPPD	198 (w)	X			4K	2708	yes	yes	
Midwest Sci.									
EPR B	95 (k)* 150 (w)*	X	X		8K	2708			*Sockets, \$15 extra.
PRR 8B	95 (k)* 150 (w)*				4K*	1702A			*Sockets, \$25 extra. 4K includes 256 bytes RAM.
SDS Technical									
MCM6830	145 (k)	800			2K	2716	8K	yes	
Smoke Signal									
P3R	129 (w)				8K	2708	no	optional	Interfaces to POP-1 EPROM programmer, Oliver paper tape reader.
P3R-1	129 (w)				8K	2708	yes	optional	

Notes:

¹Up to one board (kit or kit wired). Prices usually do not include PROMs.

²In ampere-hours, indicated by "A". Power consumption may vary with number of PROMs.

*See "Remarks" column.

BY ROBERT B. COOPER, JR.,
W5KHT,
AND S. K. RICHEY

PART 3

A PERSONAL MICROWAVE COMMUNICATIONS SYSTEM THE MINI-WAVE

Antennas, range and licensing information

Antennas and Range. Microwave Associates' Gunnplexers are shipped equipped with UG-39/U waveguide flanges and must be used with antennas having compatible flanges. The company offers several antennas that will function well with its Gunnplexer units.

The least expensive antenna available is a small horn with 17 dB of gain and a half-power beamwidth of approximately 30 degrees. A small (2-foot or 0.6-m) parabolic dish can be used if more gain is desired. The Microwave Associates Model MA-86555 dish has 32 dB of gain, a 4-degree half-power beamwidth, and mounts on a 2-inch (5.1-cm) pipe. Even more gain can be achieved by installing the Model MA-86556 antenna. This 4-foot (1.2-m) dish has 38 dB of gain and a 2-degree half-power beamwidth. It mounts to a 2-inch (5.1-cm) pipe. Ordering information for these antennas can be found in Part 1 of this article.

Exactly which antenna is right for your installation depends on the desired communications range. Antenna gain must be used to overcome path loss, which increases with frequency. At 10.250 GHz, signal loss over the first mile (1.6 km) is 116.8 dB. That's very high, but when the path is doubled to 2 miles (3.2 km), path loss increases "only" 6 dB to 122.8 dB. Each time the path is doubled

again, say, from 2 to 4 miles (3.2 to 6.4 km), the signal drops another 6 dB. Obviously, getting a signal to travel the first mile (1.6 km) while retaining a usable signal level is the biggest hurdle. Once


that distance is achieved, extending the range should be relatively easy.

Every calculation of microwave communications range includes one immutable assumption and several variable factors. The fixed assumption is that the path extends over the *line of sight*. That is, if a powerful enough pair of binoculars were available, the receiving antenna could be seen by an observer at the transmitting antenna. No obstructions by hills, buildings, or plants are permitted.

In the real world, microwaves will penetrate objects to varying degrees and over short paths (0.5 to 1 mile or 0.8 to 1.6 km) intervening objects can be tolerated if necessary. The authors have used Mini-Wave gear to communicate through one to several walls with good results. Quality of the link depends upon the composition of the intervening structures. (Wood doesn't attenuate microwaves too severely; solid steel blocks them completely!)

The reflective properties of solid objects can be employed to advantage in situations where a line-of-sight path cannot be obtained. For example, if both ends of a proposed microwave link can "see" a metal water tower but no direct line of sight exists between them, communications might well be established by aiming both antennas at the tower. Metallic objects such as the water tower

(Continued on page 74)

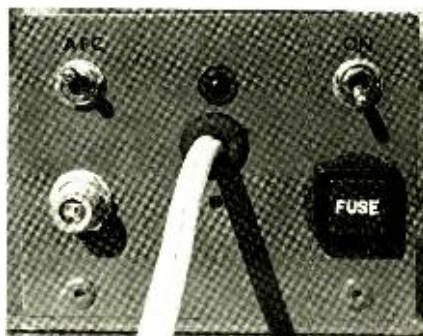

Controls for transmitter (top) and receiver (bottom) are on enclosure ends. Hole below ac line on receiver is for audio.

what's really NEW in electronics?

It's all in this latest
HEATHKIT®
CATALOG
and it's
FREE



Have you seen a real computerized, digital home weather station... or a precision electronic scale for your bathroom... or advanced educational programs that let you learn electronics or automotive maintenance at home... or a totally broadbanded amateur radio transceiver... or the world's only programmable color TV with fully automatic antenna rotor? If you haven't, send for a free Heathkit Catalog.

You'll see nearly 400 unique electronic products — the latest technology, the newest features, the best values. The kinds of quality products Heath Company has been offering for some 60 years! It's fascinating reading. But the excitement doesn't stop there.

Send for your FREE Catalog Today!

Heathkit products are displayed, sold and serviced coast-to-coast at Heathkit Electronic Centers (Units of Schlumberger Products Corporation). See the white pages of your phone book.

These sophisticated products are easy to build kits. Illustrated step-by-step instructions guide you and detailed explanations help you learn how the product works from the inside out. It's fun, easy and educational.

So send for your free catalog today. It's the best way we know to find out what's new in electronics and have fun doing it!

HEATH
Schlumberger Heath Company, Dept. 010-492
Benton Harbor, Michigan 49022

FREE!

Please send me my FREE Heathkit Catalog.
I am not currently receiving catalogs.

Name _____

Address _____

City _____ State _____

CL-678 Zip _____

(Continued from page 70)

in this hypothetical situation usually reflect microwave energy very efficiently. In some instances, a large building or mountain will reflect enough signal to make communications possible.

Other factors that govern range are transmitter output power, the method of modulation employed, receiver sensitivity and noise figure, path loss, the required signal-to-noise ratio, etc. In FM systems such as the Mini-Wave communications link, range is affected by the "FM improvement factor," which is the advantage gained by more fully modulating the carrier (increasing the frequency deviation and modulation index), the "FM threshold," the point at which limiting improves intelligibility, the design and operating characteristics of the limiter and discriminator, and other factors too complex for adequate treatment here.

The curves in Fig. 11 show the line-of-sight ranges for Mini-Wave transmitters and receivers employing 17-dB horns (A), 32-dB parabolic dishes (B), and 38-dB dishes (C), plotted against signal-to-noise ratio. Intermediate ranges will result if different antennas are used at the transmitter and receiver. If the goal of flawless video reception is established, an S/N ratio of 48 dB is required.

These range plots show what a powerful tool antenna gain is! In the Mini-Wave system, transmitter output power is fixed at a nominal value of 20 milliwatts. Receiver noise figure, discriminator and limiter characteristics and the transmitter modulation index are established by circuit design and component parameters. Accordingly, increasing antenna gain is the simplest and most effective way to increase range.

The dramatic increase in signal-to-noise ratio that can be obtained by replacing the stock 17-dB horns supplied by Microwave Associates in its MA-87141-1 package is illustrated by both Fig. 11 and the following example. Assume that 17-dB horn antennas are used at each end of a 2.5-mile (4.0-km) path and that the baseband signal at the receiver's video output has an (unacceptable) signal-to-noise ratio of 20 dB. If one of the horns is replaced with a 2-foot (0.6-m) parabolic dish, system gain increases 15 dB. Thus, the video signal-to-noise ratio becomes 35 dB.

The quality of the received picture can be further improved by replacing the other horn antenna with a 2-foot (0.6-m) dish. Adding the second dish increases the signal-to-noise ratio at the receiver output by an additional 15 dB to an ex-

cellent 50 dB, 2 dB above the requirement for flawless video reception. Employing 4-foot (1.2-m) dishes at both ends of a Mini-Wave System makes possible excellent video reception over 13-mile (20.8-km) paths, very good picture quality at 32 miles (51.2 km), and usable video reception over distances greater than 64 miles (102.4 km)—assuming that the terrain permits such long line-of-sight paths!

A final word about the range plots shown in Fig. 11. They were derived without any allowance for a *fade margin*. Commercial microwave links are designed to provide more signal at the receiving antenna than is necessary for proper reception. This extra margin of signal strength is included in the link to compensate for equipment aging, increases in path loss which can occur during heavy rain, etc. Typical commercial systems made by Bell Telephone and others provide the receiver with 40 dB more signal than is needed under optimum conditions.

Such a margin adds considerably to the cost of a communications system. Commercial users are willing to pay the price for high reliability. Otherwise, their ability to forward information (and to collect revenue for the service) would be dependent on the exact amount of atmospheric attenuation at any given instant, as well as other factors beyond their control.

Those employing Mini-Wave equipment can usually tolerate brief signal outages during extremely heavy rainstorms. They therefore do not have to invest the large sums required for substantial fade margins. However, if a particular Mini-Wave application calls for a fade margin, it can be obtained simply


by installing an antenna with more gain than is needed for clear reception. For example, if a horn providing satisfactory results is replaced with a 4-foot (1.2-m) dish, a fade margin of 21 dB or more will be obtained—at a cost of \$265.

Set-up. Place the transmitter and receiver relatively close together, say, 50 to 100 yards (47.7 to 95.4 m) apart. Connect a video source to the transmitter input jack and a video monitor to the receiver's output jack. If the audio circuits have been built, connect a high-impedance signal source to the transmitter's audio input jack and a pair of headphones or an external audio amplifier to the demodulator's output jack. Optically align the antennas and apply power to both units.

If the Gunnplexers have been ordered for compatible transmit and receive frequencies and the Varactor bias levels have been set at +4 volts, contact should be established almost instantaneously. Next, place receiver switch *S1* in the *AFC ON* position if you have not already done so, and adjust the transmitter's video level control (*R30*) for optimum picture quality if it was not set earlier with the aid of an oscilloscope. Similarly, audio level control *R7* should be adjusted for best-sounding audio if it was not previously adjusted for the proper ± 25 -kHz subcarrier deviation.

After you have gained some experience operating the Mini-Wave system over short distances, you can begin to extend the signal path. If horn antennas are employed, aiming them becomes relatively noncritical as the path length increases because the antennas have -3 -dB beamwidths of approximately 30 degrees. Parabolic dishes, however, are extremely directional and demand very precise positioning—a change in antenna alignment of only a few degrees will mean the difference between no signal at all and perfect video reception!

The following procedure is recommended for the installation of parabolic dish antennas. If possible, establish communications over the path with horn antennas. Picture quality need not be good, but the presence of a video signal (even one that is just detectable) will simplify matters greatly. Next, replace the horn on the receiving Gunnplexer with a 2-foot (0.6-m) or larger parabolic dish antenna. Leave the transmitting horn fixed and adjust the position of the receiving dish for optimum reception. Then, if necessary, replace the transmitting horn with a parabolic antenna and

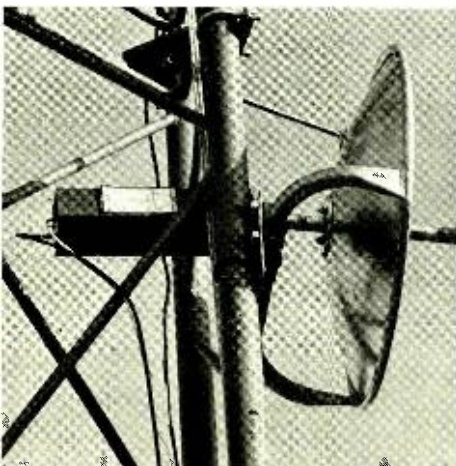

Range of several miles can be obtained with 2' parabolic dish.

A Band Plan for the 10.0-to-10.5-GHz Amateur Allocation

This plan has been developed so that the 10-GHz amateur band can accommodate the largest possible number of simultaneous, interference-free video (or video plus audio subcarrier) transmissions in a given area. Placing the receiver's Gunn local oscillator 45 MHz above the transmitter frequency and taking advantage of antenna polarization (horizontal or vertical) characteristics results in 33 one-way channels. For two-way communications, receiver

and transmitter are reversed, generating 33 reply channels.

The "national calling frequency" for general use is channel B4, 10.2 GHz transmit and 10.245 GHz receive. Note that channel C5's transmit frequency coincides with the receive frequency of the national calling channel. This has been done deliberately to allow frequency netting and calibration of equipment against a local CW (A) beacon operating on channel C5.

Channel group	A (horizontal)		B (horizontal)		C (vertical)		D (vertical)	
	T	R	T	R	T	R	T	R
1	10.010	10.055	10.035	10.080	10.025	10.070	10.050	10.095
2	10.065	10.110	10.090	10.135	10.080	10.125	10.105	10.150
3	10.120	10.165	10.145	10.190	10.135	10.180	10.160	10.205
4	10.175	10.220	10.200	10.245	10.190	10.235	10.215	10.260
5	10.230	10.275	10.255	10.300	10.245	10.290	10.270	10.315
6	10.285	10.330	10.310	10.355	10.300	10.345	10.325	10.370
7	10.340	10.395	10.365	10.410	10.355	10.400	10.380	10.425
8	10.395	10.440	10.420	10.465	10.410	10.455	10.435	10.490
9	10.450	10.495						

*Antenna polarization is given in parentheses.

aim it for best picture quality on the receiving monitor. A radio or land-line voice link will make this task easier.

Never move or attempt to align *both* antennas *simultaneously!* Always leave the transmitting antenna undisturbed (pointed in the direction you believe it should be) when aligning the receiving antenna. Conversely, when adjusting the transmitting antenna leave the receiving horn or dish fixed in position. Both the extreme directionality of parabolic dishes and the relatively abrupt quieting characteristics of the FM i-f make antenna alignment very critical, but the increase in range and improvement in picture quality make the task well worth the effort.

Licensing Your Gunnplexer System. If you are a Technician or higher class radio amateur, your ticket authorizes you to operate Gunnplexers on the 10.0-to-10.5-GHz amateur band. The author has drawn up a band plan for the 10.0-to-10.5-GHz allocation so that as many amateurs as possible can place Mini-Wave systems on this 500-MHz-wide band. (See box above for information on band plan.)

Readers who are not licensed amateurs can either obtain a ham ticket or apply to the FCC for authorization to operate Gunnplexers on nearby frequency allocations.

Satisfying the requirements for a Technician Class amateur license is relatively easy. Moreover, Technicians have extensive operating privileges on vhf, uhf, and other microwave bands, and can access repeaters and orbital satellites carrying transponders.

Two microwave allocations are available to persons not holding valid amateur radio licenses. The 10.5-to-10.55-GHz allocation is a "developmental" band for which the Commission grants "Experimental" licenses. Just above

this, from 10.55 to 10.68 GHz, is a "mobile" band for which "Research" licenses are granted. At last check, less than 50 Research licenses had been granted in the United States for operations on the mobile band. Gunnplexers for these bands are available on special-order from Microwave Associates.

The Research license is intended primarily for persons developing communications "projects," while the Experimental license is granted to facilitate the development of new equipment which might ultimately be placed on the communications market. If you are interested in simply placing the Mini-Wave system as described in this article on the air for microwave experimentation, the Experimental license is appropriate. Those wishing to expand on this concept and create new microwave communications systems are suitable candidates for a Research license. Both licenses are granted and licensees' operations regulated pursuant to Part 5 of the FCC's Rules and Regulations, which governs Experimental Radio Services (Other Than Broadcast).

To obtain either license, write to the nearest field office at the FCC, requesting Form 442. Upon receipt of this form, fill it out and return it to the Commission's office in Washington, D.C. The form requires that you submit details of the system you propose to construct, its intended application, and how and where you will use it. Both licenses have terms of one year and are renewable.

Safety and RFI Considerations.

The negative effects of microwave radiation upon living tissue are well docu-

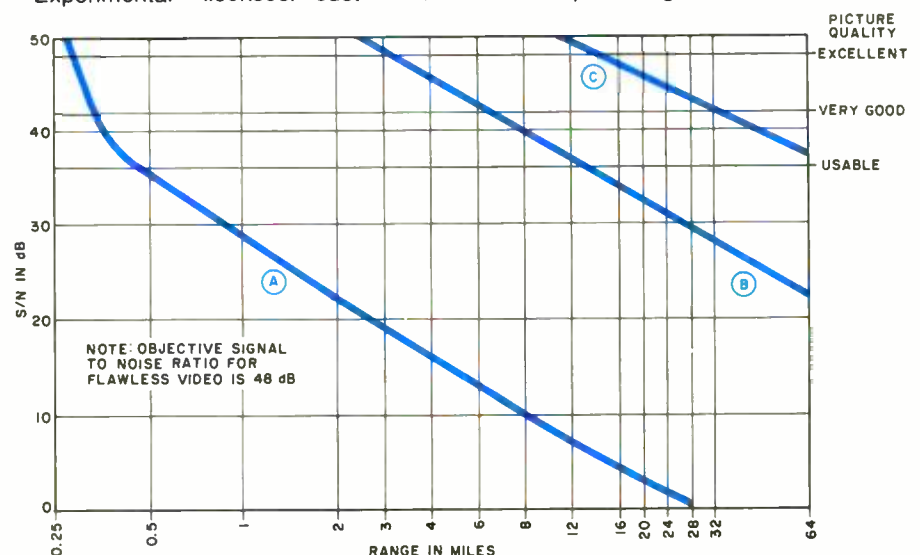


Fig. 11. Range plot for horn (A), 2-foot parabolic (B) and 4-foot parabolic (C) dish antennas when used with the Mini-Wave microwave communications system.

trigger fast soldering action



WITH
Weller[®]
COMFORT-GRIP GUNS

Dual-action trigger permits instant choice of 2 heats in all Weller's professional quality guns, the most comfortable, best-balanced units . . . anywhere. Pre-focused light for hard-to-see work areas like TV or under-dash auto service. Premium copper tips get up to temp faster . . . pre-tinned for instant soldering. Cutting or smoothing tips also, UL-listed and factory pre-tested. Models for any service including solid-state. Guns alone or kits with case, spare tips, and accessories.



Ask your local distributor or write . . .



The Cooper Group
Electronics Division

WELLER[®] · WISS[®] · XCELITE[®]

P.O. BOX 728 APEX, NORTH CAROLINA 27502 919-362-7511

76 CIRCLE NO 53 ON FREE INFORMATION CARD

mented, with the eyes being especially vulnerable. Exactly what level of intensity is hazardous to human beings has been and continues to be the subject of a worldwide debate. The Federal government's Occupational Safety and Health Administration (OSHA) has set a safety limit of 1 milliwatt per square centimeter (1 mW/cm²).

Microwave Associates Gunnplexers are low-power devices, having a nominal power output of 20 mW. However, the microwave radiation is concentrated in a relatively small area. The power density at the open (antenna) end of the waveguide is approximately 6.2 mW/cm², considerably greater than OSHA's maximum permissible value. Fortunately, r-f power density decreases dramatically with distance, and the intensity of microwave radiation is at safe levels 6 inches (15.2 cm) from the mouth of the waveguide.

To adhere to the most conservative radiation exposure limits, no one should place himself directly in front of the horn (or parabolic dish) antenna for a distance of several feet. *Never* look into the open end of a Gunnplexer while it is oscillating or place any portion of your body inside the waveguide, horn, or dish antenna. If you follow these simple rules, you can operate your Mini-Wave system in complete safety.

The 10.0-to-10.5-GHz amateur band and the 10.55-to-10.68-GHz "mobile" band are on either side of the 10.525-GHz frequency commonly used by "X-band" police radar. This frequency is actually inside the 10.5-to-10.55-GHz "developmental" band. During hundreds of hours of operating car Mini-Wave system, the authors have never suffered interference from the low-power police radar transmitters.

On several occasions, however, our 10.25-GHz transmitters have driven police radar receivers and motorists' X-band radar detectors "absolutely nuts." We therefore offer these words of advice—operating a Gunnplexer near X-band police radar units is unwise. The police radar receiver will experience interference at a far greater distance (several miles) than that at which a motorist's radar detector will be triggered by the police radar transmitter.

In Conclusion. We have presented here the first low-cost, compact microwave audio/video communications link project. The world of microwaves is waiting for you, and the Mini-Wave system will enable you to explore it. ◇




YOU'RE READING POPULAR ELECTRONICS.

That already says a lot about you. That you're fascinated by the diversity of electronics.

Everything from microcomputers to audio, from construction projects to ham radio. Who knows what area of electronics will catch your interest next? That's why you read P.E. To keep in touch with all that's new and best in the many worlds of consumer electronics.

Popular Electronics
World's largest-selling
electronics magazine

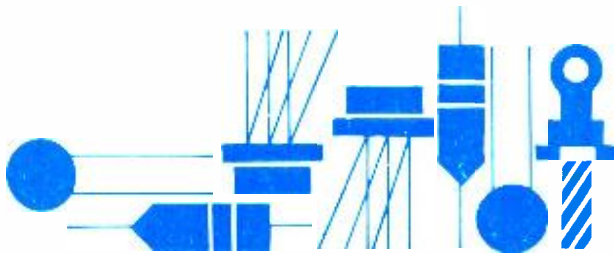

Solid State

By Lou Garner

THOSE VERSATILE MULTIS

GENERALLY, the simpler a semiconductor device, the greater its versatility—that is, the more circuits in which it can be used. Transistors and diodes, for instance, are the most versatile of all devices, and are used in virtually all types of circuits. As increasingly complex devices such as ICs are considered, however, versatility drops and some LSI devices, a calculator IC, for example, may be so specialized as to have a relatively small number of potential applications. But there are exceptions: the multifunction ICs, devices designed specifically for maximum versatility. TI's SN76477 complex sound generator, is one example. The ubiquitous 555 timer is another and there are more, including Intersil's (10900 N. Tantau Ave., Cupertino, CA 95014) powerful 8038 waveform generator and National Semiconductor's (2900 Semiconductor

Drive, Santa Clara, CA 95051) intriguing LH0094 multifunction converter.

Functionally, the 8038 comprises two externally adjustable constant-current sources, a pair of comparators, a flip-flop, buffer amplifiers, and a sine converter, as shown in Fig. 1A. A monolithic IC assembled in a standard 14-pin DIP, the device is capable of producing sine, square, triangular, sawtooth and pulse waveforms over a frequency range from less than 0.001 Hz to more than 1.0 MHz. The output frequency is independent of the supply voltage and generally depends only on the values chosen for the external resistive and capacitive timing components. If desired, however, the 8038's output can be either frequency modulated or swept over a wide range simply by applying a control voltage to its appropriate terminals (Fig 1B). Quite stable, the unit has a maximum rated frequency drift of only 50 ppm/°C. Its other features include low distortion (typically, 1.0% or less), good linearity (0.1% or better), a variable duty cycle from 2% to 98%, and the capability of driving TTL devices. Adaptable to a variety of power supplies, the 8038 may be operated on either single-ended or dual dc power sources from 10 to 30 V or from ± 5 to ± 15 V, at less than 20 mA.

In operation, the IC's nominal output frequency depends upon the values of the two external current-source (or timing) resistors connecting pins 4 and 5 to $+V_{CC}$ as well as upon the value of the timing capacitor between pin 10 and $-V_{CC}$ (or circuit ground). The *symmetry* of the waveforms varies with the *duty cycle* and this depends upon the relative values of the two timing resistors. Three different configurations for the timing resistors are given in Fig. 2. Of these, the arrangement shown in Fig. 2A is the most versatile, permitting the greatest degree of operator control over both the frequency and waveform symmetry through the two timing potentiometers (R_A and R_B). A 50% duty cycle, delivering symmetrical waveforms, is achieved when R_A equals R_B .

Requiring a single potentiometer, the arrangement shown in Fig. 2B permits a relatively small variation of the duty cycle on either side of the 50% point and may be preferred for some applications. In the last circuit, Fig. 2C, the timing resistor pins are shorted together and a single potentiometer is used for control. While this arrangement does not permit an independent adjustment of duty cycle, it is the simplest and least expensive of the three designs.

Typical variations in output waveform symmetry with square-wave duty cycles of 50% and 80% are shown in Figs. 3A and 3B, respectively. With a 50% duty cycle, the outputs are a triangular wave, sine wave and square wave. As the duty cycle is increased or decreased, the triangular wave changes into a sawtooth and the square wave into a rectangular wave, approaching a narrow pulse as the duty cycle is increased or decreased to near its extreme limits. The sine wave becomes highly distorted, for the wave-shaping circuit

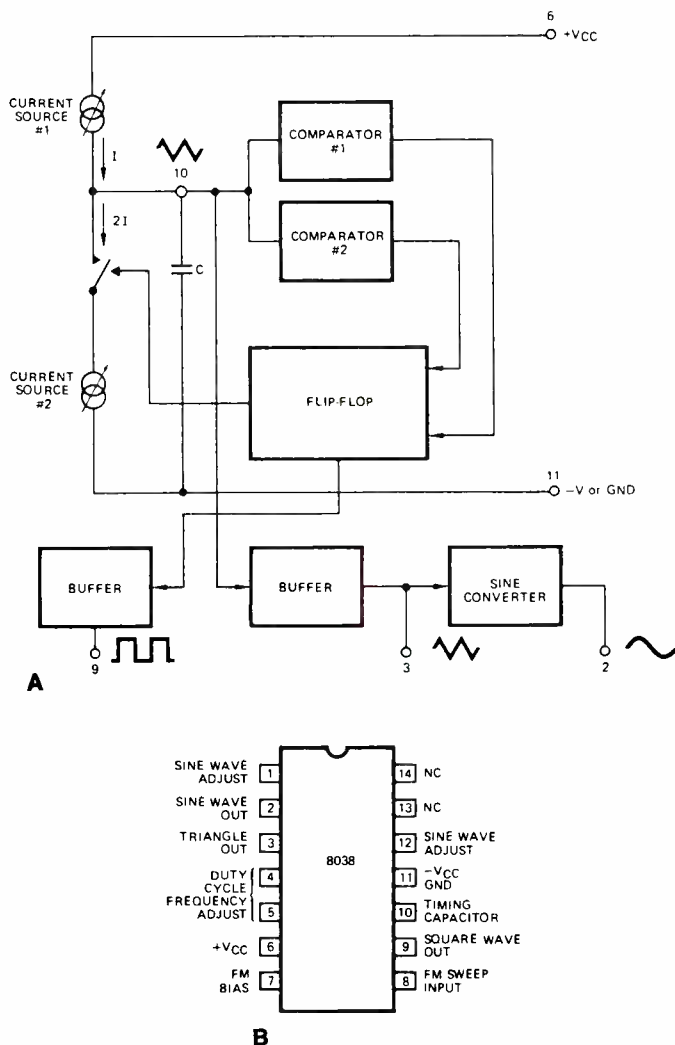


Fig. 1. Intersil's 8038 waveform generator: (A) functional block diagram; (B) pin connections.

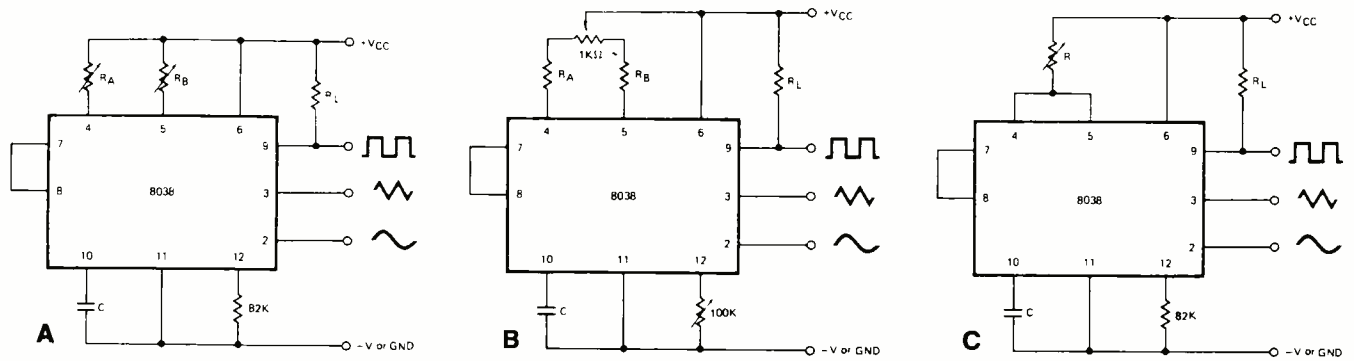


Fig. 2. Timing resistor connections for the 8038 as explained in text.

used on the chip is designed to modify a triangular wave into a sine form and requires a symmetrical input for proper shaping action.

While the output signal waveform symmetry with respect to time depends on the ratio of the two timing resistors (R_A and R_B), the symmetry with respect to ground depends on the type of power source used. If a single-ended power supply is used, the average levels of the triangular and sine-wave outputs will be one-half the supply voltage, with the square wave alternating between $+V_{CC}$ and ground. The square-wave output is not committed, however, and requires an external load resistor. If desired, this resistor may be returned to a different dc source. In computer or control applications, for example, the square-wave output load could be returned to a $+5\text{-V}$ dc source even though the 8038 is operated on a 15-V dc supply. Here, the output level would be compatible with TTL devices, permitting the square wave to be used as a clock signal for logic circuits. On the other hand, if a dual or split power supply is used, all signal waveforms will vary symmetrically on either side of circuit ground (or 0V).

The 8038 can be used as a basic signal or clock source in timers, signal generators, alarm systems, audio sweepers, computer circuits, control networks, musical instruments, tone generators, and special-purpose test instruments. Two units may be cascaded, with one serving as a sweep signal source for the second, or the IC may be used in combination with other special-purpose devices, such as TI's SN76477 complex sound generator. A small sampling of the scores of possible application circuits for the 8038 is given in Figure 4. Abstracted from Intersil's 8-page data brochure for the device, these

circuits feature standard components and may be duplicated quite easily in the home laboratory or workshop for experimental tests or incorporation into more complex equipment designs. Neither layout nor lead dress is critical but good wiring practice should be followed.

Referring, first, to Fig. 4A, the 8038 is controlled by a FET switch to form a simple tone-burst generator. Timing capacitor C is effectively shorted to ground by the 2N4392 FET as long as the FET's gate is held positive or near ground potential, thus preventing oscillation. The circuit is strobed on by applying a negative pulse to the FET's gate through a 1N914 isolation diode. A second diode, connected to output terminal 9, ensures oscillator start-up on the same slope each time it is switched on.

The second circuit, Fig. 4B, is a wide-range audio oscillator covering from 20 Hz to 20 kHz without band switching. This 1000:1 range is achieved by applying a variable dc control voltage to the IC's FM sweep input terminal (8) while holding the voltage across timing resistors R_A and R_B at a relatively low level. A 1N457 series diode drops V_{CC} and the voltage applied to the timing resistors through the Duty Cycle (or symmetry) potentiometer to several millivolts below the maximum voltage available from the 10,000-ohm frequency control. A large trimmer (15 megohms) connected to pin 5 helps minimize duty-cycle variations with frequency, while a 100-kilohm potentiometer connected to pin 12 as a distortion control serves to optimize the sine-output waveform.

In contrast to Intersil's 8038, which is essentially a signal source, National Semiconductor's LH0094 multifunction converter is a versatile signal processor. With analog inputs, the

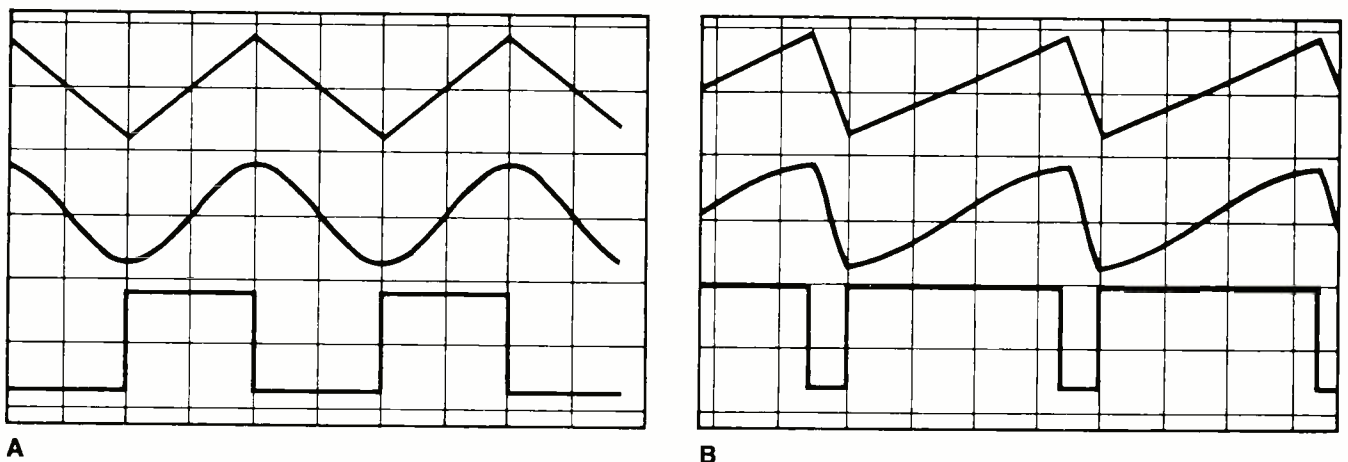


Fig. 3. Typical waveforms with (A) 50% and (B) 80% duty cycles.

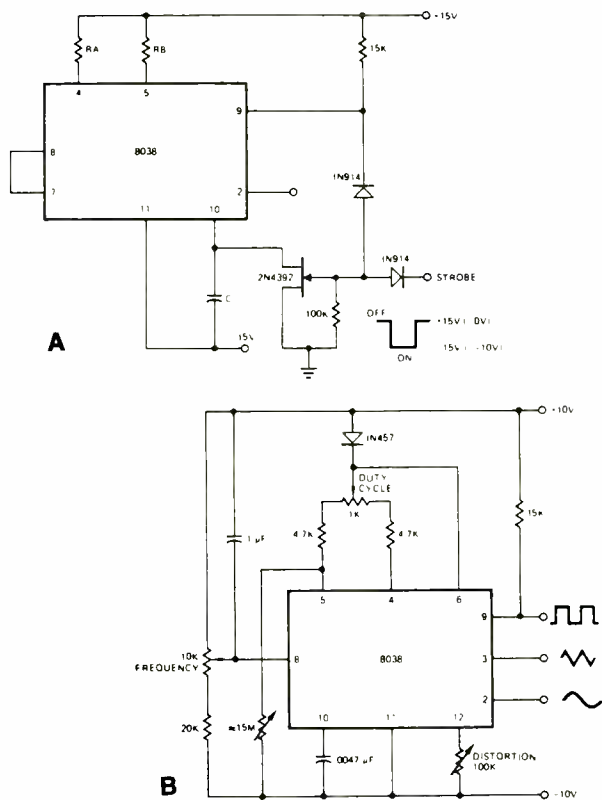


Fig. 4. Typical 8038 circuits; (A) tone-burst generator; (B) audio oscillator.

device can be used for precision multiplication and division, for squaring and extracting square roots, for generating trigonometric functions, as an exponentiator, and as a logarithmic amplifier. Depending on the auxiliary circuits used, the IC can be employed in compressors, expanders, analog computers, alarm systems, sensor translators, controls, measuring instruments, and test equipment.

Functionally, the LH0094 comprises circuits for determining the logarithmic ratio of two input voltages, multiplying this by a known constant (m), summing the result with the logarithmic equivalent of a third input voltage, and determining the antilog of the final value, as shown in Fig. 5A. In a broad sense, the device is the electrical equivalent of a sliderule. Assembled in a 16-pin metal DIP, the LH0094 includes two uncommitted precision resistors, R_A and R_B , which may be used for setting the multiplying factor (m) to either 0.5 or 2.0 (Fig. 5B). Offering typical input impedances of 100,000 ohms, the IC will accept input levels up to 10.0 volts, and can be operated from dual dc sources from ± 5.0 to ± 22.0 volts. Its output impedance is approximately 1 ohm and, with an average output load of 10,000 ohms, it can supply an output signal swing of 12.0 volts max. when operated on a standard ± 15 V dc supply. In ac applications, the device offers a 3-dB bandwidth of 10 kHz.

Typical application circuits for the LH0094, abstracted from National Semiconductor's 10-page data brochure for the device, are illustrated in Fig. 6. Precision multiplier and divider circuits are shown in Figs. 6A and 6B, respectively. In both designs, optional clamp diode $D1$ should be included for those applications in which the inputs may be either "open" or subject to negative voltages.

Referring, first, to Fig. 6A, this circuit develops an output voltage, E_O , equal to the product of input voltages V_Y and V_Z divided by 10, and offers a typical accuracy of 0.02% when

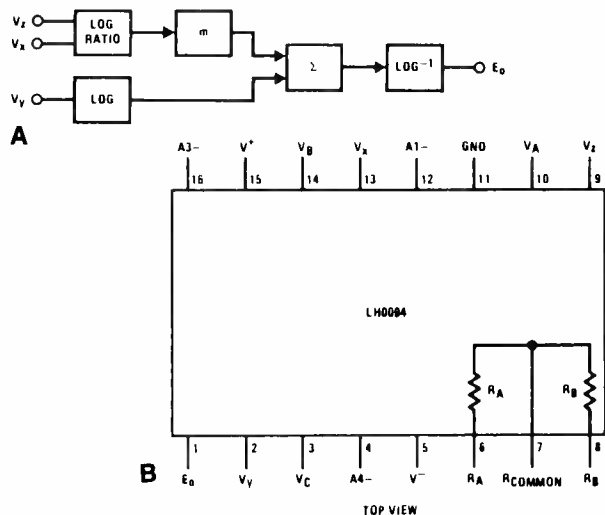


Fig. 5. National's LH0094 multifunction converter: (A) functional block diagram; (B) pin connections.

properly adjusted. Here, a precise 10-volt reference level is applied to the V_X terminal (pin 13). Prior to use, an accurate 10-volt level is applied to the V_Y and V_Z terminals and trimmer $R2$ is adjusted until the output is precisely 10.000 V.

In the divider circuit, Fig. 6B, output voltage E_O is equal to 10 times the result of input voltage V_Z divided by input V_X . Again, a precise 10-volt reference level is required, but applied, in this case, to the V_Y terminal (pin 2) through trimmer $R2$ and to the $A3-$ terminal (pin 16) through $R1$. With a typical accuracy of 0.05%, the divider requires multiple adjustments


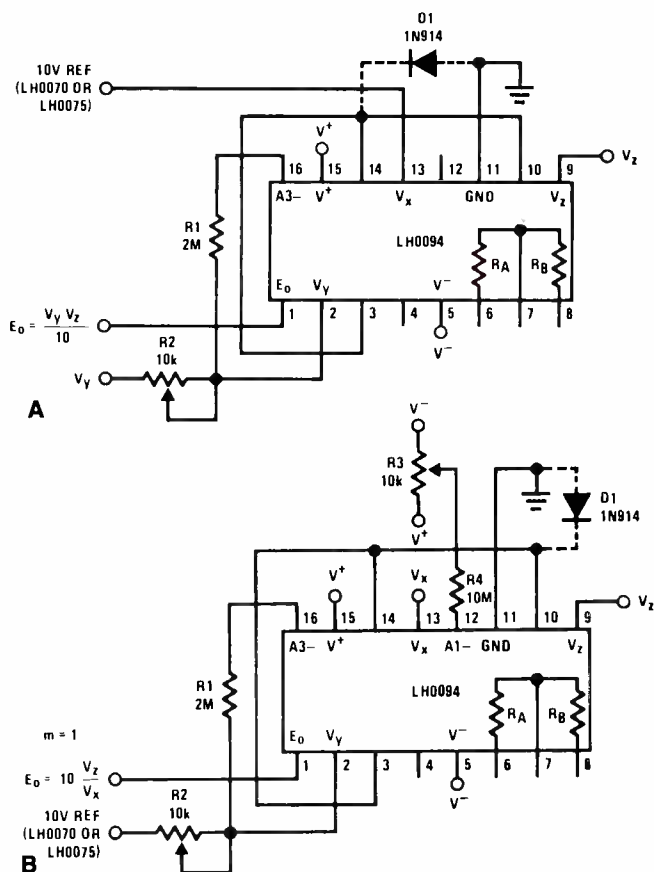


Fig. 6. Precision multiplier (A) and (B) divider circuit.

Fig. 7. Reader's circuit for a television commercial killer uses the ubiquitous 555 timer integrated circuit.

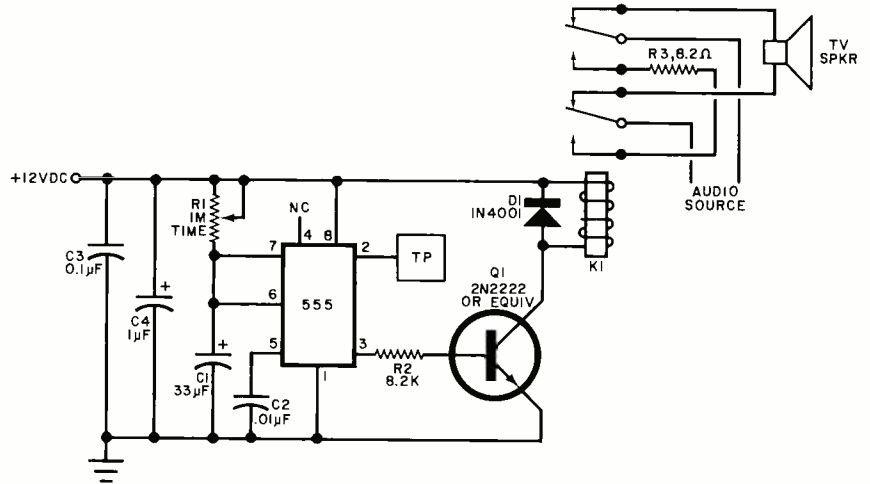

prior to use. First, with the 10-V reference applied to V_Y , 0.1 volt is applied to V_X and V_Z and R_3 is adjusted until E_O is exactly 10.000 V. Second, 10 volts is applied to all inputs and R_2 is adjusted until E_O is 10.000 V. The entire procedure is then repeated at least once.

Reader's Circuit. Guy Isabel (1725 Henri-Bourassa East Blvd., Apt. 25, Montreal, Quebec, H2C 1J5, Can.) has sent us another of his simple, but interesting, circuits. Guy writes that each time one of his circuits is featured, he receives a flood of correspondence from other experimenters and hobbyists, and that this has resulted in his establishing a number of "pen pals" with whom to exchange ideas and circuits. Dubbed a *TV*

Commercial Killer, Guy's latest circuit, shown in Fig. 7, is another application for the 555 IC. Easily duplicated in a single evening, Guy's design is essentially a simple touch-plate controlled time-delay relay. When connected to a TV set, the control permits the viewer to shut off the sound for adjustable periods up to more than thirty seconds simply by lightly touching a small control plate. At the end of the preset period, sound is restored automatically.

Referring to the schematic diagram, the 555 is wired as a monostable multivibrator. In operation, the circuit's timing cycle is initiated by a random voltage pulse applied to pin 2 when the control plate (TP) is touched by the operator's finger. Afterwards, the circuit is insensitive to further control pulses until its operating cycle is completed. The duration of the timing cycle is directly proportional to the time required to charge C_1 through R_1 and hence is dependent on R_1 's adjustment. With the component values specified in the diagram, the maximum period is somewhat over a half minute. During the timing cycle, pin 3 is high, supplying a base bias to npn transistor Q_1 through series current limiting resistor R_2 , and causing the transistor to conduct, closing relay K_1 . A dpdt type, K_1 switches the TV set's audio output terminals, from the loudspeaker voice-coil leads to an 8.2-ohm load resistor (R_3), thus silencing the set. At the end of the timed period, pin 3 goes low, K_1 drops out, and the TV set's loudspeaker is reconnected, restoring normal operation.

Guy has used standard, readily available components in his circuit design. Transistor Q_1 is type 2N2222, although other general-purpose npn transistors should work as well. A conventional 1-megohm potentiometer is used for R_1 , R_2 is a half-watt resistor, and R_3 a 2-watt unit. Capacitors C_1 and C_4 are 16-volt electrolytics, while C_2 and C_3 may be low-voltage ceramics, paper tubulars, or plastic film types. Relay K_1 is a dpdt type with a 12-V 50-mA dc coil (Radio Shack #275-206 Calectro D1-974, or equivalent). Finally, the touch plate (TP) is simply a small metal plate of a few square inches.

Neither layout nor lead dress is critical and the project can be assembled using the builder's choice of wiring techniques. All dc polarities must be observed, of course, and care must be taken not to overheat the semiconductor devices when soldering.

The final installation is quite simple. With the TV set's power off, the loudspeaker leads are disconnected and these, together with the audio output leads, are connected to appropriate terminals on K_1 . Next, time delay trimmer R_1 is adjusted for an optimum interval long enough to cover most TV commercial messages. Guy set his unit for 28 seconds. \diamond


NOW...
Add-on Mini-Disc for the TRS-80*

*Trademark of Tandy Corporation
 Dual and triple drives also available.

only **\$399⁰⁰** from **PERCOM**

Requires 16K RAM, Level II BASIC and Expansion Interface

PERCOM DATA COMPANY, INC.
 Dept. PE • 318 BARNES • GARLAND, TEXAS 75042
 Phone: (214) 272-3421
To Order Call 1-800-527-1592

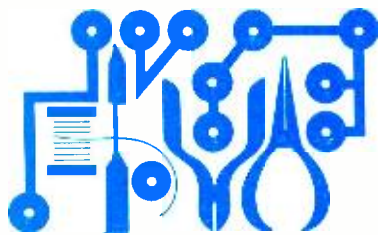

Experimenter's Corner

By Forrest M. Mims

ANALOG COMPUTER CIRCUITS, PART 1

IF YOU'RE like most readers of this column, you prefer to have us describe digital circuits. Considering how the microprocessor revolution is making a major impact in virtually every area of electronics, that's to be expected. All the excitement about digital technology, however, has left a less glamorous but very valuable technology virtually ignored by experimenters and engineers alike. The technology to which I refer is *analog computation*.

If you think analog computers are a relic of the past, think again. Recent developments have made possible sophisticated analog computer ICs with unprecedented accuracy. One of these new circuits, billed as the first single-chip analog computer is the Analog Devices AD534 precision multiplier-divider. Available for about the same price as many microprocessors, the AD534 can perform all the MDSSR functions (multiplication, division, squaring and square rooting) with ease and in *real time*. There are no elaborate software requirements and the AD534 will perform any of these operations while the input information is changing at up to 1 MHz.

At the conclusion of the second installment of this two-part series on analog computer circuits, we'll take a closer look at the AD534 and see how it's used to perform each of the MDSSR functions. Meanwhile, we're going to cover the basics of analog computing by experimenting with a potpourri of homebrew analog computer circuits.




Fig. 1. Analog adder made from potentiometers.

After you've read this and next month's columns I think you'll agree that analog computer circuits can perform many tasks much more efficiently and for less money than microprocessors. Let's begin with a little background information that will help you better understand some of the key differences between analog and digital circuits.

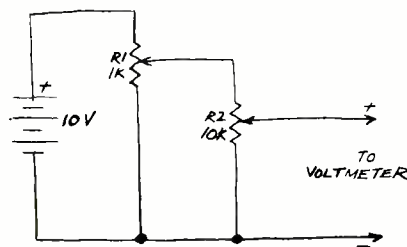


Fig. 2. Simple multiplier made from potentiometers.

Analog vs Digital. Most readers of this column already know the essential difference between analog and digital integrated circuits. Analog ICs, such as amplifiers, oscillators and timers, process or produce signals whose amplitudes are continuously variable over a given range. Digital ICs, on the other hand, process or produce signals which occupy either a low or high state.

An amazing number of applications use either digital or analog circuits. Lately, of course, the trend has been toward digital almost exclusively. In some ways, however, this trend (or is it a fad?) is clearly unfortunate. Consider the digital voltmeter (DVM). The unprecedented accuracy of a three- or four-digit DVM is ideal for making measurements of fixed voltages. But have you ever tried to monitor a slowly changing voltage with a DVM? If not, good luck! The stream of constantly changing numbers is almost impossible to read and makes little sense. An old-fashioned panel meter with an analog readout (pointer and scale) offers a much better solution to this common problem.

When it comes to computers, digital technology has the advantage in accuracy, programmability and computing power. Analog computers, however, are ideal for simulating a real-world system such as a structure, machine, dam, aircraft or missile. Simply rotating a few control knobs enables the computer's operator to observe the effect of changes on the system as they take place (in real time). Contrast this simple procedure with the elaborate software manipulation required to vary conditions in a digital computer's program.

Analog computers have one further advantage you should know about: low cost. You can build an analog computer capable of solving a general quadratic equation ($ax^2 + bx + c = 0$) with a dozen or so inexpensive op amps, a few dozen resistors and potentiometers and a digital voltmeter. And you can rewire (reprogram) this computer so that it can solve many other mathematical functions and equations also.

Adding with Resistors. A simple analog adding calculator can be made from a pair of linear potentiometers equipped with pointer knobs and scales and an ohmmeter. For best results, compromise with digital technology and use a digital multimeter. The circuit for the adder is shown in Fig. 1.

The total resistance of two resistors in series is the sum of their individual resistances. If the potentiometers in Fig. 1 each have a resistance of 1000 ohms, the adder will add any two numbers of up to 1000 and produce any total up to 2000. The accuracy of the adder is controlled by the accuracy of the ohmmeter, the linearity of the potentiometers and the calibration of the scales. Thanks to the high accuracy of the DMM, the error introduced by the ohmmeter can be very small. With this concession to digital technology, the potentiometers and their calibration scales become the major sources of error.

Assuming perfectly linear potentiometers are not available (a reasonable assumption), the adder can be *custom calibrated* with the help of the DMM. This is done by connecting the DMM to a pot and marking its scale with a fine index line at each 100-ohm interval. The index lines are then labeled 0, 100, 200, 300, . . . 1000 and the space between index lines is further subdivided into smaller increments.

Depending upon the care exercised in calibrating the adder (a large-diameter

(Continued on page 83)

PROJECT OF THE MONTH

PHOTOTRANSISTOR RECEIVER MODULE

It's easy to squeeze miniaturized LED transistors and phototransistor receivers into 16-pin DIP modules with the help of 8-pin MINIDIP ICs. Figure A is a photo of an

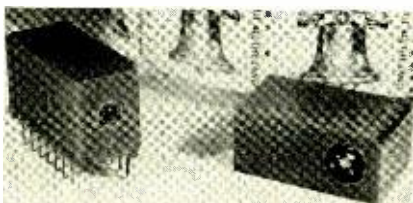


Fig. A. Miniature IR modules

infrared transmitter and receiver assembled in this fashion. This project this month is a phototransistor receiver in a DIP module. Next month, we'll build a companion transmitter module.

Figure B is a circuit diagram for the receiver. In operation, photons impinging upon the phototransistor cause a small photocurrent to flow. This signal is passed by *C1* to the 741 op amp which has a gain (determined by *R2* and *R3*) of 1000. The amplified signal appears at pin 6 of the 741

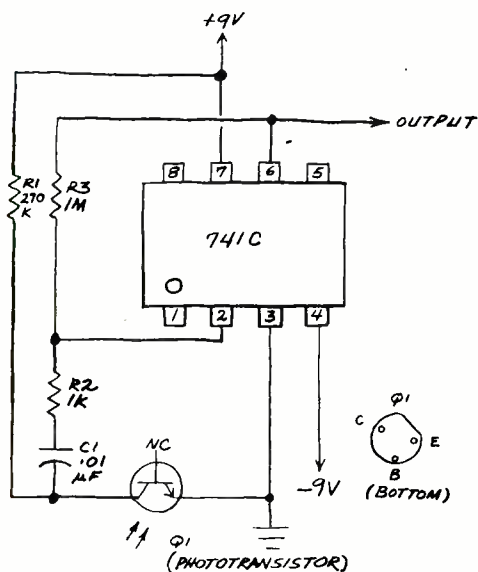


Fig. B. Schematic of an op amp phototransistor receiver.

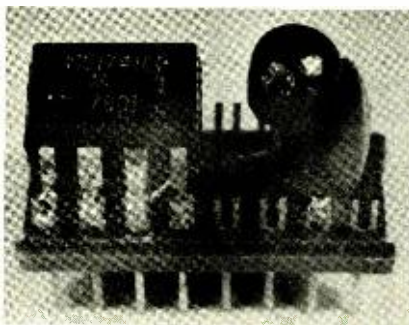


Fig. C. Phototransistor module.

where it can be coupled to another circuit or used to energize a small relay or drive a small speaker.

Figure C is a photo of the interior of the receiver module, and Fig. D shows the assembly details. Begin assembly by installing all the resistors in the bottom of the

module header and inserting their leads deep in each pin slot. Next, install *C1* and solder it and the resistors in place. Avoid using too much solder.

Next, clip off the base lead of the phototransistor and install it on the module header as shown in the figures. Make sure the collector and emitter leads are properly oriented before soldering them in place.

Place the pins of the IC adjacent to or inside the slots in the appropriate module header pins. Make sure they don't protrude too far or the module cover will not fit. Carefully solder the pins in place. Then remove excess solder from the outside edges of the header pins with a file. Finally, drill a 3/16-inch (4.8-mm) hole in the module cover directly over the location of the phototransistor and snap the cover in place.

Test the module by inserting it in a sol-

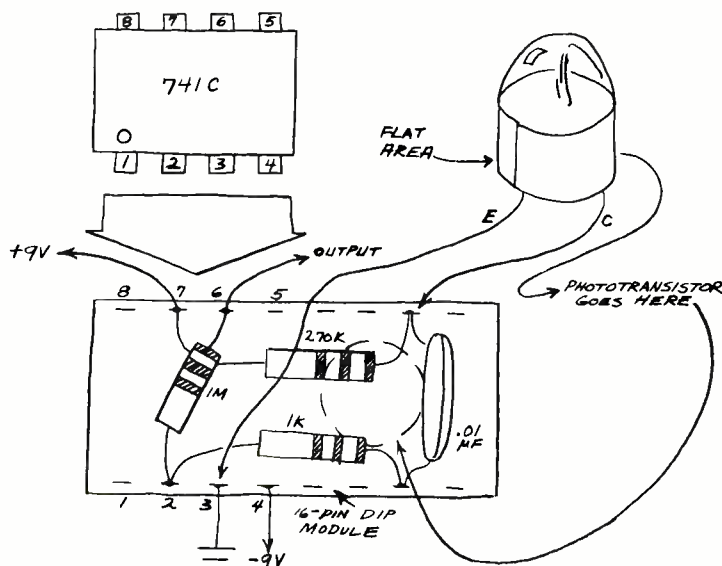


Fig. D. Assembly details of phototransistor receiver module.

derless breadboard and applying power from two 9-volt batteries via jumper leads. A small speaker or earphone connected to the receiver output through a 1000-ohm series resistor will emit a loud buzzing sound when the phototransistor is pointed toward a fluorescent lamp. If you use an earphone instead of a speaker, use caution when conducting this test! The sound from the earphone can be uncomfortably loud. It's best to hold the phone near rather than inserting it in your ear until you've had some experience with the receiver.

After the module is working properly, try listening to the pulsating tone from multiplexed LED displays in digital watches, clocks and calculators with the receiver. You will also be able to "hear" lightning, vibrating car headlights, flickering candle flames and other modulated light sources. Finally, you will be able to use the receiver to detect the signal from the LED transmitter to be described next month. ◇

(Continued from page 81)

scale helps), its accuracy can be better than 1 percent. While this is not as accurate as a pocket calculator, the analog adder operates in *real time* since it continuously adds even as the dials are being turned to new settings!

Multiplying with Resistors. Figure 2 shows a resistive circuit that multiplies. The circuit consists of two potentiometers and a DVM or conventional voltmeter. Potentiometer $R1$ forms a voltage divider across the 10-volt power supply and $R2$ forms a voltage divider across $R1$'s wiper and ground.

Can you figure out how the circuit multiplies? It's easy if you ignore the resistance of the two pots and consider only the positions of their wipers. Assume, for example, $R1$ has a scale with eleven equally spaced lines marked 0 through 10. Also assume $R2$ has a similar scale marked 0 through 1 in increments of 0.1. When $R1$'s shaft is rotated to its midpoint, its dial points to the 5 on its scale. This means the voltage at $R1$'s wiper is 5 volts. If $R2$ is rotated to its midpoint or 0.5, the incoming voltage is again divided in half. The resulting voltage at $R2$'s slider is 2.5 volts, the product of the two potentiometer settings ($5 \times 0.5 = 2.5$).

Improving the Accuracy of Resistor Calculators. The adder and multiplier circuits we've been experimenting with can be made much more accurate by using ten-turn dial potentiometers. These pots are fairly expensive when new but can sometimes be purchased used or surplus from mail-order parts suppliers. They have a built-in turns indicator usually marked from 0 to 100 and can increase the accuracy of a simple resistor calculator significantly.

Op Amps Add Versatility. The simple resistor calculators we've experimented with are ideal for simple applications where input information is programmed by hand or, perhaps, by a me-

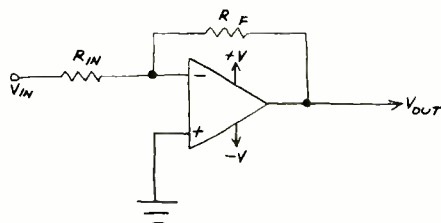


Fig. 3. Basic op amp circuit.




Fig. 4. Op amp multiplication.

chanical device. Many applications, however, require that the information enter the calculator in the form of a raw voltage.

Typically, a *transducer* is used to convert information such as windspeed, the rate of fluid flow through a pipe, temperature, weight or some other variable information into a representative voltage. This voltage may then be mathematically combined with the voltage from one or more other transducers to produce an output voltage.

The operational amplifier permits resistor calculators to process raw voltages without requiring the intervention of a human operator. The remainder of this and the next column will describe several op amp analog computer circuits.

Op Amp Fundamentals. Figure 3 illustrates the most important principle of the op amp—the output voltage (V_{OUT}) of an op amp equals the product of its feedback resistance (R_F) and the incoming voltage (V_{IN}) divided by the input resistance (R_{IN}). Algebraically, this is expressed as $V_{OUT} = -R_F V_{IN}/R_{IN}$. This simple relationship or *transfer function* means an op amp can both multiply and divide. If R_{IN} is 1 ohm, then the op amp will multiply the input voltage times the feedback resistance. Likewise, if the input voltage is a fixed 1 volt, the op amp will divide the feedback resistance by the input resistance.

Note that a negative sign appears in the transfer function. This is so because input signals are applied to the inverting input of the op amp, which causes output signals to be the opposite polarity with respect to the input signals. If R_F equals R_{IN} and a +1-volt dc level is applied between R_{IN} and ground, the output of the op amp will be -1 volt—the same magnitude (absolute value), but the opposite polarity. Keep this change of sign in mind when experimenting with this and the following circuits in this two-part series, all of whose op amps are employed in the inverting mode.

SAVE!

MONEY • TIME • FREIGHT

- QUALITY STEREO EQUIPMENT AT LOWEST PRICES.
- YOUR REQUEST FOR QUOTATION RETURNED SAME DAY.
- FACTORY SEALED CARTONS—GUARANTEED AND INSURED.
- SAVE ON NAME BRANDS LIKE:


PIONEER	SANSUI
KENWOOD	DYNACO
SHURE	SONY
MARANTZ	KOSS

AND MORE THAN 50 OTHERS
BUY THE MODERN WAY
BY MAIL—FROM

illinois audio

12 East Delaware
Chicago, Illinois 60611
312-664-0020

CIRCLE NO 26 ON FREE INFORMATION CARD

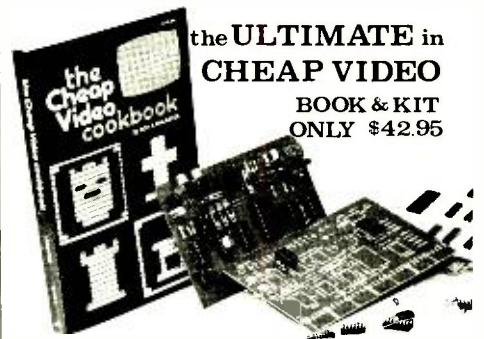

the **ULTIMATE** in
CHEAP VIDEO

BOOK & KIT
ONLY \$42.95

Don Lancaster's "Cheap Video" concept allows almost unlimited options, including:

- * Scrolling. Full performance cursor.
- * Line Character formats of 16, 32, 24/80, 32/64... or almost anything.
- * Graphics—up to 256 X 256 B&W; 96 X 128 COLOR (requires low-cost option modules)
- * Works with 6502, 6800 and other micros.

SPECIAL OFFER: Buy the Kit (upper case alpha-numeric option included) & get the Book at 1/2 price.

PIA ELECTRONICS 1020 W. WILSHIRE BLVD. OKLAHOMA CITY, OK 73116

I'm Sold. PLEASE RUSH..... () SEND FREE CATALOG
() TVT-65g Kit & Cheap Video Cookbook \$42.95
() TVT-65g Kit only (book required for assembly) \$39.95

name: _____
address: _____

city: _____ state: _____ zip: _____

PIA ELECTRONICS DEPT pe 1020 W WILSHIRE BLVD. OKLAHOMA CITY OK 73116

CIRCLE NO 39 ON FREE INFORMATION CARD



NATCAM
catalog
 Shopping center for small and precision tools

A fine selection of small tools, measuring instruments, hard-to-find items for shop, home and lab. Convenient one-stop shopping for technicians, engineers, craftsmen, hobbyists. Major credit cards accepted, satisfaction assured. Get your NATCAM catalog today.

National Camera, Inc.
 2000 West Union Ave., Dept. GGA
 Englewood CO 80110 USA

CIRCLE NO 33 ON FREE INFORMATION CARD

You can easily demonstrate op amp multiplication and division with a common op amp such as the 741, several potentiometers and a digital voltmeter. Figure 4 shows the 741 pin connections and how to connect the pots to the 741.

The op amp's offset voltage will introduce a small error in the output voltage. Figure 4 also shows how to connect a 10,000-ohm pot to the 741 to alleviate this problem. Adjust the pot so that the 741 output is exactly zero when pin 2 is grounded.

As you've probably noticed, these methods of using an op amp to multiply and divide still require at least one potentiometer adjustment to perform a calculation. There's a clever way to use op amp to multiply and divide *without* having to make manual potentiometer adjustments, and we'll examine it in detail in the second installment of this series. Meanwhile, let's look at ways to add and subtract using op amps that *don't* require potentiometer adjustments.

Adding with an Op Amp. Figure 5 shows an op amp adder that will accept two input voltages, add them and deliver the sum as an output voltage. *Summing*

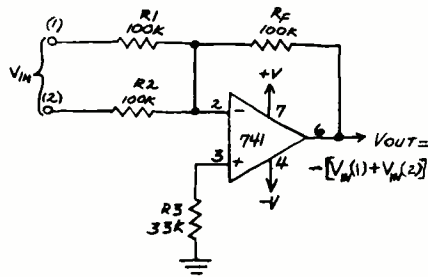


Fig. 5. Op amp summer. *amplifier* is the technical name for this circuit.

Because the feedback resistor (R_F) has the same resistance as R_1 and R_2 , the voltage gain of the op amp is 1. This means the op amp has unity gain and doesn't alter the result of an addition. Changing the resistance of R_F or both R_1 and R_2 will cause the circuit to both add and multiply.

Resistor R_3 helps reduce errors caused by the op amp's input bias current. In non-critical applications it can be eliminated, in which case pin 2 is connected directly to ground. If you use R_3 , its value should be equal to the reciprocal of the sum of the reciprocals of R_1 and R_2 . In other words, $R_3 = 1/(1/R_1 + 1/R_2) = R_1R_2/(R_1 + R_2)$.

For a quick demonstration of how the adder works, connect the positive terminals of a few flashlight cells to the inputs. Connect the negative terminals of the cells each have identical voltages of 1.5 volts, the adder's output will be -3.0 volts.

For the best results, use 1-percent tolerance resistors for R_1 , R_2 and R_F . If you don't have, can't find or can't afford 1-percent resistors, use a DMM to select three resistors having values as closely matched as possible.

You can use a summing amplifier to add more than two voltages simply by connecting additional resistors to the noninverting input. The new resistors should equal the input resistors and R_3 should be adjusted according to $R_3 = 1/(1/R_1 + 1/R_2 + 1/R_3 + \dots + 1/R_N)$.

Averaging with an Op Amp. A summing amplifier can also average two incoming voltages. All that's necessary is to make the ratio R_F/R_{IN} equal to the reciprocal of the number of input voltages. For example, to convert the adder circuit of Fig. 5 to an averager, leave the values of R_1 and R_2 undisturbed but change R_F to 50,000 ohms. This causes the ratio of R_F/R_{IN} (1/2) to equal the reciprocal of the number of inputs (2).

If you want to average more than two voltages, add additional input resistors and adjust the values of R_F and R_3 accordingly. The average of five incoming voltages is their sum divided by 5. Therefore, the reciprocal of R_F/R_{IN} should be 5. Because the resistance of R_{IN} is fixed at 100,000 ohms, the resistance of R_F should be 20,000 ohms.

Subtracting with an Op Amp. The final analog computer circuit we will look at this month is the subtractor or *difference amplifier* shown in Fig. 6. This circuit is based upon the ability of an op amp to amplify the difference between the two voltages applied to its two inputs. If the ratio of R_F to the circuit's input resistors is 1, the circuit has unity gain and will produce the arithmetic difference of two input voltages.

The output voltage of the difference amplifier equals $V_2 - V_1$. The circuit works for both positive and negative inputs and outputs. Thus, if V_1 is +5 volts and V_2 is +10 volts, the output will be +5 volts. Of course, the output cannot exceed the power supply voltage.

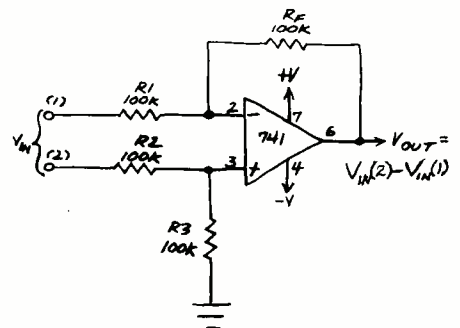



Fig. 6. Op amp subtraction.

Incidentally, an analog computer circuit that handles any of the four possible combinations of positive and negative inputs is called a *four-quadrant* device. A *two-quadrant* device responds to two of the four combinations of input polarities, and *one-quadrant* devices respond to one combination of input polarities.

Going Further. Be sure to experiment with both the resistor and op amp analog computer circuits described in this month's column. If you have a DMM, a dual-polarity power supply and a handful of 1-percent resistors, so much the better. With the help of a solderless breadboard you'll be able to change circuit parameters with ease and to try different op amps. Finally, you'll be well prepared to experiment with the sophisticated logarithmic amplifier circuits we'll explore in Part 2. ◇



Our recording tape is considered by most audiophiles to be the world's finest tape.

Our tape windows are welded in to keep dust out.

Our pressure pad is locked into a special four-sided retainer to maintain perfect tape-to-head contact.

Our slip sheet is made of a substance that's so slippery, even glue can't stick to it.



Our leader not only keeps you from making recording errors, it also keeps your tape heads clean.

Our Delrin guide rollers make sure our tape stays perfectly aligned with your tape heads.

Our cassette is held together by steel screws to assure precise alignment and even distribution of pressure on all sides of the cassette.

Our standard cassette shell is finished to higher tolerances than industry standards.

Our tape is anchored to our hub by a special clamping pin that makes slippage impossible.

There's more to the world's best tape than the world's best tape.

Our reputation for making the world's best tape is due in part to making the world's best cassettes.

In fact, we put more thought

and more work into our cassettes than most manufacturers put into their tape.

We do all this, because at Maxell

we believe in a simple philosophy.

To get great sound out of a cassette takes a lot more than just putting great tape into it.

maxell




CIRCLE NO. 73 ON FREE INFORMATION CARD

Maxell Corporation of America, 60 Oxford Drive, Mahanachie, N.J. 07074

www.americanradiohistory.com

projection television

COMPLETE SYSTEMS FROM \$399 TO \$999

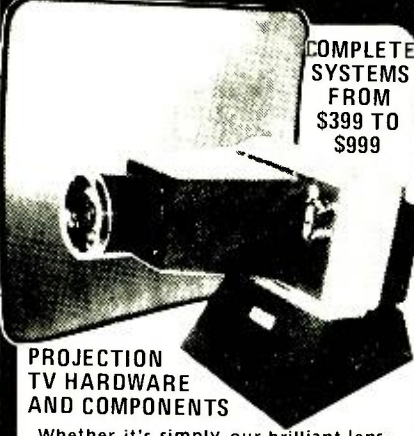

PROJECTION TV HARDWARE AND COMPONENTS

Whether it's simply our brilliant lens, our hoods, bases, cabinets or screens...to a complete projection system... You deserve the best. So, write to the largest supply house and manufacturer of quality parts for Projectapix's big catalog on parts, components, accessories, screens and stands. Everything shipped is guaranteed or your money refunded. Can we promise any more?

MFR. & DLR. INQUIRIES INVITED
Send \$1 For Complete 8-Page Booklet On Projection TV Construction Plans.

PROJECTAPIX, LTD.

300 WEST 53 STREET
NEW YORK, N.Y. 10019
TELEPHONES: (212) 765-7869

CIRCLE NO 44 ON FREE INFORMATION CARD

I-PE

name _____

address _____

city _____ state _____

zip _____

MAIL THIS COUPON AND WE'LL SEND YOU THE BEST SPEAKER CATALOG YOU EVER READ!

No kidding. Speakerlab's catalog took longer to write than some of our competitors have been in business. In fact, we created an industry by "building great kits so you can afford great speakers." Our catalog is an invaluable

manual of speaker function and design. And, it will introduce you to the finest speaker kits made anywhere...with the strongest money-back guarantee. Find out for yourself...FREE, FREE, that is. Mail the coupon now.



Dept. I-PE, 735 N. Northlake Way
Seattle, WA 98103

Hobby Scene



By John McVeigh

Have a problem or question on circuitry, components, parts availability, etc? Send it to the Hobby Scene Editor, POPULAR ELECTRONICS, One Park Ave., New York, N.Y. 10016. Though all letters can't be answered individually, those with wide interest will be published.

NO-LICENSE LOW-FREQUENCY BANDS

Q. I've heard that it is legal to run up to 1 watt on the 160-to-190-kHz band. I've seen schematics for receiving equipment for these frequencies, but have found no information relating to transmitters and antennas. Help!—Fabian Lanzy, Redford, MI.

A. Experimenters are permitted to operate unlicensed transmitters in the low-frequency region between 10 and 1600 kHz. Operations on the 160-to-190-kHz band are limited by FCC regulations to a power level of one watt and antenna length is restricted to 15 meters. See FCC Rules and Regulations, Volume II, Part 15, entitled Radio Frequency Devices. Despite these rather severe limitations, DX contacts between

stations as much as several hundred miles from each other have been reported. A beacon in New Mexico is regularly monitored in Los Angeles, 700 miles away. Interestingly, there are no restrictions on operating modes—AM, FM, CW, etc. are all permitted.

For more information, I suggest that you procure a copy of the Low and Medium Frequency Scrapbook by Ken Cornell, W2IMB. This 110-page publication contains a wealth of schematics and construction details for receiving and transmitting equipment, as well as antennas. Excerpts from relevant FCC regulations, information on the design and winding of low-frequency coils, and data on the conversion of low-cost military surplus gear are also included. The book, which costs \$6.95, is available from some electronics retailers, as well as from the Ham Radio Communications Bookstore (catalog No. HR-LF), Greenville, NH, 03048. Also available is an Addendum 77/78 designed to complement the scrapbook (\$3.95, catalog HR-LFA).


BATTERY CHARGER = POWER SUPPLY?

Q. I have a 4-ampere automotive battery charger. Is there any way I can use it as a base power supply for my mobile CB transceiver?—Wayne Gilbert, Westminster, CO.

A. I have seen battery chargers which I think are of the same type that you have. They consist simply of a transformer, bridge rectifier, and perhaps a limiting resistor. The dc output is *not* filtered. Rather, it is a full-wave rectified pulsating waveform. At the peaks of the waveform, its voltage is greater than that across the battery, and charging current pulses flow into the battery.

Such a charger can be used with the circuit shown in the figure to power a CB

transceiver, auto tape player, etc. The 1- μ F capacitors should be solid Tantalum components rated at 25 volts or more. The 0.1- μ F capacitor should be a disc ceramic type. Heatsink the pass transistor using a mica washer and silicone thermal compound. When the charger is used to power the regulator circuit and transceiver, the current limiting resistor in the charger (if any) should be bypassed. If room permits, the regulator circuit can be included in the charger's enclosure and a multi-pole switch used to select the charge or power-supply functions. This switch would bypass the limiting resistor, connect the rectifier to the filter capacitors (simultaneously disconnecting the charger output leads from the charger circuitry) and apply voltage to the power supply output terminals.

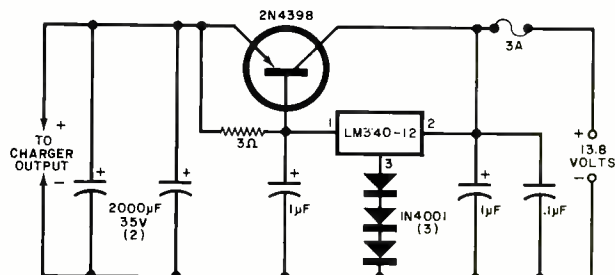

POPULAR ELECTRONICS



Computer Bits

By Hal Chamberlin

UPDATE ON GRAPHICS

WHEN PERSONAL microcomputers were first introduced, input/output facilities were a problem. The norm was a front panel brimming with toggle switches, and rows of binary lights representing memory and register contents. Some experimenters might have purchased a surplus Teletype for external communication with the computer system. But a "television typewriter" with 16 lines of 32 characters was considered to be sophisticated, indeed, while graphics was an unheard of luxury.

In contrast, many of the present crop of packaged and modular computers have CRT display provisions, many capable of displaying as much as 24 lines of 80 characters on the screen. Moreover, graphics capability of some kind is common today, implemented in a variety of ways, and with a wide range of capabilities.

The obvious reason for incorporating video provisions in today's breed of computers is to meet computer users' desires and needs for video. Many computer users, for instance, are interested in increasingly complex, realistic game boards; others wish to pursue creative computer art techniques. Schools form a large block of potential customers, too, with growing interest in graphics for teaching mathematics and physics concepts. Even business applications can use graphics for billing display, financial analysis, word processing, etc.

When selecting a system for a graphics application one must be careful to properly evaluate the capabilities of the systems being considered. There is a large variation in display quality, screen capacity, image resolution, image restrictions, and ease of display programming. For example, photographs of the display screen can be misleading, particularly when in color. As we shall see later, display quality depends heavily on the display monitor and the interface method utilized. Sometimes the images displayed have been painstakingly pro-

grammed a bit at a time solely for promotional reasons. Real software support for producing or working efficiently with the image shown may not be available. Also, many graphics systems have severe limitations on the types of images that can be displayed. Therefore, even if the "promotional" video example is possible, other images of similar complexity may not be.

The Display Monitor. If the system being considered does not include its own display (CRT) monitor, the user will have to provide one. The method of connecting a computer to the display is vitally important in determining the resulting image quality.

The least costly and most convenient method is via an r-f modulator connected to the antenna terminals of a television receiver. The r-f modulator simply transmits the computer's video signal on a locally unused channel, via a coaxial cable, to the TV. Unfortunately, in this approach, the display quality is mediocre at best. The sharp cutoff of video frequencies beyond about 3 MHz produced by the sound traps, cause horizontal smearing of characters and images so that 32 characters or 200 dots across is about its limit.

Even if brightness and contrast controls are carefully adjusted for an acceptable picture, the absence of dc-restoration in virtually all TV receivers causes the brightness to shift considerably as screen content changes. The result worsens with systems providing color or video.

At this time the r-f modulator needed to effect this interface method is not supplied with the computer. Thus, the user must procure one. A recent FCC directive, however, emphasizes that all such modulators be type approved when combined with a computer since they fall into a Class 1 device category. Furthermore, the FCC has enjoined r-f modulator makers to desist in selling the devices separately!

The other—and by far preferable method of interface—is direct video to a broadband closed-circuit TV monitor. With this method, r-f modulation/demodulation distortions and the potential for external interference are bypassed. Video frequency response to 10 MHz and beyond is routine, producing sharp edges and consistent brightness to video characters and lines. Broadband monitors are expensive, however, with monochrome units costing from \$150 to \$300 and color starting at about \$500.

Monitors usually have such features as excellent voltage regulation, improved sweep linearity, sharper CRT focus, and dc restoration. When shopping for a used surplus monitor, be sure that the model accepts *composite* video input, since some require separate horizontal, vertical, and video drive signals at TTL logic levels.

A TV receiver can also be converted to a monitor by a knowledgeable hardware person. Although a vast improvement over r-f modulation, the display is not as "clean" as with a true monitor. Usually, an isolation transformer must be added, which increases expense.


Many of the newer computers include a color-display capability. To realize the potential advantages of color, direct video into a color monitor is required. Even so, the display appearance is likely to be visibly worse than that of a monochrome display. Signal degradation is the result of NTSC encoding of the color signal necessary for composite color video. The blues and greens are limited to 1.5 MHz, while red is good only up to 500 kHz. The consequence is that 16 to 20 characters (about 100 dots) is the limit of usable color resolution. Also, unless the monitor is carefully converged, the edges of characters in corners of the screen may be a rainbow of colors, even when color is not being used. The best color systems utilize direct red-green-blue input. Generally, this is only available on a computer system with an integral CRT.

Graphic Generator Techniques.

Almost every system or board that does so offers graphics capability in a different way. The wide variety of approaches used is a result of four difficult problems faced by graphics interface designers. The first is *memory usage*, since the image on the screen must be encoded into bytes stored in memory. The second is the amount of graphic detail or *resolution* that it is possible to display. The third is *flexibility*, or the variety of image types

(Continued on page 92)

Train with NTS for the MicroComputers, digital the first name

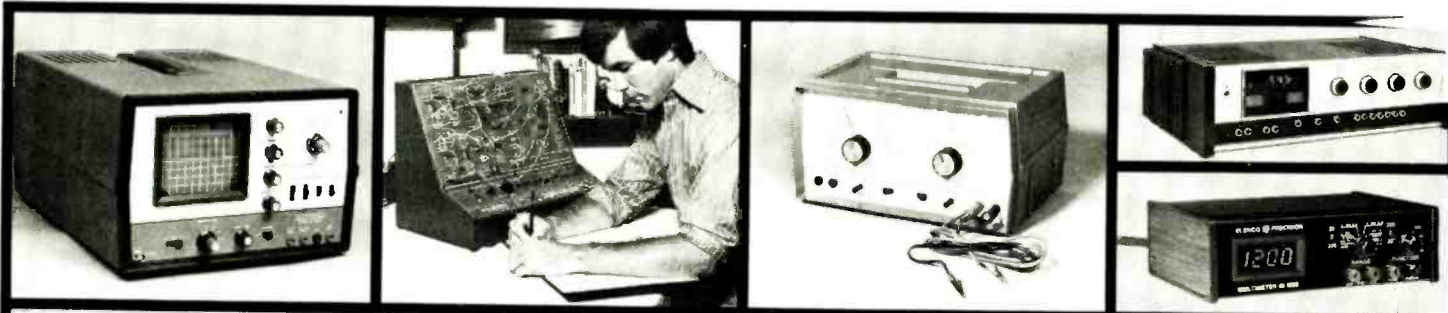

MicroComputers



The world of electronics is daily becoming more challenging. Technology is growing more specialized, and the importance of digital systems increases every day. Test instruments, home entertainment units and industrial control systems are all going digital. And now, NTS training programs include a wider choice of solid-state and digital equipment than ever before offered in any home study course: Advanced NTS/Heath digital color TV (25" diagonal with optional programming capability), NTS/Heath microcomputer, digital test equipment, digital stereo receiver (70 watts per channel), NTS compu-trainer, plus much more state-of-the-art equipment to make your training exciting and relevant.


The equipment you receive with NTS training programs is selected to provide you with a solid

background in electronic systems. Kits and lessons are designed to work together to demonstrate electronic principles and applications. The kit-building not only shows you how electronic hardware functions, but how various circuit designs accomplish different purposes. Your lessons guide you through any number of experiments associated with many projects. This is the Project-Method, and it works. Step-by-step, you learn how and why digital electronics has become a part of our world, and the even bigger role it is sure to play in the future.


Whether you are looking for training in Consumer, Commercial, or Industrial electronics, NTS offers fourteen courses, some basic, many advanced, in several areas of electronics. An all-new full-color NTS catalog shows you what each course covers,

electronics of the future.

systems and more...from in home study.

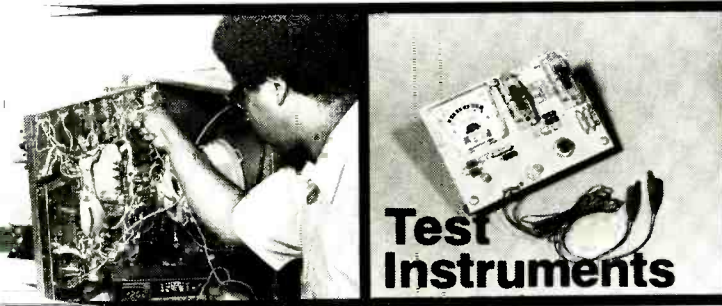

**Test
Instruments**


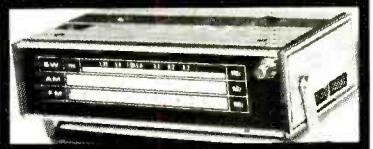


Simulated TV Reception

**Digital
Color TV**



**Basic
Electronics**

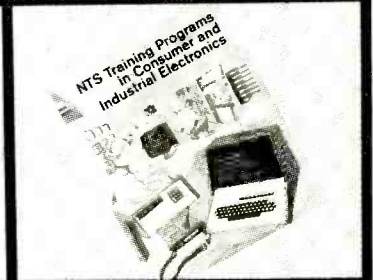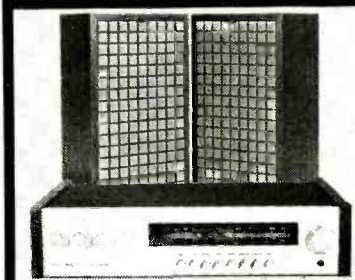

and every piece of equipment included.
Send for it today, and see for yourself what's really happening in electronics training technology at NTS. Find out how much has changed, and what new directions the field is taking. You'll probably want to be a part of it.
It's free. Just mail the card or coupon. Today.

**NO OBLIGATION. NO SALESMAN WILL CALL.
APPROVED FOR VETERAN TRAINING.**

NATIONAL  TECHNICAL SCHOOLS

TECHNICAL-TRADE TRAINING SINCE 1905
Resident and Home-Study Schools
4000 South Figueroa St., Los Angeles, Calif. 90037

NATIONAL TECHNICAL SCHOOLS Dept. 205-019
4000 South Figueroa Street, Los Angeles, California 90037

Please send FREE Color Catalog and Sample Lesson.

- Color TV Servicing
- B & W TV and Radio Servicing
- FCC License Course
- Electronic Communications
- Electronics Technology
- Audio Electronics Servicing
- Digital Electronics
- MicroComputers/MicroProcessors

Name _____

Address _____

Apartment Number _____ Age _____

City _____

State _____ Zip _____

- Check if interested in G.I. Bill information.
- Check if interested ONLY in classroom training in Los Angeles.

The world of electronics gee-wizardry



-YOURS FREE.

32-pages of test instruments — from the latest digital multimeters to the famous EICO scopes. Security systems. Automotive and hobbyist products. Kits and assembled. EICO quality. EICO value. For FREE catalog, check reader service card or send 75¢ for first class mail.

EICO 108 New South Road
Hicksville, N.Y. 11801

CIRCLE NO 18 ON FREE INFORMATION CARD

★ FREE! ★



NEW CATALOG OF HARD-TO-FIND PRECISION TOOLS

Jensen's new 144-page catalog is jam-packed with more than 3000 quality items. Your single source for hard-to-find precision tools used by electronic technicians, scientists, engineers, instrument mechanics, schools, laboratories and government agencies. This popular catalog also contains Jensen's world-famous line of more than 40 tool kits. Plus 10 pages of useful "Tool Tips" to aid in tool selection. Send for your free copy today!

JENSEN TOOLS & ALLOYS
1230 SOUTH PRIEST DRIVE - TEMPE, AZ 85281
A BUSS & LAUGHLIN industry

92 CIRCLE NO 31 ON FREE INFORMATION CARD

(Continued from page 87)

that can be displayed. And the fourth is *compatibility* with character generators so that nongraphics applications are simplified.

These are conflicting requirements. For example, a high-resolution flexible display will require considerable memory to store the image. On the other hand, maintaining compatibility with character generators minimizes memory usage but limits resolution and flexibility.

In most cases, designers have opted for compatibility with character-oriented displays. Such a display divides the screen into rows and columns of *character cells*. The PET computer for example, uses 25 rows of 40 characters per row for a total of 1000 character cells. Each cell, in turn, is divided into *pixels* or dots; the PET uses 8 rows of 8 dots per row. The characters that make up the display are therefore displayed centered in the character cells and are, in turn, composed of the dots. Each byte of display in the PET memory corresponds to a character cell. Hence, 1000 bytes (1 KB) of memory are used for the display.


Graphic images can be formed from a special *graphics character set* used in addition to the normal ASCII character set. Shapes such as horizontal, vertical, diagonal, and curved lines are provided and can be pieced together to form crude line drawings. Special symbols, such as hearts, clubs, spades, etc., are also included for a total of 64 graphics characters. Add the 64-character uppercase ASCII subset and a bit for inverse video (black-on-white) and all 256 possible character codes are used up.

Such a display is very adept at putting on-screen gameboards, simple line drawings, and, of course, text. On the other hand, mathematical curve plotting resolution is no better than the typical character plot with "*" for points. Although one may be able to hand-fit a curve with the line segments and other shapes available, there is no software support available to do this. Moving im-

ages can also be programmed, but the movement is quite choppy since it must be in character cell increments.

A related technique employs a *programmable* character generator, such as one made by Objective Design for S-100 bus compatible display interface boards. Essentially, the usual ROM character generator is replaced by a small RAM that can be written into to provide a changeable character set. In the Sorcerer from Exidy, for example, the character to be displayed can be determined by software. Thus, it is now possible for a user to tailor the graphic character set to match the application. If the application is line drawing, the RAM can be filled with a greater variety of line segments and curves. If it is chess, chesspiece symbols can be written. Whatever graphic set is chosen, it must be used for the entire display. Even with the added flexibility, the limitations of this scheme are basically the same as with the fixed-graphics character set.

Another variation attempts to increase the screen resolution for random-dot graphics such as required for curve plotting. Radio Shack's Model TRS-80 display, for example, uses 16 rows of 64 character cells per row with a character cell being 12 rows of 8 dots each. For graphics, each character cell is divided into a two-wide by three-high array of blocks or pixels and any possible on/off combination of the six blocks can be specified. In the graphics mode, therefore, the screen becomes an array of 48 rows of 128 *blocks* per row and any conceivable combination of blocks can be on and off. While the resolution for line drawing and game boards is inferior to the graphic character generator approach, arbitrary curves are displayed with about twice as much resolution. Display memory in the TRS-80 is only 7 bits wide and comprises 1024 bytes. Normal ASCII characters take up 64 of the codes, while the other 64 codes are used to specify the 64 possible combi-

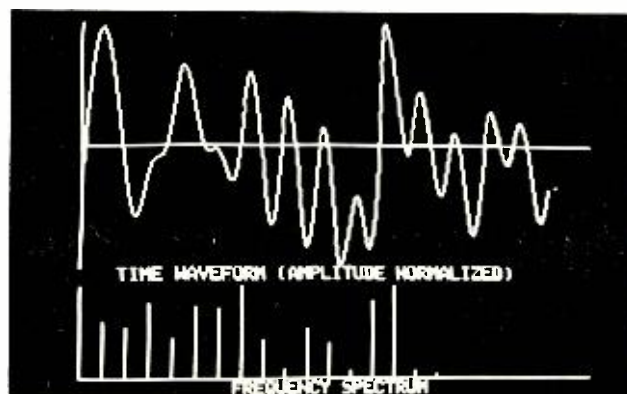

The Micro Technology Unlimited Visible Memory in action.

nations of graphic blocks in a character cell.

Bit-Mapped Displays. An entirely different approach to graphics ignores character generators altogether and simply divides the screen up into a very large number of individual dots, with one bit of display memory for each dot. Such displays are called *pixel* or *bit-mapped* displays to distinguish them from character displays. If a sufficient number of dots are provided, this is by far the most flexible graphic display technique because there are no restrictions on image type or placement.

When using the proper software, even text can be displayed with complete freedom as to character shape, size, and placement. This makes possible bold headlines, tilted italics, subscript and superscript for math and chemical equations, and proportionally spaced text for clean right-margin justification. Their main disadvantage is that a large amount of memory is needed for a high resolution display. Upwards of 8K bytes is not uncommon.

The Apple II computer, for example, has a black-and-white pixel display mode with 192 rows of 240 dots per row, which is sufficient resolution for well detailed drawings, graphs, and charts. The 120 by 96 full-color mode, which can display 7 colors at two intensity levels and black, is less useful for curve plotting but is capable of beautiful computer art.

Users of KIM-1s can use the Visible Memory (see photo), which provides a 320-wide by 200-high dot matrix as well as 8K of refresh memory, all on one board. Owners of S-100 bus micros can utilize a new graphics interface from Vector Graphics that provides a 256 by 240 image in black and white or a 128 by 120 image with 16 levels of gray. The latter mode is useful for half-tone picture processing and display in applications such as amateur slow-scan TV.

Software support is important in any graphics application, particularly if only BASIC is used. Although the user can perform any graphic operation by POKEing data into memory, BASIC is likely to be very slow in manipulating the large amount of data required. Radio Shack, on the other hand, provides BASIC statements for setting and resetting any graphic cell given its X and Y coordinates. The Apple provides statements for setting the coordinates of endpoints and will automatically and rapidly draw the best straight line connecting them. ◇

HOBBYISTS! ENGINEERS! TECHNICIANS! STUDENTS!

Write and run machine language programs at home, display video graphics on your TV set and design microprocessor circuits—the very first night—even if you've never used a computer before!

ELF II featuring **RCA COSMAC** microprocessor / mini-**COMPUTER \$99.95**



Stop reading about computers and get your hands on one! With ELF II and our new *Short Course* by Tom Pittman, you can master computers in no time at all! ELF II demonstrates all 91 commands an RCA 1802 can execute and the *Short Course* quickly teaches you how to use each of the 1802's capabilities. ELF II's video output lets you display an alphanumeric readout or graphics on any TV screen or video monitor plus enjoy the latest video games, including an exciting new target/missile gun game that was specifically developed for ELF II.

But that's not all. Once you've mastered computer fundamentals, ELF II can give you POWER with add-ons that are among the most advanced found anywhere. No wonder IEEE chapters plus hundreds of universities and major corporations have chosen the ELF II to introduce their students and personnel to microprocessor computing!

Learn The Skill That May Soon Be Far More Important Than Your College Degree!

The ability to use a computer may soon be more important to your earning power than a college degree. Without a knowledge of computers, you are always at the mercy of others when it comes to solving highly complex business, engineering, industrial and scientific problems. People who understand computers can command MONEY and to get in on the action, you must learn computers. Otherwise you'll be left behind.

ELF II Is The F-A-S-T Way To Learn Computer Fundamentals!

Regardless of how minimal your computer background is now, you can learn to program a computer in almost no time at all. That's because Netronics has developed a special *Short Course on Microprocessor And Computer Programming* in non-technical language that leads you through every one of the RCA COSMAC 1802's capabilities so you'll understand everything ELF II can do...and how to get ELF II to do it!

All 91 commands that an 1802 can execute are explained to you, step-by-step. The text, written for Netronics by Tom Pittman, is a tremendous advance over every other programming book in print.

Keyed specifically to the ELF II, it's loaded with "hands-on" illustrations. When you're finished, ELF II and the 1802 will no longer hold any mysteries to you.

In fact, not only will you be able to use a personal computer creatively, you'll also be able to read magazines such as BYTE, INTERFACE, AGE, POPULAR ELECTRONICS and PERSONAL COMPUTING and understand the articles.

If you work with large computers, ELF II and our *short Course* will help you to understand what makes them tick.

A Dynamite Package For Just \$99.95!

With ELF II, you learn to use machine language—the fundamental language of all computers. Higher level languages such

as FORTRAN and BASIC must be translated into machine language before a computer can understand them. With ELF II you build a solid foundation in computers so you'll really know what you're doing, no matter how complicated things get.

Video output also makes ELF II unique among computers selling for such a low price. Attached to your TV set, ELF II becomes a fabulous home entertainment center. It's capable of providing endless hours of fun for both adults and children of all ages! ELF II can create graphics, alphanumeric displays and fantastic video games.

No additional hardware is required to connect ELF II to your TV's video input. If you prefer to connect ELF II to your antenna terminals instead, simply use a low cost RF modulator (to order one, see coupon below).

ELF II's 5-card expansion bus (connectors not included) allows you to expand ELF II as your needs for power grow. If you're an engineer or hobbyist, you can also use ELF II as a counter, alarm, lock, thermostat, timer or telephone dialer, or for countless other applications.

ELF II Explodes Into A Giant!

Thanks to ongoing work by RCA and Netronics, ELF II add-ons are among the most advanced anywhere. Plug in the **GIANT BOARD™** and you can record and play back programs, edit and debug programs, communicate with remote devices and make things happen in the outside world. Add **Kluge Board** to get ELF II to solve special problems, such as operating a more complex alarm system or controlling a printing press. Add **4k RAM** board and you can write longer programs, store more information and solve more sophisticated problems.

Expanded, ELF II is perfect for engineering, business, industrial, scientific and personal finance applications. No other small computer anywhere near ELF II's low price is backed by such an extensive research and development program.

The **ELF-BUG™ Monitor** is an extremely recent breakthrough that lets you debug programs with lightning speed because the key to debugging is to know what's inside the registers of the microprocessor and, instead of single stepping through your program, the ELF-BUG™ Monitor, utilizing break points, lets you display the entire contents of the registers on your TV screen at any point in your program. You find out immediately what's going on and can make any necessary changes. Programming is further simplified by displaying 24 bytes of RAM with full address, blinking cursor and auto scrolling. A must for serious programmers!

Netronics will soon be introducing the **ELF II Color Graphics & Music System**—more breakthroughs that ELF II owners will be the first to enjoy!

Now BASIC Makes Programming ELF II Even Easier!

Like all computers, ELF II understands only "machine language"—the language computers use to talk to each other. But, to make life easier for you, we've developed an ELF II **Tiny BASIC**. It talks to ELF II in machine language for you so that you can program ELF II with simple words that can be typed out on a keyboard such as PRINT, RUN and LOAD.

"Ask Now What Your Computer Can Do... But What Can It Do For YOU!"

Don't be trapped into buying a dinosaur simply because you can afford it and it's big. ELF II is more useful and more fun than "big name" computers that cost a lot more money.

With ELF II, you learn to write and run your own programs. You're never reduced to being a mere keypunch operator, working blindly with someone else's predeveloped software.

No matter what your specialty is, owning a computer which you really know how to use is sure to make you a leader. ELF II is the fastest way there is to get into computers. Order from the coupon below!

SEND TODAY!

NOW AVAILABLE FOR ELF II—

- Tom Pittman's *Short Course On Microprocessor & Computer Programming* teaches you just about everything there is to know about ELF II or any RCA 1802 computer. Written in non-technical language, it's a learning breakthrough for engineers and laymen alike. **\$5.00** postpaid!
- Deluxe metal cabinet with plexiglas dust cover for ELF II. **\$29.95** plus \$2.50 p&h.
- ELF II connects to the video input of your TV set. If you prefer to use your antenna terminals, order **RF Modulator**. **\$8.95** postpaid.
- GIANT BOARD™** kit with cassette I/O, RS 232-C/TTY I/O, 8-bit P I/O, decoders for 14 separate I/O instructions and a system monitor/editor. **\$39.95** plus \$2 p&h.
- Kluge (Prototype) Board** accepts up to 36 IC's. **\$17.00** plus \$1 p&h.
- 4k Static RAM** kit. Addressable to any 4k page to 64k. **\$89.95** plus \$3 p&h.
- Gold plated **86-pin connectors** (one required for each plug-in board). **\$5.70** postpaid.
- Professional **ASCII Keyboard** kit with 128 ASCII upper/lower case set, 96 printable characters, onboard regulator, parity, logic selection and choice of 4 handshaking signals to mate with almost any computer. **\$64.95** plus \$2 p&h.
- Deluxe metal cabinet for ASCII Keyboard. **\$19.95** plus \$2.50 p&h.
- ELF II **Tiny BASIC** on cassette tape. Commands include SAVE, LOAD, =, <, >, (), 26 variables A-Z, LET, IF/THEN, INPUT, PRINT, GO TO, GO SUB, RETURN, END, REM, CLEAR, LIST, RUN, PLOT, PEEK, POKE. Comes fully documented and includes alphanumeric generator required to display alphanumeric characters directly on your TV screen without additional hardware. Also plays tick-tack-toe plus a drawing game that uses ELF II's hex heyboard as a joystick. 4k memory required. **\$14.95** postpaid.
- Tom Pittman's *Short Course on Tiny BASIC* for ELF II. **\$5** postpaid.
- Expansion Power Supply** (required when adding 4k RAM). **\$34.95** plus \$2 p&h.
- ELF-BUG™ Deluxe System Monitor** on cassette tape. Allows displaying the contents of all registers on your TV at any point in your program. Also displays 24 bytes of memory with full addresses, blinking cursor and auto scrolling. A must for the serious programmer! **\$14.95** postpaid.

Coming Soon: A-D, D-A Converter, Light Pen, Controller Board, Color Graphics & Music System...and more!

Call or write for wired prices!

Netronics R&D Ltd., Dept. PE-1
333 Litchfield Road. Phone
New Milford, CT 06776 (203) 354-9375

Yes! I want to run programs at home and have enclosed **\$99.95** plus \$3 postage & handling for **RCA COSMAC ELF II kit**.

- \$4.95 for power supply (required).
- \$5 for RCA 1802 User's Manual. \$5 for *Short Course on Microprocessor & Computer Programming*.
- I want mine wired and lusted with power supply, RCA 1802 User's Manual and *Short Course* included for just **\$149.95** plus \$3 p&h!
- I am also enclosing payment (including postage & handling) for the items checked at the left.

Total Enclosed (Conn. res. add tax) \$ _____ Check here if you are enclosing Money Order or Cashier's Check to expedite shipment

USE YOUR VISA Master Charge (interbank # _____)

Account # _____

Signature _____ Exp. Date _____

PHONE ORDERS ACCEPTED (203) 354-9375

Print Name _____

Address _____

City _____

State _____ Zip _____

DEALER INQUIRIES INVITED

wirewrap

Incredible! but True

Precut wire is Cheaper than cutting your own!

Fast • Reliable • Economical

No more cutting & stripping by hand
Clean, uniform strip
Cheaper than using bulk wire

\$34.95

HOBBY WRAP
Model BW 630

with **FREE** WIRE KIT #1
(\$6.95 Value)

It's **Like** getting it
for **\$28.00**

Batteries & Charger \$11.00

We also have
PRECUT WIRE BY SIZE
WIRE WRAP SOCKETS
WIRE WRAP TOOLS
INTERCONNECT CABLES
PROTOTYPING BOARDS
SOLDERLESS BREADBOARDS
AND MORE!

Catalog available on request

Ordering information:

- Orders under \$25 and COD's add \$2
 - All others shipped Ppd in U.S. via UPS
 - For Blue Label (Air) or 1st Class add \$1
 - We accept Visa & Mastercard
- Dealer Inquiries Invited

WIRE KITS

#1	\$6.95	#2	\$19.95
250 3 100 4	250 2 250 4	500 3 100 4	500 3 250 4
250 3 100 5	500 3 100 4	500 3 250 4	500 4 100 4
500 1 100 6	500 4 100 4	500 4 100 4	500 4 100 4

Choose One Color
or Assortment

PAGE DIGITAL ELECTRONICS

135 E. Chestnut St #5 Monrovia CA 91016 (213) 357-5005

CIRCLE NO 38 ON FREE INFORMATION CARD



Software Sources

8080 Debugging and File Management Software. Two programs for S-100 bus, 8080 or Z80 systems are among the first offerings of PRS, the Program of the Month Corp. Microfile, a Data File Management System, and DDS-II, a Dynamic Debugging System, are both available on CUTS, Tarbell or TDL cassette, for \$50 each. Through computer stores, or from PRS, 27 Central Park West, New York, NY 10024.

Poly Disk Mailing-List Program. Written in Disk BASIC for a PolyMorphic 8810 or 8813. Mailing List is also available in hard-copy, adaptable to other computers.



Operations include Add, Delete, Search, Sorted List, Modify and Sequential Printout; remark fields up to 64 characters long can be used for sorting and retrieval. Default printing formats, for up to 5 labels across a page, with optional remarks-field printing and ZIP-code positioning, are also under user control. On diskette or as hard-copy, \$40. Software Industries, 902 Pinecrest, Richardson, TX 75080.

Sol, Apple, TRS-80 and SWTPC Programs from GRT. GRT has expanded its tape offerings from sound recordings to program cassettes for the Sol, Apple 2, TRS-80 and SWTPC 6800. Several programs are available. "Dollars and Sense" includes checkbook programming with facilities to recall checks by grouping, such as car payments. "Best Choice," on the same tape, includes a decision matrix which helps evaluate decisions according to the user's options and preferences. The "Clinic" tape includes diet, longevity and biorhythm programs. "Beat the House" includes four game programs—blackjack, craps, roulette and slot-machine. \$15 per tape, including 20-to-30 page manual. Sold through computer stores; information from GRT Music Tapes, 1286 Lawrence Station Rd., Sunnyvale, CA 94086.

THE MICROCOMPUTER MART

COMPUTER RETAIL STORES

Advertisement

CALIFORNIA

Rainbow Computing
Complete Apple II Line
10723 White Oak Avenue
Granada Hills, CA 91344
(213) 360-2171

COLORADO

Amptec, Inc.
Send For Our Catalogue—10% Off
5975 North Broadway
Denver, CO 80216
(303) 571-8033

Byte Shop

Complete Apple II Line
3664 South Acorn Street
Englewood, CO 80110
(303) 761-6232

ILLINOIS

American Microprocessors
Equipment and Supply Corporation
6934 North University
Peoria, IL 61614
(309) 692-5852

American Microprocessors
Equipment and Supply Corporation
At the Chicagoland Airport
20 North Milwaukee Avenue
Half Day, IL 60069
(312) 634-0076

MARYLAND

Computers Unlimited, Inc.
Tomorrow's Technology Today
907 York Road
Towson, Maryland
(301) 688-6806

MICHIGAN

The Computer Mart
We Will Not Be Undersold
1800 West 14 Mile Road
Royal Oak, MI 48073
(313) 634-0076

United Microsystems Corporation
The Professional Computer Store
2601 South State Street
Ann Arbor, MI 48104
(313) 688-6806

NEW JERSEY

Computer Mart of New Jersey
The Microcomputer People™
501 Route 27
Iselin, NJ 08830
(201) 283-0600

NEW YORK

Byte Shop of Long Island
The Affordable Computer Store
2721 Hempstead Turnpike
2 Blocks East of Wantagh Parkway
(516) 731-8116

Byte Shop of New York
The Affordable Computer Store
130 East 40th Street
New York, NY 10016
(212) 889-4204

Computer Mart of New York
First In The East
118 Madison Avenue
(30th Street Entrance)
New York, NY 10016
(212) 686-7923

OHIO

Ohio Microcomputer Specialists
Imsai Personal and Business Systems
1265 Grandview Avenue
Columbus, OH 43212

OKLAHOMA

Microlithics, Inc.
Medical Systems-Differential Diagnosis
2918 North MacArthur Boulevard
Oklahoma City, OK 73127
(405) 947-5646

PENNSYLVANIA

Personal Computer Corporation
OEM Specialists
Frazer Mall
Lancaster Avenue and Route 352
Frazer, PA 19355
(215) 647-8463

SOUTH CAROLINA

Byte Shop #32
1920 Blossom Street
Columbia, SC 29205
(803) 771-7824

VIRGINIA

The Computer Hardware Store
Alpha-Micro, Apple II, S-100
818 Franklin Street
Alexandria, VA 22314
(703) 584-8085

CANADA

TJB Microsystems, Ltd.
Your Commodore Pet Headquarters
10991-124th Street
Edmonton, Alberta, Canada
T5M 0H9
(403) 455-5298

Dealers: For information about how to have your store listed in THE MICROCOMPUTER MART, please contact: POPULAR ELECTRONICS, One Park Ave., New York, N.Y. 10016 • (212) 725-3568.

Active Electronic Sales Corp.

BRAND NEW!
JUST RELEASED
1979 IC MASTER
2500 pages



Complete integrated circuit data selector. Master guide to the latest I.C.'s including microprocessors and consumer circuits.

Free Quarterly Updates **\$39.95**

ELECTRONICS Market Place

TTL LOW POWER SCHOTTKY PLASTIC DUAL-IN-LINE I.C.

Part No	Price	Part No	Price	Part No	Price	Part No	Price	Part No	Price	Part No	Price
74LS00	15	74LS47	89	74LS123	79	74LS170	125	74LS256	75	74LS368	55
74LS01	15	74LS48	89	74LS124	99	74LS173	95	74LS259	145	74LS373	175
74LS02	15	74LS49	89	74LS125	59	74LS174	69	74LS260	29	74LS374	175
74LS03	15	74LS51	19	74LS126	59	74LS175	69	74LS261	185	74LS375	65
74LS04	19	74LS54	19	74LS132	79	74LS181	250	74LS266	39	74LS377	150
74LS05	19	74LS55	19	74LS133	29	74LS183	350	74LS273	165	74LS378	125
74LS08	19	74LS63	150	74LS136	39	74LS190	89	74LS275	450	74LS379	135
74LS09	19	74LS73	29	74LS138	64	74LS191	89	74LS279	59	74LS386	49
74LS10	15	74LS74	35	74LS139	64	74LS192	95	74LS280	175	74LS390	150
74LS11	19	74LS75	49	74LS145	99	74LS193	95	74LS283	85	74LS393	125
74LS12	19	74LS76	39	74LS147	195	74LS194	75	74LS290	85	74LS395	150
74LS13	35	74LS78	39	74LS148	99	74LS195	66	74LS293	110	74LS396	170
74LS14	59	74LS83	79	74LS151	59	74LS196	109	74LS295	125	74LS398	265
74LS15	19	74LS85	99	74LS153	59	74LS197	109	74LS298	125	74LS399	150
74LS20	15	74LS86	35	74LS155	99	74LS221	125	74LS299	295	74LS424	450
74LS21	19	74LS90	59	74LS156	80	74LS240	195	74LS324	125	74LS445	125
74LS22	19	74LS91	99	74LS157	59	74LS241	195	74LS325	255	74LS447	125
74LS26	25	74LS92	59	74LS158	69	74LS242	195	74LS326	255	74LS490	195
74LS27	21	74LS93	49	74LS160	84	74LS243	195	74LS327	255	74LS668	90
74LS28	21	74LS95	70	74LS161	84	74LS244	195	74LS347	125	74LS669	90
74LS30	15	74LS96	99	74LS162	84	74LS245	195	74LS348	175	74LS670	200
74LS32	25	74LS107	39	74LS163	84	74LS247	125	74LS352	135		
74LS33	27	74LS109	32	74LS164	89	74LS248	125	74LS353	135		
74LS37	23	74LS112	32	74LS165	125	74LS249	125	74LS362	700		
74LS38	23	74LS113	39	74LS166	145	74LS251	85	74LS365	55		
74LS40	19	74LS114	39	74LS168	150	74LS253	85	74LS366	55		
74LS42	54	74LS122	50	74LS169	150	74LS257	60	74LS367	55		

Dual In-line Sockets

- PLUGGABLE SOCKET FOR IC PACKAGES WITH LEADS
- HIGH RELIABILITY GAS TIGHT JOINT
- FULLY QUALIFIED TO MIL-S-8834
- COMPACT LOW PROFILE DESIGN
- NO WICKING WHEN SOLDERED TO PC BOARD
- FLAMMABILITY RATING UL 94V-0

Finest Quality Sockets Available Anywhere

Stock level	Contacts	Price
44000	8 PIN	.11
620000	14 PIN	.13
410000	16 PIN	.15
38000	18 PIN	.19
21000	22 PIN	.27
59000	24 PIN	.28
140000	28 PIN	.36
197000	40 PIN	.48

MICROPROCESSOR CHIPS

CPU s

Stock level	Part No	Price
9300	8080A	5.95 5.50
18800	6800	8.95 7.95

LINEAR I.C.'S

Part No	Price	Description
LM324N	49	Quad Op Amp
LM339N	49	Quad Comparator
LM555N-8	29	Timer
LM556N-14	59	Dual Timer
LM723CN	34	Voltage Regulator
LM723CH	39	Voltage Regulator
LM741CH	37	Op Amp
LM741CN-8	24	Op Amp
LM1458N-8	39	Dual Op Amp

MOS Static RAM'S

Stock level	Part No.	Price
23600	2114	7.50
	4K (1K x 4) 450NS	
88000	2102LFPC	1.19
	1K 350NS (Low Power)	

INTERFACE SUPPORT CIRCUITS

Stock level	Part No	Price
13000	8212	1.98
700	8214	3.95 3.95
800	8216	1.98
1100	8224	2.75
600	8226	1.98
1600	8228	4.75
1050	8238	4.75
2800	8251	5.95 4.95
400	8253	14.95
16000	8255	5.95
600	8257	9.95
250	8259	14.95
4800	6810	3.95 3.50
1100	6820	4.95 3.95
1900	6821	4.95 3.95
5900	6850	5.95 4.95
1800	6852	5.95 4.95
100	6843	29.95
100	6844	35.00
100	6845	29.95
100	6501	6.95
100	6502	39.95

GENERAL INSTRUMENT

1 Amp Rectifiers (Epoxy)

Stock level	Part No	Price	Stock level	Part No	Price		
19 Million	1N4001	50V	24	6000	W12M	200V	2h
8 Million	1N4002	100V	238	3000	W14M	400V	1h
22 Million	1N4003	200V	142	270000	W06M	600V	1h
4.8 Million	1N4004	300V	149	70000	W08M	800V	3h
7 Million	1N4005	400V	155	2000	W10M	1000V	1h
8 Million	1N4006	600V	165				
2.9 Million	1N4007	1000V	177				

1.5 AMP Single Phase Silicon Bridge Rectifiers

All new major manufacturer production material offered. Largest variety of device types available anywhere.

Zilog

Z80-CPU	14.95	Z80-SIO/0	59.00
Z80A-CPU	24.95	Z80A-SIO/0	68.00
Z80-PIO	7.95	(common TX & RX clocks with DTRB)	
Z80A-PIO	11.95		
Z80-CTC	7.95	Z80-SIO/1	59.00
Z80A-CTC	11.95	Z80A-SIO/1	68.00
Z80-DMA	46.00	(separate TX & RX clocks without DTRB)	

MOS Dynamic RAM'S

Stock level	Part No.	Price
2000	4K 4060	3.95
	300NS	
23000	4K 4027	2.95
	4K(4K x 1)300NS 16 pin	
48000	16K 416-3	9.95
	200NS	
162000	16K 416-5	7.95
	300NS	

UART'S

Stock level	Part No.	Price
38000	AY5-1013A	4.95
6000	AY3-1015	5.95

1K CMOS RAM

Stock level	Part No.	Price
18800	5101	4.95
	450NS (Low Power)	

Active Electronic Sales Corp.

P.O. BOX 1035 FRAMINGHAM, MASSACHUSETTS 01701

Over-the-counter sales, 12 Mercer Rd., Natick, Mass 01760 Behind Zayres on Rte. 9 Telephone Orders & Enquires (617) 879-0077

IN CANADA 3 LOCATIONS

5651 FERRIER ST. MONTREAL, QUEBEC H4P 2K5 Tel: (514) 735-6425	4800 DUFFERIN ST. DOWNSVIEW, ONTARIO M3H 5S9 Tel: (416) 661-1115	BAXTER CENTRE 1050 BAXTER ROAD OTTAWA, ONTARIO K2C 3P2 Tel: (613) 820-9471
---	--	--

MINIMUM ORDER \$10.00 • ADD \$2.00 TO COVER POSTAGE & HANDLING

Foreign customers please remit payment on an international bank draft or international postal money order in American dollars.

Master Charge, VISA

DIGI-KEY CORPORATION

Quality Electronic Components

TOLL FREE 1-800-346-5144

MINN., AK., HI. RESIDENTS 218-681-6674

DON'T FORGET OUR DISCOUNTS WHEN COMPARING PRICES

**I.C.'S • RESISTORS • TRANSISTORS • CAPACITORS • DIODES • I.C. SOCKETS & PINS • SWITCHES
CLOCK MODULES • OPTOELECTRONICS • BREADBOARD & TESTING DEVICES • DRAFTING SUPPLIES
DATA BOOKS • HEAT SINKS • WIRE • TOOLS... AND MORE... WRITE FOR FREE CATALOG.....**

INTEGRATED CIRCUITS

7400	7410	7411	7412	7413	7414	7415	7416	7417	7418	7419	7420	7421	7422	7423	7424	7425	7426	7427	7428	7429	7430	7431	7432	7433	7434	7435	7436	7437	7438	7439	7440	7441	7442	7443	7444	7445	7446	7447	7448	7449	7450	7451	7452	7453	7454	7455	7456	7457	7458	7459	7460	7461	7462	7463	7464	7465	7466	7467	7468	7469	7470	7471	7472	7473	7474	7475	7476	7477	7478	7479	7480	7481	7482	7483	7484	7485	7486	7487	7488	7489	7490	7491	7492	7493	7494	7495	7496	7497	7498	7499
------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------

NEW! DIE-CAST METAL

ONLY \$21.90

Trouble-free Module!

- 270° Swivel Mount!
- Inlaid Walnut Chrome Trim Bezel!
- Ideal for Car, Van or Boat!
- 3-5/8" x 2-3/16" Tall!
- 2-1/8" Deep!
- Quick and Easy to Install!

Part No. 5001K

THE MA1023 by NATIONAL SEMICONDUCTOR

THE "PROGRAMMABLE" CLOCK MODULE

0.7" HIGH DIGITS - RED LED DISPLAY

The "NIBBLER" A MICROCOMPUTER AT A MICROPRICE!

• Based on National Semiconductor's 5C 8P-11 microprocessor.
• The NIBBLER includes 4K NIBBLE ROM and 2K of RAM.
• The NIBBLER requires 5 volts of +5VDC power.
• Round serial ASCII I/O which is easily interfaced with a CRT or Teletype.
• And our low price of \$149.95 is for an assembled and tested system! Software Hardware manual included with NIBBLER available separately for \$5.00.

PANASONIC ELECTROLYTIC CAPACITORS

Part No.	Value	Volts	Price	Part No.	Value	Volts	Price
----------	-------	-------	-------	----------	-------	-------	-------

I.C. SOCKETS

Part No.	Value	Price
----------	-------	-------

DIAMOND

Part No.	Value	Price
----------	-------	-------

MA1023 CLOCK MODULE

MA1023 Clock Module offers a degree of flexibility not available in other clock modules. This has been achieved by manufacturing the central MA1023 Module as a set of options upon which the user has total control in any one year. The following is a list of the MA1023's 10 year options:

- **MA1023 CLOCK MODULE** fully assembled. Includes 1201, 1202, 1203, 1204, 1205, 1206, 1207, 1208, 1209, 1210, 1211, 1212, 1213, 1214, 1215, 1216, 1217, 1218, 1219, 1220, 1221, 1222, 1223, 1224, 1225, 1226, 1227, 1228, 1229, 1230, 1231, 1232, 1233, 1234, 1235, 1236, 1237, 1238, 1239, 1240, 1241, 1242, 1243, 1244, 1245, 1246, 1247, 1248, 1249, 1250, 1251, 1252, 1253, 1254, 1255, 1256, 1257, 1258, 1259, 1260, 1261, 1262, 1263, 1264, 1265, 1266, 1267, 1268, 1269, 1270, 1271, 1272, 1273, 1274, 1275, 1276, 1277, 1278, 1279, 1280, 1281, 1282, 1283, 1284, 1285, 1286, 1287, 1288, 1289, 1290, 1291, 1292, 1293, 1294, 1295, 1296, 1297, 1298, 1299, 1300.

DIGI-KEY SWITCHING PANEL KIT MA1023P

Includes: 1201, 1202, 1203, 1204, 1205, 1206, 1207, 1208, 1209, 1210, 1211, 1212, 1213, 1214, 1215, 1216, 1217, 1218, 1219, 1220, 1221, 1222, 1223, 1224, 1225, 1226, 1227, 1228, 1229, 1230, 1231, 1232, 1233, 1234, 1235, 1236, 1237, 1238, 1239, 1240, 1241, 1242, 1243, 1244, 1245, 1246, 1247, 1248, 1249, 1250, 1251, 1252, 1253, 1254, 1255, 1256, 1257, 1258, 1259, 1260, 1261, 1262, 1263, 1264, 1265, 1266, 1267, 1268, 1269, 1270, 1271, 1272, 1273, 1274, 1275, 1276, 1277, 1278, 1279, 1280, 1281, 1282, 1283, 1284, 1285, 1286, 1287, 1288, 1289, 1290, 1291, 1292, 1293, 1294, 1295, 1296, 1297, 1298, 1299, 1300.

PANASONIC POLYESTER CAPACITORS

Part No.	Value	Volts	Price
----------	-------	-------	-------

MOLEX I.C. SOCKET PINS

Part No.	Value	Price
----------	-------	-------

DIAMOND

Part No.	Value	Price
----------	-------	-------

CLOCK MODULE SALE OF SALES

MA1010 0.34" High Digits

DIGI-KEY CORPORATION BOOKS!!!!

- NATIONAL SEMI-CONDUCTOR DATA BOOKS
- ADAM OSBORNE MICROPROCESSOR SERIES
- HOWARD W. SAMAS
- MIATON
- DIGITAL WORLD
- AND INTRODUCING TAB BOOKS

PANASONIC METALLIZED POLYESTER CAPACITORS

Part No.	Value	Volts	Price
----------	-------	-------	-------

1/2 WATT ZENER DIODES

Part No.	Value	Price
----------	-------	-------

DIAMOND

Part No.	Value	Price
----------	-------	-------

CLOCK MODULE SALE OF SALES

MA1010 0.34" High Digits

DIGI-KEY STOCKS

Part No.	Value	Price
----------	-------	-------

PANASONIC RESIN DIPPED TANTALUM CAPACITORS

Part No.	Value	Price
----------	-------	-------

1/2 WATT RESISTOR ASSORTMENTS

Part No.	Value	Price
----------	-------	-------

DIAMOND

Part No.	Value	Price
----------	-------	-------

JM DIGITAL DISPLAY BEZEL

Part No.	Value	Price
----------	-------	-------

Bishop Graphics

Part No.	Value	Price
----------	-------	-------

PANASONIC TRIMMER POTENTIOMETERS

Part No.	Value	Price
----------	-------	-------

1/2 WATT ZENER DIODES

Part No.	Value	Price
----------	-------	-------

DIAMOND

Part No.	Value	Price
----------	-------	-------

MINI CONSOLES PROJECT BOXES ENCLOSURES

Part No.	Value	Price
----------	-------	-------

Bishop Graphics

Part No.	Value	Price
----------	-------	-------

PANASONIC RESIN DIPPED TANTALUM CAPACITORS

Part No.	Value	Price
----------	-------	-------

1/2 WATT ZENER DIODES

Part No.	Value	Price
----------	-------	-------

DIAMOND

Part No.	Value	Price
----------	-------	-------

DIGI-KEY CORPORATION Quality Electronic Components

P.O. Box 677, Thief River Falls, MN 56701 (218) 681-6674

Bishop Graphics

Part No.	Value	Price
----------	-------	-------

PANASONIC TRIMMER POTENTIOMETERS

Part No.	Value	Price
----------	-------	-------

SAVE

COMPUTER INTERFACES & PERIPHERALS

SAVE

For free catalog including parts lists and schematics, send a self-addressed stamped envelope.


APPLE II SERIAL I/O INTERFACE *

Part no. 2
Baud rate is continuously adjustable from 0 to 30,000 • Plugs into any peripheral connector • Low current drain. RS-232 input and output • On board switch selectable 5 to 8 data bits, 1 or 2 stop bits, and parity or no parity either odd or even • Jumper selectable address • SOFTWARE • Input and Output routine from monitor or BASIC to teletype or other serial printer • Program for using an Apple II for a video or an intelligent terminal. Also can output in correspondence code to interface with some selectrics Board only — \$15.00; with parts — \$42.00; assembled and tested — \$62.00




T.V. TYPEWRITER

Part no. 106
• Stand alone TVT • 32 char/line, 16 lines, modifications for 64 char/line included • Parallel ASCII (TTL) input • Video output • 1K on board memory • Output for computer controlled cursor • Auto scroll • Non-destructive cursor • Cursor inputs: up, down, left, right, home, EOL, EOS • Scroll up, down • Requires +5 volts at 1.5 amps, and -12 volts at 30 mA • All 7400, TTL chips • Char. gen. 2513 • Upper case only • Board only \$39.00, with parts \$145.00



8K STATIC RAM

Part no. 300
• 8K Altair bus memory • Uses 2102 Static memory chips • Memory protect • Gold contacts • Wait states • On board regulator • S-100 bus compatible • Vector input option • TRI state buffered • Board only \$27.50; with parts \$160.00




MODEM *

Part no. 109
• Type 103 • Full or half duplex • Works up to 300 baud • Originate or Answer • No coils, only low cost components • TTL input and output-serial • Connect 8 ohm speaker and crystal mic. directly to board • Uses XR FSK demodulator • Requires +5 volts • Board \$7.60; with parts \$27.50



TIDMA *

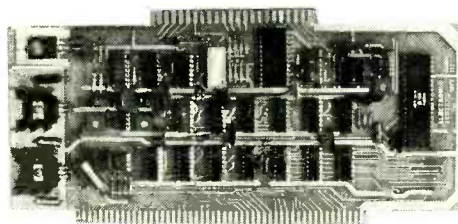

Part no. 112
• Tape Interface Direct Memory Access • Record and play programs without bootstrap loader (no prom) has FSK encoder/decoder for direct connections to low cost recorder at 1200 baud rate, and direct connections for inputs and outputs to a digital recorder at any baud rate. • S-100 bus compatible • Board only \$35.00; with parts \$110.00

RF MODULATOR *

Part no. 107
• Converts video to AM modulated RF, Channels 2 or 3. So powerful almost no tuning is required. On board regulated power supply makes this extremely stable. Rated very highly in Doctor Dobbs' Journal. Recommended by Apple. • Power required is 12 volts AC C.T., or +5 volts DC • Board \$7.60; with parts \$13.50




DC POWER SUPPLY *

Part no. 6085
• Board supplies a regulated +5 volts at 3 amps., +12, -12, and -5 volts at 1 amp. • Power required is 8 volts AC at 3 amps., and 24 volts AC C.T. at 1.5 amps. • Board only \$12.50; with parts excluding transformers \$42.50



RS 232/TTY *

Part no. 600
• Converts RS-232 to 20mA current loop, and 20mA current loop to RS-232 • Two separate circuits • Requires +12 and -12 volts • Board only \$4.50, with parts \$7.00




TAPE INTERFACE *

Part no. 111
• Play and record Kansas City Standard tapes • Converts a low cost tape recorder to a digital recorder • Works up to 1200 baud • Digital in and out are TTL-serial • Output of board connects to mic in of recorder • Earphone of recorder connects to input on board • No coils • Requires +5 volts, low power drain • Board \$7.60; with parts \$27.50




UART & BAUD RATE GENERATOR *

Part no. 101
• Converts serial to parallel and parallel to serial • Low cost on board baud rate generator • Baud rates: 110, 150, 300, 600, 1200, and 2400 • Low power drain +5 volts and -12 volts required • TTL compatible • All characters contain a start bit, 5 to 8 data bits, 1 or 2 stop bits, and either odd or even parity • All connections go to a 44 pin gold plated edge connector • Board only \$12.00; with parts \$35.00 with connector add \$3.00



RS 232/TTL *

Part no. 232
• Converts TTL to RS-232, and converts RS-232 to TTL • Two separate circuits • Requires -12 and +12 volts • All connections go to a 10 pin gold plated edge connector • Board only \$4.50; with parts \$7.00 with connector add \$2.00



ELECTRONIC SYSTEMS

Dept. PE, P.O. Box 21638, San Jose, CA, USA 95151

To Order:

Mention part number and description. For parts kits add "A" to part number. In USA, shipping paid for orders accompanied by check, money order, or Master Charge, BankAmericard, or VISA number, expiration date and signature. Shipping charges added to C.O.D. orders. California residents add 6.5% for tax. Outside USA add 10% for air mail postage, no C.O.D.'s. Checks and money orders must be payable in US dollars. Parts kits include sockets for all ICs, components, and circuit board. Documentation is included with all products. All items are in stock, and will be shipped the day order is received via first class mail. Prices are in US dollars. No open accounts. To eliminate tariff in Canada boxes are marked "Computer Parts" Dealer inquiries invited. 24 Hour Order Line: (408) 226-4064



* Circuits designed by John Bell

DIODES/ZENERS				SOCKETS/BRIDGES				TRANSISTORS, LEDS, etc.					
1N914	100v	10mA	.05	8-pin	pcb	.20	ww	.35	2N2222	NPN (2N2222 Plastic .10)	.15		
1N4005	600v	1A	.08	14-pin	pcb	.20	ww	.40	2N2907	PNP	.15		
1N4007	1000v	1A	.15	16-pin	pcb	.20	ww	.40	2N3906	PNP (Plastic - Unmarked)	.10		
1N4148	75v	10mA	.05	18-pin	pcb	.25	ww	.75	2N3904	NPN (Plastic - Unmarked)	.10		
1N4733	5.1v	1 W Zener	.25	22-pin	pcb	.35	ww	.95	2N3054	NPN	.35		
1N753A	6.2v	500 mW Zener	.25	24-pin	pcb	.35	ww	.95	2N3055	NPN 15A 60v	.50		
1N758A	10v	"	.25	28-pin	pcb	.45	ww	1.25	T1P125	PNP Darlington	.95		
1N759A	12v	"	.25	40-pin	pcb	.50	ww	1.25	LED Green, Red, Clear, Yellow		.15		
1N5243	13v	"	.25	Molex pins	.01	To-3 Sockets	.25	D.L. 747	7 seg 5/8" High com-anode	1.95			
1N5244B	14v	"	.25	2 Amp Bridge		100-prv	.95	MAN72	7 seg com-anode (Red)	1.25			
1N5245B	15v	"	.25	25 Amp Bridge		200-prv	1.95	MAN3610	7 seg com-anode (Orange)	1.25			
								MAN82A	7 seg com-anode (Yellow)	1.25			
								MAN74A	7 seg com-cathode (Red)	1.50			
								FND359	7 seg com-cathode (Red)	1.25			

C MOS			- T T L -									
4000	.15	7400	.10	7473	.25	74176	.85	74H72	.35	74S133	.40	
4001	.15	7401	.15	7474	.30	74180	.55	74H101	.75	74S140	.55	
4002	.20	7402	.15	7475	.35	74181	2.25	74H103	.55	74S151	.30	
4004	3.95	7403	.15	7476	.40	74182	.75	74H106	.95	74S153	.35	
4006	.95	7404	.10	7478	.55	74190	1.25			74S157	.75	
4007	.20	7405	.25	7481	.75	74191	.95	74L00	.25	74S158	.30	
4008	.75	7406	.25	7483	.75	74192	.75	74L02	.20	74S194	1.05	
4009	.35	7407	.55	7485	.55	74193	.85	74L03	.25	74S257 (8123)	1.05	
4010	.35	7408	.15	7486	.25	74194	.95	74L04	.30			
4011	.20	7409	.15	7489	1.05	74195	.95	74L10	.20	74LS00	.20	
4012	.20	7410	.15	7490	.45	74196	.95	74L20	.35	74LS01	.20	
4013	.40	7411	.25	7491	.70	74197	.95	74L30	.45	74LS02	.20	
4014	.75	7412	.25	7492	.45	74198	1.45	74L47	1.95	74LS04	.20	
4015	.75	7413	.25	7493	.35	74221	1.00	74L51	.45	74LS05	.25	
4016	.35	7414	.75	7494	.75	74367	.75	74L55	.65	74LS08	.25	
4017	.75	7416	.25	7495	.60			74L72	.45	74LS09	.25	
4018	.75	7417	.40	7496	.80	75108A	.35	74L73	.40	74LS10	.25	
4019	.35	7420	.15	74100	1.15	75491	.50	74L74	.45	74LS11	.25	
4020	.85	7426	.25	74107	.25	75492	.50	74L75	.55	74LS20	.20	
4021	.75	7427	.25	74121	.35			74L93	.55	74LS21	.25	
4022	.75	7430	.15	74122	.55			74L123	.85	74LS22	.25	
4023	.20	7432	.20	74123	.35	74H00	.15			74LS32	.25	
4024	.75	7437	.20	74125	.45	74H01	.20	74S00	.35	74LS37	.25	
4025	.20	7438	.20	74126	.35	74H04	.20	74S02	.35	74LS38	.35	
4026	1.95	7440	.20	74132	.75	74H05	.20	74S03	.25	74LS40	.30	
4027	.35	7441	1.15	74141	.90	74H08	.35	74S04	.25	74LS42	.65	
4028	.75	7442	.45	74150	.85	74H10	.35	74S05	.35	74LS51	.35	
4030	.35	7443	.45	74151	.65	74H11	.25	74S08	.35	74LS74	.35	
4033	1.50	7444	.45	74153	.75	74H15	.45	74S10	.35	74LS86	.35	
4034	2.45	7445	.65	74154	.95	74H20	.25	74S11	.35	74LS90	.55	
4035	.75	7446	.70	74156	.70	74H21	.25	74S20	.25	74LS93	.55	
4040	.75	7447	.70	74157	.65	74H22	.40	74S40	.20	74LS107	.40	
4041	.69	7448	.50	74161	.55	74H30	.20	74S50	.20	74LS123	1.00	
4042	.65	7450	.25	74163	.85	74H40	.25	74S51	.25	74LS151	.75	
4043	.50	7451	.25	74164	.60	74H50	.25	74S64	.15	74LS153	.75	
4044	.65	7453	.20	74165	1.10	74H51	.25	74S74	.35	74LS157	.75	
4046	1.25	7454	.25	74166	1.25	74H52	.15	74S112	.60	74LS164	1.00	
4049	.45	7460	.40	74175	.80	74H53J	.25	74S114	.65	74LS193	.95	
4050	.45	7470	.45			74H55	.20			74LS367	.75	
4066	.55	7472	.40							74LS368	.65	

9000 SERIES			LINEARS, REGULATORS, etc.								
9301	.85	95H03	1.10	MCT2	.95	LM320T5	1.65	LM340K15	1.25	LM723	.40
9309	.35	9601	.20	8038	3.95	LM320T12	1.65	LM340K18	1.25	LM725N	2.50
9322	.65	9602	.45	LM201	.75	LM320T15	1.65	LM340K24	1.25	LM739	1.50
				LM301	.45	LM324N	1.25	78L05	.75	LM741 (8-14)	.25
				LM308 (Mini)	.95	LM339	.75	78L12	.75	LM747	1.10
				LM309H	.65	7805 (340T5)	.95	78L15	.75	LM1307	1.25
				LM309K (340K-5)	.85	LM340T12	.95	78M05	.75	LM1458	.65
				LM310	.85	LM340T15	.95	LM373	2.95	LM3900	.50
				LM311D (Mini)	.75	LM340T18	.95	LM380 (8-14 PIN)	.95	LM75451	.65
				LM318 (Mini)	1.75	LM340T24	.95	LM709 (8,14 PIN)	.25	NE555	.35
				LM320K5 (905)	1.65	LM340K12	1.25	LM711	.45	NE556	.85
				LM320K12	1.65					NE565	.95
										NE566	1.25
										NE567	.95

MICRO'S, RAMS, CPU'S, E-PROMS			
74S188	3.00	8214	8.95
1702A	4.50	8224	3.25
MM5314	3.00	8228	6.00
MM5316	3.50	8251	8.50
2102-1	1.45	8255	8.50
2102L-1	1.75	8T13	1.50
2114	9.50	8T23	1.50
TR1602B	3.95	8T24	2.00
TMS 4044-	9.95	8T97	1.00
		2107B-4	4.95
8080	8.95	2708	9.50
8212	2.95	Z80 PIO	8.50

INTEGRATED CIRCUITS UNLIMITED

CIRCLE NO 27 ON FREE INFORMATION CARD

7889 Clairemont Mesa Boulevard, San Diego, California 92111
(714) 278-4394 (Calif. Res.)

All orders shipped prepaid

Open accounts invited

Discounts available at OEM Quantities

24 Hour Toll Free Phone 1-800-854-2211

No minimum

COD orders accepted

California Residents add 6% Sales Tax

American Express / BankAmericard / Visa / MasterCard

All IC's Prime/Guaranteed. All orders shipped same day received.

SPECIAL DISCOUNTS

Total Order	Deduct
\$35 - \$99	10%
\$100 - \$300	15%
\$301 - \$1000	20%

Radio Shack: No. 1 Parts Place

Low Prices and New Items Everyday!

ELECTRONICS Market Place

Top-quality devices, fully functional, carefully inspected. Guaranteed to meet all specifications, both electrically and mechanically. All are made by well-known American manufacturers, and all have to pass manufacturer's quality control procedures. These are not rejects, not fallouts, not seconds. In fact, there are none better on the market! Always count on Radio Shack for the finest quality electronic parts!

TTL and CMOS Logic ICs

Full-Spec Devices
Direct from
Motorola and
National Semiconductor



Type	Cat No	ONLY
7400	276-1801	35¢
7402	276-1811	39¢
7404	276-1802	35¢
7406	276-1821	49¢
7410	276-1807	39¢
7413	276-1815	79¢
7420	276-1809	39¢
7427	276-1823	49¢
7432	276-1824	49¢
7441	276-1804	99¢
7447	276-1800	99¢
7448	276-1816	99¢
7451	276-1825	39¢
7473	276-1803	49¢
7474	276-1818	79¢
7475	276-1806	59¢
7476	276-1817	1.19
7485	276-1826	49¢
7486	276-1827	79¢
7490	276-1808	69¢
7492	276-1819	99¢
74123	276-1817	1.19
74145	276-1828	1.19
74150	276-1829	1.39
74154	276-1834	1.29
74192	276-1831	1.19
74193	276-1820	1.19
74194	276-1832	1.19
74196	276-1833	1.29
4001	276-2401	Reg \$.49 Sale 39¢
4011	276-2411	Reg \$.49 Sale 39¢
4012	276-2412	Reg \$.69 Sale 49¢
4013	276-2413	Reg \$.89 Sale 69¢
4017	276-2417	Reg \$ 1.29 Sale 1.19
4020	276-2420	Reg \$ 1.49 Sale 1.19
4021	276-2421	Reg \$ 1.49 Sale 99¢
4023	276-2423	Reg \$.69 Sale 49¢
4027	276-2427	Reg \$.89 Sale 69¢
4028	276-2428	Reg \$ 1.29 Sale 89¢
4036	276-2436	Reg \$.69 Sale 1.29
4049	276-2449	Reg \$.69 Sale 49¢
4050	276-2450	Reg \$.69 Sale 49¢
4051	276-2451	Reg \$ 1.49 Sale 1.19
4066	276-2466	Reg \$.99 Sale 79¢
4070	276-2470	Reg \$.69 Sale 49¢
4511	276-2447	Reg \$ 1.59 Sale 1.19
4518	276-2490	Reg \$ 1.49 Sale 1.19
4543	276-2491	Reg \$ 1.89 Sale 1.49

SN-76477 Sound/Music Synthesizer IC

NEW



299

Featured in Oct. Popular Electronics

Creates almost any type of sound — music to "gunshots"! Built-in audio amp. Includes 2 VCO's, LF osc., noise gen., filter, 2 mixers, envelope modulator, logic circuit. 28-pin DIP. With data/application circuits. 276-1765 2.99

Analog Audio Delay IC MN 3002

NEW


10⁹⁵



For Phase-Shifter, Reverb & Delay Circuits

'Bucket Brigade' device uses 512 shift registers to provide a continuously variable electronic delay for complex audio signals. Includes data sheet and application circuits. 276-1760 10.95

Heat Sinks



- ⓐ TO-220. For PC board-mounted power semiconductors in TO-220 cases. Anodized aluminum. 276-1363 79¢
- ⓑ TO-3 Sink. For PC or chassis mtg. 276-1364 1.39
- ⓒ Universal. Mounts 2 devices, accepts 9 case styles. 276-1361 2.69

Top-Quality IC and PCB Accessories



- ⓐ PC Board. Mounts two 14 or 16-pin ICs or sockets for bread boarding. Copper clad 2" x 5x1" 1/16". 276-151 Reg. \$2.99 Sale 1.99
- ⓑ PC Board. Mounts single 14 or 16-pin IC or socket. 276-024 Pkg. of 2/99¢ 3.99
- ⓒ 16-Pin IC Test Clip. 276-1951 1.29
- ⓓ 16-Pin DIP Header. With snap-on cover. 276-1980 1.99
- ⓔ 8-Rocker 16-Pin DIP Switch. 276-1301 1.49
- ⓕ Vertical 16-pin Socket. For LED displays. 276-1986 3.99
- ⓖ 16-Pin DIP Jumper Cable. 18" long. 276-1976 3.99

Wire Wrapping Accessories



- Wire Wrapping Tool. Strips and wraps 30-gauge wire. 276-1570 6.95
- 14-Pin Wire Wrapping Sockets. 276-1993 2/1.29
- 16-Pin Wire Wrapping Sockets. 276-1994 2/1.39
- 50 Red 30-ga. Kynar Wire. 278-501 1.99
- 50 White 30-ga. Kynar Wire. 278-502 1.99
- 50 Blue 30-ga. Kynar Wire. 278-503 1.99

PC Potentiometers




Ohms	Vertical (Fig. A)		Horizontal (Fig. B)	
	Cat No	Ea	Cat No	Ea
500k	271-226	49¢	—	—
1k	271-227	49¢	271-333	39¢
5k	271-217	49¢	—	—
10k	271-218	49¢	271-335	39¢
25k	—	—	271-336	39¢
50k	271-219	49¢	—	—
100k	271-220	49¢	271-338	39¢
500k	271-221	49¢	—	—
1 Meg	271-225	49¢	—	—

Switches



- ⓐ Miniature Toggle. 6A @ 125VAC. SPDT. 275-662 2.39
- ⓑ DPDT. 275-663 2.89
- ⓒ DPDT. Center-Off. 275-664 2.99
- ⓓ Momentary SPST. 275-609 1.79
- ⓔ Momentary SPDT. 275-1549 1.99
- ⓕ SPST Mercury. 275-027 99¢

Molded Connectors



- Molded nylon body. Each circuit rated 3A @ 250V Standard .093" pin diameter.
- ⓐ 4-Pin Male. 274-224 99¢
- ⓑ 6-Pin Male. 274-226 1.19
- ⓒ 9-Pin Male. 274-229 1.39
- ⓓ 12-Pin Male. 274-232 1.49
- ⓔ 4-Pin Female. 274-234 99¢
- ⓕ 6-Pin Female. 274-236 1.19
- ⓖ 9-Pin Female. 274-239 1.39
- ⓗ 12-Pin Female. 274-242 1.49
- 2-Pin Male & Female (Not Shown.) Pair 89¢
- 274-222

Linear ICs

Type	Cat No	ONLY
301CN	276-017	49¢
324N	276-1711	1.49
339N	276-1712	1.49
385CN	276-1731	99¢
555CN	276-1723	79¢
556CN	276-1728	1.39
566CN	276-1724	1.69
567CN	276-1721	1.99
723CN	276-1740	69¢
741CN	276-007	49¢
741H	276-010	49¢
3900N	276-1713	99¢
3909N	276-1705	99¢
4558CN	276-038	79¢
75491	276-1731	99¢
75492	276-1702	99¢
7805	276-1770	1.29
7812	276-1771	1.29
7815	276-1772	1.29

8080A Microprocessor



The heart of a low-cost microcomputer. 2 μsec cycle time. Includes 10-page data sheet and full specs. 276-2510 Reg. \$12.95 Sale 9.95

RAM Memory ICs

Under 450 nS Access Time
2102 1024 x 1 Array. Low-cost static memory chip. 16-pin DIP. Buy 8 and save!
276-2501 2.49 Ea. or 8/14.95
2114L 1024 x 4 Array. High-density static RAM. 18-pin DIP. NMOS design. 276-2504 12.95

IC Breadboard Sockets



- Modular boards snap together and feature standard 0.3" center. Accept 22 through 30-gauge solid hookup wire.
- ⓐ 550 connections in 2 bus strips of 40 tie points each with 47 rows of 5 connected tie points. 2" x 6" 276-174 9.95
- ⓑ 270 connections in 2 bus strips of 40 tie points each with 23 rows of 5 connected tie points. 2" x 3" 276-175 5.95
- ⓒ Mini-Socket. 22 rows of 5 tie points each, plus 2 bus strips with 10 connections each. 2" x 1 1/8" 276-176 3.95

SALE



- 4cm x 2cm Silicon Cell
- Silicon type cell converts light to electrical power, delivering up to 100 mA at 0.5V. Use several in series-parallel for higher voltage or current. 276-120 Reg. 2.99 Sale 2.29

Solar Cells



- Electricity from Light
- 2 1/4" Dia. Silicon Cell
- Highly efficient! Delivers up to 400 mA at 0.5V. Ideal for solar power projects, battery charging and operating electronic equipment. 276-121 5.99

Low-Cost Power Transformers

- Primaries Designed to Operate from 120VAC. 60 Hz
- Solder Lugs for Easy Wiring or PC Board Mounting

Volts	Current	Cat No	Each	Volts	Current	Cat No	Each
6.3	1.2A	273-050	2.49	6.3 CT	3A	273-1510	3.99
6.3	300 mA	273-1384	1.99	12.6 CT	3A	273-1511	4.69
12	300 mA	273-1385	1.99	25.2 CT	2A	273-1512	4.99
24	300 mA	273-1386	2.49	12	5A	273-1513	8.95
24	1.2A	273-1480	2.99	18 CT*	4A	273-1514	8.95
12.6 CT	1.2A	273-1505	2.89	18 CT*	2A	273-1515	4.99

*Ideal for 5V (using CT) or 12V solid-state regulators

Epoxy-Glass Plug-In PC Boards



- For 22-pin connectors. 4 1/2 x 4 1/2" 1/16" grid. 3 styles available.
- Standard. 276-155 4.49
- Digital. 276-156 4.49
- Op-Amp. 276-157 4.49
- 22-Pin Dual Connector. 276-1551 2.99

WHY WAIT FOR MAIL ORDER DELIVERY?
IN STOCK NOW AT OUR STORE NEAR YOU!

Radio Shack®

A DIVISION OF TANDY CORPORATION • FORT WORTH, TEXAS 76102
OVER 7000 LOCATIONS IN NINE COUNTRIES

Prices may vary at individual stores and dealers

Jameco Electronics New Kits Regulated Power Supply JE200 \$14.95

Function Generator Kit JE2206B \$19.95

Digital Stopwatch Kit JE900 \$39.95

4-Digit Clock Kit JE730 \$14.95

6-Digit Clock Kit JE701 \$19.95

Jumbo 6-Digit Clock Kit JE747 \$29.95

MICROPROCESSOR COMPONENTS TABLE with columns for ROMs, RAM S, PROM S, and MICROMODULES

POWERACE EVALUATORS WITH POWER # 1680 solderless, plug-in tie points

CS Mini-Max 6 Digit 50MHz Frequency Counter \$89.95

The Incredible Pennywhistle 103 \$139.95 Kit Only

TRS-80 16K Conversion Kit \$115.00

COMPUTER CASSETTES CAS-6 \$14.95

SUP'R MOD II MOD II \$29.95 Kit

Custom Cables & Jumpers DB25 Series Cables

CONNECTORS 25 Pin-D Subminiature

Hexadecimal Unencoded Keypad \$10.95/each

Jameco Electronics MAIL ORDER ELECTRONICS - WORLDWIDE

FAIRCHILD RED LED LAMPS

#FLV5057 Medium Size Clear Case RED EMITTING These are not retested off-spec units as sold by some of our competition. These are factory prime, first quality, new units



10 FOR \$1.19
50 FOR \$4.95

"WE BOUGHT 250,000 PCS."

COMPUTER KITS


We stock our own line of top quality computer kits.

8K STATIC RAM (S-100) — \$129
16K STATIC RAM (S-100) — \$295

16K EPROM (2708) BOARD (S-100) — \$59.95
16K STATIC RAM (SWTPC 6800 SS-50) BOARD — \$295
ADDITIONAL DATA ON ANY KIT AVAILABLE ON REQUEST

**NATIONAL SEMICONDUCTOR
JUMBO CLOCK MODULE**

MA1008A
BRAND NEW!



\$6.95

2 FOR \$13

(AC XFMR \$1.95)

ASSEMBLED! NOT A KIT!

ZULU VERSION!
We have a limited number of the 24 HR Real time version of this module in stock
#MA1008D — \$9.95

PERFECT FOR USE WITH A TIMEBASE.

- FEATURES
- FOUR JUMBO 1/2 INCH LED DISPLAYS
 - 12 HR REAL TIME FORMAT
 - 24 HR ALARM SIGNAL OUTPUT
 - 50 OR 60 HZ OPERATION
 - LED BRIGHTNESS CONTROL
 - POWER FAILURE INDICATOR
 - SLEEP & SNOOZE TIMERS
 - DIRECT LED DRIVE (LOW RFI)
 - COMES WITH FULL DATA

COMPARE AT UP TO TWICE OUR PRICE!

MANUFACTURER'S CLOSEOUT!

16K DYNAMIC RAM CHIP

16K X 1 Bits 16 Pin Package. Same as Mostek 4116-4 250 NS access 410 NS cycle time. Our best price yet for this state of the art RAM 32K and 64K RAM boards using this chip are readily available. These are new, fully guaranteed devices by a major mfg

VERY LIMITED STOCK!

\$14.95 each

8 FOR \$89.95

EXPERIMENTER'S CRYSTAL



262 144KHZ This frequency is 2 to the 18th power. Easily divided down to any power of 2 and even to 1HZ. New by CTS-Knight A \$5 value!

\$1.25 each

SALE!

1N4148 DIODES

High speed switching diodes. Silicon. Same as 1N914. Brand New. Full Leads. Prime!

100 FOR \$2 1000 FOR \$17.50

FAIRCHILD PNP "SUPER TRANSISTOR"

2N4402 TO-92 Plastic Silicon PNP Driver High Current VCEO-40 HFE-50 to 150 at 150 MA FT-150MHZ A Super BEEFED-UP Version of the 2N3906

8 FOR \$1

DISC CAPACITORS

.1 MFD 16V. P.C. leads. Most popular value! By Sprague.

20 for \$1.00

Full Wave Bridge
4 Amp 200 PIV
69cea. 10/5.75

VOLTAGE SUPPRESSORS

By Midwest #67D5010 Silicon Carbide Vanistors. These units grab voltage transients, spikes, surges etc. For use on AC or DC in the range of 12 to 28 Volts Small Size 5 Inch Disc with radial leads. For use across transformer secondaries, relays, etc. More rugged and reliable than silicon devices. Rated at 30 WATT-SEC 25 WATT CONT. Perfect for use on AC operated clocks and instruments

SPECIAL PURCHASE: 3 FOR \$1

FET SALE!

2N4304 Brand New N Channel Junction Fet BVGD0-30V IDSS-15 MA Ft. 1500 uMHOS TO-18 Plastic Case. Mfg by Teledyne

6 FOR \$1

TIP-30 POWER TRANSISTOR

Prime new units TO-220 Case PNP silicon VCEO-40 IC-1AMP FT - 3 MHZ 30 WATTS

3 FOR \$1

SURPLUS SPECIAL!

COMPUTER CAPACITOR

By GE 36,000 MFD 15WVDC. Small Size. 4 1/2 x 1 1/2 Inches

SUPER DEAL! \$2.95 Each

3 FOR \$8

RCA MICRO-POWER OP AMP.

#CA30781 Metal Can. Most OPAMPS require -15V to operate. But the CA3078 is designed to operate from -7.5 V to +6V!!! Perfect for battery use. Standby power as low as 700 NW/High Gain 92 DB typical Open Loop Gain. Requires only one capacitor for compensation. See RCA Linear Data Book for more details. Similar to National LM112. Originally cost about \$2 each

75¢ EACH 3 FOR \$2

Digital Research Corporation

(OF TEXAS)

P. O. BOX 401247A GARLAND, TEXAS 75040 • (214) 271-2461

TERMS: Add 30¢ postage, we pay balance. Orders under \$15 add 75¢ handling. No C.O.D. We accept Visa, MasterCard, and American Express cards. Tex. Res. add 5% Tax. Foreign orders (except Canada) add 20% P & H. 90 Day Money Back Guarantee on all items.

SALE! SALE! SALE!

ULTRASONIC MOTION DETECTOR
This alarm sensor fills the protected area with an energy screen that cannot be seen, felt or heard. Triggers your alarm whenever burglar moves through detector or field. Mounts on ceiling, wall, desk, shelf etc. Optional delay mode, auto-reset. Operates on 12.5 VDC. A closeout that originally sold for \$179.00!
Qty. Ltd. 8D30336 . . . \$49.88
Sh. Wt 3 Lbs. \$49.88

BURGLAR ALARM BOARD
Neat new closed-circuit alarm board will latch a relay if the alarm circuit is opened. This unit operates on 12-VDC at such a low price. It makes a perfect compact alarm component. With data. Qty. Ltd. 8K30267 . . . \$2.88
Sh. Wt 6oz. \$2.88
3 for \$13.88 \$13.88

16/8 WATT Stereo Amp
Neat assembled board contains all solid state components. Contains a DARRINGTON drive, push-pull output, all with complementary power tab transistors & mounted to lg. heat sinks. Accepts input from tape decks, magnetic or ceramic phono cartridges, mikes, etc. Requires a 48V transformer & 1 meg volume control. (not supplied). Output 8 into 8 ohms. (Supplied with data).
Sh. Wt 1 Lb. 8Y0513 . . . \$5.78
* Stereo Xformer . . . 8G0530 . . \$2.88
* Stereo Pkg. - 16 watts W/xformer & cont.
Sh. Wt 4 Lbs. 8E0544 . . . \$13.88

CALL DIRECTORS
3-Line-5 Line-11 Line, with rotary dial, reconditioned. Please state choice!
Sh. Wt 10 Lbs. 3 Line 8C30277 \$29.88
Sh. Wt 10 Lbs. 5 Line 8C0549 \$39.88
Sh. Wt 15 Lbs. 11 Line. 8C0550 \$49.88
ALSO: TOUCH TONE-PAY STATION TELEPHONES! . . . 8C30273 . . . \$69.95

REMOTE CONTROL
Originally made for TV use. You can use it to control stereo-on/off, tape, on/off power, volume control & more. All are controlled from across the room with a hand held transmitter. For the serious custom designer. Includes transmitter & receiver & will control 3-circuits. Includes DATA.
Sh. Wt 1 Lbs. 8C0372 . . . \$25.00
Price \$25.00

WHERE SURPLUS REIGNS SUPREME

SEND ORDERS TO:
B&F ENTERPRISES
DEPT. P-1
119 Foster Street
Peabody, MA. 01960
(617-531-5774)

Visit our Retail Stores-119 Foster Peabody, Mass. 01960 or our NEW store-THE TOWNE DUMPE, INC. next to WOOLCO, 777 Willow St., Manchester, New Hampshire.

Use your BA/MC or AE for telephone orders -Call (617) 531-5774 No C.O.D's - Please add POSTAGE.

B&F

INTEGRATED ELECTRONICS

540 Weddell Drive, #4, Sunnyvale, CA 94086 (408) 734-8470

SN6477 Complex Sound Generator \$3.50
This is a programmable sound effect generator capable of producing a wide variety of sounds from high to low frequency. Using this chip & a small number of inexpensive parts, a variety of projects may be built. Specs & application notes \$1.00

TL500 Analog Processor \$8.50
The TL500 contains all the active analog elements for an automatic zeroing and automatic polarity. It is a 13-bit dual-slope A/D converter that has true differential inputs. It requires 3 caps. & 2 resistors with no special matching or tolerances. It is designed for use with the TL502. Spec sheet \$.25

TL502 Digital Panel Meter L.D. \$5.50
This is a 4 1/2-digit Digital Panel Meter L.D. that is designed to interface with the TL500 analog processor. It provides base drive for external PNP digit & segment drivers providing direct interface with 7-segment display. Spec sheet \$.25

LD130 A/D Converter \$5.50
Single-reference voltage, auto zero and auto polarity. It is designed for Digital Voltmeters, Panel Meters, Digital Thermometers, Microprocessor Interfaces to Analog Signals, & General Instrumentation. 34-pg. Spec & Application notes \$2.50

MM5865 Programmable Stopwatch \$7.50
7-function Universal Timer and Stopwatch. Start/stop with elapse time, start/stop accumulative event time, split, sequential total elapse time, rally total elapse time, program up and down count. It uses 32.8 KHz crystal or external clock. Spec sheet & 10-page Application notes \$1.50

32.8 KHz Crystal \$4.00
Minimum order \$5.00 US currency. Check or money order only. Add 5% to cover shipping and handling charges. Calif residents add 6% sales tax. Santa Clara County residents add 6.5% sales tax.

B&F

PLANNING TO MOVE?

Let us know 8 weeks in advance so that you won't miss a single issue of **POPULAR ELECTRONICS**.

Attach old label where indicated and print new address in space provided. Also include your mailing label whenever you write concerning your subscription. It helps us serve you promptly.

Write to: P.O. Box 2774, Boulder, CO 80322 giving the following information
 Change address only Extend my subscription

ENTER NEW SUBSCRIPTION
 1 year \$13.00 Payment enclosed (1 extra BONUS issue)
Allow 30-60 days for delivery. Bill me later

← AFFIX OLD LABEL →
If you have no label handy, print OLD address here.

Name _____ please print
Address _____
City _____ Zip _____
State _____

NEW ADDRESS HERE 0382

Name _____ please print
Address _____ Apt. _____
City _____
State _____ Zip _____

Additional postage on foreign orders: add \$3 a year for Canada, \$5 a year for all other countries outside the U.S. and its possessions. Cash only on foreign orders, payable in U.S. currency.

Why Pay More?

Fairchild Channel F	\$ 169.00	Northstar	
AIM 65	375.00	Horizon I (kit)	\$1349.00
LA 180 DEC Printer	1895.00	Horizon I (assm)	1599.00
TI 818 Impact Printer	1705.00	Horizon II (kit)	1699.00
Inter-color 8070	6999.00	Horizon II (assm)	1939.00
TEI		Extensys	
MCS-112 (assm)	395.00	32K Dyn RAM (assm)	895.00
MCS-122 (assm)	495.00	48K Dyn RAM (assm)	1195.00
MTS-22	4785.00	64K Dyn RAM (assm)	1495.00
TF-12	495.00	Apple II	
RM TF-12	595.00	4K	970.00
Industrial Micro Systems		16K	1195.00
8K Static RAM (assm)	159.95	32K	1495.00
16K Static RAM (assm)	429.00	48K	1795.00
Southwest Technical		Parallel I/O	180.00
MP-6800/2 (kit)	439.00	Serial I/O	195.00
MP-6800-2 (assm)	495.00	AppleSoft II Card	100.00
DMAF-1 (assm)	2095.00	Disc II	495.00
PR-40 (kit)	250.00	Programmer Aid I	30.00
MP-8M (kit)	250.00	Communication Card	50.00
MP-1 (kit)	35.00	Tarbell	
MP LA (kit)	35.00	Disc Controller (kit)	180.00
CT 64 (kit)	325.00	Cassette I/O (kit)	120.00
MF-68 (kit)	995.00	Cassette I/O (assm)	170.00
Shugart		Sozac	
SA 100	355.00	IQ-120	935.00
SA 900-1	995.00	IQ-120-1	1099.00
SA 801	610.00	IQ-125	1095.00
SA 851	780.00	IQ-140	1495.00
Micropolis		Video Brain	
1042	716.00	Computer Software	499.00
1022	491.00	Music Teacher	29.95
1043	1031.00	Math Tutor	29.95
1053	1706.00	Wordwise I	19.95
1033	1395.00	Wordwise II	19.95
Hayaltine		Checkers	29.95
1400	795.00	Pinball	19.95
1500	1045.00	Gladiator	29.95
1510	1165.00	Blackjack	19.95
1520	1650.00	Integral Data System Printers	
IP 125	749.00	IP 225	949.00
IP 225	949.00	Cromemco	
Z 1 (assm)	2995.00	Z 1 (kit)	499.00
Z 2 (assm)	845.00	Z 2 (kit)	1270.00
Z 2D (assm)	1780.00	ZPU (assm)	395.00
System 2 (assm)	3390.00	System 3 (assm)	4999.00
System 3 (assm)	4999.00	3703	2545.00
3100	1350.00	16K RAM Card (kit)	399.00
16K RAM Card (assm)	499.00	TU ART (kit)	165.00
TU ART (assm)	250.00	Disk Controller Card (kit)	335.00
Disk Controller Card (assm)	515.00	Dazdler (assm)	297.00
Disk Software	80.00	Dynabyte	
Dazdler (assm)	297.00	IMSAI	
8080-22 (assm)	931.00	PCB-80-15	949.00
PCB-80-15	949.00	PCB-80-30	1499.00
PCB-80-35	2245.00	Cetronic	
779	999.00	Paratronics	
Model 100A/10	599.00	Anadex	
DP8010	995.00	DP8020	995.00
DP-8040	995.00	NPC	
16K-1000 (assm)	129.00	VIB-2000 (assm)	159.00
VIB-2000 (assm)	159.00	VIB-3000 (assm)	169.95
VIB-2000S (assm)	189.95	Dynabyte	
1625 (assm)	444.00	3245 (assm)	796.00
3225 (assm)	796.00		

Olson 1000 OHMS PER VOLT TESTER

8.99 Reg. **12.50**
TE-184

- Pocket Size Goes Anywhere
- Easy to Read Meter

Volume Controls

49¢ Reg. **59¢**
VC-274

- Less Than 5¢ Each
- 12 Popular Values
- Various Diameters and Lengths

COMPACT TRUMPET

4.44 Reg. **6.99**
SS-453

- Mounts Under Hood or In/On Truck Cab

60 Minute Blank CASSETTE

3 For 87¢
TA-879 Reg. ~~1.49~~

- Pkg. of 3
- 60-Minutes
- Ideal for Music or Voice

AC BATTERY ADAPTOR

Reg. **5.99** **2.79** BA-159

- For Radios, Recorders, Calculators, and More!
- 6.75, 9V @ 300mA
- Includes Plug for Mini, Micro, Co-Ax Jacks
- Styles Vary

8-TRACK Recording Tape

Reg. **99¢** **49¢** TA-907

- 40-Minute Recording Tape
- Quality Reproduction

20 lbs. SURPRISE KIT

Reg. **10.99** **9.99** XX-197

- Capacitors
- Motors
- Resistors
- Most Anything Electrical

500-Ft. Hookup Wire Kit

Reg. **4.99** **3.99** WW-579

- For Printed Circuits or Wiring Project, Hobbyist and Repair
- Less Than 1 Cent A Foot
- Five 100-Ft. Rolls

SALE	7400 SERIES TTL	SALE
7400N \$ 13	74439N \$ 36	7490N \$ 29
7401N \$ 13	74440N \$ 09	7491N \$ 78
7402N \$ 13	74441N \$ 80	7492N \$ 29
7404N \$ 16	74442N \$ 37	7493N \$ 31
7405N \$ 16	74443N \$ 54	7494N \$ 29
7406N \$ 16	74444N \$ 54	7495N \$ 59
7407N \$ 19	74445N \$ 54	7496N \$ 59
7408N \$ 17	74450N \$ 57	74100N \$ 24
7409N \$ 17	74471N \$ 57	74100N \$ 59
7410N \$ 13	74488N \$ 59	74104N \$ 50
7411N \$ 15	74509N \$ 09	74118N \$ 88
7412N \$ 14	74510N \$ 09	74118N \$ 16
7413N \$ 25	74533N \$ 09	74109N \$ 22
7414N \$ 54	74544N \$ 14	74110N \$ 78
7415N \$ 16	74601N \$ 14	74111N \$ 14
7417N \$ 21	74709N \$ 09	74116N \$ 18
7420N \$ 09	74729N \$ 09	74118N \$ 16
7421N \$ 17	74739N \$ 22	74121N \$ 21
7422N \$ 56	74742N \$ 21	74122N \$ 34
7423N \$ 24	74755N \$ 30	74123N \$ 29
7425N \$ 24	74760N \$ 30	74125N \$ 36
7426N \$ 21	74800N \$ 55	74126N \$ 44
7427N \$ 18	74811N \$ 15	74128N \$ 56
7428N \$ 46	74829N \$ 09	74132N \$ 48
7430N \$ 13	74830N \$ 84	74133N \$ 84
7432N \$ 21	74849N \$ 18	74141N \$ 15
7433N \$ 42	74855N \$ 51	74143N \$ 48
7437N \$ 09	74879N \$ 16	74144N \$ 16
7438N \$ 13	74899N \$ 25	74145N \$ 44

SALE	CD4000 SERIES CMOS	SALE
4001 \$ 14	4018 \$ 77	4040 \$ 85
4002 \$ 15	4020 \$ 77	4042 \$ 85
4003 \$ 15	4022 \$ 81	4044 \$ 83
4004 \$ 134	4024 \$ 82	4046 \$ 81
4005 \$ 84	4026 \$ 84	4048 \$ 61
4007 \$ 15	4028 \$ 84	4049 \$ 37
4008 \$ 73	4032 \$ 85	4047 \$ 14
4009 \$ 35	4034 \$ 85	4048 \$ 94
4010 \$ 34	4036 \$ 150	4049 \$ 32
4011 \$ 15	4037 \$ 33	4050 \$ 32
4012 \$ 15	4038 \$ 72	4051 \$ 88
4013 \$ 28	4039 \$ 94	4052 \$ 88
4014 \$ 72	4040 \$ 20	4053 \$ 88
4015 \$ 28	4042 \$ 180	4055 \$ 124
4016 \$ 28	4044 \$ 350	4056 \$ 258
4017 \$ 77	4035 \$ 84	4057 \$ 20

OVER 800.00 CMOS AND TTL IC'S IN STOCK	
microNOVA computer system - includes 18 slot microNOVA computer with 32K words memory - half bay (1/2") high cabinet - real-time clock - disk drive system - and Automatic Program Load. Software features - DOS (with/without) - FORTRAN IV and DOS BASIC (single user). Also included are both DASHER CRT (6052 II) and Terminal Printer (5040 II). Please specify power requirements.	\$16,910.00
Optics - Console Debug - operates in place of the Automatic Program Load. Allows any ASCII file console to supervise program execution, debugging and program load.	\$50.00
Handheld Programmer's Console - operates in place of the Automatic Program Load. Calculator-format programmers console interfaced to computer via 10' flat cable. Portability. Allows similar control as console debug.	\$550.00
TRS-232 PRINTER INTERFACE for TRS-80	\$39.95
ICM7555IPA 8 Pin Dip \$1.13	XR 2242C 8 Pin Dip \$1.50
Micro-power version of the popular 555 and 556 Timers and directly interchangeable. Dissipates 1/15th the power and operates down to 2 volts. Perfect for Batt. op and CMOS circ	
ICM7556IPD 14 Pin Dip \$2.15	

ORDERING INFORMATION - Minimum order \$10.00. Add \$1.00 to cover postage and handling. California Residents add 6% Sales Tax.

At Reasonable Prices: HIGH QUALITY COMPONENTS

ADVANCED IC ELECTRONICS P.O. Box 19577, Irvine, CA 92713
COD and Phone Orders: Call Frank Miller at (714) 547-0234

Olson electronics

Master Charge, BankAmericard, VISA

FREE!

Dept. IK 260 S. Forge St. Akron, Ohio 44327

NAME				
ADDRESS				
CITY				
STATE	ZIP			
Qty	Stk #	Description	Price Ea	Total

For 24 Hour PHONE Service Call (216)535-1800

Tax Postage Total

Please send me a free subscription to Olson Value Packed Catalog. (Within the Continental USA Only)



PENNY ARCADE

WE'RE FIGHTING BACK INFLATION WITH THIS EXCLUSIVE 1¢ SALE
BUY 1 AT SALE PRICE, GET 2ND FOR 1¢ MORE!!!

SALE



LYTIC KLINIC ELECTRO'S

UF	10	15	20	25	30	35	40	50	60	75	100	150	200	300	400	500	1000	10000
10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15
20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30
35	35	35	35	35	35	35	35	35	35	35	35	35	35	35	35	35	35	35
40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50
60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60
75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75
100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150
200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200
300	300	300	300	300	300	300	300	300	300	300	300	300	300	300	300	300	300	300
400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400
500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000

All PC type except for noted Axial

RIBBON CABLE!

Cond.	10	15	20	25	30	35	40	45	50	60
Cond.	10	15	20	25	30	35	40	45	50	60
10	10	10	10	10	10	10	10	10	10	10
15	15	15	15	15	15	15	15	15	15	15
20	20	20	20	20	20	20	20	20	20	20
25	25	25	25	25	25	25	25	25	25	25
30	30	30	30	30	30	30	30	30	30	30
35	35	35	35	35	35	35	35	35	35	35
40	40	40	40	40	40	40	40	40	40	40
45	45	45	45	45	45	45	45	45	45	45
50	50	50	50	50	50	50	50	50	50	50
60	60	60	60	60	60	60	60	60	60	60

LED WATCH GUTS \$1.95 2 for \$1.96

Factory "lay-abouts." Do they work? Who knows! A micro digital technicians bonanza. The complete guts are there, with back plastic case and

HOW TO ORDER

When ordering, always use catalog number, type no., the name of the magazine you are ordering from and the month.

leatherette band 5 functions
HOURS MINUTES
SECOND, 5 MONTH, and DATE. Sorry, no specs. W1 2oz
CAT. No. S267

PARTS & SEMI "ONE-CENTERS"

100-CAPACITOR SPECIAL, discs, mylar, lytic, more (#2738).....	2.00
10-VOLTAGE REGULATORS, hobby LM320, 340, 70-3 (#3330).....	2.00
30-PANEL SWITCHES, silicon, rotary, carcase, med. etc (#3288).....	2.00
200-RESISTOR SPECIAL 5W, 1% tolerance, 1/2W (#3054).....	2.00
200-HALF WATERS, resistors, carbon, metal (#3046).....	2.00
100-NATIONAL IC BONANZA, linears, 7400e ROMS (#2860).....	2.00
18-LM3407 VOLTAGE REGULATORS, 8 to 24V, 70-220 (#2638).....	2.00
100-POLYETHYLENE CAPS, ass't. values, voltage, 1/2W (#2729).....	2.00
50-THERMISTORS, resistors that change with temp (#A089).....	2.00
20-BRIDGES, untested, 2, 4, 6, amp, full wave (#4022).....	2.00
28-LAMP "B" SOCKET SETS, micro, 1.8V, 7T (#3987).....	2.00
100-MIXED READOUTS, hobby, untested, 137, 1.8, 8 etc (#3618).....	2.00
150-QUARTER WATERS, resistors, metal film, 1/4W, 5% (#3413).....	2.00
100-PLASTIC TRANSISTORS, untested, 70-92 (#2604).....	2.00
200-PREFORMED RESISTORS, 1/4, 1/2, 1W, marked, ass't'd (#2608).....	2.00
200-PRECISION RESISTORS, 1/4, 1/2, 1W, 1%, 2% marked (#2428).....	2.00
80-DIPPED MYLARS, resistors, metal film, 1/4W, 5% (#2421).....	2.00
30-VOLUME CONTROLS, audio, linear, ass't'd values (#2421).....	2.00
30-CLOCK CHIPS, National, hobby, untested, alarm (#5089).....	2.00
30-MEMOZ 22 WATERS, hobby, untested (#3940).....	2.00
10-PUSH SWITCHES, push-to-break, apt. size (#3413).....	2.00
25-CD-4000 SERIES CMOS, untested, 50% ass't'd value (#5284).....	2.00
1-CHARACTER GENERATOR, 5 x 7 Mosaic MK 2002P (#3898).....	4.95
1-CONDENSER MILES, sensitive, 500 ohms 1.5 Vols (#3178).....	4.95
150-SHAFTS, untested, 1/2, 3/4, 1" (#2187).....	2.00
75-CARBON FILM RESISTORS, 1/4, 1/2 watt, 5 & 10% marked, ass't' (#3524).....	2.00
250-UNMARKED CAPACITORS, polystyrene, molded, pop values (#3805).....	2.00
300-SILICON SIGNAL DIODES, micro, glass, zener tool 50% yield (#2620).....	2.00
8-IC SOCKETS, 18 pins, plastic, 1/2" (#3618).....	2.00
100-LM148/194 S WITCHING DIODES, 50%+ yield, untested (#2418).....	2.00
30-PC TRIM POTENTIOMETERS, thumbwheel, screwdriver size (#3345).....	2.00
18-SLIDE VOLUME CONTROLS, ass't'd values, dual, singles (#3057).....	2.00
75-4" CABLE TIES, plastic, like "Ty-wrap" (#5218).....	2.00
10-CRYSTALS, may include CB, Ham & more (#3250).....	2.00
100-TERMINAL STRIPS, from 2 lugs up to (#3136).....	2.00
30-NE-ZNIEON LAMP, all 100% good (#2613).....	2.00
40-4" SHIELDING CABLE, 1 cond. miter, phone (#5218).....	2.00
3-SOUND TRIGGERS, sound triggers scr/wamp (#3425).....	2.00
10-CB CRYSTALS, for phase lock loop, Ham, MC 18 (#8050).....	2.00
1-VEEDER ROOT CONTROL, 000-999, resettable, panel mt. (#5081).....	1.49
2-DUAL GATE MONITOR, sim. to 3N200, 3N187, for RF & Mixer (#5101).....	1.00
2-LCD THERMAL INDICATORS, 88-100 F, 7x1", flexible (#5198).....	1.00
1-JOYSTICK, fear 100K pots, with knob (#3804A).....	4.95
1-REC'D THUMBWHEEL SWITCH, BCD, 0-7 (#2870A).....	2.00
1-PLEXY TV BROADCAST FILTER, for cable PL & stat (#5044).....	1.95
2-6V Ni-CAD CHARGER PAK, incl. 125mA, 128 VAC pr. (#4008).....	1.49
20-DATA ENTRY PUSH-SWITCHES, apt. norm. open, for keyboards (#5279).....	2.00
75-SM4700 TTL IC, untested 50%+ yield, pop types (#2415).....	2.00
100-MINI DIP ICs, linears, untested 50%+ yield, pop types (#3245).....	2.00
100-MINI DIP ICs, 2 watts to 400mA, 24V, 5% (#3245).....	2.00
75-LINEARS, OP AMPS, untested 50%+ yield, amp, diode, mini-dips (#2416).....	2.00
100-TTL & LINEAR MIXED, with 7400s, 80%+ yield (#2413).....	2.00
1-40 CHANNEL CB SELECTOR, w/knob, for PLL circuits (#5048).....	1.00
1-13 CHANNEL CB SELECTOR, for PLL circuits (#5044).....	1.00
15-"POP" OPTICAL LENSES, plano-convex, 1" dia, plastic (#5043).....	1.19
10-IC "DICE", microcopic circuits, teaches theory (#5088).....	1.19
1-8" HI-FI SPEAKER, full range, for car-home (#5294).....	4.95
1-LED WATCH GUTS, men's, how good? We don't know (#5267).....	1.95
1-UHF TUNER, solid state, standard type (#2927).....	1.00
10-SLIDE SWITCHES, apt. pop styles (#1488).....	2.00
4-TANTALUM CAPACITORS, 6 uf 35V, diode (#5281).....	1.00
8-PANCAKE PHOTOCELLS, 800-180 ohms 1/2" (#2878).....	1.00
1-100KHZ MARKER CRYSTALS, approx for marker gen. (#3886).....	1.00
1-MOTHERBOARD EDGE CONNECTOR, 106 pins, 125" (#3947).....	3.50
1-48-PIN EDGE CONNECTOR, 125" spacing (#3963).....	1.95
1-SPST 24V REED RELAY, norm. open, dip style, 1280 ohms (#5178).....	1.49
150-PREFORMED RESISTORS, 1/4, 1/2 watt, 5 & 10% marked, ass't'd (#2608).....	2.00
10-CALCULATOR KEYBOARDS, 20 keys end, 1/2" (#3824).....	2.00
3-ALARM WARNING STICKERS, for windows, 4" x 3" (#5338).....	1.00
10-CALCULATOR SWITCHES, SPST-N.O., ass't'd, 1/4" sq. (#5371).....	2.00
1-ITT 8 DIGIT COUNTER, 1.0V AC, white chip (#5382).....	2.00
6-2N2369 TRANSISTORS, NPN switch, like 2N2222 (#1982).....	1.00
3-6 AMP, 50 VPI TRIAC, TO-5 metal case, (#5403).....	6.00
2000-FACTORY REJECT DIODES, zeners, rect, signal, untested (#3369).....	4000
40-AXIAL ELECTROLYTIC CAPS, ass't'd values & capacitance (#3228).....	2.00
40-UPRIGHT ELECTROLYTIC CAPS, ass't'd values & capacitance (#3228).....	2.00
150-RED DISC SPECIAL, 400 mw, glass, metal, (#5404).....	2.00
10-15 VOLT ZENERS, 400 mw, glass, metal, (#5404).....	2.00
100-CERAMIC CAPS, axial, color coded ass't'd values NPO's etc.....	2.00

IBRAND NEW! 22 OP AMP & TTL IC FACTORY "DUMP-IN"

7 for \$1.00 **14 for \$1.01**

- LM308V
- LM311V
- LM730M
- LM1804N
- LM3900N
- LM555V
- SN7401
- SN7403
- SN7404
- SN7406
- SN7410
- SN7412
- SN7413
- SN7414
- SN7415
- SN7416
- SN7417
- SN7418
- SN7419
- SN7420
- SN7421
- SN7422
- SN7423
- SN7424
- SN7425
- SN7426
- SN7427
- SN7428
- SN7429
- SN7430
- SN7431
- SN7432
- SN7433
- SN7434
- SN7435
- SN7436
- SN7437
- SN7438
- SN7439
- SN7440
- SN7441
- SN7442
- SN7443
- SN7444
- SN7445
- SN7446
- SN7447
- SN7448
- SN7449
- SN7450
- SN7451
- SN7452
- SN7453
- SN7454
- SN7455
- SN7456
- SN7457
- SN7458
- SN7459
- SN7460
- SN7461
- SN7462
- SN7463
- SN7464
- SN7465
- SN7466
- SN7467
- SN7468
- SN7469
- SN7470
- SN7471
- SN7472
- SN7473
- SN7474
- SN7475
- SN7476
- SN7477
- SN7478
- SN7479
- SN7480
- SN7481
- SN7482
- SN7483
- SN7484
- SN7485
- SN7486
- SN7487
- SN7488
- SN7489
- SN7490
- SN7491
- SN7492
- SN7493
- SN7494
- SN7495
- SN7496
- SN7497
- SN7498
- SN7499
- SN7500
- SN7501
- SN7502
- SN7503
- SN7504
- SN7505
- SN7506
- SN7507
- SN7508
- SN7509
- SN7510
- SN7511
- SN7512
- SN7513
- SN7514
- SN7515
- SN7516
- SN7517
- SN7518
- SN7519
- SN7520
- SN7521
- SN7522
- SN7523
- SN7524
- SN7525
- SN7526
- SN7527
- SN7528
- SN7529
- SN7530
- SN7531
- SN7532
- SN7533
- SN7534
- SN7535
- SN7536
- SN7537
- SN7538
- SN7539
- SN7540
- SN7541
- SN7542
- SN7543
- SN7544
- SN7545
- SN7546
- SN7547
- SN7548
- SN7549
- SN7550
- SN7551
- SN7552
- SN7553
- SN7554
- SN7555
- SN7556
- SN7557
- SN7558
- SN7559
- SN7560
- SN7561
- SN7562
- SN7563
- SN7564
- SN7565
- SN7566
- SN7567
- SN7568
- SN7569
- SN7570
- SN7571
- SN7572
- SN7573
- SN7574
- SN7575
- SN7576
- SN7577
- SN7578
- SN7579
- SN7580
- SN7581
- SN7582
- SN7583
- SN7584
- SN7585
- SN7586
- SN7587
- SN7588
- SN7589
- SN7590
- SN7591
- SN7592
- SN7593
- SN7594
- SN7595
- SN7596
- SN7597
- SN7598
- SN7599
- SN7600
- SN7601
- SN7602
- SN7603
- SN7604
- SN7605
- SN7606
- SN7607
- SN7608
- SN7609
- SN7610
- SN7611
- SN7612
- SN7613
- SN7614
- SN7615
- SN7616
- SN7617
- SN7618
- SN7619
- SN7620
- SN7621
- SN7622
- SN7623
- SN7624
- SN7625
- SN7626
- SN7627
- SN7628
- SN7629
- SN7630
- SN7631
- SN7632
- SN7633
- SN7634
- SN7635
- SN7636
- SN7637
- SN7638
- SN7639
- SN7640
- SN7641
- SN7642
- SN7643
- SN7644
- SN7645
- SN7646
- SN7647
- SN7648
- SN7649
- SN7650
- SN7651
- SN7652
- SN7653
- SN7654
- SN7655
- SN7656
- SN7657
- SN7658
- SN7659
- SN7660
- SN7661
- SN7662
- SN7663
- SN7664
- SN7665
- SN7666
- SN7667
- SN7668
- SN7669
- SN7670
- SN7671
- SN7672
- SN7673
- SN7674
- SN7675
- SN7676
- SN7677
- SN7678
- SN7679
- SN7680
- SN7681
- SN7682
- SN7683
- SN7684
- SN7685
- SN7686
- SN7687
- SN7688
- SN7689
- SN7690
- SN7691
- SN7692
- SN7693
- SN7694
- SN7695
- SN7696
- SN7697
- SN7698
- SN7699
- SN7700
- SN7701
- SN7702
- SN7703
- SN7704
- SN7705
- SN7706
- SN7707
- SN770

Operation Assist

If you need information on outdated or rare equipment, a schematic, parts list, etc., another reader might be able to assist. Simply send a postcard to Operation Assist: POPULAR ELECTRONICS, 1 Park Ave., New York, NY 10016. For those who can help readers, please respond directly to them. They'll appreciate it. Only those items regarding equipment not available from normal sources are published.

Rogers type 30 radio. Schematic, tube numbers. T. Branton, 1735 College La., S.W., Calgary, Alta, Canada, T2S 2E9.

Hammarlund 23-channel CB. Schematic and any information. Mark Sinchar, 3316 Ford St., McKeesport, PA 15132.

Dumont cathode-ray oscilloscope type 303, serial 257. Operation manual and schematic. Fred Rapant, 1327 Marion Ave., S Milwaukee, WI 53172.

Electronic Designs oscillator model 190. Manual and schematic. F. Putman, 5374 S. Huron St., Littleton, CO 80120.

Concertone stereo tape recorder model 505. Operation manual and schematic. James Dunavant, 717 NE 5th Ter. Gainesville, FL 32601.

Grundig Satellite 2000 SW receiver. Adaptor with instructions needed. Tonyo Poweigha, 324 M.I. Building, University Park, PA 16802.

Hammarlund model HQ 100 A SW receiver. Need operation manual. Douglas W. Bucholz, Rhame, ND 58651.

Elco transistor TV model TVA-12. Schematic. Wyman Thompson, Box 63, Mead, WA 99021.

Hallcrafters model SX-100. Operator's manual, schematic and any other information. John M. Snider, 103 Mulberry, Scott City, MO 63780.

Panasonic FM/AM stereo cassette recorder model RS-280S. Schematic. H.L. Murdock, 517 Tilgham St., Kenton, TN 38233.

Harvey Wells Bandmaster TBS-50D transmitter. Instruction manual and schematic. H. Eddy, W2BU, 3 No. Belmont Circle, Oneonta, NY 13820.

General Radio type 650-A impedance bridge. Schematic and operator's manual. Mike Miller, 80 Sutton Dr., Glenbrook, CT 06906.

Friden 1154 and 1102 calculator. Schematic, parts list, service information. P.M. Erlenbaugh, Fremont High School, Box 655, Fremont, IN 46737.

Packard-Bell model SMC-2P dual-trace oscilloscope. Schematic, other data. Phil Hartman, 169 Boutwell, San Francisco, CA.

MBI, Inc. Model 015 disc memory unit. Specifications, schematics and maintenance manual. Bert Richardson, 13 Fern St., Natick, MA 01760.

Concord VTR 600-1. Need manual. Robert Sloat, Box 0537, Tice, FL 33905.

Superior Instruments model TD-55 tube tester. Operations manual and schematic. Larry R. Cook, 362 East South St., Richland Center, WI 53581.

DeVry Technical Institute oscilloscope model 1G09. Schematic and assembly manual. Tom Williams, 1625 Greenview Cr., Windsor Ontario, Canada.

Tektronix 511AD oscilloscope. Manual and schematic. J.A. Cali, 1876 E. 2990 So., Salt Lake City, UT 84106.

Huges model 105A memo-scope and HAC H1051. Need operation manual. Ed McGarry, 3209 Spring Drive, Alexandria, VA 22306.

International Radio Corporation model 66x. Need JFD air-cooled ac-dc ballast type C. William Christoffel, 1110 Varsity Apt 225, DeKalb, IL 60115.

Emerson radio 8CW-334-2. Need I-f transformers and schematic. Ted Liszewski, 182 Fairview Ave., Paramus, N.J. 07652.

Fisher 550-T receiver. Service manual and schematic. Chuck Landresy, 409 Buena Vista, Windor, GA 30680.

Precision E-200 signal generator. Manual and schematic. Bill Hocutt, 926 So., Shades Crest Road, Bessemer, AL 35020.

Motorola model FMTRU-5V hi-band transceiver. Need schematic and instruction manual. Gordon E. Dahl, 604 9th St. So., Virginia, MN 55792.

Hewlett Packard model 410B VTVM. Schematic and manual. A. Reges, 16W761 White Pines, Bensenville, IL 60106.

Knight model 83Y125-J VTVM. Schematic and manual. P. Young, 16W761 White Pines, Bensenville, IL 60106.

Precision Apparatus Co., Inc. model ES525 serial #1019 oscilloscope. Service manual, owners manual, schematic and pc layout. STCM D.E. Miller, Code 915, Navseacentlant, St. Julien's Creek Annex, Portsmouth, VA 23702.

Moseley 135 x-y plotter. Service manual and schematic. Peter Braun, Box 399, Sunnymead, CA 92388.

Morrow model MBR-5 serial #R-1458 communication receiver. Schematic and service manual. Alex Kiriluk, 419-50th Ave., Bellwood, IL 60104.


Fujiya-Corder tape player recorder. Manual and schematic. W.D. Barry, 5050-147 Jackson St., N. Highlands, CA 95660.

Zenith Trans-Oceanik receiver #8G-005. Need schematic and manual. Steve Kritzberg, 1030-16 Franklin Ave., Valley Stream, NY 11580.

Heathkit Mohawk model RX-1 receiver. Manual and schematic. **Marauder** model HX-10. Manual and schematic. Stuart L. Balingier, 57 S. Clinton St., Poughkeepsie, NY 12601.

Magnus organ. Circuit diagram for oscillator board 24-1353 revision D. M.W. Greene, 7 Maple Street, Bellport, NY 11713.

Olektron FP-CDB-115. Need double-balanced modulator circuit. Gene Cronenwett, 2618 Beecher St., Findlay, OH 45840.



EDLIE TUBE BONANZA

BUY BRAND NEW MANUFACTURER'S BOXED TUBES (Raytheon, Dumont, IEC Mullard, GE, Elmenco, etc.) AT 70% OFF LIST!


1 YEAR MFRS. GUARANTEE

Terms: Minimum order \$10.00. Include postage. Either full payment with order or 30% deposit. balance C.O.D. F.O.B. Levittown, N.Y.

B&K Dual-Trace 10 MHz Triggered 5" Scope MODEL 1471B


Mode automatically shifts between CHOP and ALTERNATE as you change sweep time for fast set-up. Bright P31 blue phosphor. 18 calibrated sweeps — μ SEC to .5SEC/cm. Sweep to 200nSEC/cm with 5X magnification. Front panel X-Y operation using matched vertical amps. Input grounding switches. TV sync separators. Check most digital logic circuitry including CMOS. Character display applications using TTL compatible Z-axis intensity modulation. Includes probes.

Reg. price \$599.00.
Our price \$505.00.



COPPER CLAD BOARDS.
Copper on both sides. Glass Epoxy 1/16" thick 9-3/4" x 18". Excellent quality for either production or experimental work.
Price \$1.49 ea.; 3 for \$3.99; 12 for \$11.99

Type B) Double sided copper clad. Size 12" x 18".
\$1.99 ea.; 3 for \$4.99; 12 for \$18.00



DE102 ANOTHER EDLIE SUPER TAPE SPECIAL JUST ARRIVED. A TRAILER LOAD OF OVER 50,000 REELS OF 1800 FT. QUALITY TAPE. Made by Scotch, Ampex or Soundcraft. These tapes come on 7" reels regular. They were bought surplus and are of excellent grade.
79c ea.; 3 reels for 2.25 6 reels for \$3.99; 100 for \$59.95

1AD2	1.82	6AU8	2.42	6XK6	1.67	6S07	4.75	12DW7	1.75
1B3	1.92	6AV6	1.34	6XG6	3.59	6T10	2.70	12FX5	1.61
1BC2	1.97	6AV11	1.97	6XHA5	1.85	6U5	9.00	12GE5	2.42
1K3	1.92	6AW8	2.15	6HB7	1.86	6U8	1.88	12GN7	2.70
1U4	1.83	6AX4	1.73	6HE5	2.31	6U10	1.97	12HL7	2.34
1V5	1.19	6AY3	1.82	6HF5	3.96	6V6G1	2.21	12JB6	3.12
1X2	1.94	6AZ8	3.56	6HF8	2.51	6X4	1.73	12MD8	2.77
1AH2	1.92	6B10	2.45	6H05	2.43	6X5	1.77	12S07	4.75
1AV2	1.52	6BA6	1.61	6HS5	3.54	6X8	1.97	12S07	4.75
2D21	2.00	6BA7	4.47	6HS8	2.30	6X9	2.46	12T10	3.81
2GAS	1.91	6BA11	2.36	6HV5	4.26	6Z10	2.93	13FM7	1.97
2HA5	1.64	6BE6	1.77	6I15	1.53	7B7	5.40	13L10	2.80
3A3	1.94	6BH6	1.82	6I24	2.24	7K6	2.33	14B11	3.54
3A12	1.88	6B16	1.88	6I5	2.01	7V7	4.20	14BR11	2.90
3AW2	1.94	6BK4	3.59	6J10	2.93	8A19	5.67	15BD11	2.70
3BS2	2.04	6BK7	2.36	6J11	3.03	8AR11	3.38	15CW5	1.21
3B76	1.73	6BL8	1.35	6JA5	2.37	8AW8	2.48	15D08	1.92
3C03	2.36	6BM8	2.91	6JB6	2.90	8BA11	2.70	15KV8	3.50
3C3	2.12	6BN6	2.02	6JC6	2.15	8BM11	3.50	15M7	2.72
3D3	1.97	6BN11	3.24	6J06	2.21	8BU11	2.85	15A8	2.49
3D3	2.04	6B05	1.91	6JF6	4.02	8BU11	2.82	167L08	3.59
3E17	1.77	6B07	2.37	6JF6	3.32	8CB11	3.41	17A7	1.82
3K5	1.86	6BR8	2.42	6JH6	3.38	8CG7	1.46	17B10	1.82
3HA5	1.85	6BU8	2.36	6JH6	1.71	8JH8	1.58	17B10	2.88
3HO5	2.73	6BV11	2.69	6JH8	2.75	8JH8	1.58	17BR3	1.64
3JC6	2.34	6B26	1.52	6JH8	2.61	8L8	1.95	17B3	1.64
3K16	1.86	6C4	1.91	6JN6	2.43	9GH8	1.91	17C13	1.67
3V4	2.88	6C5	5.00	6JN6	3.12	9JH8	1.52	17DW4	1.82
4B16	1.80	6CA4	1.83	6JN8	3.12	9KX6	2.33	17EW8	1.28
4B26	1.70	6CA7	2.84	6JN8	2.73	9OX6	2.33	17M6	2.73
4CB6	1.37	6CB6	1.59	6K5G1	1.89	10CW5	1.71	17R6	2.91
4DK6	1.60	6CG3	1.79	6K7	4.61	10G7	2.51	17N6	2.63
4DT6	1.75	6CG7	1.46	6KA8	2.34	10K6	2.18	17J28	2.04
4EH7	1.80	6C8	1.97	6KA8	2.34	10G7	2.31	17K6	3.50
4E17	1.80	6CH3	1.65	6K6	4.07	10I8	1.88	13C03	1.89
4HA5	1.50	6C13	1.94	6K6	2.93	10Y8	1.80	20A03	3.70
4HS8	1.74	6C16	2.36	6K6	2.61	10R8	2.33	20L6	3.96
4JC6	2.31	6C18	2.34	6K8	3.21	10R8	2.33	21G05	2.45
1K16	2.01	6C4	5.45	6K8	1.97	11AF9	3.20	21H85	4.36
4L18	2.22	6C5	1.72	6K8	2.93	11B011	3.29	21J26	2.32
4M8	1.88	6CX8	2.69	6K8	4.77	11B11	3.62	21LRR	2.59
5A05	1.73	6C75	2.82	6K8	3.87	11DS5	2.24	21LUR	2.39
5AR4	2.52	6D6	2.82	6K8	2.79	11F7	2.06	22F6	3.20
5GH8	2.37	6DC6	1.61	6K8	3.84	11M7	2.46	22R6	3.41
5G17	1.73	6D18	2.50	6K8	2.82	11V8	2.66	23A9	2.59
5G57	1.52	6D15	1.52	6L7	3.48	11L08	2.49	24E6	3.84
5G26	2.10	6D05	2.40	6L8	2.15	11MS8	2.04	25C5	1.85
5H26	1.52	6D06	2.58	6L8	2.34	12AB5	1.76	25CG3	1.67
5K08	1.88	6D54	4.77	6L8	1.37	12AL5	1.92	25EH5	1.40
5LJ8	2.12	6D16	1.59	6L8	3.69	12A05	1.63	26H05	1.71
5U4	1.61	6D4	1.80	6L8	2.84	12A16	1.43	27	5.40
5V4	2.66	6D8	1.55	6L8	1.97	12A17	1.65	27GB5	1.67
5Y4	0.00	6EAB	1.91	6L8	2.33	12A06	1.64	30A63	1.86
5Z3	4.26	6EB8	2.81	6L8	1.32	12A07	1.47	31J56	3.48
6A8	0.00	6EH5	1.52	6L8	2.02	12AV6	1.41	31L26	4.07
6AB4	1.70	6EH7	1.85	6L8	3.30	12AV7	2.21	33G7	3.11
6AC10	2.09	6E17	1.76	6L8	2.82	12AK7	1.52	34C3	1.92
6AD10	3.89	6EM5	2.02	6L8	2.79	12A7	1.97	35C5	1.47
6AF4	2.40	6EM7	2.72	6L8	4.80	12B6	1.40	35L6	2.27
6AF9	3.11	6E58	2.70	6M11	2.81	12B6	1.26	35LR6	3.69
6AG5	1.85	6E17	1.83	6MD8	3.75	12BH7	1.92	35W4	1.22
6AG7	5.04	6EW6	1.73	6ME8	3.50	12BY7	1.92	35Z5	1.64
6AG9	3.21	6EW7	2.75	6MU8	4.25	12B26	2.40	38H7	3.53
6AH6	2.99	6F5	5.00	6M7	2.60	12D06	2.61	38HK7	3.53
6A18	2.87	6F6	5.00	6SA7	1.86	12D18	1.77	42KN6	3.38
6AK5	2.28	6FC6	1.65	6SG7					
6AK8	1.92	6F7	2.60	6S17					
6AL3	1.75	6FM7	2.22	6SK7					
6AL5	1.56	6F05	2.22	6SL7					
6AL11	3.01	6GE5	2.61	6SN7					
6AM8	2.49	6G17	2.55						
6AN8	2.19	6GH8	1.52						
6AQ5	1.64	6G17	1.73						
6A08	1.73	6GK6	1.70						
6AR5	1.26	6GM6	2.02						
6AR11	2.75	6GS7	2.10						
6AU5	2.75	6GU7	2.02						
6AU6	1.56	6GW8	1.93						

WRITE FOR FREE VALUE PACKED CATALOG OUTSIDE USA \$1.00

EDLIE ELECTRONICS, INC. 2700-CP HEMPSTEAD TPKE, LEVITTOWN, N.Y. 11756

JANUARY 1979

www.americanradiohistory.com

CIRCLE NO. 17 ON FREE INFORMATION CARD

109

KIM-1 MICROCOMPUTER
Fully Assembled & Tested
\$179.00
Including Documentation



Ballantine Model 1010A Dual Channel/X-Y Scope
A professional oscilloscope to fit your basic needs.
\$695



Intersil LED or LCD 3 1/2 DIGIT PANEL METER KITS
BUILD A WORKING DPM IN 1/2 HOUR WITH THESE COMPLETE EVALUATION KITS
Test these new panels for yourself with Intersil's low cost prototyping kits complete with A/D Converter and LCD display (for the 7106) or LED display (for the 7107). Kits provide all materials including PC board for a functioning panel meter.
ICL7106E(LED) \$29.95 ICL7107(LED) \$24.95




The Instructor 50
Desktop Computer
from SIGNETICS
Complete, Ready-To-Use Microprocessor Learning Package
Includes everything you need to write, run and debug machine-language programs. Housed in one compact package.
\$350.00



SUPER KIM... \$395.00
Economic expansion into more RAM, user EPROM and prototype area on one modern, compact fully assembled and integrated board. Total compatibility with KIM-1 software. On board SV, 3A regulator and TTY, RS232 and Audio Tape interfaces.
Model 8020A
\$169




HYBRID AUDIO POWER AMPLIFIER
P/N Power Matching Transformer
SI-1010G(10W) \$ 6.95 TR10 \$ 7.90
SI-1020G(20W) \$13.95 TR20 \$10.90
A-SI-8(Socket for above) .95
SI-1030G(30W) \$19.00 TR30 \$12.90
SI-1050G(50W) \$27.80 TR50 \$17.90
A-SI-10(Socket for above) .95
*Note: One Transformer can power two audio amplifiers.




FUNCTION GENERATOR KIT
XR2206KB \$19.95
XR2206KA \$14.95
Includes all components, PC board and instructions.

SYM-1
The Complete MICRO-Computer System
\$269.00



5% CARBON FILM RESISTORS
1/4W \$1.69
1/2W \$1.79
All values from 10Ω to 10 MΩ - Only in multiples of 100 pcs per value

ANCRONA HAS THE SOURCERER™ COMPUTER
\$895.00
STANDARD FEATURES: Z80-4K ROM-8K RAM-Dual Cassette I/O-30 Lines of 64 Characters-64 Defined Characters and 64 User Defined Characters-512 x 240 Graphic Resolution-Edge Card Connection to S100 Bus-Serial and Parallel I/O
OPTIONS: Expandable to 32K RAM-B-Slot S100 Bus-Printer-Disk Storage-Telephone-Voice-Home Controller



OPCOA - RED/GREEN LED LAMP
Changes red to green with biasing change
1 24 25 up 100 up
CSL310L \$ 1.40 \$ 1.10 \$.95

INTERASIL
1 24 25 up 100 up
ICL8038CCPD \$ 4.45 \$ 3.75 \$ 3.13
ICM7216A1J1 30.00 24.00 20.00
ICM7216B1P1 24.95 20.05 16.65
ICM7216C1J1 24.97 19.98 16.65
ICM7216D1P1 20.00 16.00 13.35
ICL7106CPL 14.70 11.75 9.80
ICL7107CPL 13.85 11.10 9.25

ADTECH POWER SUPPLIES
Model Rating
Number Vdc Amps Price
AP55-3 5 3 \$35.50
AP56-2.5 6 2.5 35.50
AP512-1.6 12 1.6 35.50
AP515-1.5 15 1.5 35.50
DAP55-8 ±5 0.8 46.00
DAP59-12.5 ±9 to ±12 0.5 46.00
DAP512-7.5 ±12 0.75 46.00
DAP515-6.0 ±15 0.60 46.00

1802 SERIES
CERAMIC 85° Epoxy 40
to +125° to -85°C
1802LD \$19.95 1802LE \$11.20
1822LD 14.00 1822LE 8.05
1824LD 7.75 1824LE 3.65
1852LD 8.25 1852LE 1.90
1853LD 5.65 1853LE 1.45
1854LD 11.70 1854LE 6.50
1855LD 5.50 1855LE 1.10
1857LD 5.50 1857LE 1.10
1858LD 5.65 1858LE 1.45
1859LD 5.65 1859LE 1.45

ANCRONA Send Check or Money Order to
P.O. Box 2208P, Culver City, CA 90230. California residents add 6% sales tax. Minimum Order, \$10.00. Add \$1.00 to cover postage and handling. Master Charge and Visa welcomed. Please include your charge card number, interbank number and expiration date. PHONE ORDERS (213) 641-4064

ARIZONA ANCRONA 4518 E Broadway Tucson, AZ 85711 (602) 881-2348	CALIFORNIA ANCRONA 11080 Jefferson Blvd Culver City, CA 90230 (213) 390-2595	CALIFORNIA ANCRONA 1300 E Eslinger Ave Santa Ana, CA 92705 (714) 547-8424	OREGON ANCRONA 1125 N.E. 82nd Ave Portland, OR 97220 (503) 264-5841
CANADA ANCRONA 5656 Fraser St Vancouver, B.C. V5M 2Y2 (604) 324-0707	CALIFORNIA ANCRONA 1054 E El Camino Real Sunnyvale, CA 94087 (408) 243-4121	GEORGIA ANCRONA 3030 Piedmont Rd, N.E. Atlanta, GA 30305 (404) 261-7100	TEXAS ANCRONA 2849 Richmond Houston, TX 77009 (713) 528-2498



Electronics Library

THE HOME COMPUTER REVOLUTION

by Ted Nelson

This book concerns itself with the "why" of home computing and provides interesting insight to many facets of this infant industry. The beginning computer hobbyist and those casually interested will find much information on the development and applications of home computers. Likewise, there are many fresh ideas and interesting facts within its pages which will fascinate established computer hobbyists.

Distributed by The Distributors, 702 South Michigan, South Bend, IN 46618. 224 pages. \$2.00 soft cover.

UNDERSTANDING AMATEUR RADIO

by Jay Rusgrove, Doug DeMaw and George Grammer

The American Radio Relay League has published a totally revised edition of the venerable book Understanding Amateur Radio. Advances in the state of the art are reflected in the new edition, which is in a larger (8 1/4 x 10 1/2 in.) and more graphic format. After presenting some electronic fundamentals, the book explores semiconductors and vacuum tubes, CW and phone transmitters, receivers, antennas and feeders, the workshop and test bench, building receivers, accessories for your receiver, building transmitters, transmitting accessories, the power supplies, making measurements, antennas and masts, and setting up a station.

Published by the American Radio Relay League, 225 Main Street, Newington, CT 06111. 223 pages. \$5.00 (soft cover) in the U.S., \$5.50 elsewhere.

MICROPROCESSOR INTERFACING TECHNIQUES

by Austin Lesea and Rodney Zaks

This work describes the techniques and components used for interfacing a microprocessor-based CPU to all major peripherals. Following an introductory discussion of basic concepts, techniques, and bus systems, assembly of the CPU is covered for four popular microprocessors. A chapter on basic I/O systems precedes the essential part of the text, Chapter IV. It is here that the authors relate how to interface the microprocessor-based CPU to a keyboard, LED indicators, teletypewriter, paper-tape reader, cassette-tape recorder, floppy disk, and CRT display.

Published by SYBEX Incorporated, 2161 Shattuck Ave., Berkeley, CA 94704. 348 pages. \$9.95 soft cover.

STATEMENT OF OWNERSHIP, MANAGEMENT AND CIRCULATION (Required by 39 U.S.C. 3685). 1. Title of Publication: Popular Electronics. A. Publication No. 438240. 2. Date of filing: October 1, 1978. 3. Frequency of issue: Monthly. A. No. of issues published annually: 12. B. Annual subscription price: \$13.00. 4. Location of known office of publication: One Park Avenue, New York, New York 10016. 5. Location of the Headquarters or General Business Offices of the publishers: One Park Avenue, New York, New York 10016. 6. Names and complete addresses of publisher, editor, and managing editor: Publisher, Joseph E. Mesics, One Park Avenue, New York, New York 10016; Editor, Arthur P. Salsberg, One Park Avenue, New York, New York 10016; Managing Editor, John R. Riggs, One Park Avenue, New York, New York 10016. 7. Owner: Ziff-Davis Publishing Company, One Park Avenue, New York, New York 10016; Ziff Corporation, One Park Avenue, New York, New York 10016. 8. Known bondholders, mortgagees, and other security holders owning or holding 1 percent or more of total amount of bonds, mortgages or other securities: None.

10. Extent and nature of circulation	Average no. copies each issue during preceding 12 months	Actual no. copies of single issue published nearest to filing date
A. Total No. Copies Printed (Net Press Run)	507,200	511,499
B. Paid Circulation		
1. Sales through Dealers and Carriers, Street Vendors and Counter Sales	85,271	81,200
2. Mail Subscriptions	332,370	331,100
C. Total Paid Circulation (Sum of 10B1 and 10B2)	417,641	412,300
D. Free Distribution by Mail, Carrier or Other Means Samples, Complimentary, and Other Free Copies	10,984	10,152
E. Total Distribution (Sum of C and D)	428,625	422,452
F. Copies not distributed		
1. Office Use, Left Over, Unaccounted, Spoiled After Printing	2,912	5,138
2. Returns from News Agents	75,663	83,909
G. Total (Sum of E, F1 and 2—should equal net press run shown in A)	507,200	511,499

11. I certify that the statements made by me above are correct and complete.

WILLIAM L. PHILLIPS,
Assistant Treasurer

12. For Completion by Publishers Mailing at the Regular Rates: (Section 132.121, Postal Service Manual)

39 U. S. C. 3626 provides in pertinent part: "No person who would have been entitled to mail matter under former section 4359 of this title shall mail such matter at the rates provided under this subsection unless he files annually with the Postal Service a written request for permission to mail matter at such rates."

In accordance with the provisions of this statute, I hereby request permission to mail the publication named in item 1 at the phased postage rates presently authorized by 39 U. S. C. 3626.

WILLIAM L. PHILLIPS,
Assistant Treasurer

POPULAR ELECTRONICS

Original Japanese Replacement Parts for TV, Stereo and CB

25-UP 10:24 1.9				25-UP 10:24 1.9				25-UP 10:24 1.9				25-UP 10:24 1.9				25-UP 10:24 1.9							
2SA102	29	34	39	2SC460	45	50	55	2SC1114	340	360	380	2SC2072	3.55	3.75	3.95	AN247P	2.40	2.60	2.90	TA7089P	1.95	2.15	2.45
2SA473	45	55	60	2SC481	1.25	1.35	1.45	2SC1116A	3.20	3.45	3.80	2SC2076	.45	.60	.65	AN274	1.50	1.70	1.90	TA7092	4.40	4.90	5.40
2SA484	1.85	2.05	2.35	2SC482	1.25	1.35	1.45	2SC1124	80	85	95	2SC2091	95	105	115	AN313	4.20	4.40	4.60	TA7120P	1.45	1.65	1.85
2SA495	35	40	45	2SC483	1.25	1.35	1.45	2SC1128	80	85	95	2SC2092	1.75	1.95	2.20	AN315	1.75	1.95	2.20	TA7120P	1.55	1.75	1.95
2SA497	90	1.15	1.25	2SC485	.45	.55	.60	2SC1162	70	75	85	2SC2098	3.00	3.20	3.45	BA511A	1.70	1.90	2.15	TA7153P	5.70	5.90	6.10
2SA509	30	35	40	2SC509	30	40	.45	2SC1166	25	35	40	2SD72	.50	.60	.65	BA521	1.85	2.05	2.35	TA7203P	2.45	2.60	2.85
2SA562	25	30	35	2SC517	2.90	3.10	3.25	2SC1172B	310	3.50	3.85	2SD91	1.30	1.40	1.55	HA1151	1.45	1.70	1.85	TA7204P	1.95	2.10	2.45
2SA564A	29	34	39	2SC535	30	35	40	2SC1173	50	65	70	2SD92	1.40	1.55	1.75	HA1156	1.60	1.75	1.95	TA7205P	1.55	1.75	1.95
2SA634	35	40	45	2SC620	45	50	55	2SC1177	10.90	12.40	13.80	2SD180	3.55	3.75	3.95	HA1206W	1.90	2.10	2.40	TA7214P	3.90	4.20	4.50
2SA636	80	85	90	2SC632A	.45	.55	.60	2SC1209	25	35	40	2SD187	.30	.40	.45	HA1322	2.40	2.60	2.90	TA7219P	1.25	1.40	1.55
2SA643	30	35	40	2SC634A	40	45	50	2SC1226	50	60	70	2SD218	2.95	3.20	3.45	HA1339	2.45	2.65	2.95	TA7607P	5.80	6.00	6.20
2SA673	30	40	45	2SC697A	3.20	3.50	3.90	2SC1226A	50	60	70	2SD234	.60	.70	.80	HA1339A	2.45	2.65	2.95	TA7609P	4.00	4.60	4.80
2SA678	40	50	55	2SC710	20	27	30	2SC1237	170	190	215	2SD235	.60	.70	.80	LA1222	2.10	2.30	2.50	TBA8105H	1.85	2.05	2.35
2SA683	40	50	55	2SC711	20	27	30	2SC1239	210	265	285	2SD261	.30	.35	.40	LA3431	3.45	3.60	3.75	TC5081P	2.90	3.10	3.30
2SA684	40	50	55	2SC712	20	27	30	2SC1306	1.25	1.65	1.85	2SD287	2.50	2.65	2.85	LA4031P	1.75	1.95	2.20	TC5082P	3.30	3.45	3.80
2SA695	40	50	55	2SC717	35	40	45	2SC1307	2.15	2.65	2.85	2SD291	2.05	2.45	2.75	LA4032P	1.75	1.95	2.20	UHC001	4.90	5.10	5.60
2SA699A	50	60	65	2SC730	2.95	3.15	3.35	2SC1318	30	40	45	2SD311	.60	.65	.70	LA4220	2.25	2.40	2.55	UHC002	4.90	5.10	5.60
2SA706	85	95	105	2SC732	20	25	30	2SC1364	30	40	45	2SD315	.60	.70	.80	LA4400	1.85	2.05	2.35	UHC003	4.90	5.10	5.60
2SA720	30	35	40	2SC733	20	25	30	2SC1383	30	40	45	2SD325	.60	.65	.75	LD3114	4.85	4.90	4.95	UHC004	4.90	5.10	5.60
2SA733	25	27	30	2SC734	20	25	30	2SC1384	30	40	45	2SD330	.69	.79	.89	LA1001P	1.75	1.95	2.20	UHC005	4.90	5.10	5.60
2SB147	4.15	4.35	4.85	2SC735	20	25	30	2SC1424	2.75	2.85	2.95	2SD356	.70	.75	.80	M51513L	1.95	2.15	2.45	UHC006	4.90	5.10	5.60
2SB22	45	50	55	2SC756	1.45	1.75	1.95	2SC1448A	1000	1100	1200	2SD359	.75	.85	.95	MN3002	9.25	10.00	11.55	UPC20C	2.00	2.40	2.70
2SB4	30	35	40	2SC756A	2.00	2.10	2.20	2SC1475	65	85	95	2SD427	1.75	1.95	2.20	MN3003	5.64	6.34	7.04	UPC157A	3.25	3.45	3.65
2SB77	30	40	45	2SC781	1.95	2.15	2.45	2SC1509	55	60	65	2SD525	.70	1.05	1.15	PL101A	4.00	4.15	4.55	UPC554C	1.60	1.70	1.80
2SB175	35	40	45	2SC784	3.0	3.6	4.0	2SC1567A	60	65	75	2SD526	.60	.70	.80	PL102A	4.95	5.20	5.80	UPC555H	1.60	1.70	1.80
2SB186	25	27	30	2SC789	75	85	95	2SC1675	25	30	35	2SK19	.45	.50	.55	PL103A	7.50	7.90	8.70	UPC572C	3.70	4.10	3.69
2SB187	20	27	30	2SC789	75	85	95	2SC1678	1.25	1.40	1.55	2SK23	.80	.95	1.05	SG264A	7.00	7.40	7.80	UPC574C	9.00	1.08	1.20
2SB324	25	35	40	2SC793	1.95	2.15	2.45	2SC1687	10	45	50	2SK30	.40	.45	.50	SG613	5.05	5.45	5.85	UPC575C2	1.25	1.40	1.55
2SB367	1.10	1.20	1.35	2SC799	1.95	2.15	2.45	2SC1727	1.20	1.25	1.30	2SK33	.60	.65	.75	SM5104	7.90	8.40	8.90	UPC582H	7.5	8.5	9.5
2SB405	25	30	35	2SC828	20	27	30	2SC1728	90	95	100	2SK34	.50	.55	.60	STK011	3.55	3.95	4.35	UPC100H21	8.5	2.05	2.35
2SB407	70	85	95	2SC829	20	27	30	2SC1760	85	100	110	2SK37	1.20	1.35	1.50	STK015	4.10	4.30	4.80	UPC100H3	1.85	2.05	2.35
2SC183	40	50	55	2SC830	20	27	30	2SC1775	30	35	40	2SK40	1.25	1.40	1.55	STK050	23.10	25.98	28.86	UPC1025	1.85	2.05	2.35
2SC184	40	50	55	2SC874	4.00	4.25	4.50	2SC1816	1.45	1.70	1.95	2SK45	1.25	1.40	1.55	STK435	8.00	9.00	10.00	UPC1026	1.40	1.62	1.80
2SC372	20	27	30	2SC900	20	27	30	2SC1908	25	35	40	3K22Y	1.60	1.70	1.80	STK438	8.00	9.00	10.00	UPC1031H	2.52	2.74	2.98
2SC373	20	27	30	2SC930	20	27	30	2SC1909	200	255	275	3K35	1.20	1.35	1.50	TA7055P	1.95	2.15	2.45	UPC1152H	2.90	3.10	3.30
2SC380	20	27	30	2SC945	20	27	30	2SC1945	4.40	4.90	5.60	2SC1945	4.40	4.90	5.60	TA7060P	.85	1.05	1.15	UPC1156	1.85	2.05	2.35
2SC382	30	40	45	2SC1000BL	35	40	45	2SC1967	60	70	80	2SC2009	75	80	85	TA7061P	.85	1.05	1.15	UPD277C	8.70	8.90	9.10
2SC387A	30	40	45	2SC1013	45	60	65	2SC1969	3.50	3.90	4.30	2SC2071	.55	.60	.65	TA7062P	1.05	1.20	1.35	UPD821C	7.90	8.30	9.00
2SC394	25	30	35	2SC1014	50	60	65	2SC1973	60	65	70	2SC2078	50	60	65	TA7063P	1.25	1.35	1.50	UPD858C	7.00	7.10	7.20
2SC458	20	27	30	2SC1018	70	75	85	2SC1974	1.25	1.65	1.85	2SC2029	1.45	1.75	1.95	TA7074P	3.70	3.85	4.00				

PRICES MAY CHANGE WITHOUT NOTICE COD ORDERS WELCOMED

Minimum order \$10.00 - N.J. Residents add 5% Sales Tax.
We pay postage for prepaid orders of \$50.00 or more, Under \$50.00, add \$1.00, Canada \$1.50.
Quantity Discount Prices - Ask for our complete price list - Manufacturer inquiries welcome - All parts guaranteed.

TOLL FREE TELEPHONE

Nationwide 800/631-1250 Local 201/748-5089

HOURS: Mon. - Fri. 8 to 5:30 Sat. 8 to 1

IMMEDIATE DELIVERY WITHIN 48 HOURS
ON ALL TRANSISTORS IN STOCK



NEW-TONE ELECTRONICS INTERNATIONAL
P. O. Box 1738, Bloomfield, N. J. 07003
New Jersey Phone: 201/748-6171

CIRCLE NO 35 ON FREE INFORMATION CARD

DIRECT FROM JAPAN'S BIGGEST ELECTRONICS SUPPLIER

2SA102	29	34	39	2SA473	45	55	60	2SA484	1.85	2.05	2.35	2SA495	35	40	45	2SA509	30	35	40	2SA562	25	30	35	2SA564A	29	34	39	2SA634	35	40	45	2SA636	80	85	90	2SA643	30	35	40	2SA673	30	40	45	2SA678	40	50	55	2SA683	40	50	55	2SA684	40	50	55	2SA695	40	50	55	2SA699A	50	60	65	2SA706	85	95	105	2SA720	30	35	40	2SA733	25	27	30	2SB147	4.15	4.35	4.85	2SB22	45	50	55	2SB4	30	35	40	2SB77	30	40	45	2SB175	35	40	45	2SB186	25	27	30	2SB187	20	27	30	2SB324	25	35	40	2SB367	1.10	1.20	1.35	2SB405	25	30	35	2SB407	70	85	95	2SC183	40	50	55	2SC184	40	50	55	2SC372	20	27	30	2SC373	20	27	30	2SC380	20	27	30	2SC382	30	40	45	2SC387A	30	40	45	2SC394	25	30	35	2SC458	20	27	30	2SC460	45	50	55	2SC481	1.25	1.35	1.45	2SC482	1.25	1.35	1.45	2SC483	1.25	1.35	1.45	2SC485	.45	.55	.60	2SC509	30	40	.45	2SC517	2.90	3.10	3.25	2SC535	30	35	40	2SC620	45	50	55	2SC632A	.45	.55	.60	2SC634A	40	45	50	2SC697A	3.20	3.50	3.90	2SC710	20	27	30	2SC711	20	27	30	2SC712	20	27	30	2SC717	35	40	45	2SC730	2.95	3.15	3.35	2SC732	20	25	30	2SC733	20	25	30	2SC734	20	25	30	2SC735	20	25	30	2SC756	1.45	1.75	1.95	2SC756A	2.00	2.10	2.20	2SC781	1.95	2.15	2.45	2SC784	3.0	3.6	4.0	2SC789	75	85	95	2SC793	1.95	2.15	2.45	2SC799	1.95	2.15	2.45	2SC828	20	27	30	2SC829	20	27	30	2SC830	20	27	30	2SC874	4.00	4.25	4.50	2SC900	20	27	30	2SC930	20	27	30	2SC945	20	27	30	2SC1000BL	35	40	45	2SC1013	45	60	65	2SC1014	50	60	65	2SC1018	70	75	85	2SC1030	1.80	2.05	2.35
--------	----	----	----	--------	----	----	----	--------	------	------	------	--------	----	----	----	--------	----	----	----	--------	----	----	----	---------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	---------	----	----	----	--------	----	----	-----	--------	----	----	----	--------	----	----	----	--------	------	------	------	-------	----	----	----	------	----	----	----	-------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	------	------	------	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	---------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	------	------	------	--------	------	------	------	--------	------	------	------	--------	-----	-----	-----	--------	----	----	-----	--------	------	------	------	--------	----	----	----	--------	----	----	----	---------	-----	-----	-----	---------	----	----	----	---------	------	------	------	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	------	------	------	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	------	------	------	---------	------	------	------	--------	------	------	------	--------	-----	-----	-----	--------	----	----	----	--------	------	------	------	--------	------	------	------	--------	----	----	----	--------	----	----	----	--------	----	----	----	--------	------	------	------	--------	----	----	----	--------	----	----	----	--------	----	----	----	-----------	----	----	----	---------	----	----	----	---------	----	----	----	---------	----	----	----	---------	------	------	------

Electronics Classified

REGULAR CLASSIFIED: COMMERCIAL RATE: For firms or individuals offering commercial products or services, \$2.50 per word. Minimum order \$37.50. **EXPAND-AD® CLASSIFIED RATE:** \$3.75 per word. Minimum order \$56.25. Frequency discount: 5% for 6 months; 10% for 12 months paid in advance. **PERSONAL RATE:** For individuals with a personal item to buy or sell, \$1.50 per word. No minimum! **DISPLAY CLASSIFIED:** 1" by 1 column (2-1/4" wide), \$300. 2" by 1 column, \$600.00. 3" by 1 column, \$900.00. Advertiser to supply film positives. For frequency rates, please inquire. **GENERAL INFORMATION:** Ad copy must be typewritten or clearly printed. Payment must accompany copy except when ads are to be billed on credit cards — American Express, Diners Club, Master Charge, VISA (supply expiration date) — or when ads are placed by accredited advertising agencies. First word in all ads set in caps. All copy subject to publisher's approval. All advertisers using Post Office Boxes in their addresses **MUST** supply publisher with permanent address and telephone number before ad can be run. Advertisements will not be published which advertise or promote the use of devices for the surreptitious interception of communications. Ads are not acknowledged. They will appear in first issue to go to press after closing date. Closing Date: 1st of the 2nd month preceding cover date (for example, March issue closes January 1st). Send order and remittance to Classified Advertising, **POPULAR ELECTRONICS**, One Park Avenue, New York, N.Y. 10016. For inquiries, contact Gladys Mathieu at (212) 725-3926.

FOR SALE

FREE! Bargain Catalog—1 C.'s. LED's, readouts, fiber optics, calculators parts & kits, semiconductors, parts. Poly Paks, Box 942PE, Lynnfield, Mass. 01940.

GOVERNMENT and industrial surplus receivers, transmitters, sniperscopes, electronic parts, Picture Catalog 25 cents. Meshna, Nahant, Mass. 01908

LOWEST Prices Electronic Parts Confidential Catalog Free. KNAPP, 4750 96th St N., St. Petersburg, FL 33708.

ELECTRONIC PARTS, semiconductors, kits. **FREE FLYER.** Large catalog \$1.00 deposit **BIGELOW ELECTRONICS**, Bluffton, Ohio 45817.

RADIO—T.V. Tubes—36 cents each. Send for free catalog. Cornell, 4213 University, San Diego, Calif. 92105

AMATEUR SCIENTISTS, Electronics Experimenters, Science Fair Students... Construction plans — Complete, including drawings, schematics, parts list with prices and sources... Robot Man — Psychedelic shows — Lasers — Emotion Lie Detector — Touch Tone Dial — Quadraphonic Adapter — Transistorized Ignition — Burglar Alarm — Sound Meter... over 60 items. Send 50 cents coin (no stamps) for complete catalog. Technical Writers Group, Box 5994, University Station, Raleigh, N.C. 27650.

ROTARY SWITCH 4P11P 5 \$5; 6P11P 5 \$7.25. Dip Switch 10-SPST 10 \$15. Transformers 12.2 V CT-6A plus 8.5V-5A \$6.95. 24V-5A \$5.95. 10' RG58C U.12 \$10. Ferteks, 5400 Ella St., Philadelphia, PA 19120.

SOUND SYNTHESIZER KITS—Surf \$14.95, Wind \$14.95, Wind Chimes \$19.95, Musical Accessories, many more. Catalog free. PAIA Electronics, Box J14359, Oklahoma City, OK 73114.

HEAR POLICE FIRE Dispatchers! Catalog shows exclusive directories of "confidential" channels, scanners. Send postage stamp. Communications, Box 56-PE, Commack, N.Y. 11725.

UNSCRAMBLERS Fits any scanner or monitor, easily adjusts to all scrambled frequencies. Only 4" square \$29.95, fully guaranteed. Dealer inquiries welcomed. PDQ Electronics, Box 841, North Little Rock, Arkansas 72115.

TELETYPE EQUIPMENT for sale for beginners and experienced computer enthusiasts. Teletype machines, parts, supplies. Catalogue \$1.00 to: ATLANTIC SALES, 3730 Nautilus Ave., Brooklyn, NY 11224. Tel (212) 372-0349.

WHOLESALE C.B. Scanners, Antennas, Catalog 25 cents. Crystals: Special cut, \$4.95, Monitor \$3.95. Send make, model, frequency. G. Enterprises, Box 461P, Clearfield, UT 84015.

BUILD AND SAVE TELEPHONES, TELEVISION, DETECTIVE, BROADCAST Electronics. We sell construction plans with an Engineering Service. Speakerphones, Answering Machines, Carphones, Phonevision, Dialers, Color TV Converters, VTR, Games, \$25 TV Camera, Electron Microscope, Special Effects Generator, Time Base Corrector, Chroma Key Engineering Courses in Telephone, Integrated Circuits, Detective Electronics **PLUS MUCH MORE.** NEW Super Hobby Catalog **PLUS** year's subscription to Electronic News Letter, \$1.00. Don Britton Enterprises, 6200 Wilshire Blvd., Los Angeles, Calif. 90048.

NAME BRAND Test Equipment. Up to 50% discount. Free catalog. Salen Electronics, Box 82, Skokie, Illinois 60076.

SURPLUS COMPONENTS. Communication and test equipment. Illustrated catalog 25 cents. E. French, P.O. Box 249, Aurora, Illinois 60505.

BUILD THE ARTISAN ELECTRONIC ORGAN... The 20th century successor to the classic pipe organ. Kits feature modular construction, with logic controlled stops and RAM Pre-Set Memory System. Be an arti-san. Write for our free brochure. AOK Manufacturing, Inc. Box 445, Kenmore, WA 98028.

TELEPHONES UNLIMITED. Equipment Supplies. All types. Regular. Keyed. Modular. Catalog 50 cents. Box 1147E, San Diego, California 92112.

WEATHER MAP RECORDERS: Copy Satellite Photographs. National-Local Weather Maps. Learn How! \$1.00. Atlantic Sales, 3730 Nautilus Ave., Brooklyn, N.Y. 11224. Tel: (212) 372-0349.

NAME BRAND TEST EQUIPMENT at discount prices 72 page catalogue free. Write: Dept. PE, North American Electronics, 1468 West 25th Street, Cleveland, OH 44113

UNSCRAMBLERS FOR any scanner. Several models available. Free literature. Capri Electronics, 8753T Windom, St. Louis, MO 63114.

RADIO SHACK Authorized Sales Center offering 10% discount on products including TRS-80. 1117 Conway, Mission, TX 78572.

UNSCRAMBLER KIT. Tunes all scramble frequencies, may be built-in most scanners, 2-3 4 x 2-1/4 X 1.2. \$19.95. Factory built Code-Breaker. \$29.95. Free Catalog: KRYSTAT KITS, Box 445, Bentonville, Ark. 72712. (501) 273-5340.

ELECTRONIC SURPLUS
FREE CATALOGS
ETCO ELECTRONICS, Dept. EB
North Country Shopping Center
Rt. 9N, Plattsburgh, N.Y. 12801

B&K Test Equipment Free catalog. Free Shipping. Dinosaur discounts. Spacetrone-AN, 948 Prospect, Elmhurst, IL 60126.

SURPLUS ELECTRONICS
ATTENTION HOBBYISTS — SEND FOR YOUR FREE CATALOG

Great buys in tape drives, keyboards, power supplies, and transformers. We also have heat sinks, steel cabinets, I/O terminals, video displays, printers, and equipment cases. And of course components, fans, wire, and cable. Write now to:

130 Northeastern Blvd
Nashua, N.H. 03060

Worldwide Electronics

WRITE US AND WE'LL SEND YOU THE BEST CATALOG YOU EVER READ!

No kidding. Speakerlab's catalog took longer to write than some of our competitors have been in business. In fact, we created an industry by "building great kits so you can afford great speakers." Our catalog is an invaluable manual of speaker function and design. And it will introduce you to the finest speaker kits made anywhere... with the strongest money-back guarantee. Find out for yourself...**FREE, FREE,** that is. Write now. Right now.



Dept. C-PE, 735 N. Northlake Way
Seattle, WA 98103

1802 EXTENDED MONITOR. Relocatable, K.C. tape routines, 18 powerful subroutines, requires 1K memory. K.C. tape \$20.00, paper tape \$18.00, w/manual and listing. Information sase. Benchmark Computer Systems, 17 Hanover Place, Hicksville, L.I., N.Y. 11801.

THE BEST CB ANTENNA
SEND FOR FREE **PAL** FULL LINE
CATALOG AND DECAL

PAL Antenna Corp.

2614 EAST ADAMS · PHOENIX · ARIZONA 85034

POLICE/FIRE SCANNERS, crystals, antennas, CBs, Radar Detectors. HPR, Box 19224, Denver, CO 80219.

TEST EQUIPMENT CATALOG listing used Tektronix, HP and GR equipment at bargain prices. PTI, Box 8699, White Bear Lake, MN 55110. Price \$1.00 refundable with first order.

CB RADIOS, VHF-UHF Scanners, Crystal, Antennas, Radar Detectors. Wholesale. Southland, Box 3591, Baytown, TX 77520.

PRINTED CIRCUIT boards from sketch or artwork. Affordable prices. free details. DANOCINTHS INC., Box 261, Westland, MI 48185.

NEW, ADJUSTABLE, THREE OUTPUT, REGULATED POWER SUPPLY plus 900 parts worth over \$400.00 in complete CARTRIVISION television recorder electronic assembly. Documentation included. Perfect for MICROPROCESSOR and all electronic applications. \$16.95 plus \$4.50 S&H. Master Charge, VISA. Free brochure. Madison Electronics, 369, Madison, Alabama 35758. **SATISFACTION GUARANTEED** 205-837-6658, Res.

BARGAINS GALORE! Buy-sell-trade classifieds in "Electronics Trader" only 10¢ word! Send \$2.00 for next four issues. Box 1333, Sun Valley, CA 91352.

TRANSISTORS FOR C-B Repair, IC's and diodes TV audio repairs 2SC756A — \$2.40, 2SC1306 — \$2.95, 2SC1307 — \$3.85, PLOZAG — \$7.50, AN239 — \$5.50, STK439 — \$8.95. Many more. **FREE** Catalog and transistor. B&D Enterprises, Box 32, Mt. Jewett, PA 16740.

ELECTRONICS EQUIPMENT HOTLINE is a classified advertising newsletter for professional, industrial, and surplus electronic equipment. Subscriptions \$6/year, ads 50¢ word P.O. Box 4768, Dept. PE, Panorama City, CA 91412.

YOUR DIGITAL MULTIMETER can read resistance values in the milliohm range. Send \$2.95 to G. Peterson, RD1, Box 8G, Slate Hill, N.Y. 10973 for schematic and instructions.

CIRCUIT BOARDS from camera-ready artwork. Free details. Quantity discounts. CM Circuits, 22 Maple Ave., Lackawanna, NY 14218.

UNSCRAMBLE CODED MESSAGES from Police, Fire and Medical Channels. Same day service. Satisfaction guaranteed. Don Nobles Electronics, Inc., Rt. 7, Box 265B, Hot Springs, Arkansas 71901. (501) 623-6027.

CARBON FILM RESISTORS 1/4W, 1/2W - 1.7 cents each **FREE** sample, specifications. Other components. COMPONENTS CENTER, Box 295, W. Islip, New York 11795.

NEW TI SN76477 Complex Sound Generator IC \$2.95 plus 50¢ postage. Key Electronics, Box 3506, Schenectady, NY 12303.

MONTHLY PICTURE FLYER. Quality Surplus Electronic parts. Low Prices. Star-Tronics, Box 683, McMinnville, OR 97128.

DX CB SWL. Computerized list: geographic, compass bearings, distances from your location to US, world cities, SW stations. \$2.00. BENCHMARK, Box 385-P1, Providence, Utah 84332.

PRINTED CIRCUIT supplies, chemicals, tools, artwork, plating solutions. Major credit cards. Catalog \$1.00, refundable. CIRCOCLEX, Box 198, Marcy, NY 13403

RECONDITIONED TEST EQUIPMENT \$1.00 for catalog. WALTER'S TEST EQUIPMENT, 2697 Nickel, San Pablo, CA 94806, (415) 758-1050.

INVISIBLE CB MOBILE ANTENNA. Complete kit installs INSIDE and turns metal frame of AUTO, VAN, WAGON, TRUCK, TRACTOR into efficient antenna. FREE details: send stamped envelope and vehicle make and year. Dept. PECA, MFC Inc., Box 486, East Syracuse, NY 13057.

ELECTRONIC PARTS, Tubes, Semiconductors, Phonograph Needles, FREE CATALOG. Rey Enterprises, Box 1539, Hialeah, FL 33011.

ELECTRONIC PARTS, manufacturer's surplus and overstock. Price sheet 50 cents. POCKETRONICS, P.O. Box 578, Healdsburg, CA 95448.

Zig-Saw Puzzle Fanatics, We Challenge You . . .

. . . to put this together. The Woofer puzzle. Probably the most difficult puzzle ever produced. 500 tiny pieces all in black and grey. Frankly, we don't think you can do it. If you think you're up to it, it's yours for \$1.50. And if you send us a photo of the completed puzzle, we'll give you a free subscription to POPULAR ELECTRONICS. Be the first to put the Woofer together. Please Send Me The Woofer

Name _____
Address _____
Make Check or Money Order Payable To:
POPULAR ELECTRONICS
One Park Avenue,
Department KR, NYC, NY 10016

SCANNERS: WHOLESALE PRICES to the public — Bearcat 250 \$299.95; REGENCY K500 \$319.95; REGENCY ACT 720A \$269.95; REGENCY K100 \$199.95. 20 other models at similar discounts from one of the nation's largest scanner dealers: For free brochure write, SCANNERS UNLIMITED, 3816 Beresford St., San Mateo, CA 94403 or phone (415) 573-1624.

CHEMICALS, Lab Supplies. Lowest prices, fastest service anywhere. Listing 25¢ Westech Corp., Box 593, Logan, Utah 84321.

LOW, LOW Component Prices! Ask for free flyer. Write: EEP, 11 Revere Place, Tappan, NY 10983.

MAGNETS

MAGNETS. All types. Specials-20 disc, or 10 bar, or 2 stick or 8 assorted magnets. \$1.00. Magnets, Box 192-H, Randallstown, Maryland 21133.

PLANS AND KITS



**TIGER SST
SIMPLI-KIT**

**FOR THE DO-IT-YOURSELF
NOW!** a high quality CD Electronic Ignition System in kit form.

Contains all components and solder to build complete Solid State Electronic CD Ignition System for your car. Assembly requires less than 3 hours.

- Increases MPG 15%
- Increases horsepower 15%
- Plugs and Points last 50,000 miles
- Eliminates 4 of 5 tune-ups
- Instant starting, any weather
- Dual system switch

Fits only 12 volt neg. ground Only \$21.95 (postpaid)

Tri-Star Corporation
P.O. Box 1727 Grand Junction, Colorado 81501

BUILD YOUR OWN LASER GUN . . . Exclusive plans plus advanced Laser Crystal device. Send \$24.95, guaranteed, to: Desmond Gahan, Laser Laboratories, 90 Annamoe Terrace, Cabra, Dublin 7, Ireland.

AMAZING ELECTRONIC PRODUCTS

LASERS SUPER POWERED. RIFLE. PISTOL. POCKET. SEE IN OAK. PYRO. TECHNICAL. DE BUGGING. UNCRAMBLERS. GIANT TESLA. STUNWAND. TV DISRUPTER. ENERGY PRODUCING. SCIENTIFIC DETECTION. ELECTRIFYING. CHEMICAL. ULTRASONIC. CB. AERO. AUTO AND MECH. DEVICES. HUNDREDS MORE. ALL NEW PLUS INFO UNLTD. PARTS SERVICE.

INFORMATION unlimited

CATALOG \$1 Dept. EB, Box 716, Amherst, NH 03031

FREE KIT Catalog contains Test and Experimenter's Equipment. Dage Scientific Instruments, Box 1054P, Livermore, CA 94550.

BUILD YOUR OWN SYMPHONY OF SOUND!



It's fun and easy — takes just minutes a day! Complete kits for organs, pianos, strings, rhythms, amplifiers, synthesizers. Also factory assembled. 104-page catalog \$2.00

WERSI

Wersi Electronics, Inc.
Dept. ZD, 1720 Hempstead Road
Lancaster, PA 17601

CB/HAM HIGH GAIN ANTENNAS. Modulation boosting VOX-COMPRESSOR. Portable 300MHz COUNTER with memory! Plans \$3.00 ea. \$7.50/all. Many others. catalog with order. PANAXIS, Box 130-A1, Paradise, CA 95969.

TV-OSCILLOSCOPE CONVERTER externally adapts TV into audio frequency oscilloscope. Info. \$1.00. Plans \$5.00, with P.C. \$12.00. Evolutions, Box 855-C, San Rafael, CA 94902.

PROJECTION TV . . . Convert your TV to project 7 Foot picture. Results equal to \$2,500 projector. Total cost less than \$20.00. PLANS & LENS \$16.00. Illustrated info. FREE: Macrocomca, Washington Crossing, PA 18977.

LASER PLANS — Seven for \$8.00. Welding — Burning Laser \$9.00. Giant Catalog — \$2.00. Booksellers, Box 1015, Claremont, CA 91711

PLANS FOR SIMPLE, inexpensive, reliable temperature control for soldering irons. \$2.00. GDH Enterprises, Box 353, Somerville, Indiana, 47683.

PLANS TO BUILD an Accurate Low Cost Digital Capacitance Meter. Send \$1.00 to D.C.M., P.O. Box 1002, Yorba Linda, CA 92686

ALARMS

QUALITY BURGLAR-FIRE ALARM EQUIPMENT at discount prices. Free Catalog! Steffens, Box 624K, Cranford, N.J. 07016

Burglar - Fire - Smoke Alarm Catalog

• Billions of dollars lost annually due to lack of protective warning alarms.

FREE CATALOG Shows you how to protect your home, business and person. Wholesale prices. Do-it-yourself. Free engineering service.



Burdex Security Co.

Box 82802 PE-019 Lincoln, Ne. 68501

TELEPHONES & PARTS

OMAK PHONE CENTER All types of telephones — keyed, modular and decorator. Catalog \$1.00 (refundable). Box 38, Beardstown, IL 62618

CORDLESS TELEPHONES: Operate 300 ft. from base. Factory rechecked, schematics included for personal maintenance. Originally \$399.50 — now \$149.95. Check, M.O. or Credit Card. Telephone Marketers, P.O. Box 216, Brookfield, WI 53005.

MUSICAL INSTRUMENTS

UP TO 60% DISCOUNT. Name brand instruments catalog. Freeport Music, 114 G. Mahan St., W. Babylon, N.Y. 11704.

HIGH FIDELITY

DIAMOND NEEDLES and Stereo Cartridges at Discount prices for Shure, Pickering, Stanton, Empire, Grado and ADC. Send for free catalog. LYLE CARTRIDGES, Dept. P, Box 69, Kensington Station, Brooklyn, New York 11218. For Fast Service call Toll Free 800-221-0906.

SpeakerKit, Lambda Series

Charles Graham reports in American Record Guide: "The Model 5 (speaker) is probably the finest sounding and best buy for home listening available today, provided you assemble it yourself". Send 25¢ for details.



Speakerkit, Box 12PE, Menomonee, WI 54751

MICROCOMPUTERS

"HOW TO PROFIT FROM YOUR PERSONAL COMPUTER," \$7.95, \$50 postage: Ohio Scientific's Challenger IP micro-computer, \$349. PET Printer, \$425; software: books. Free literature. ELKHART COMPUTER CO., 29934 Riviera Ln., Elkhart, IN 46514.

MEMORY EXPANSION KITS for TRS-80 or Apple Computers. All necessary instructions and jumpers supplied for TRS-80. \$89 for 8-16K Hobby Grade, or \$119 for 8-16K Computer Grade @ 200ns. Mastercharge, Visa. Microcomputer-world, P.O. Box 242, San Dimas 91773. (213) 286-2661.

WANTED

GOLD, Silver, Platinum, Mercury, Tantalum wanted. Highest prices paid by refinery. Ores assayed. Free circular. Mercury Terminal, Norwood, MA 02062.

WANTED! CB DEALERS AND DISTRIBUTORS

PAL Antenna Corp.

2614 EAST ADAMS · PHOENIX ARIZONA 85034

TUBES

RADIO & T.V. Tubes—36 cents each. Send for free Catalog. Cornell, 4213 University, San Diego, Calif. 92105.

TUBES: "Oldies", Latest Supplies, components, schematics. Catalog Free (stamp appreciated). Steinmetz, 7519-PE Maplewood, Hammond, Ind. 46324.

TUBES-RECEIVING, Industrial and Semiconductors Factory Boxed. Free price sheet including TV, Radio and audio parts list. Low, low prices. Transelectronic, Inc., 1365 39th St., Brooklyn, New York 11218. Telephone: (212) 633-2800. Toll free: 800-221-5802.

RADIO AND TV TUBES 1938 to 1978 \$1.00 ea. PRELLER TV, Augusta, AR 72006 (501) 347-2281.

TRANSFORMERS, Capacitors, Connectors, Tubes, etc. Send for list. Science Traders, P.O. Box 71, City Island, NY 10464.

GOVERNMENT SURPLUS

MANUALS for Govt Surplus radios, test sets, scopes. List 50 cents (coin). Books, 7218 Roanne Drive, Washington, D.C. 20021.

JEEPS—\$59.30! — CARS—\$33.50! — 200,000 ITEMS! — GOVERNMENT SURPLUS — Most COMPREHENSIVE DIRECTORY AVAILABLE tells how, where to buy — YOUR AREA — \$2.00 — MONEYBACK GUARANTEE — Government Information Services, Department GE-45, Box 99249, San Francisco, California 94109 (433 California).

GOVERNMENT SURPLUS. Buy in your Area. How, where. Send \$2.00. Surplus, 30177-PE Headquarters Building, Washington, D.C. 20014.

"GOVERNMENT SURPLUS DIRECTORY." Buy 250,000 items (including Jeeps) . . . low as 2¢ on dollar! Most complete information available — \$2.00. Surplus Disposal, Box 19107-HA, Washington, DC 20036.

PERSONALS

MAKE FRIENDS WORLDWIDE through international correspondence, illustrated brochure free. Hermes-Verlag. Box 110660/Z, D-1000 Berlin 11, Germany.

ASTONISH YOUR FRIENDS with magic, Esp, card tricks, you can do. Details: Langen, Box 191-EA, Downsview, Ontario M3M 3A3. U.S. Inquiries.

INSTRUCTION

SCORE high on F.C.C. Exams . . . Over 300 questions and answers. Covers 3rd, 2nd, 1st and even Radar. Third and Second Test, \$14.50; First Class Test, \$15.00. All tests, \$26.50. R.E.I., Inc., Box 806, Sarasota, Fla. 33577.

UNIVERSITY DEGREES BY MAIL! Bachelors, Masters, Ph.D's. Free revealing details. Counseling, Box 317-PE01, Tustin, California 92680.

LEARN WHILE ASLEEP! HYPNOTIZE! Astonishing details, strange catalog free! Autosuggestion, Box 24-ZD, Olympia, Washington 98507.

GRANTHAM'S FCC LICENSE STUDY GUIDE — 377 pages, 1465 questions with answers/discussions — covering third, second, first radiotelephone examinations. \$13.50 postpaid. GSE, P.O. Box 25992, Los Angeles, California 90025.

INTENSIVE 5 week course for Broadcast Engineers. FCC First Class license. Student rooms at the school. Radio Engineering Inc., 61 N. Pineapple Ave., Sarasota, FL 33577 and 2402 Tidewater Trail, Fredericksburg, VA 22401.

1979 "TESTS - ANSWERS" for FCC First Class License. Plus - "Self Study Ability Test." Proven! \$9.95 Unconditional Moneyback Guarantee. Command Productions, Box 26348-P, San Francisco, CA 94126.

BROADCAST STATION: Start your own. Home, school, church, business operation. Get free equipmnt, records. Details free. "Broadcasting", Box 130-A1, Paradise, CA 95969.

PASS FCC 1st, 2nd, 3rd and Radar License Examinations using course prepared by noted author-teacher. Workbook has example problems with complete solutions. Question-Answer Manual provides hundreds of practice questions. \$9.95 each or both Manuals \$14.95 Postpaid. Includes Counseling. Oeffinger, Box 1240, Garden Grove, CA 92642.

MATHEMATICS. ELECTRONICS. Advanced mathematics. Engineering mathematics. Digital Technology. Free catalog. IHSI, Box 1189, Panama City, FL 32401.

INVENTIONS

PATENT AND DEVELOP Your invention. Registered Patent Agent and Licensed Professional Engineer. Send for FREE PATENT INFORMATION every inventor should have. Richard L. Miller, P.E., 3612 Woolworth Building, New York, NY 10007. (212) 267-5252.

BUSINESS OPPORTUNITIES

I MADE \$40,000.00 Year by Mailorder! Helped others make money! Free Proof. Torrey, Box 318-NN, Ypsilanti, Michigan 48197.

FREE CATALOGS. Repair air conditioning, refrigeration. Tools, supplies, full instructions. Doolin, 2016 Canton, Dallas, Texas 75201.

NEW LUXURY Car Without Cost. Free Details! Codex-ZZ, Box 6073, Toledo, Ohio 43614.

GET RICH!!! Secret law erases debts. Free report exposes millionaire's secrets. Blueprints, No. EE1, 453 W. 256, NYC 10741.

EARN \$1000 stuffing 1000 envelopes! Free Details: D. Fraser, 208 So. 4th, De Soto, MO 63020.

HIDDEN PROFITS in common pocket change! Learn Secrets. Only \$2.00: Coins, Box 331, Milton, MA 02186.

BIG PROFITS **ELECTRONIC ASSEMBLY BUSINESS**

Start home, spare time. Investment, knowledge or experience unnecessary **BIG DEMAND** assembling electronic devices. Sales handled by professionals. Unusual business opportunity.

FREE: Complete Illustrated Literature
BARTA, Box 248 DM
Walnut Creek, Calif. 94597

MECHANICALLY INCLINED individuals desiring ownership of Small Electronics Manufacturing Business — without investment. Write: BUSINESSSES, 92-K2 Brighton 11th, Brooklyn, New York 11235.

MILLIONS in Mail!!! Free Secrets. Transworld-17, Box 6226, Toledo, OH 43614.

MECHANICALLY INCLINED INDIVIDUALS — WANTED —

Assemble electronic devices in your home. Get started in spare time. Experience, Knowledge or Investment Not Necessary. Expect big profits: \$300 - \$600/Wk. Possible. Write for free literature telling how.

ELECTRONIC DEVELOPMENT LAB
Box 1535PS, Pinellas Park, FL 33565

EARN \$1,000 MONTHLY sparetime, homework, "Guaranteed." Free details. Write: UNICORN, ZD1,1140 Chelton, Colorado Springs, CO 80910.

ESTABLISH YOUR OWN Profitable Mail Order Business! Everything supplied. Michael-W, 46 Tanager Rd., Monroe, N.Y. 10950.

\$600/Thousand Profit!!! Guaranteed Earnings!!! Easy Home Work, Detail: DGTWING, Box 311, Novato, CA 94947.

\$3,000 MONTHLY, fabulous mailing profits, daily earnings. Free report. Send long, stamped, addressed envelope. Modern, Box 222-E, Upland, CA 91786.

VINYL'S WHERE THE MONEY IS! Professionally repair, re-finish, recolor furniture, luggage, car tops. Quick, easy. Two small \$20 jobs a day earn you \$1,000 a month. Homes, cars, offices, restaurants, unlimited customers. Start earning after a few days practice. Sensational details Free. VIP, 2012 Montrose, Chicago 60618.

BORROW \$25,000 "OVERNIGHT." Any purpose. Keep indefinitely! Free Report! Success Research, Box 29263 GA, Indianapolis, Indiana 46229.

FANTASTIC! \$500.00 weekly easy mailing circulars! Free information! Brooks, Box 68-ZD, Quenemo, KS 66528.

EMPLOYMENT OPPORTUNITIES

ELECTRONICS/AVIONICS EMPLOYMENT OPPORTUNITIES. Report on jobs now open. Details FREE. Aviation Employment Information Service, Box 240E, Northport, New York 11768.

INSTANT CASH COMMISSIONS Full or part time. Free sales kit features America's largest line low priced Business, Printing, Advertising Specialties, Sign, Calendars and other necessities used daily by business people. Profitable repeat order. No experience. No investment. No collections or deliveries. Write today. National Press, Dept. 908, North Chicago, IL 60064.

RADIO-TV JOBS . . . Stations hiring nationwide! Free details: "Job Leads", 1680-PG Vine, Hollywood, CA 90028.

TECHNICIANS — ENGINEERS: Work in Sunny California. Detailed Employer descriptions and listings for Digital, RF, Microwave. Bay Area Job Market at its Best! Send \$3.00 to: TOPJOB, 121 South 15th Street, San Jose, CA 95112.

BOOKS AND MAGAZINES

FREE book prophet Elijah coming before Christ. Wonderful bible evidence. MEGIDDO Mission, Dept. 64, 481 Thurston Rd., Rochester, N.Y. 14619.

POPULAR ELECTRONICS INDEXES For 1977 now available. Prepared in cooperation with the Editors of "P/E," this index contains hundreds of references to product tests, construction projects, circuit tips and theory and is an essential companion to your magazine collection. 1977 Edition, \$1.50 per copy. All editions from 1972 onward still available at the same price. Add \$.25 per order for postage and handling. \$.50 per copy, foreign orders. INDEX, 6195 Deer Path, Manassas, Va. 22110.

SELL BOOKS by Mail, For Big Profits! Michael, Box 738-W, Monroe, NY 10950.

PUBLISH YOUR BOOK! Join our successful authors. Publicity, advertising, beautiful books. All subjects invited. Send for fact-filled booklet and free manuscript report. Carlton Press, Dept. PEA, 84 Fifth Ave., New York, NY 10011.

DO-IT-YOURSELF

MODULAR TELEPHONES now available. Sets and components, compatible with Western Electric concept. Catalog 50 cents. Box 1147W, San Diego, California 92112.

AUDIO/ANALOG/SYNTHESIS. Plans, parts, kits, etc. for the most exciting sound projects ever. Get on our mailing list, send 25¢ to: CFR Associates Inc., Newton, N.H. 03858.

COMPLETE LINE Security Systems for home. Business. Send self addressed, stamped envelope. Darbar, Box 1147E, San Diego, CA 92112.

REPAIR COLOR TV'S. Anyone can. Easy method. Stamp appreciated. Write: Publications, Box 517H, Brea, CA 92621.

REAL ESTATE

BIG . . . FREE . . . SPRING CATALOG! Over 2,600 top values coast to coast!!! UNITED FARM AGENCY, 612-EP, West 47th, Kansas City, MO 64112

RUBBER STAMPS

RUBBER STAMPS, BUSINESS CARDS. Many new products. Catalog. Jackson's, E-100, Brownsville Rd., Mt. Vernon, Ill. 62864.

HYPNOTISM

FREE Hypnotism. Self-Hypnosis. Sleep Learning Catalog! Drawer H400, Ruidoso, New Mexico 88345.

DON'T GET HYPNOTIZED before reading this book. Vital discoveries on the mind and how hypnotism actually works. \$3: ABILITY, Box 42716-PE2, L.A., CA 90042.

PRINTING

QUALITY PRINTING. Good prices, prompt service. Free catalog. Deep South, Dept E, Clinton, Mississippi 39056.

MOTION PICTURE FILMS

IT'S SPORTLITE FOR FILM VALUES BY MAIL! Order Columbia Pictures \$8 400' color/sound features — Charles Bronson "Breakout"; Peter Falk "Machine Gun McCain"; More From Emmanuelle; Sean Connery "The Anderson Tapes"; Walter Matthau "Fail Safe"; and Bryan's Song — Football — extra long. \$47.95 ea + \$1.00 for shipping, regular price \$54.95. You save \$\$\$ on every film you buy. Tear out this ad & send with order today! Start a \$8 boxing film collection: Choose from Ring Classics 200' B&W reels — Gavilan vs Basilio; Moore vs Maxim; Patterson vs Jackson; Joe Louis vs Primo Carnera — \$8.00 ea, regular price \$11. ea. Also, Ali-Spinks I, \$8 Eastman color 400' snd, \$49.95 PPD (save \$5.) or Ali-Spinks I complete fight — 4 reels \$8 color/sound (RT 64.00), special \$190. (\$220. Value!). New Universal spectacular 64-pg glossy catalog, \$1.25. Columbia, Sportlite Films, Universal, Ring Classics order forms, 35¢ ea. SPORTLITE FILMS, Elect-1/79, Box 24-500, Speedway, IN 46224.

MISCELLANEOUS

MPG INCREASED! Bypass Pollution Devices easily. REVERSIBLY!!! Free details — Posco GEE1, 453 W. 256, NYC 10471.

1979 STEREO DIRECTORY & BUYING GUIDE

All the latest information on stereo and quadraphonic systems and components for your home. A complete guide to more than 2500 products in all — with complete specifications, descriptions and prices. PLUS bonus feature articles. A must for anyone concerned with good sound.

Order from STEREO DIRECTORY, Dept. 01053, P.O. Box 278, Pratt Station, Brooklyn, New York 11205. Enclose \$3 00* (\$2.50 plus 50¢ for post age and handling).
*Residents of CA, CO, DC, FL, IL, MI, MO, NY STATE, and VT add applicable sales tax.

Popular Electronics

ADVERTISERS INDEX

READER SERVICE NO.	ADVERTISER	PAGE NO.
1	Active Electronics Sales Corp.	95
2	Ado Electronics Industrial Co., Ltd.	111
3	Advanced IC Electronics	105
4	Ancrona Corp.	110
6	Antenna Specialists Co.	31
7	Apple Computer	27
8	AP Products, Incorporated	6
9	B & F Enterprises	103
10	Byte	39
	Chaney Electronics	111
	Cleveland Institute of Electronics, Inc.	34, 35, 36, 37
11	Cobra, Product of Dynascan	SECOND COVER
12	Consumers Company	57
13	Contemporary Marketing, Inc.	61
14	Continental Specialties Corporation CREI, Capitol Radio Engineering Institute	42 52, 53, 54, 55
15	Digi-Key Corporation	96
	Digital Research Corp.	103
16	Douglas Dunhill	13
17	Edlie Electronics	109
	Edmund Scientific Co.	111
18	EICO	92
19	Electronic Systems	97
20	Electronics Book Club	7
21	Fordham Radio Supply	104
22	Godbout Elecs., Bill	115
23	Grantham College of Engineering	41
5	Heath Company	71, 72, 73
24	Hobby World	115
25	IE Integrated Electronics	103
26	Illinois Audio	83
27	Integrated Circuits	98
28	International Components Corp.	104
29	Jameco Electronics	100, 101
30	J & R Music World	41
31	Jensen Tools and Alloys	92
	JS & A National Sales Group	1
32	McIntosh Laboratory, Inc.	23
	Micro Computer Mart	94
52	Motorola	FOURTH COVER
33	National Camera Supply	84
	National Technical Schools	88, 89, 90, 91
34	Netronics R & D, Ltd.	93
35	New-Tone Electronics	111
	NRI Schools	16, 17, 18, 19
36	Ohio Scientific Instrument	5
51	Ohio Scientific Instrument	14
37	Olson Electronics	105
38	Page Digital Electronics	94
39	PAL/A Electronics, Inc.	83
40	PAL "Firestik" Antenna Corp.	57
41	Percom Data Company, Inc.	80
42	Pickering & Co.	21
43	Poly Paks	106
44	Projectapix, Ltd.	86
45	Quest Electronics	102
	Radio Shack	9, 99
46	RCA Solid State	2
	Sabtronics International, Inc.	11
47	Schober Organ Corp., The	61
48	Scientific Audio Electronics, Inc.	THIRD COVER
49	Shure Brothers, Inc.	8
50	Southwest Technical Products Corp.	33
	Speakerlab, Inc.	86

JANUARY 1979

SPECIAL: LM317 adjustable (+) regulator, **\$2.25** (ltd qty).

**TRS-80
CONVERSION
KIT: \$109, 3/\$320.**

Please note our kit is guaranteed for 1 yr. Includes DIP shunts, and uses 250 ns chips for 4 MHz operation. Upgrades 4K TRS-80 to 16K, or populates Memory Expansion Module — our novice level instructions show you how. Also suitable for APPLE memory expansion.

GODBOUT
BILL GODBOUT ELECTRONICS
BOX 2355, OAKLAND AIRPORT, CA 94614

TERMS: Add \$1 orders under \$15, a low 5% shipping excess refunded. Cal res add tax. VISA /Mastercharge — (\$15 min) call (415) 562-0636, 24 hrs. COD OK with street address for UPS.

**HEATH H8
COMPATIBLE
12K X 8 MEMORY
BOARD: \$200** Econom
y!™ is fully static, and comes with sockets and bypass caps pre-soldered in place for easy assembly. Assembled/tested: \$270.

**THE ECONORAM
FAMILY**

The ECONORAM™ family of static memory offers high performance at low cost. All boards are static low power/high speed, fully buffered, and backed with 1 year limited warranty. Available in 3 forms unkit (sockets, bypass caps soldered in place), assembled/tested; or qualified under our Certified System Component high-reliability program (200 hr. burn-in, 4 MHz operation over full temp range exchange if failure occurs within 1 year of invoice date). Send for our flyer for additional information on these fine memories, or better yet, visit your local computer store.

Name	Bus	Unkit	Asm	CSC
8K Econoram II™	\$100	\$139	\$159	N/A
16K Econoram IV™	\$100	\$279	\$314	\$ 414
24K Econoram VII™	\$100	\$445	\$485	\$ 605
32K Econoram X™	\$100	\$599	\$649	\$ 789
32K Econoram XI™	SBC	N/A	N/A	\$1050
32K Econoram IX™	Dig.	\$650	N/A	N/A
	Group			

All of the above use static technology.

CompuKit™

SEND FOR OUR FLYER !!

CIRCLE NO 22 ON FREE INFORMATION CARD



THE NEW HOBBY WORLD CATALOG

Your source for factory prime, professional quality equipment. Computers, add-on boards, IC's, sockets, resistors, supplies, tools, test equipment, books, and more. Shop your buy list at Hobby World. You'll find what you want, and at a solid savings. For example, look at this month's specials:

THE NEW ELENCO 3½ DIGIT SOLID STATE MULTIMETER

The ultimate in performance: measures resistance to .01 ohms, voltage to 100 micro-volts, current to one micro-amp. Assembled and tested, with 2-Year warranty. Lists at \$99.95. **HOBBY WORLD PRICE ONLY \$74.95!**

16K MEMORY ADD-ON FOR APPLE OR TRS-80

HOBBY WORLD PRICE IS ONLY \$98.00 (specify when ordering)

WAHL ISO-TIP CORDLESS SOLDERING IRON

Includes ni-cad batteries and wall plug transformer. Lists at \$19.95. **BUT HOBBY WORLD HAS IT FOR \$14.95!**

SEND ME A FREE CATALOG!

Name _____

Address _____

City _____

State _____

Hobby World
19355 Business Center Dr #6
Northridge CA 91324

TELEPHONE ORDERS
Inside Cal 213 886 9200
Outside Cal 800 423 5387

PE-1

CIRCLE NO 24 ON FREE INFORMATION CARD

ELECTRONICS WORLD® *Personal Electronics News*

Videotaping Movies and Slides

Converting slides or motion-picture film to video cassettes is now as easy as taking them to a local Fotomat film-processing store. Fotomat will record them on your video cassette (or sell you a blank cassette, if needed), and return them a week later. Exposure and color errors (if not too extreme) are automatically corrected; and, for an extra dollar, Fotomat will remove blank sections from movie frames. Prices range from \$3.50 for the first 50 feet of movie film down to 50¢ per reel when five or more are transferred. Slide transfer prices range from \$3.00 for the first three minutes down to 15 cents for each minute after the 10th. Slides fade in and out at intervals of 5, 10 or 15 seconds.

First U. S. Digital Recording

The first commercial, classical music disc recorded in the U. S. by digital processing has been released on the "Telarc" label, distributed by Audio-Technica U.S., Inc. The disc, retailing at \$14.95, features the Cleveland



Symphonic Winds, conducted by Frederick Fennell, with music by Holst, Handel, and Bach. A Soundstream digital tape recorder was used in the process, which is said to virtually eliminate distortion and other problems common to conventional tape recordings. The music signal is converted into binary computer pulse codes rather than analog magnetic waveforms. No compressors, equalizers or limiters were used in recording music signals on a master disc.

Cadillac's Trip Computer

The Trip Computer, manufactured by General Motors and available on 1979 Cadillac Seattles, is a pre-programmed system which computes and displays operational information in three areas on the instrument panel. The first is a digital speedometer above the steering wheel. Second, a fuel gauge gives the amount of gas available in the tank. Finally, a command control center

offers a variety of information by depressing of a console button: actual instantaneous fuel economy, average-fuel economy for trip, average car speed, total elapsed trip time, driving range on remaining gasoline, miles to go to a pre-determined destination, estimated time of arrival, time of day, engine rpm, engine temperature, and system voltage. The link between all the various analog quantities and the digital microprocessor is a National Semiconductor 16-channel, 8-bit ADC 0816 analog-to-digital converter. You don't have to buy a '79 Seville, however, to enjoy automotive computer benefits. Add-on systems, such as the Prince "on-board computer," will provide any car with this facility.

Japanese TV Gets Multiplex Sound

Japan's Radio Regulatory Council for the Posts & Telecommunications Ministry has approved a plan to authorize TV stations to start multiplex sound broadcasting. This will allow Japanese TV viewers to watch foreign movies in either original-language or Japanese-dubbed versions, or musical programs in stereo. In the future, TV receivers are expected to be built to include receivers for multiplex broadcasting. The receivers will also be available separately; adapters would be attached to TV receivers with multiplex terminals or to stereo systems, which could then be used on TV receivers without multiplex terminals. It's reported, too, that the government eventually plans to approve a facsimile broadcast service over the multiplex sound system.

FCC Fee Over-\$20 Inquiry

The Federal Communications Commission has begun an inquiry on the refund of fees collected between August 1, 1970 and January 1, 1977, and on alternatives for future fee schedules (Gen. Docket No. 78-316). However, this action deals only with fees in amounts greater than \$20 and therefore does not deal with fees paid by citizens band (CB) licensees. The Commission emphasized that action on fees under \$20, including those for CB, would be taken in the near future. It asked that CBers not make inquiries at this time concerning fees.

Monthly NY Computer Flea Show

A Computer Flea Show and Market is now available to computer hobby enthusiasts in the New York area. It is scheduled for the third Sunday of every month at the Doral Inn (Lexington Ave. and 49th St.) and is intended for the experienced hobbyist as well as the new owner of a personal computer. Exhibitors are expected to include computer manufacturers and computer stores and sellers of used equipment. It is hoped that vendors of software will also be on hand to run their programs. Admission is \$1 and hours are 11 a.m. to 5 p.m. For more information, contact Robert Schwartz, 375 Riverside Dr., New York, NY 10025.

SAE TWO by SAE



Styled to reflect professional elegance.
Engineered for maximum performance.

A new experience from SAE, called SAE TWO. These competitively priced components incorporate the same kind of advanced circuit design which has made SAE's high end line one of the most respected in audio.

The R3C AM/FM Stereo Receiver delivers a vigorous 30 Watts* RMS per channel. Separate, easy-to-read signal strength and center tuning meters ensure precise FM reception. Price - \$335.00†

The T3U AM/FM Stereo Tuner's linear scale simplifies accurate station tuning and its steep quieting requires only 37.3 dBf (40 microvolts) for 50 dB signal-to-noise in stereo. Linear Phase filters result in excellent separation of 45 dB at 1kHz. Price - \$275.00†

*These ratings are at 8 Ohms per FTC regulations.
Total Harmonic Distortion - for R3C - 0.09%, for C3A - 0.05%

The C3A Integrated Amplifier delivers a cool clean 50 Watts* RMS per channel. Maximum tape flexibility is assured by provisions for two tape recorders with full tape dubbing capabilities. Price - \$325.00†

The C3D Cassette Deck features a full-logic electronic tape control system for the protection of your valued tapes. A DC-servo motor keeps wow and flutter below 0.06%. And for optimum tape performance full Bias-EQ selection and Dolby NR circuitry are provided. Price - \$400.00†
For more information and an informative brochure write:

SAE
Scientific Audio Electronics, Inc.

P.O. Box 60271 Terminal Annex, Los Angeles, CA 90060
CIRCLE NO. 48 ON FREE INFORMATION CARD

†Nationally Advertised Value, actual retail prices are established by SAE Dealers.



Performance that's easy to handle.

The Motorola[®] System 500 Remote CB. The first full-featured Remote that's easy to handle. It's designed to feel natural. To operate effortlessly. With about as much thought as you give to shifting gears.



But what good is a Remote that fits your hand, if it doesn't fit your needs? The Motorola System 500 Remote features a 2-speed channel selector. A local/distance switch that reduces interference and background noise. A channel 9 emergency switch that puts you in touch with help instantly when you need it.

You also get the CB features you've come to expect from Motorola. Like a phase lock-loop synthesizer. Power mic. Phosphorescent control labels for easy identification. Hot-last channel memory. L.E.D. channel readout. And an optional relay which interrupts radio audio as CB messages are received.

As easy as it is to handle and operate, this CB is tough to steal. The transceiver chassis is compact — easily hidden away in the trunk, under the seat, or mounted on the firewall.

The complete, uncomplicated Motorola System 500 Remote. Because when you're driving, you've got enough to handle.



MOTOROLA
CB

CIRCLE NO 52 ON FREE INFORMATION CARD

To find the dealer nearest you, write: Market Relations Manager, Motorola, Inc., Automotive Products Division, 1299 East Algonquin Road, Schaumburg, Illinois 60196. Motorola is a registered trademark of Motorola Inc.