


# STABILIZER BAR REAR REPLACEMENT

2707T-01


HINT:

COMPONENTS: See page 27-2

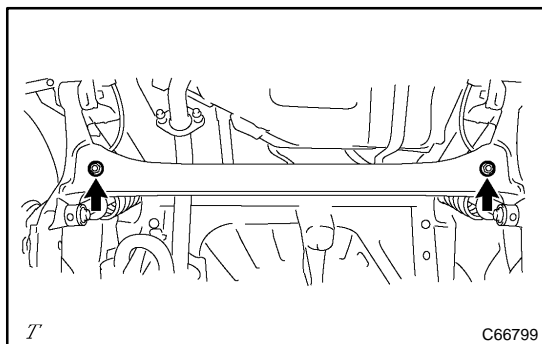

## 1. REMOVE STABILIZER BAR REAR

- (a) Remove the 2 bolts, nuts and stabilizer bar.

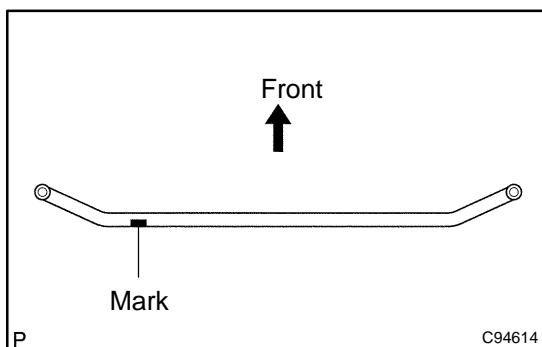

## 2. INSTALL STABILIZER BAR REAR

- (a) Install the 2 bolts, nuts and stabilizer bar.

**Torque: 195 N·m (1,990 kgf·cm, 144 ft·lbf)**

HINT:

Install the stabilizer bar so that the mark is positioned on the rear right side of the vehicle.