

*Remington Arms Company, Inc.*  
870 Remington Drive  
PO Box 700  
Madison, NC 27025-0700  
(336) 548-8700  
800-243-9700

# ***REMINGTON***

## **Arms Company, Inc.**

**SPORTSMAN 58  
AUTOLOADING SHOTGUN**


- **Shooting Safety Commandments**
- **Information**
- **Instructions for Operation & Care of Shotgun**
- **Components Parts Listing**
- **Value and Reference Book Listing**

**NOTE:** We are pleased to accommodate your request for the Sportsman 58 Autoloading Shotgun information. The following documentation represents all information available on this model from the Remington Arms Co., Inc.

**DO NOT MAKE CHANGES OR ALTERATIONS TO ANY PARTS OF A FIREARM. USE ONLY REMINGTON PARTS. NEVER MAKE AN ADJUSTMENT TO THE TRIGGER, OR CHANGE THE SHAPE OR SIZE OF THE SEAR, SEAR NOTCH, OR OTHER PARTS.**

# **Ten Commandments of Shooting Safety**

- 1. Always keep the muzzle pointed in a safe direction.**
- 2. Firearms should be unloaded when not in use.**
- 3. Don't rely on your gun's "safety".**
- 4. Be sure of your target and what is beyond it.**
- 5. Use correct ammunition.**
- 6. If your gun fails to fire when the trigger is pulled, handle with care!**
- 7. Always wear eye and ear protection when shooting.**
- 8. Be sure the barrel is clear of obstructions before shooting.**
- 9. Do not alter or modify your gun, and have guns serviced regularly.**
- 10. Learn the mechanical and handling characteristics of the firearm you are using.**

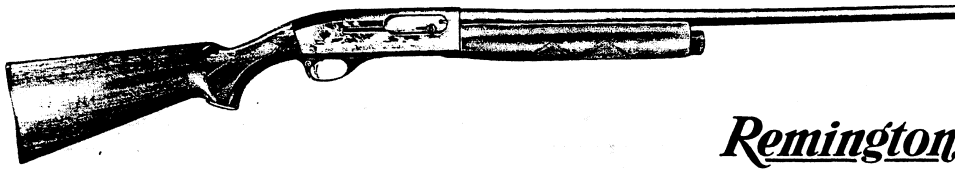

**MODEL  
SPT-58**  
Autoloading  
Shotgun

*Remington*

**"Sportsman-58" with "Power-Matic"  
Action**


**"DISCONTINUED  
NO PARTS AVAILABLE  
FROM REMINGTON"**

**3 Shot  
12-16-20 Gauge**

IDENTIFY COMPONENTS BY LOCA-  
TION AND PART NAME FROM  
SECTIONAL VIEW

**This Model is  
Discontinued**

**SECTIONAL VIEW  
ACTION CLOSED**

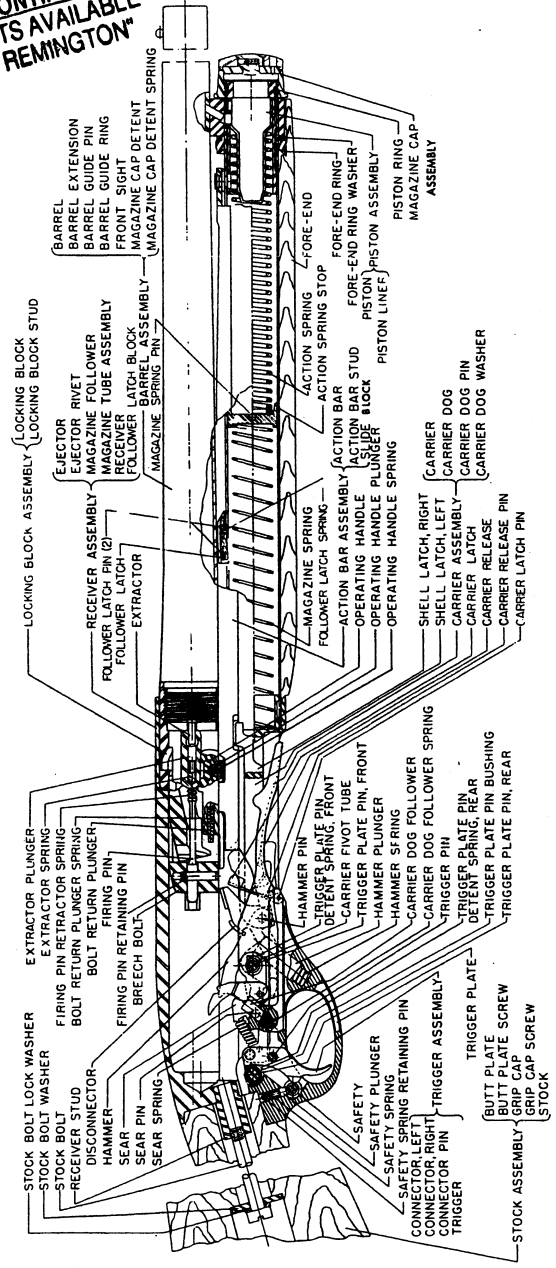

**REPLACEMENT PARTS**

When ordering parts, specify model, gauge, part name and number, and the serial number of the gun. All parts, including barrel assemblies, will be shipped as ordered but, since they are made to close dimensions, the particular part may require slight adjustment or fitting to assure proper functioning of the arm.

**REMINGTON ARMS COMPANY, INC. • Ilion, N. Y. 13357, U.S.A.**

"SPORTSMAN-58" is Reg. U. S. Pat. Off. by Remington Arms Company, Inc., Bridgeport 2, Conn.

**COMPONENT PARTS**



**PRICE LIST**

**MODEL  
SPT-58**

**Autoloading Shotgun  
3 SHOT  
12-16-20 Gauge**

**"DISCONTINUED  
NO PARTS AVAILABLE  
FROM REMINGTON"**

**When ordering parts — Model No., Part No. and Part Name must be given.**

Part No.	NAME OF PART	List Price	Part No.	NAME OF PART	List Price
25865	Action Bar Assembly (includes Action Bar, Action Bar Stud, Slide Block) .....	\$	23890	Barrel Assembly, D GRADE, All Gauges (Vent Rib only) (includes same as Barrel Assembly, Vent Rib, except uses Ivory Bead Front Sight) (All Standard lengths available) .....	} Price on Application
19355	Action Bar Stud .....		23891	Barrel Assembly, F GRADE, All Gauges (Vent Rib only) (includes same as D GRADE) .....	
19365	Action Spring .....		23892	Barrel Assembly, SD GRADE, All Gauges, (Vent Rib only) (includes same as SC GRADE) .....	} Price on Application
16405	Action Spring Stop .....		23893	Barrel Assembly, SF GRADE, All Gauges, (Vent Rib only) (includes same as SC GRADE) .....	
25755	Action Spring Stop Assembly, MAGNUM GRADE (includes Action Spring Stop, Action Spring Stop Stud, Magazine Buffer Spring) .....		16358	Bolt Return Plunger .....	} Price on Application
	NOTE: Barrel Assemblies interchangeable without adjustment. Prices upon application.		17676	Bolt Return Plunger Cross Pin .....	
21690	Barrel Assembly, PLAIN, 12 Ga. (30 in.) (includes Barrel, Barrel Guide Ring, Barrel Guide Pin, Front Sight, Magazine Cap Detent, Magazine Cap Detent Spring) .....	} Price on Application	16360	Bolt Return Slide Plunger Spring .....	} Price on Application
21693	Barrel Assembly, PLAIN, 12 Ga. (28 in.) .....		18869	Breech Bolt, 12 Ga. Use 16967 .....	
21694	Barrel Assembly, PLAIN, 12 Ga. (26 in.) .....	} Price on Application	23025	Breech Bolt, 16 Ga. .....	} Price on Application
21691	Barrel Assembly, PLAIN, 16 Ga. (28 in.) .....		16400	Breech Bolt, 20 Ga. .....	
21695	Barrel Assembly, PLAIN, 16 Ga. (26 in.) .....	} Price on Application	23575	Breech Bolt Assembly, Complete, 12 Ga. (includes Breech Bolt, Extractor, Extractor Plunger, Extractor Spring, Firing Pin, Firing Pin Retaining Pin, Firing Pin Retractor Spring, Locking Block Assembly). Use 25190 .....	} Price on Application
21692	Barrel Assembly, PLAIN, 20 Ga. (28 in.) .....		23576	Breech Bolt Assembly, Complete, 16 Ga. .....	
21696	Barrel Assembly, PLAIN, 20 Ga. (26 in.) .....	} Price on Application	23577	Breech Bolt Assembly, Complete, 20 Ga. .....	} Price on Application
22973	Barrel Assembly, MAGNUM GRADE, 12 Ga. only, 28 in., VENT RIB (3 in. chamber) (See page SG-4) .....		16889	Buffer .....	
23235	Barrel Assembly, VENT RIB, 12 Ga. (30 in.) (includes Barrel, Barrel Guide Pin, Barrel Guide Ring, Front Sight, Front Sight Retaining Pin, Magazine Cap Detent, Magazine Cap Detent Spring, Ventilated Rib) .....	} Price on Application	20616	Butt Plate .....	} Price on Application
23236	Barrel Assembly, VENT RIB, 12 Ga. (28 in.) .....		25410	Butt Plate Screw .....	
23237	Barrel Assembly, VENT RIB, 12 Ga. (26 in.) .....	} Price on Application	15714	Carrier, 12 - 16 - 20 Ga. Use 15628 .....	} Price on Application
23240	Barrel Assembly, VENT RIB, 16 Ga. (28 in.) .....		23545	Carrier Assembly, 12 - 16 - 20 Ga. (includes Carrier, Carrier Dog, Carrier Dog Pin, Carrier Dog Washer, Carrier Release, Carrier Release Pin, Carrier Release Spring). Use 26875 .....	
23241	Barrel Assembly, VENT RIB, 16 Ga. (26 in.) .....	} Price on Application	15480	Carrier Dog .....	} Price on Application
23245	Barrel Assembly, VENT RIB, 20 Ga. (28 in.) .....		17416	Carrier Dog Follower .....	
23246	Barrel Assembly, VENT RIB, 20 Ga. (26 in.) .....	} Price on Application	16966	Carrier Dog Follower Spring .....	} Price on Application
23800	Barrel Assembly, SKEET GRADE, 12 Ga. (Vent Rib only) (26 in. only) (includes Barrel, Barrel Guide Pin, Barrel Guide Ring, Front Sight (Ivory Bead), Magazine Cap Detent, Spring, Middle Sight, Ventilated Rib) .....		18781	Carrier Dog Pin .....	
23802	Barrel Assembly, SKEET GRADE, 20 Ga. (Vent Rib only) (26 in. only) .....	} Price on Application	18760	Carrier Dog Washer .....	} Price on Application
23238	Barrel Assembly, SKEET GRADE, COMP. 20 Ga. (Vent Rib only) (26 in. only) (includes Barrel, Barrel Guide Pin, Barrel Guide Ring, Ventilated Rib, Compensator (steel), Compensator Bushing, Compensator Bushing Screw, Compensator Front Sight, Middle Sight, Full Choke Tube, Spreader Tube, Wrench) .....		16348	Carrier Latch .....	
23247	Barrel Assembly, SKEET GRADE, COMP. 20 Ga. (Vent Rib only) (26 in. only) .....	} Price on Application	16345	Carrier Latch Pin .....	} Price on Application
23800	Barrel Assembly, SC GRADE, 12 Ga. (Vent Rib only) (includes same as Skeet Grade) .....		16344	Carrier Latch Spring .....	
23802	Barrel Assembly, SC GRADE, 20 Ga. (Vent Rib only) .....	} Price on Application	17417	Carrier Pivot Tube .....	} Price on Application
24060	Barrel Assembly, TB GRADE, 12 Ga. only, (Vent Rib only) (30 in. length) (includes Barrel, Barrel Guide Pin, Barrel Guide Ring, Front Sight (Ivory Bead), Magazine Cap Detent, Magazine Cap Detent Spring, Middle Sight, Ventilated Rib) .....		16347	Carrier Release .....	
24061	Barrel Assembly, TB GRADE, 12 Ga. only (Vent Rib only) (28 in. length) .....	} Price on Application	16983	Carrier Release Pin .....	} Price on Application
			16327	Carrier Release Spring .....	
		} Price on Application	17419	Connector, Left .....	} Price on Application
			17551	Connector, Right .....	
		} Price on Application	17420	Connector Pin .....	} Price on Application
			16712	Disconnecter .....	
		} Price on Application	25430	Ejector, 12 Ga. Use 25431 .....	} Price on Application
			24449	Ejector, 16 Ga. Use 24446 .....	
		} Price on Application	24450	Ejector, 20 Ga. Use 24447 .....	} Price on Application
			18647	Ejector Rivet .....	
		} Price on Application	16176	Extractor .....	} Price on Application
			17432	Extractor Plunger .....	
		} Price on Application	17433	Extractor Spring .....	} Price on Application
			17436	Firing Pin .....	
		} Price on Application	18623	Firing Pin Retaining Pin .....	} Price on Application
			17437	Firing Pin Retractor Spring .....	
		} Price on Application	16332	Follower Latch (12 Ga. only) .....	} Price on Application
			16303	Follower Latch Pin (12 Ga. only) .....	
		} Price on Application	16333	Follower Latch Spring (12 Ga. only) .....	} Price on Application

**COMPONENT PARTS**

*Remington*

**PRICE LIST**

**MODEL  
SPT-58**

**Autoloading Shotgun  
3 SHOT  
12-16-20 Gauge**

**DISCONTINUED  
NO PARTS AVAILABLE  
FROM REMINGTON**

**When ordering parts — Model No., Part No. and Part Name must be given.**

Part No.	NAME OF PART	List Price	Part No.	NAME OF PART	List Price
<b>APPENDIX TO BE ADDED TO PRESENT COMPONENT PARTS PRICE LIST:</b>					
24060	Barrel Assembly, ADX GRADE, 12 Ga. (30in.) VENT RIB only (includes Barrel, Barrel Guide Pin, Barrel Guide Ring, Front Sight (Ivory), Magazine Cap Detent, Magazine Cap Detent Spring, Middle Sight, Ventilated Rib)	} Price on Application	25411	Butt Plate Screw, ADX-SX-TX GRADE	\$
24061	Barrel Assembly, ADX GRADE, 12 Ga. (28 in.) VENT RIB only		16992	Ejector, MAGNUM GRADE	
24062	Barrel Assembly, ADX GRADE, 12 Ga. (26 in.) VENT RIB only		23805	Front Sight, RSS GRADE	
25475	Barrel Assembly, ADX GRADE, 16 Ga. (28 in.) VENT RIB only		25385	Grip Cap Screw, TB-TC GRADE	
25476	Barrel Assembly, ADX GRADE, 16 Ga. (26 in.) VENT RIB only		16923	Magazine Buffer Spring (used on MAGNUM GRADE only)	
25477	Barrel Assembly, ADX GRADE, 20 Ga. (28 in.) VENT RIB only		22897	Magazine Cap Assembly, MAGNUM GRADE	
25478	Barrel Assembly, ADX GRADE, 20 Ga. (26 in.) VENT RIB only		16917	Magazine Follower, MAGNUM GRADE	
23800	Barrel Assembly, SX GRADE, 12 Ga. (26 in. only) VENT RIB only (includes same as SKEET GRADE)		16915	Magazine Spring, MAGNUM GRADE	
23802	Barrel Assembly, SX GRADE, 20 Ga. (26 in. only) VENT RIB only		24525	Rear Sight Assembly, RSS GRADE (includes Rear Sight Collar, Rear Sight Eyepiece, Rear Sight Leaf, Rear Sight Windage Screw)	
24060	Barrel Assembly, TX GRADE, 12 Ga. (30 in.) VENT RIB only (includes same as TRAP GRADE)		16456	Rear Sight Screw, RSS GRADE	
24061	Barrel Assembly, TX GRADE, 12 Ga. (28 in.) VENT RIB only	25585	Rear Sight Step, RSS GRADE		
25215	Barrel Assembly, MAGNUM GRADE, 12 Ga. only (30 in. only) PLAIN (includes same as PLAIN Barrel) (3 in. chamber)	22133	Receiver Assembly, MAGNUM GRADE		
22971	Barrel Assembly, MAGNUM GRADE, 12 Ga. only (30 in.) VENT RIB (includes same as MAGNUM GRADE plus Ventilated Rib, Front Sight (Ivory), Middle Sight) (3 in. chamber)	24375	Receiver Assembly, TB-TX GRADE (includes same as ADL GRADE except Receiver Rivet supplied)		
25216	Barrel Assembly, MAGNUM GRADE, 12 Ga. only, 28 in., PLAIN (3 in. chamber)	16980	Receiver Rivet (used on TB-TX GRADES only)		
25288	Barrel Assembly, RSS GRADE, 12 Ga. (26 in.) PLAIN (includes Barrel, Barrel Guide Pin, Barrel Guide Ring, Front Sight, Front Sight Ramp, Rear Sight Assembly, Rear Sight Base, Rear Sight Base Pin, Rear Sight Screw, Rear Sight Step, Magazine Cap Detent, Magazine Cap Detent Spring)	21386	Recoil Pad, TX GRADE (Black)		
		16909	Shell Latch, Left, MAGNUM GRADE		
		22991	Stock Assembly, MAGNUM GRADE (includes Screw (2))		

PARTS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE

DELIVERIES ARE F.O.B. ILION, N. Y.

Send all guns for factory service and inquiries on service and parts to  
**REMINGTON ARMS COMPANY, INC.**  
 Arms Service Division  
 Ilion, New York 13357

All other inquiries are to be addressed to  
**REMINGTON ARMS COMPANY, INC.**  
 Bridgeport, Connecticut 06602





**INSTRUCTION  
FOLDER**

*Remington*



**MODEL  
SPORTSMAN -58  
POWER-MATIC  
AUTOLOADING  
SHOTGUN**

12-16-20 GAUGE



Includes  
12 Gauge  
3 in. MAGNUM

*Important*


Read instructions before  
assembling this gun.

**also**

Clean grease from bore of  
barrel before firing.

**REMINGTON ARMS COMPANY, INC.**

Ilion, N. Y., U. S. A.

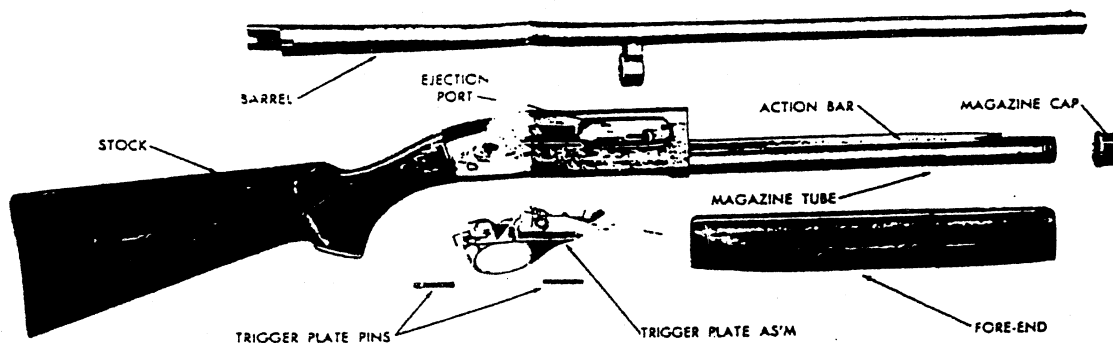

## **NORMAL CLEANING AND CARE**

*can be done with these simple take-apart instructions*

### **DISASSEMBLY**

#### **TO REMOVE BARREL AND FORE-END**

*CAUTION: Push safety "ON SAFE" (Red band will not show). Unscrew magazine cap. Slide barrel and fore-end together from gun.*

#### **TO REMOVE TRIGGER PLATE ASSEMBLY**

Push out front and rear trigger plate pins. Lift trigger plate assembly from receiver. Inspect and clean, whenever necessary. Clean as a unit. *NOTE: Do not allow cocked hammer to snap forward with trigger plate assembly removed from receiver.*

#### **TO REMOVE BREECH BOLT ASSEMBLY AND SLIDE**

Remove piston mechanism. See opposite instructions. Pull out operating handle. Depress left shell latch in receiver. Pull action bar assembly with breech bolt assembly attached from front of receiver. Replace in reverse order.

#### **FOR CLEANING**

An evaporating cleaning solvent should be used. mechanisms remain clean much longer after shooting

necessary precautions. Action lubrication is used.

### **RE-ASSEMBLY**

#### **TO REPLACE TRIGGER PLATE ASSEMBLY**

Cock hammer and push safety to "ON SAFE" position. Slide trigger plate assembly into receiver taking care that projecting parts of assembly clear receiver rails properly. Align trigger plate pin holes and insert front and rear trigger plate pins.

#### **TO REPLACE BARREL AND FORE-END**

Hold both barrel and fore-end together with barrel guide ring fitted into top of fore-end. Place combined barrel and fore-end over magazine tube and slide towards receiver. Guide barrel extension into receiver and barrel guide ring over magazine tube. Open action to seat barrel properly into receiver. Replace magazine cap over barrel guide ring onto magazine tube and screw down tightly.




**PLACE BARREL AND FORE-END**

Place both barrel and fore-end together with barrel guide ring filled into top of fore-end. Slide magazine tube and slide towards receiver. Guide barrel extension into receiver and barrel guide ring over magazine tube. Open action to barrel properly into receiver. Replace magazine cap over barrel guide ring onto magazine tube and screw down tightly.

**BELOW FREEZING WEATHER**

may also require additional care. Special attention should be taken that all oil is removed from action parts. If a lubricant is desired — use dry graphite or similar non-congealing lubricant. Take care also to prevent rusting from condensation (cold weather to warm room temperature) on action parts.

**SECTIONAL VIEW**

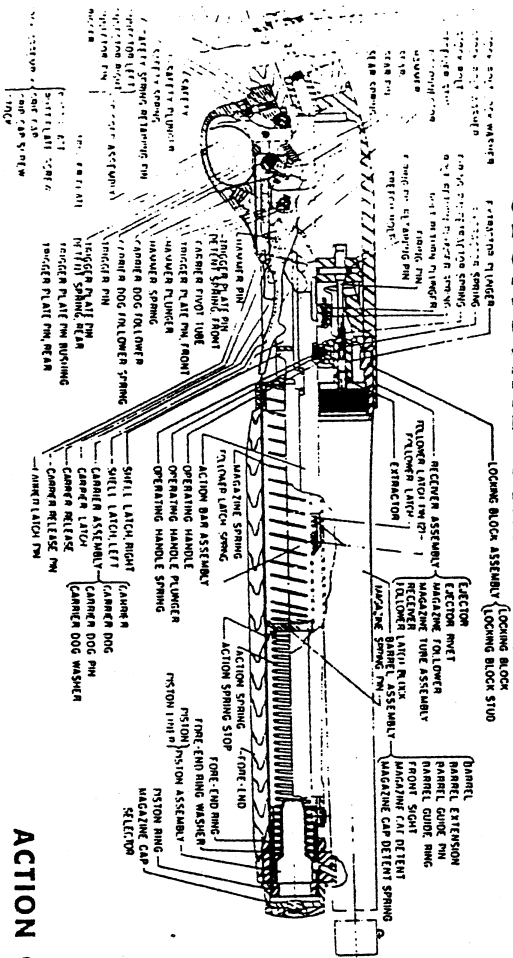

**ACTION CLOSED**


**REPLACEMENT PARTS: Parts may be identified from the Sectional View.**

Prices for parts will be furnished on application. When ordering parts, specify model, gauge, part name, and the serial number of the gun. All parts, including barrel assemblies, will be shipped as ordered but, since they are made to close dimensions, the particular part may require slight adjustment or fitting to assure proper functioning of the arm.

Send all guns for factory service and inquiries on service and parts to  
**REMINGTON ARMS COMPANY, INC.**  
 Arms Service Division  
 Ilion, New York  
 All other inquiries are to be addressed to  
**REMINGTON ARMS COMPANY, INC.**  
 Bridgeport, Connecticut

## MORE POWER FOR HUNTERS

### WITH REMINGTON AND PETERS STANDARD-LENGTH MAGNUM LOADS

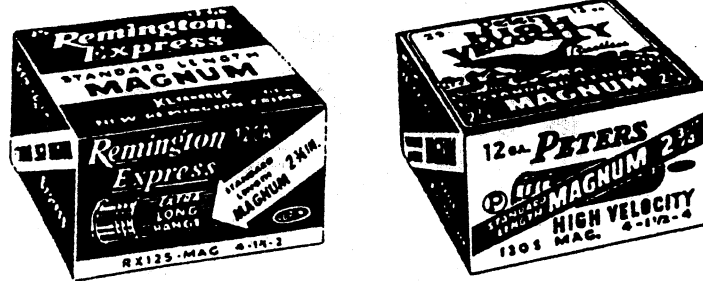

Hunters who own 12, 16 or 20-gauge shotguns with standard  $2\frac{3}{4}$ " or longer chambers can now get denser, harder-hitting patterns with *magnum* power . . . in the sensational Remington "Express" and Peters "High Velocity" standard-length *magnum* loads. They're available in No. 2 and No. 4 shot in all three gauges. CAUTION: These magnum-powered shells should be used only in shotguns in good shooting condition and intended for maximum loads.

### SIGHT ADJUSTMENT FOR "RIFLED SLUG SPECIAL"

**WINDAGE** — Rear sight eyepiece may be moved to left by turning windage screw clockwise. This will move slug impact to left. By turning screw counter clockwise rear sight eyepiece may be moved to right. This will move slug impact to right. *NOTE: Windage screw is located beneath eyepiece.*

### ELEVATION OR RANGE

Rear sight may be raised or lowered by sliding notched sight step beneath eyepiece back and forth. Slug impact will lift, or range increase, by raising rear sight. Slug impact will lower, or range decrease, if rear sight is lowered.

"SPORTSMAN"—58, "EXPRESS,"  
"HIGH VELOCITY," and "POWER-MATIC" are Reg. U.S. Pat.  
Off., by Remington Arms Company, Inc., Bridgeport 2, Conn.  
Form RD-5287 Rev. 1161 Litho in U.S.A.

## Firearms Value & Reference Books

NOTE: We do not provide information on firearms' values. You may want to have your firearm appraised by a gunsmith. The following sources may also be helpful. We do not accept responsibility for the goods or services provided by these sources.

### Firearms Value Books

#### Blue Book of Gun Values

Blue Book Publications  
8009 34<sup>th</sup> Avenue South #175  
Minneapolis, MN 55425  
800-877-GUNS

#### Flayderman's Guide to Firearm Values

Gun List  
Modern Gun Values  
Krause Publications  
700 East State Street  
Iola, WI 54990-0001  
847-573-8530

#### Gun Trader's Guide

Stoeger Publishing Company  
5 Mansard Court  
Wayne, NJ 07470  
973-872-9500

### Reference Books

#### The Remington 700

John Flacy  
Brownells, Inc.  
200 South Front Street  
Montezuma, IA 50171  
515-623-5401

#### Cartridges of the World

Frank C. Barnes  
Standard Catalog of Firearms  
Krause Publications  
700 East State Street  
Iola, WI 54990-0001  
847-573-8530

#### Shooter's Bible

Stoeger Publishing Company  
5 Mansard Court  
Wayne, NJ 07470  
973-872-9500

#### Remington, America's Oldest

Gunmanker  
Remington Arms Co.  
PO Box 700  
Madison, NC 27025  
Attention: History Book  
800-423-8495